



EN55032 Emissions Test Report

Tests Performed:

EN55032 (CISPR 32) Conducted Emissions

EN55032 (CISPR 32) Radiated Emissions

Models Tested:

GTM962250P22512 (12V/225W)

GTM962250P22524 (24V/225W)

GTM962250P22538 (38V/225W)

GTM962250P22554 (54V/225W)

Isolation Option:

All power supplies in this test report were configured with GlobTek's "F2" functional earth isolation option.

Test Conditions:

All testing was performed with a resistive load at 100%, 50%, and 25% load conditions.

Conducted emissions measurements were taken on line and neutral, per standard.

Radiated emissions measurements were taken with vertical and horizontal orientations, per standard.

Publish date:

September 14, 2020



Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 12V 100% load

Note:

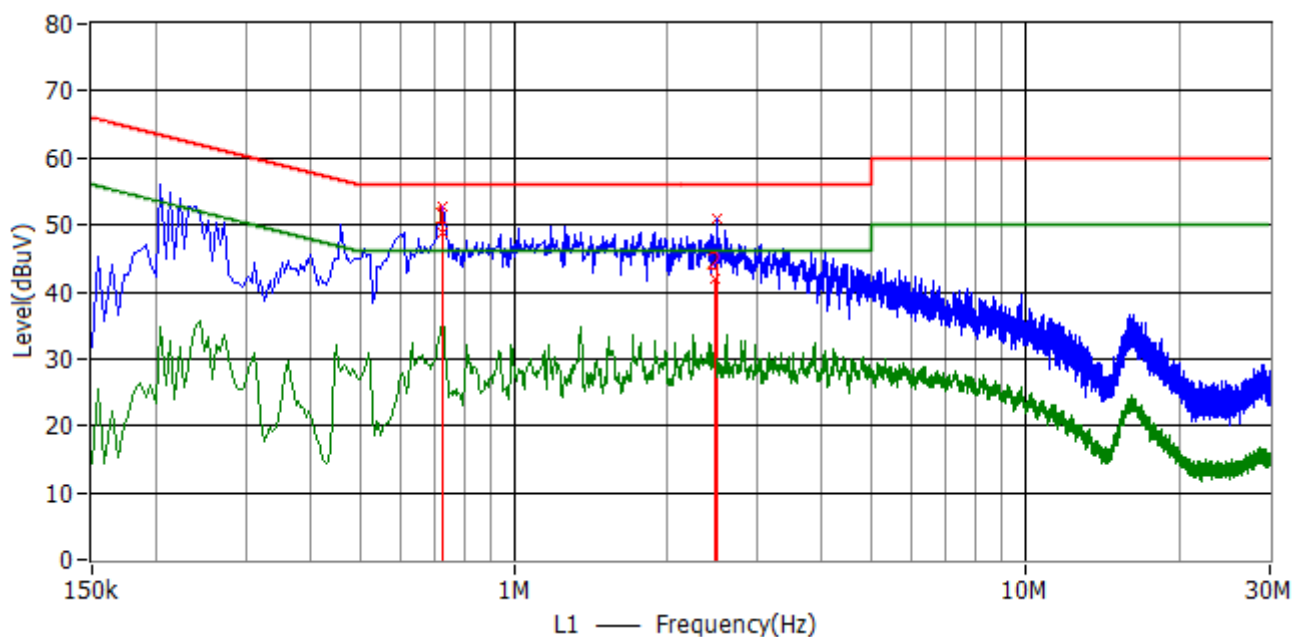

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	726.000 kHz	56.0	48.7	-7.3	9.9	QP	L1
2	2.481 MHz	56.0	41.8	-14.2	10.1	QP	L1
3*	726.000 kHz	56.0	52.7	-3.3	9.9	PK	L1
4*	2.503 MHz	56.0	50.8	-5.2	10.1	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 12V 100% load

Note:

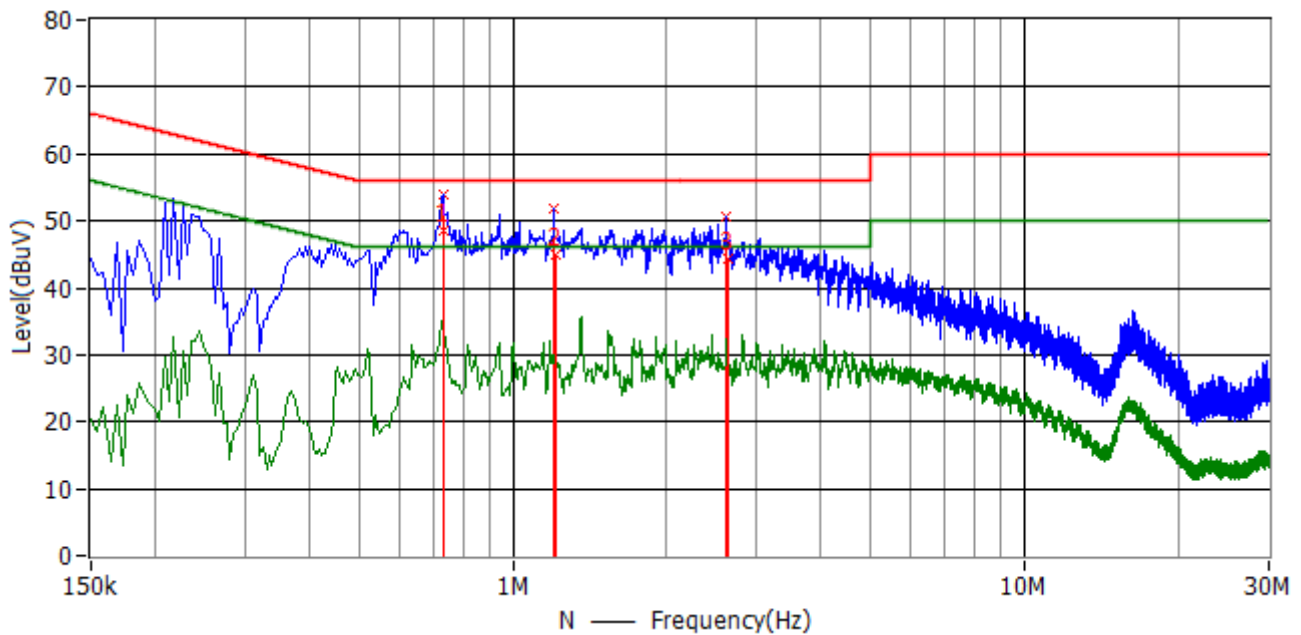

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	730.500 kHz	56.0	48.6	-7.4	9.6	QP	N
2	1.212 MHz	56.0	44.8	-11.2	9.7	QP	N
3	2.625 MHz	56.0	44.4	-11.6	9.9	QP	N
4*	730.500 kHz	56.0	53.8	-2.2	9.6	PK	N
5*	1.203 MHz	56.0	51.9	-4.1	9.7	PK	N
6*	2.616 MHz	56.0	50.5	-5.5	9.9	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 12V 100% load

Note:

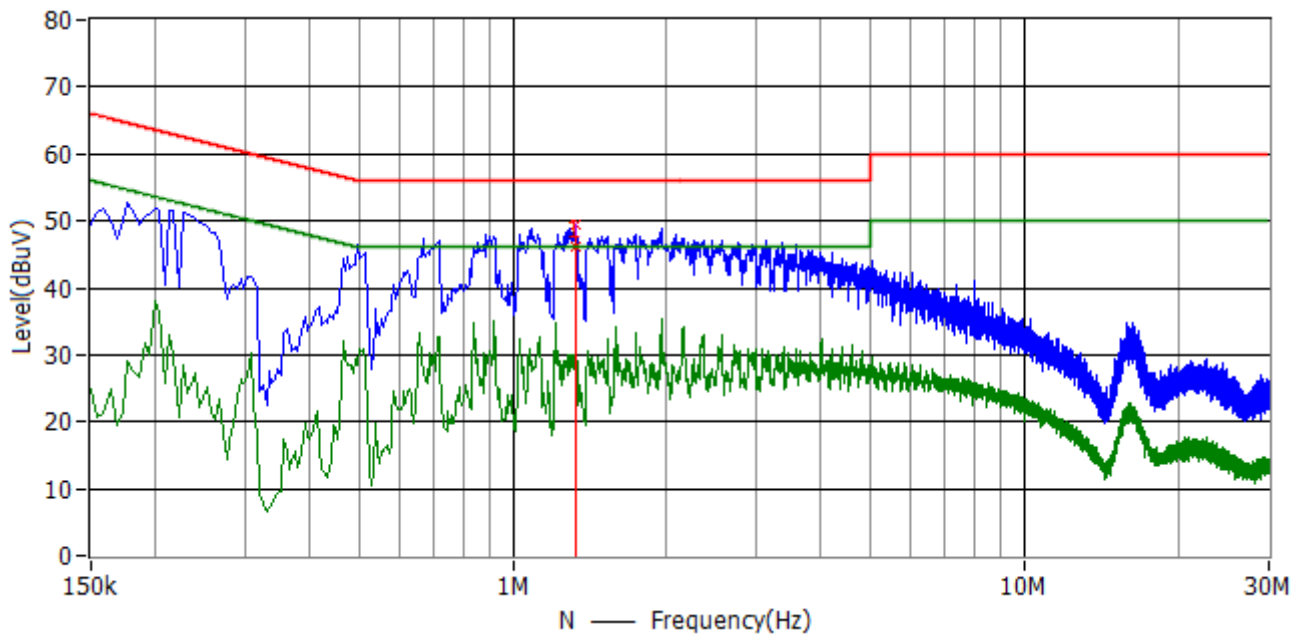

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	1.329 MHz	56.0	46.2	-9.8	9.7	QP	N
2*	1.329 MHz	56.0	49.5	-6.5	9.7	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 12V 100% load

Note:

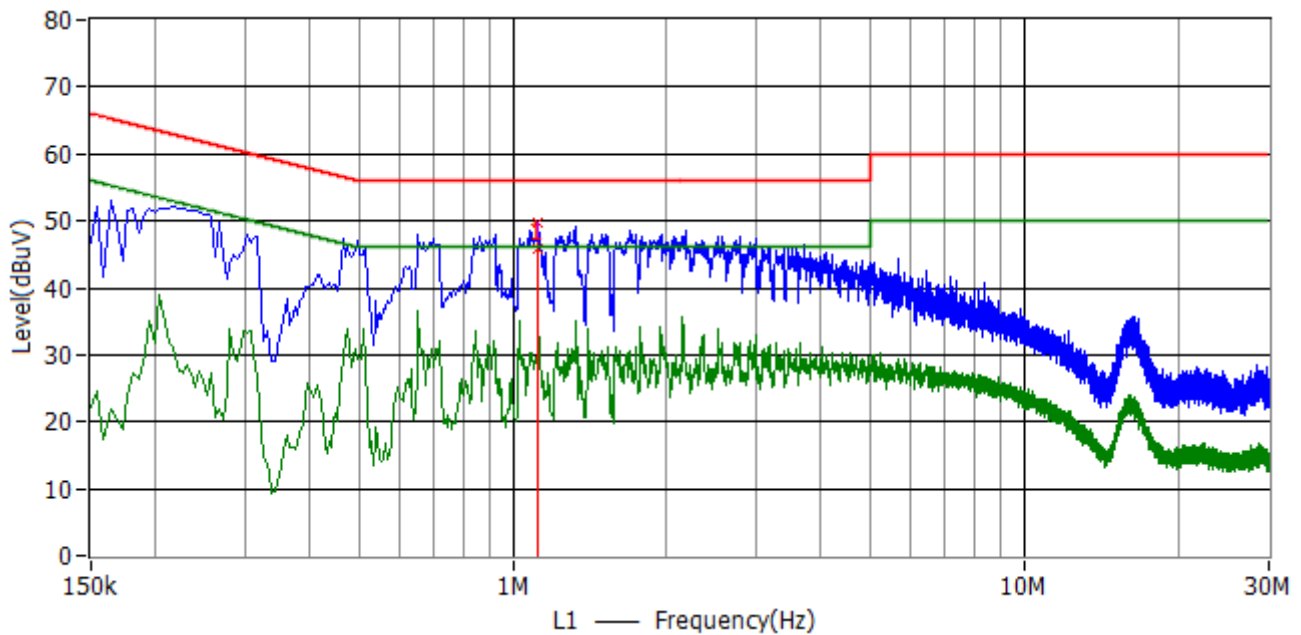

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	1.122 MHz	56.0	45.7	-10.3	10.0	QP	L1
2*	1.122 MHz	56.0	49.7	-6.3	10.0	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 12V 50% load

Note:

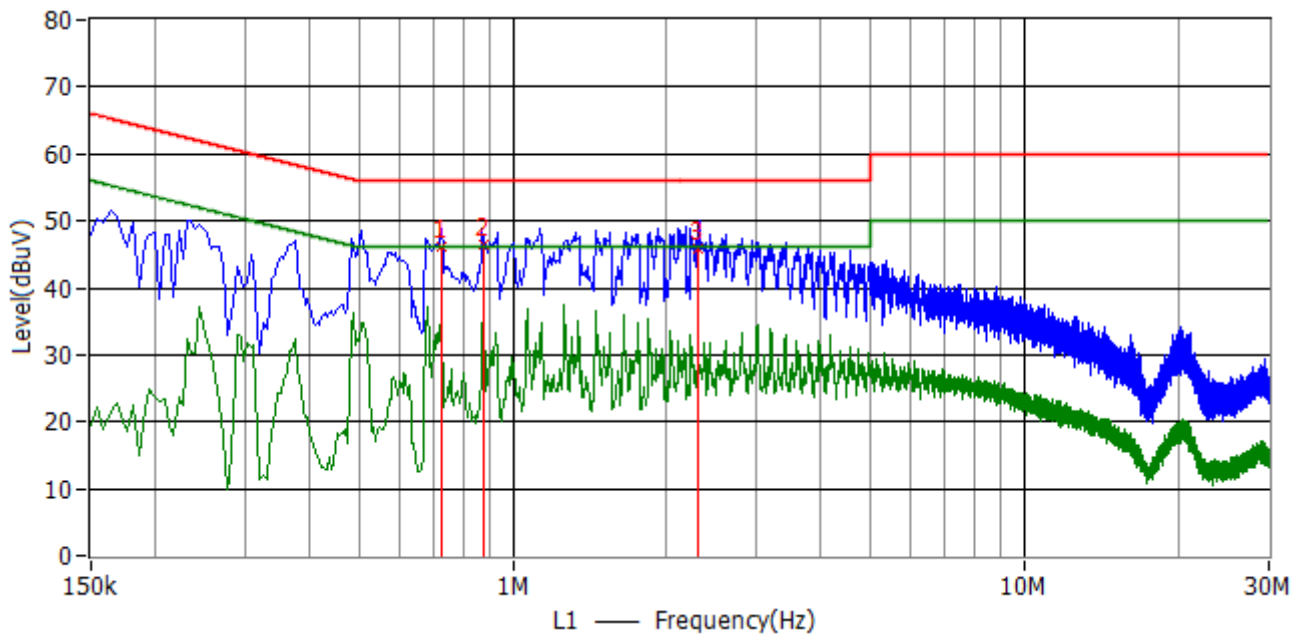

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	726.000 kHz	56.0	46.0	-10.0	9.9	QP	L1
2	874.500 kHz	56.0	46.3	-9.7	9.5	QP	L1
3	2.310 MHz	56.0	45.8	-10.2	10.1	QP	L1
4*	726.000 kHz	56.0	48.9	-7.1	9.9	PK	L1
5*	870.000 kHz	56.0	48.8	-7.2	9.5	PK	L1
6*	2.314 MHz	56.0	50.0	-6.0	10.1	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 12V 50% load

Note:

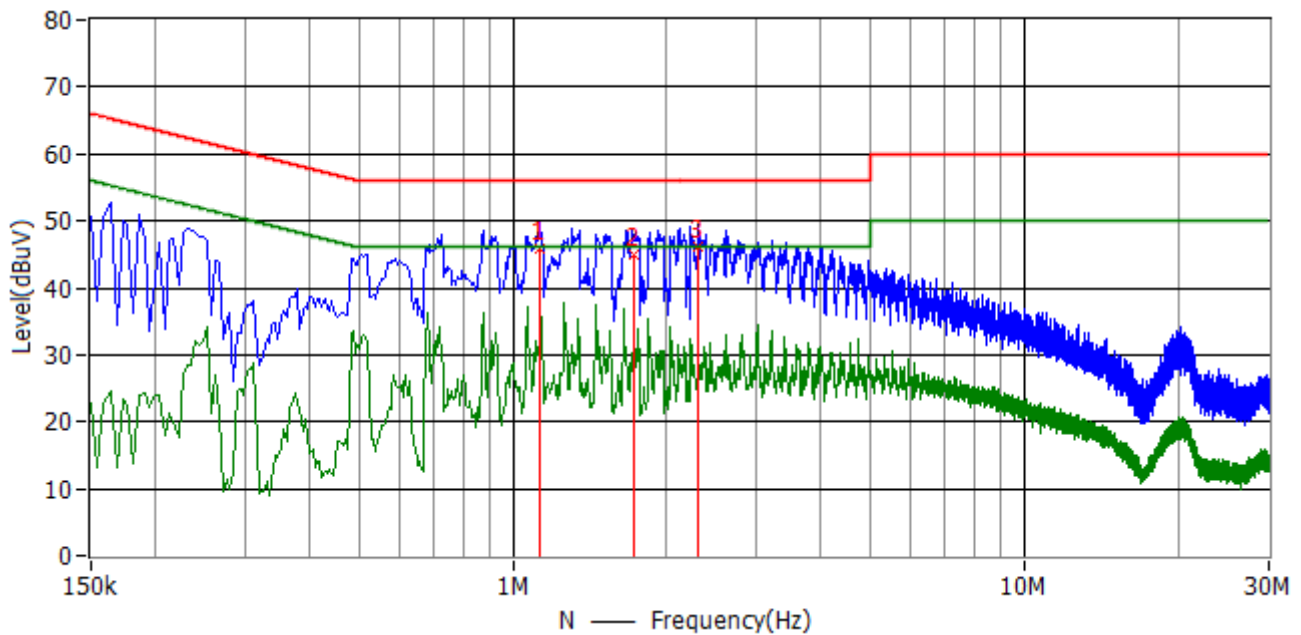

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	1.127 MHz	56.0	45.9	-10.1	9.7	QP	N
2	1.720 MHz	56.0	45.0	-11.0	9.8	QP	N
3	2.310 MHz	56.0	46.1	-9.9	9.9	QP	N
4*	1.127 MHz	56.0	49.8	-6.2	9.7	PK	N
5*	1.707 MHz	56.0	48.8	-7.2	9.8	PK	N
6*	2.310 MHz	56.0	49.4	-6.6	9.9	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 12V 50% load

Note:

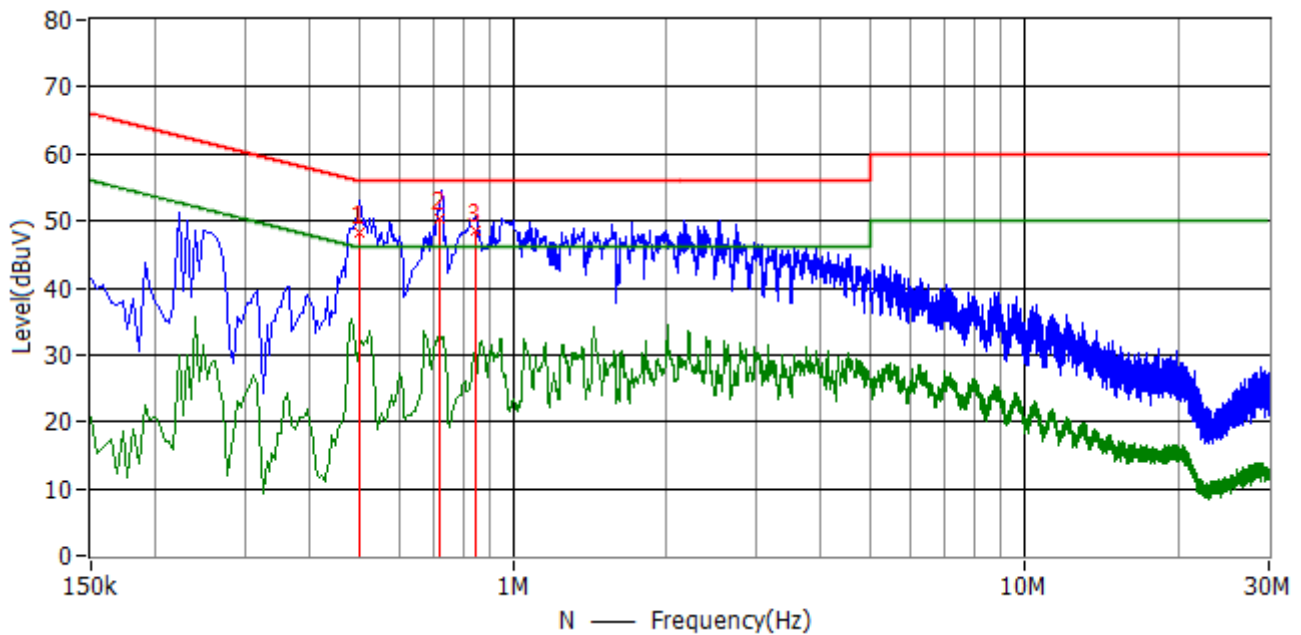

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	501.000 kHz	56.0	48.2	-7.8	9.6	QP	N
2	721.500 kHz	56.0	50.4	-5.6	9.6	QP	N
3	843.000 kHz	56.0	48.5	-7.5	9.6	QP	N
4*	501.000 kHz	56.0	53.0	-3.0	9.6	PK	N
5*	726.000 kHz	56.0	54.4	-1.6	9.6	PK	N
6*	843.000 kHz	56.0	50.6	-5.4	9.6	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 12V 50% load

Note:

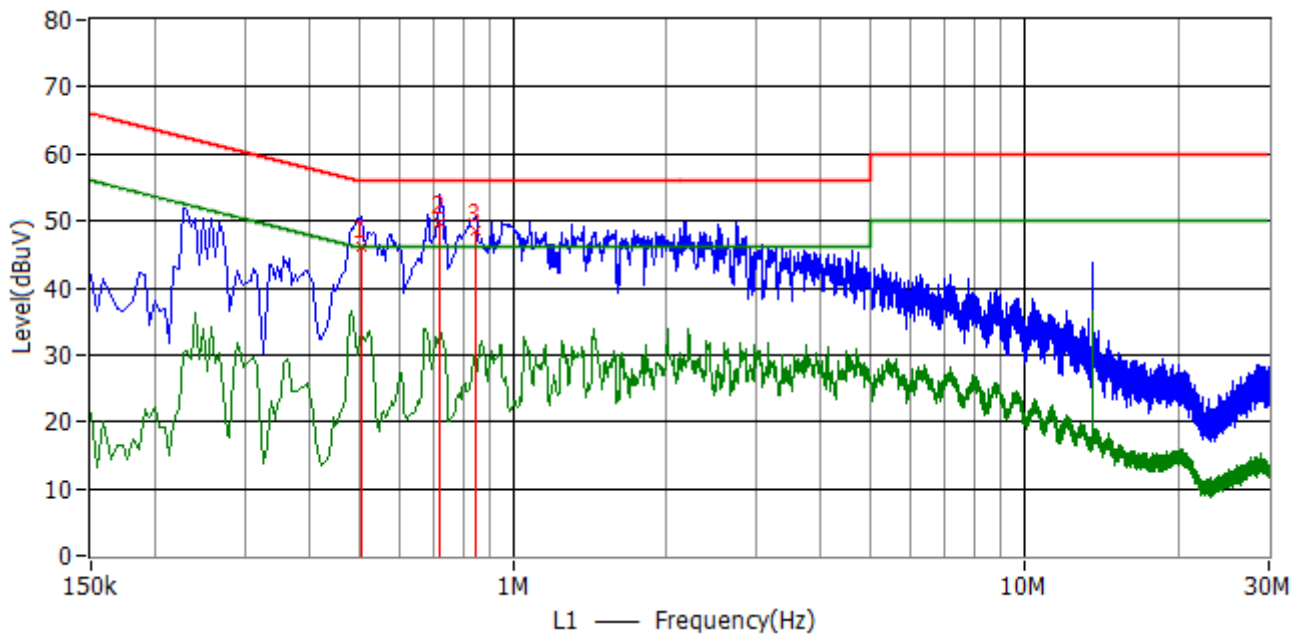

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	505.500 kHz	56.0	46.0	-10.0	9.9	QP	L1
2	721.500 kHz	56.0	49.8	-6.2	9.9	QP	L1
3	843.000 kHz	56.0	48.4	-7.6	9.7	QP	L1
4*	505.500 kHz	56.0	50.6	-5.4	9.9	PK	L1
5*	721.500 kHz	56.0	54.1	-1.9	9.9	PK	L1
6*	843.000 kHz	56.0	50.5	-5.5	9.7	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 12V 25% load

Note:

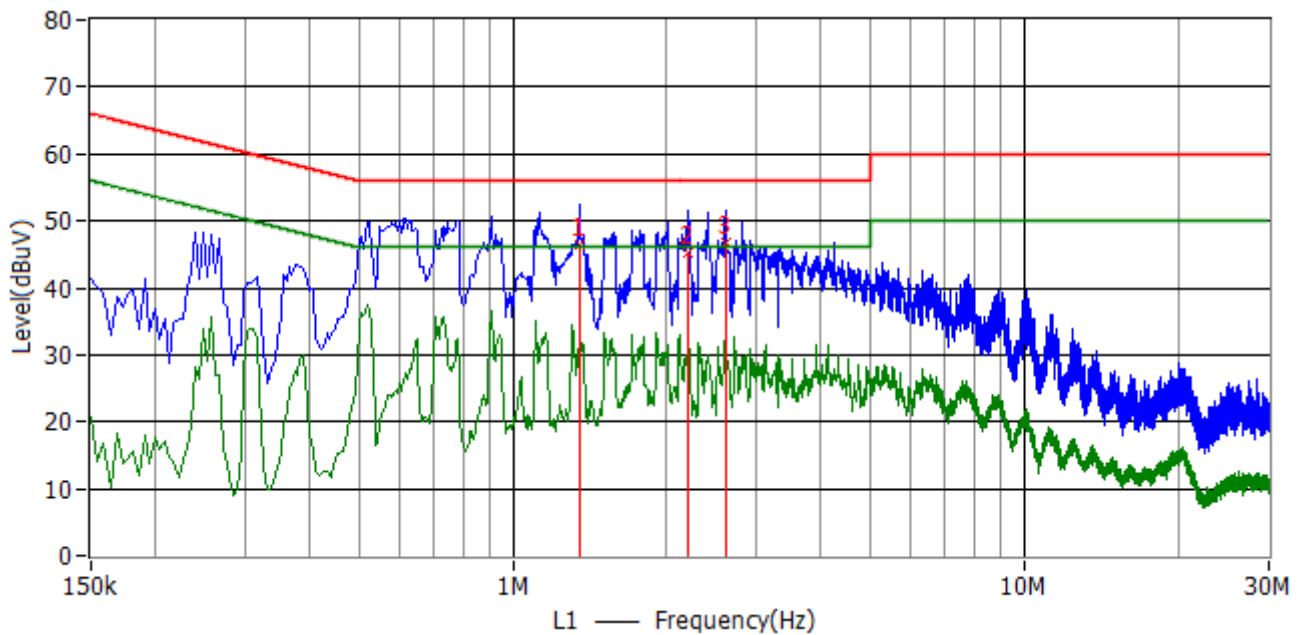

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	1.347 MHz	56.0	46.3	-9.7	10.0	QP	L1
2	2.202 MHz	56.0	45.1	-10.9	10.1	QP	L1
3	2.603 MHz	56.0	46.8	-9.2	10.1	QP	L1
4*	1.347 MHz	56.0	52.3	-3.7	10.0	PK	L1
5*	2.197 MHz	56.0	51.6	-4.4	10.1	PK	L1
6*	2.607 MHz	56.0	51.4	-4.6	10.1	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 12V 25% load

Note:

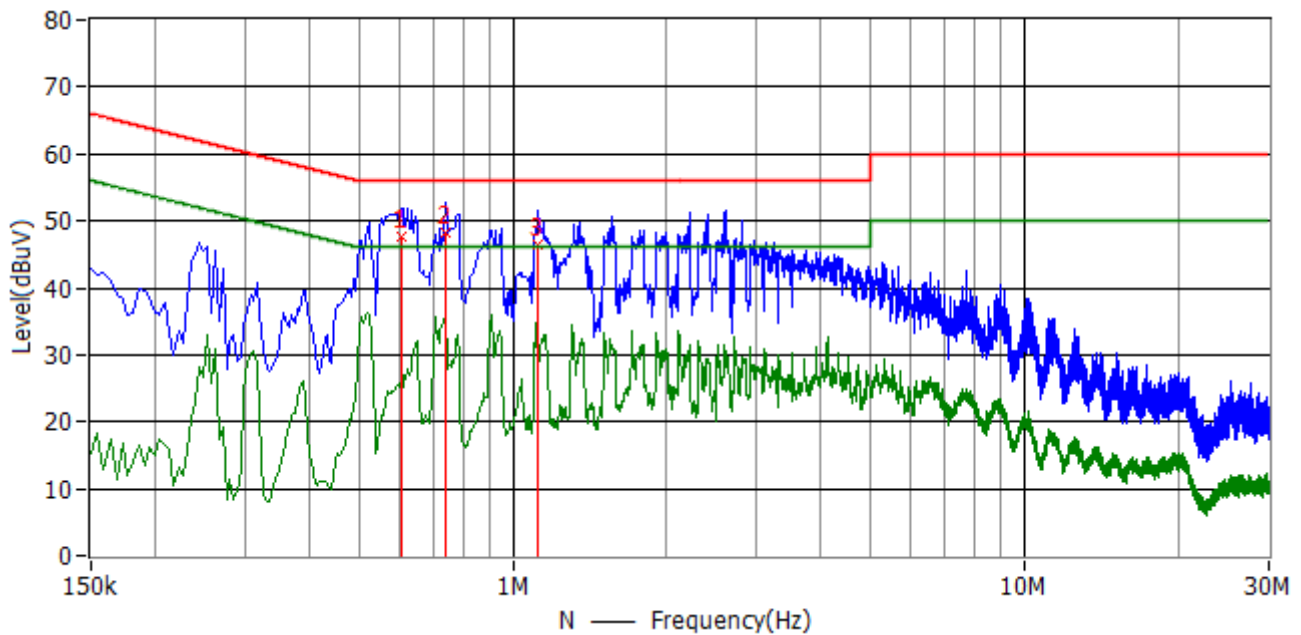

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	604.500 kHz	56.0	47.7	-8.3	9.6	QP	N
2	739.500 kHz	56.0	48.3	-7.7	9.6	QP	N
3	1.117 MHz	56.0	46.3	-9.7	9.7	QP	N
4*	604.500 kHz	56.0	51.9	-4.1	9.6	PK	N
5*	739.500 kHz	56.0	52.6	-3.4	9.6	PK	N
6*	1.122 MHz	56.0	51.6	-4.4	9.7	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 12V 25% load

Note:

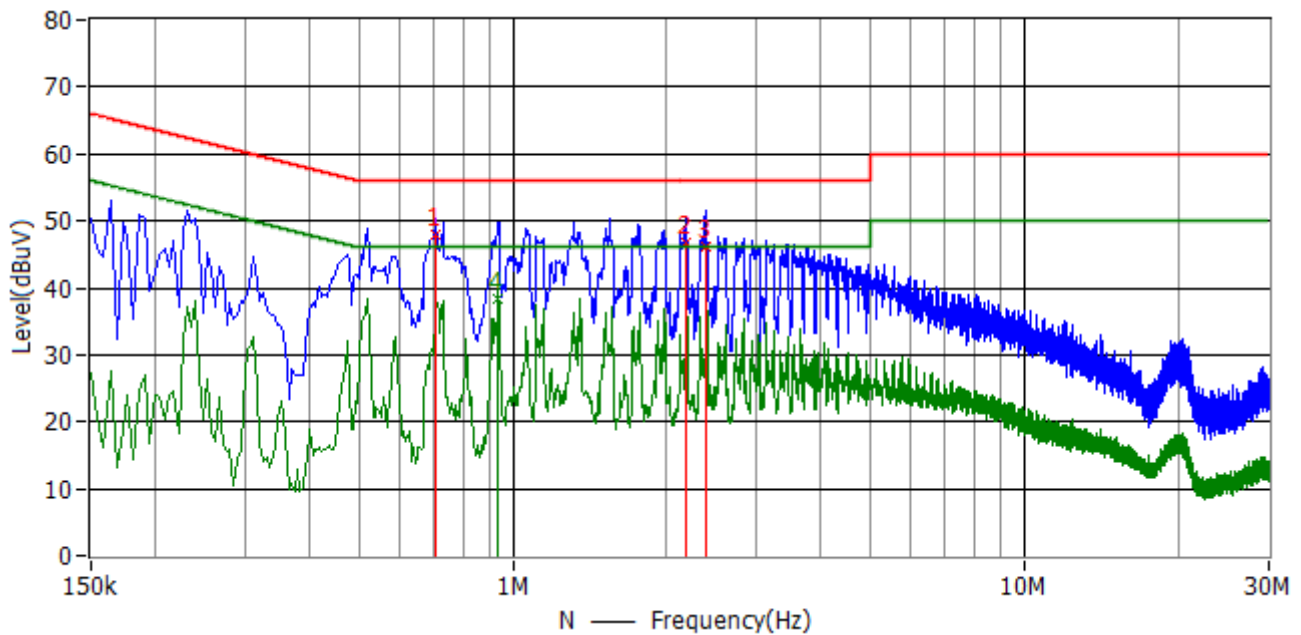

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	703.500 kHz	56.0	47.8	-8.2	9.6	QP	N
2	2.179 MHz	56.0	46.8	-9.2	9.9	QP	N
3	2.386 MHz	56.0	46.2	-9.8	9.9	QP	N
4	937.500 kHz	46.0	38.4	-7.6	9.6	CAV	N
5*	708.000 kHz	56.0	50.5	-5.5	9.6	PK	N
6*	2.179 MHz	56.0	50.3	-5.7	9.9	PK	N
7*	2.386 MHz	56.0	51.5	-4.5	9.9	PK	N
8*	937.500 kHz	46.0	39.6	-6.4	9.6	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22512 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 12V 25% load

Note:

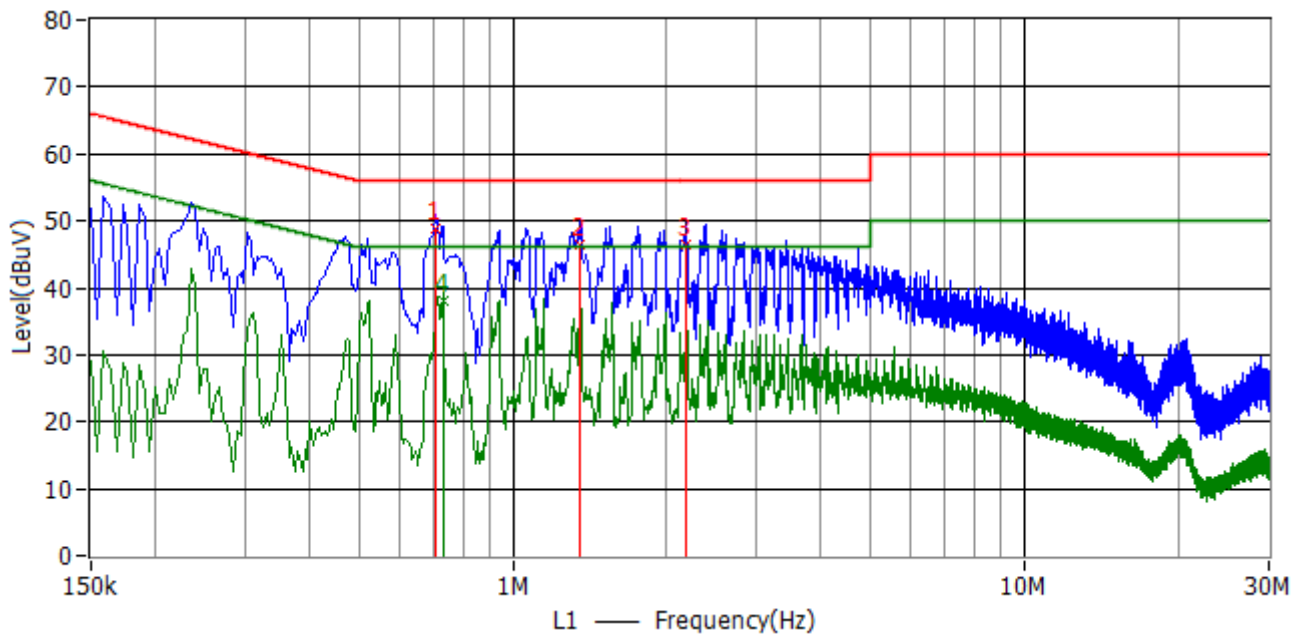

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	708.000 kHz	56.0	48.7	-7.3	9.9	QP	L1
2	1.356 MHz	56.0	46.5	-9.5	10.0	QP	L1
3	2.179 MHz	56.0	46.3	-9.7	10.1	QP	L1
4	730.500 kHz	46.0	38.0	-8.0	9.9	CAV	L1
5*	703.500 kHz	56.0	51.0	-5.0	9.9	PK	L1
6*	1.356 MHz	56.0	50.0	-6.0	10.0	PK	L1
7*	2.179 MHz	56.0	49.9	-6.1	10.1	PK	L1
8*	730.500 kHz	46.0	39.3	-6.7	9.9	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 24V 100% load

Note:

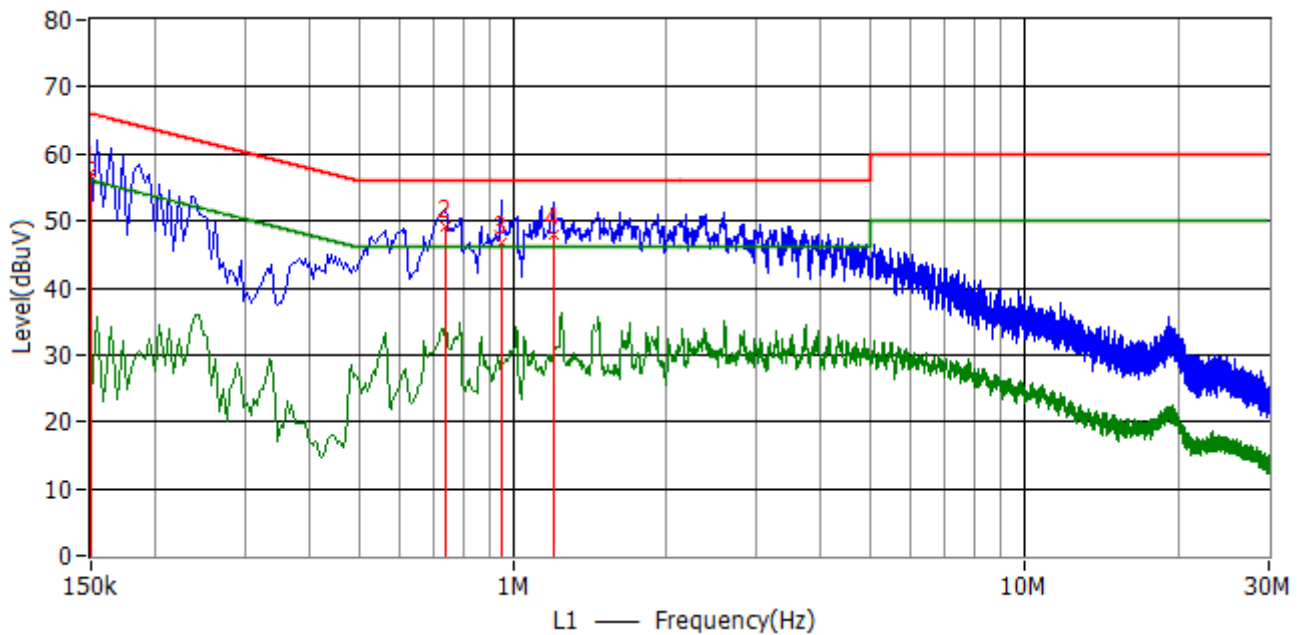

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	150.000 kHz	66.0	57.3	-8.7	9.9	QP	L1
2	739.500 kHz	56.0	49.1	-6.9	9.9	QP	L1
3	955.500 kHz	56.0	46.8	-9.2	9.7	QP	L1
4	1.208 MHz	56.0	47.9	-8.1	10.0	QP	L1
5*	154.500 kHz	65.8	62.0	-3.7	9.9	PK	L1
6*	739.500 kHz	56.0	51.8	-4.2	9.9	PK	L1
7*	951.000 kHz	56.0	53.1	-2.9	9.7	PK	L1
8*	1.198 MHz	56.0	52.7	-3.3	10.0	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 24V 100% load

Note:

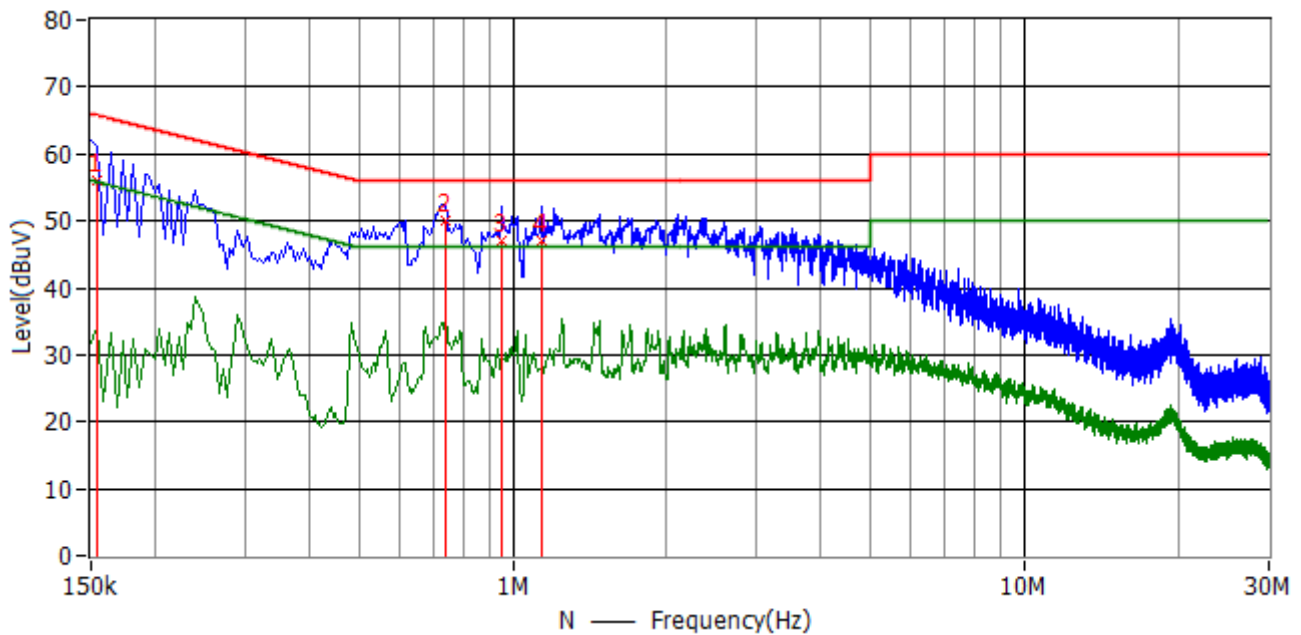

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	154.500 kHz	65.8	55.9	-9.9	9.5	QP	N
2	739.500 kHz	56.0	50.0	-6.0	9.6	QP	N
3	955.500 kHz	56.0	47.1	-8.9	9.6	QP	N
4	1.140 MHz	56.0	46.9	-9.1	9.7	QP	N
5*	150.000 kHz	66.0	61.9	-4.1	9.5	PK	N
6*	730.500 kHz	56.0	52.5	-3.5	9.6	PK	N
7*	955.500 kHz	56.0	52.1	-3.9	9.6	PK	N
8*	1.135 MHz	56.0	52.1	-3.9	9.7	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 24V 100% load

Note:

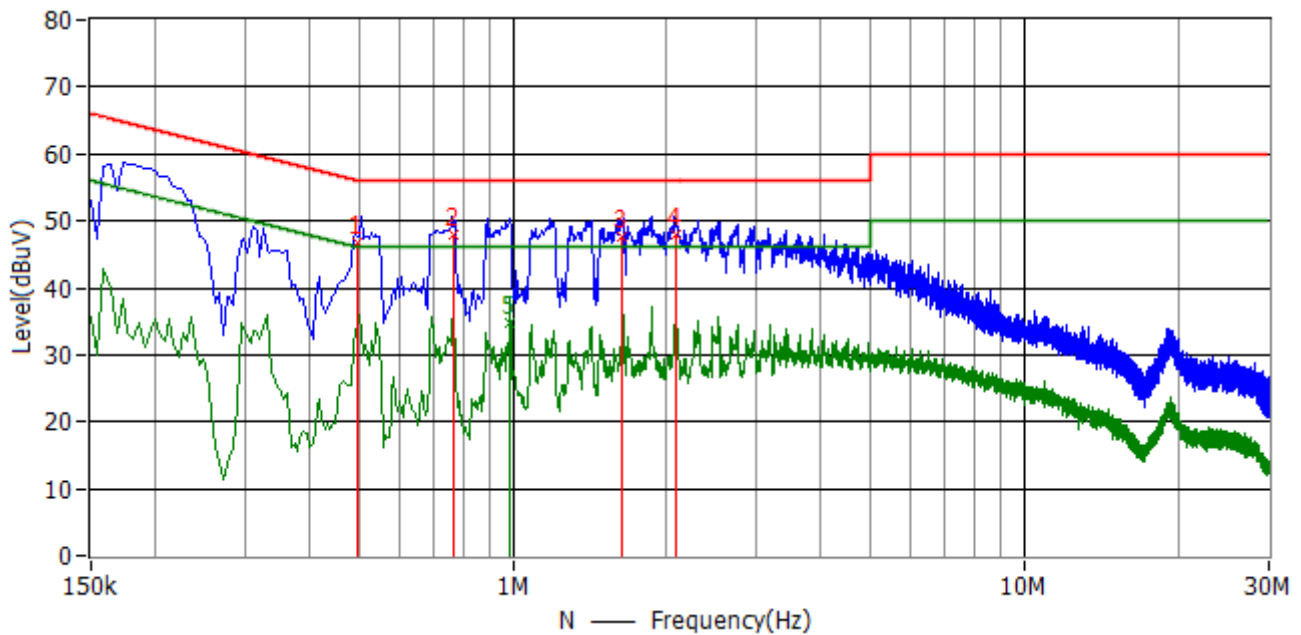

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	496.500 kHz	56.1	46.8	-9.3	9.6	QP	N
2	766.500 kHz	56.0	48.0	-8.0	9.6	QP	N
3	1.639 MHz	56.0	47.5	-8.5	9.8	QP	N
4	2.085 MHz	56.0	48.0	-8.0	9.9	QP	N
5	987.000 kHz	46.0	34.9	-11.1	9.7	CAV	N
6*	505.500 kHz	56.0	50.5	-5.5	9.6	PK	N
7*	762.000 kHz	56.0	50.5	-5.5	9.6	PK	N
8*	1.649 MHz	56.0	50.3	-5.7	9.8	PK	N
9*	2.062 MHz	56.0	50.7	-5.3	9.9	PK	N
10*	987.000 kHz	46.0	38.2	-7.8	9.7	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 24V 100% load

Note:

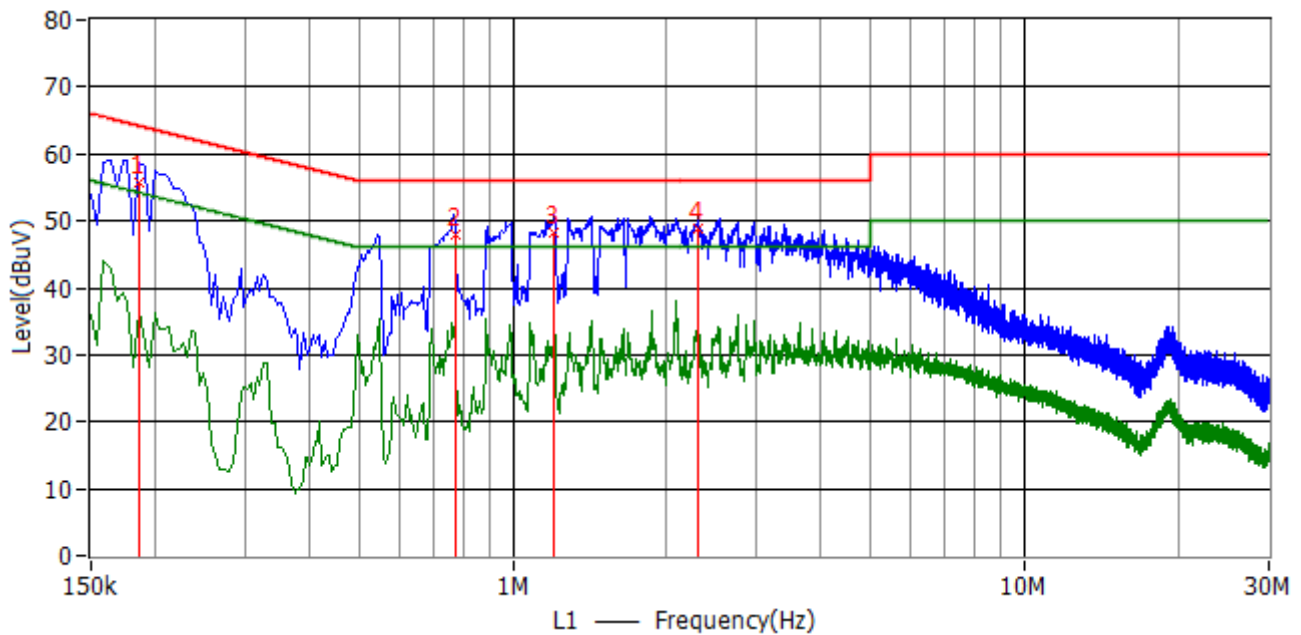

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	186.000 kHz	64.2	55.8	-8.5	9.9	QP	L1
2	771.000 kHz	56.0	48.0	-8.0	9.9	QP	L1
3	1.198 MHz	56.0	48.1	-7.9	10.0	QP	L1
4	2.310 MHz	56.0	48.7	-7.3	10.1	QP	L1
5*	186.000 kHz	64.2	58.7	-5.5	9.9	PK	L1
6*	766.500 kHz	56.0	51.0	-5.0	9.9	PK	L1
7*	1.208 MHz	56.0	50.9	-5.1	10.0	PK	L1
8*	2.310 MHz	56.0	50.7	-5.3	10.1	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 24V 50% load

Note:

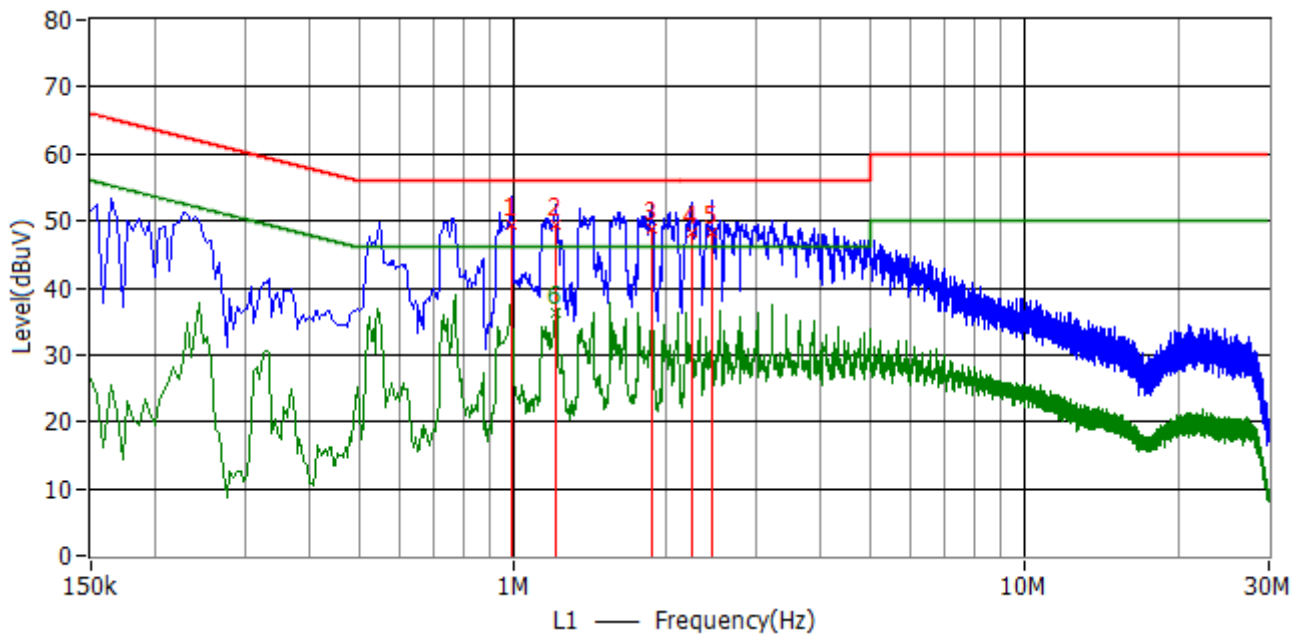

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	996.000 kHz	56.0	49.4	-6.6	10.0	QP	L1
2	1.216 MHz	56.0	49.5	-6.5	10.0	QP	L1
3	1.873 MHz	56.0	48.8	-7.2	10.0	QP	L1
4	2.243 MHz	56.0	48.1	-7.9	10.1	QP	L1
5	2.450 MHz	56.0	48.3	-7.7	10.1	QP	L1
6	1.216 MHz	46.0	36.3	-9.7	10.0	CAV	L1
7*	996.000 kHz	56.0	53.6	-2.4	10.0	PK	L1
8*	1.216 MHz	56.0	52.5	-3.5	10.0	PK	L1
9*	1.873 MHz	56.0	52.5	-3.5	10.0	PK	L1
10*	2.238 MHz	56.0	52.7	-3.3	10.1	PK	L1
11*	2.454 MHz	56.0	53.0	-3.0	10.1	PK	L1
12*	1.216 MHz	46.0	41.1	-4.9	10.0	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 24V 50% load

Note:

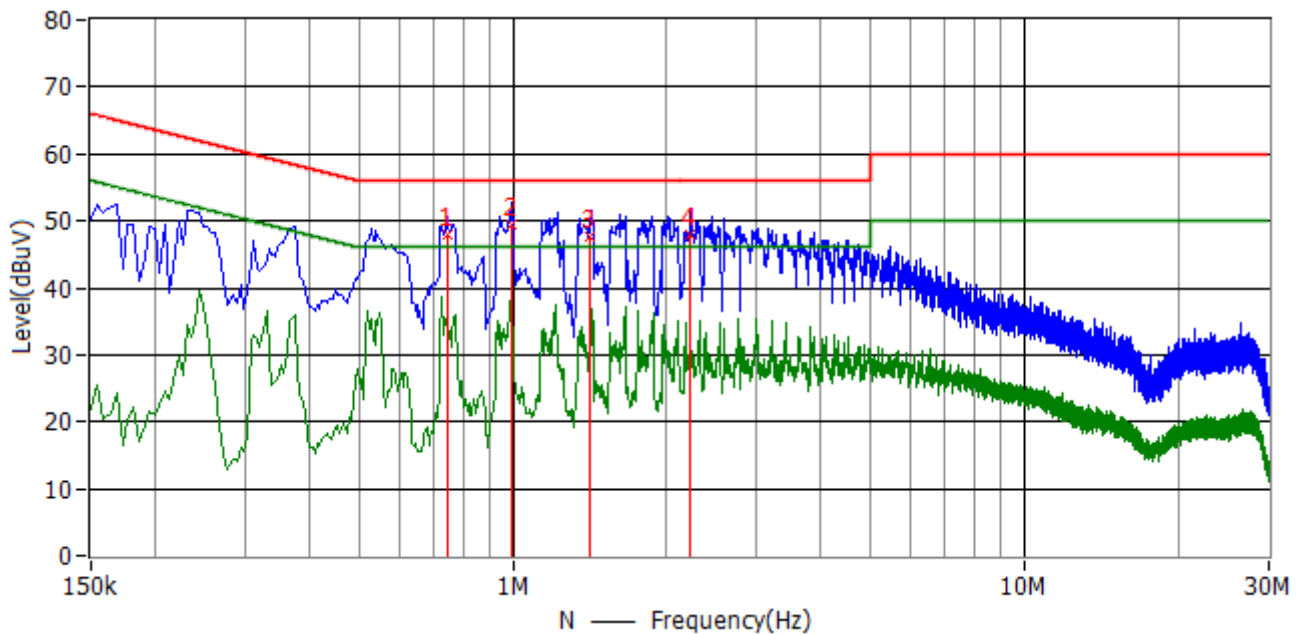

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	744.000 kHz	56.0	47.9	-8.1	9.6	QP	N
2	991.500 kHz	56.0	49.4	-6.6	9.7	QP	N
3	1.419 MHz	56.0	47.6	-8.4	9.7	QP	N
4	2.229 MHz	56.0	48.0	-8.0	9.9	QP	N
5*	744.000 kHz	56.0	50.6	-5.4	9.6	PK	N
6*	996.000 kHz	56.0	52.7	-3.3	9.7	PK	N
7*	1.423 MHz	56.0	51.4	-4.6	9.7	PK	N
8*	2.233 MHz	56.0	51.8	-4.2	9.9	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 24V 50% load

Note:

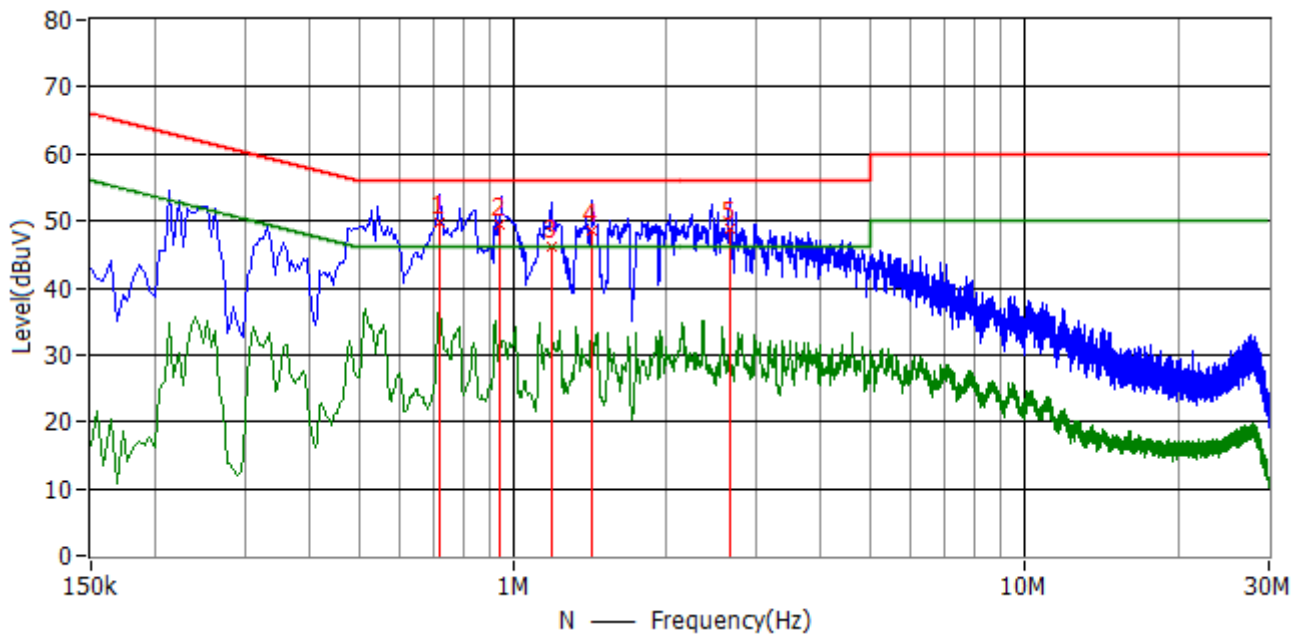

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	721.500 kHz	56.0	49.6	-6.4	9.6	QP	N
2	946.500 kHz	56.0	49.4	-6.6	9.6	QP	N
3	1.194 MHz	56.0	46.1	-9.9	9.7	QP	N
4	1.433 MHz	56.0	48.5	-7.5	9.7	QP	N
5	2.661 MHz	56.0	48.7	-7.3	9.9	QP	N
6*	721.500 kHz	56.0	53.9	-2.1	9.6	PK	N
7*	951.000 kHz	56.0	53.5	-2.5	9.6	PK	N
8*	1.190 MHz	56.0	52.8	-3.2	9.7	PK	N
9*	1.433 MHz	56.0	53.2	-2.8	9.7	PK	N
10*	2.661 MHz	56.0	53.3	-2.7	9.9	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 24V 50% load

Note:

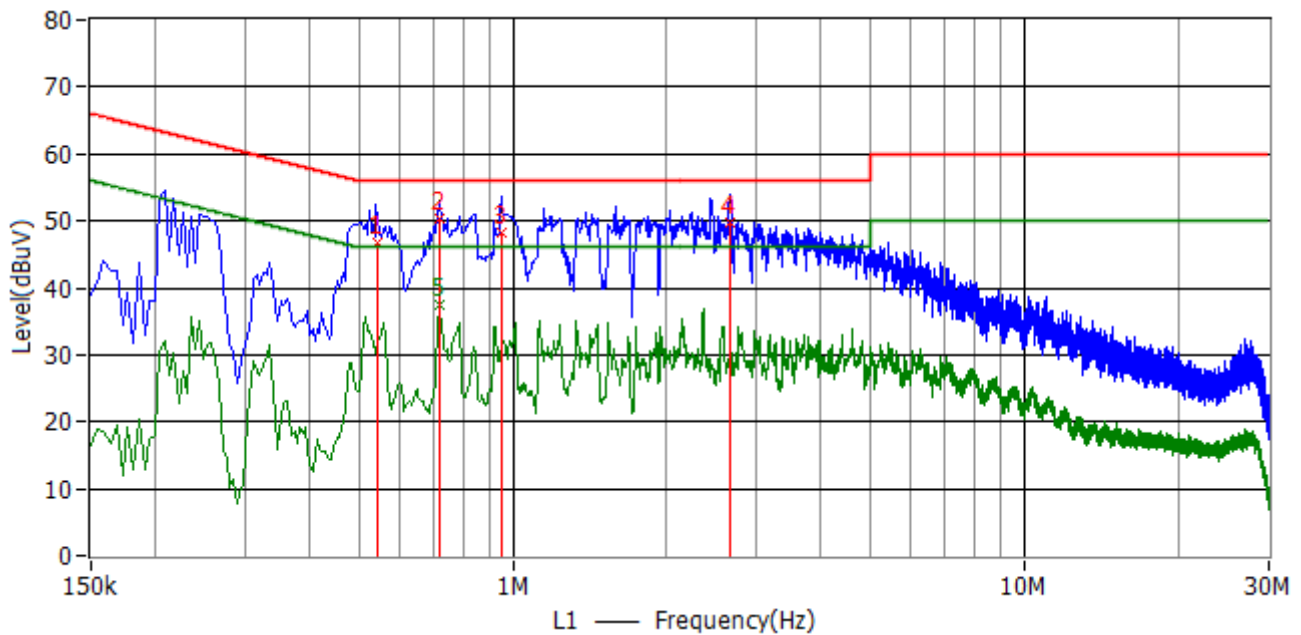

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	546.000 kHz	56.0	46.8	-9.2	9.9	QP	L1
2	721.500 kHz	56.0	50.4	-5.6	9.9	QP	L1
3	951.000 kHz	56.0	48.1	-7.9	9.7	QP	L1
4	2.661 MHz	56.0	49.6	-6.4	10.0	QP	L1
5	717.000 kHz	46.0	37.6	-8.4	9.9	CAV	L1
6*	541.500 kHz	56.0	52.5	-3.5	9.9	PK	L1
7*	717.000 kHz	56.0	53.0	-3.0	9.9	PK	L1
8*	951.000 kHz	56.0	53.5	-2.5	9.7	PK	L1
9*	2.661 MHz	56.0	54.0	-2.0	10.0	PK	L1
10*	717.000 kHz	46.0	37.6	-8.4	9.9	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 24V 25% load

Note:

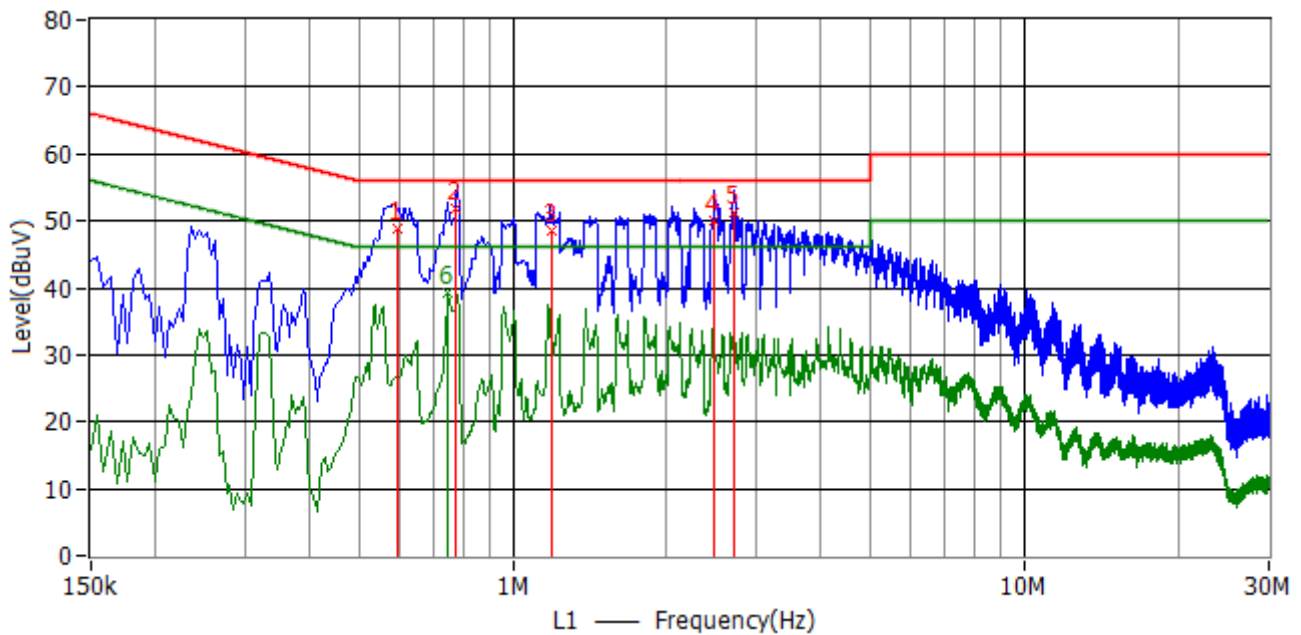

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	595.500 kHz	56.0	48.8	-7.2	9.9	QP	L1
2	775.500 kHz	56.0	51.8	-4.2	9.9	QP	L1
3	1.194 MHz	56.0	48.5	-7.5	10.0	QP	L1
4	2.477 MHz	56.0	49.9	-6.1	10.1	QP	L1
5	2.715 MHz	56.0	51.1	-4.9	10.0	QP	L1
6	744.000 kHz	46.0	39.3	-6.7	9.9	CAV	L1
7*	591.000 kHz	56.0	52.5	-3.5	9.9	PK	L1
8*	780.000 kHz	56.0	55.5	-0.5	9.9	PK	L1
9*	1.198 MHz	56.0	52.2	-3.8	10.0	PK	L1
10*	2.477 MHz	56.0	54.4	-1.6	10.1	PK	L1
11*	2.706 MHz	56.0	54.6	-1.4	10.0	PK	L1
12*	748.500 kHz	46.0	39.3	-6.7	9.9	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 24V 25% load

Note:

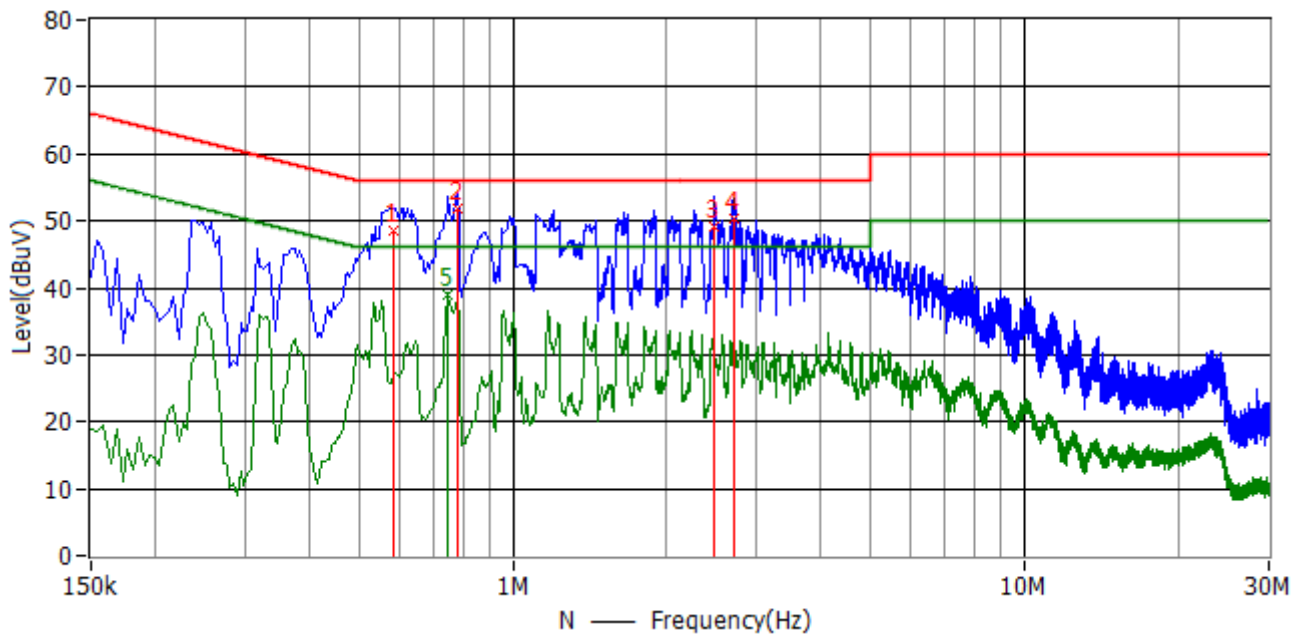

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	586.500 kHz	56.0	48.6	-7.4	9.6	QP	N
2	780.000 kHz	56.0	51.8	-4.2	9.6	QP	N
3	2.477 MHz	56.0	49.1	-6.9	9.9	QP	N
4	2.697 MHz	56.0	50.3	-5.7	9.8	QP	N
5	748.500 kHz	46.0	39.1	-6.9	9.6	CAV	N
6*	591.000 kHz	56.0	52.0	-4.0	9.6	PK	N
7*	780.000 kHz	56.0	54.2	-1.8	9.6	PK	N
8*	2.477 MHz	56.0	53.7	-2.3	9.9	PK	N
9*	2.711 MHz	56.0	53.3	-2.7	9.8	PK	N
10*	744.000 kHz	46.0	39.2	-6.8	9.6	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 24V 25% load

Note:

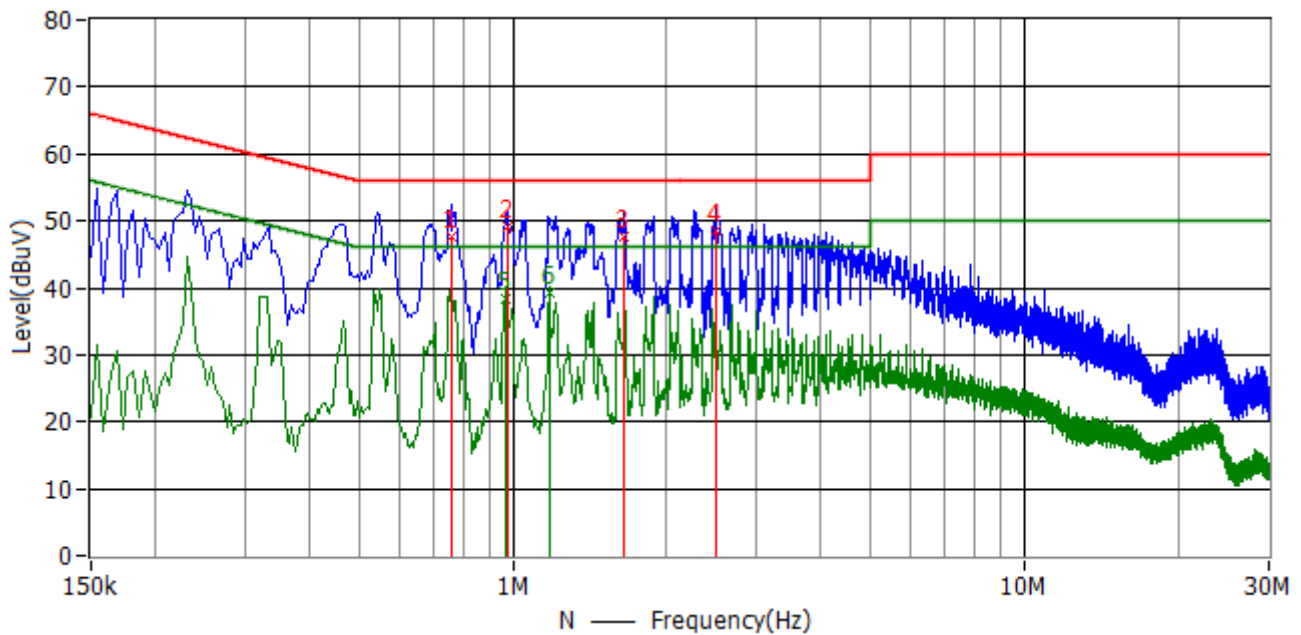

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	762.000 kHz	56.0	47.6	-8.4	9.6	QP	N
2	973.500 kHz	56.0	49.0	-7.0	9.7	QP	N
3	1.653 MHz	56.0	47.6	-8.4	9.8	QP	N
4	2.486 MHz	56.0	48.6	-7.4	9.9	QP	N
5	964.500 kHz	46.0	38.5	-7.5	9.6	CAV	N
6	1.176 MHz	46.0	39.2	-6.8	9.7	CAV	N
7*	762.000 kHz	56.0	52.4	-3.6	9.6	PK	N
8*	973.500 kHz	56.0	51.5	-4.5	9.7	PK	N
9*	1.653 MHz	56.0	51.5	-4.5	9.8	PK	N
10*	2.490 MHz	56.0	52.4	-3.6	9.9	PK	N
11*	964.500 kHz	46.0	40.3	-5.7	9.6	AV	N
12*	1.176 MHz	46.0	40.3	-5.7	9.7	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22524 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 24V 25% load

Note:

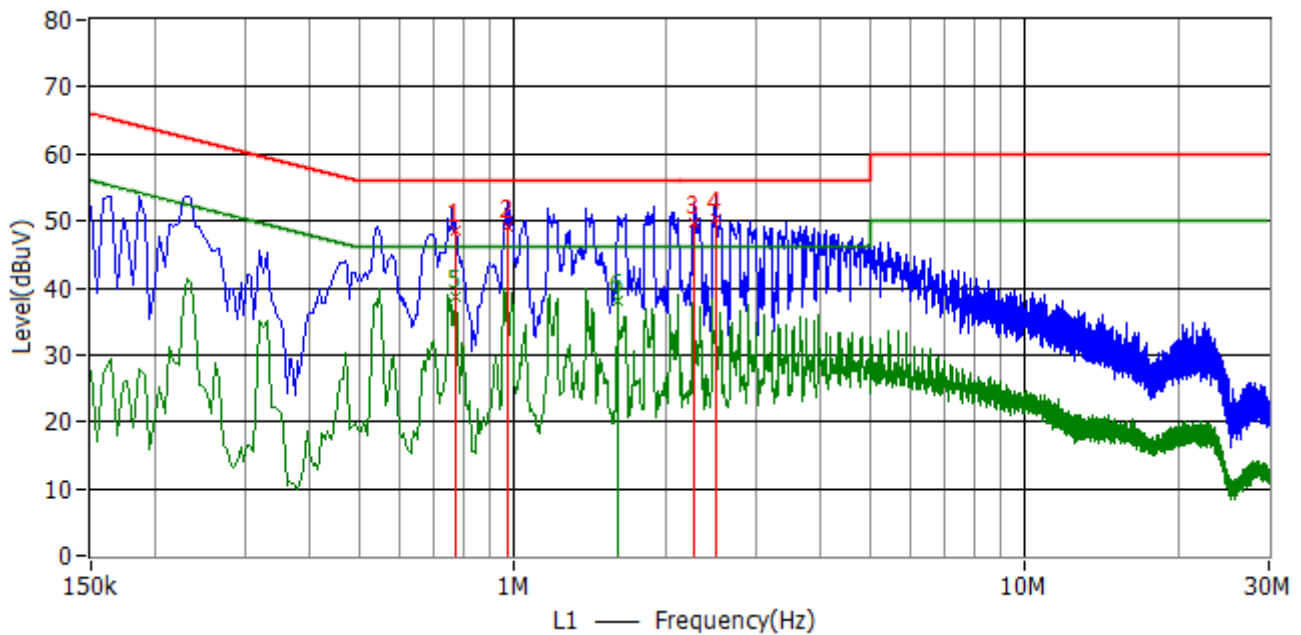

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	771.000 kHz	56.0	48.4	-7.6	9.9	QP	L1
2	973.500 kHz	56.0	49.1	-6.9	9.8	QP	L1
3	2.269 MHz	56.0	49.7	-6.3	10.1	QP	L1
4	2.486 MHz	56.0	50.2	-5.8	10.1	QP	L1
5	771.000 kHz	46.0	38.6	-7.4	9.9	CAV	L1
6	1.603 MHz	46.0	38.1	-7.9	10.0	CAV	L1
7*	762.000 kHz	56.0	52.2	-3.8	9.9	PK	L1
8*	973.500 kHz	56.0	52.8	-3.2	9.8	PK	L1
9*	2.269 MHz	56.0	52.9	-3.1	10.1	PK	L1
10*	2.490 MHz	56.0	53.9	-2.1	10.1	PK	L1
11*	775.500 kHz	46.0	40.4	-5.6	9.9	AV	L1
12*	1.603 MHz	46.0	41.0	-5.0	10.0	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 38V 100% load

Note:

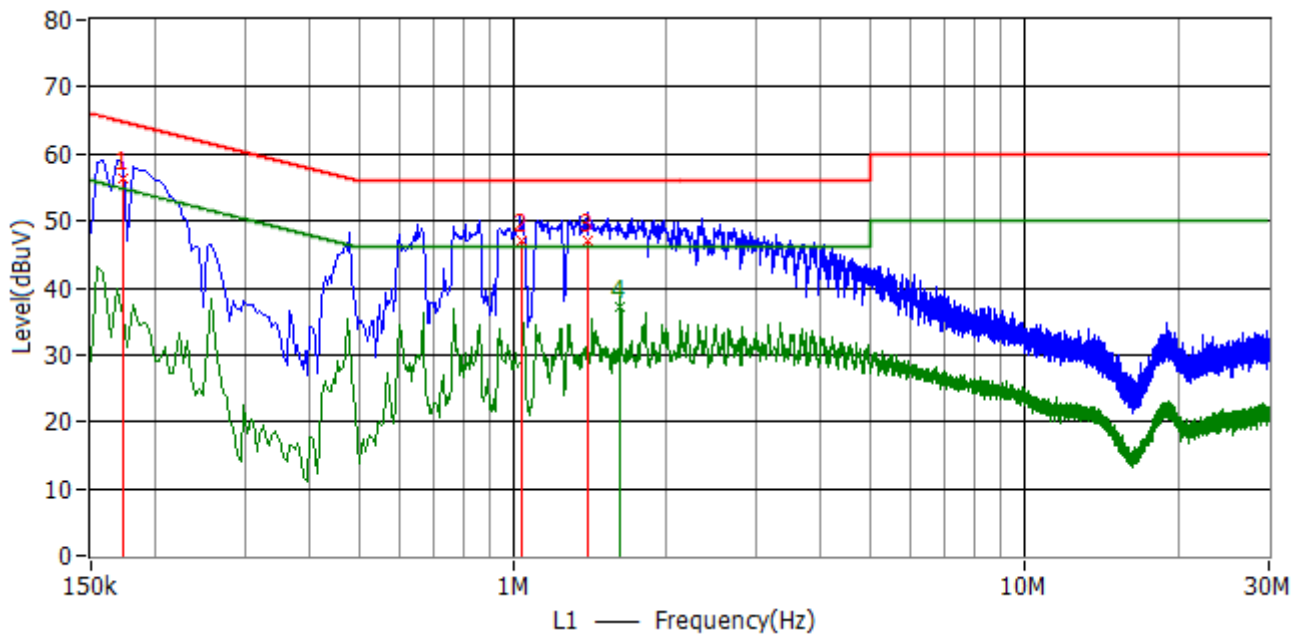

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	172.500 kHz	64.8	56.2	-8.7	9.9	QP	L1
2	1.036 MHz	56.0	46.9	-9.1	10.0	QP	L1
3	1.401 MHz	56.0	47.1	-8.9	10.0	QP	L1
4	1.626 MHz	46.0	37.1	-8.9	10.0	CAV	L1
5*	168.000 kHz	65.1	59.1	-6.0	9.9	PK	L1
6*	1.032 MHz	56.0	50.8	-5.2	10.0	PK	L1
7*	1.397 MHz	56.0	51.3	-4.7	10.0	PK	L1
8*	1.626 MHz	46.0	38.6	-7.4	10.0	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 38V 100% load

Note:

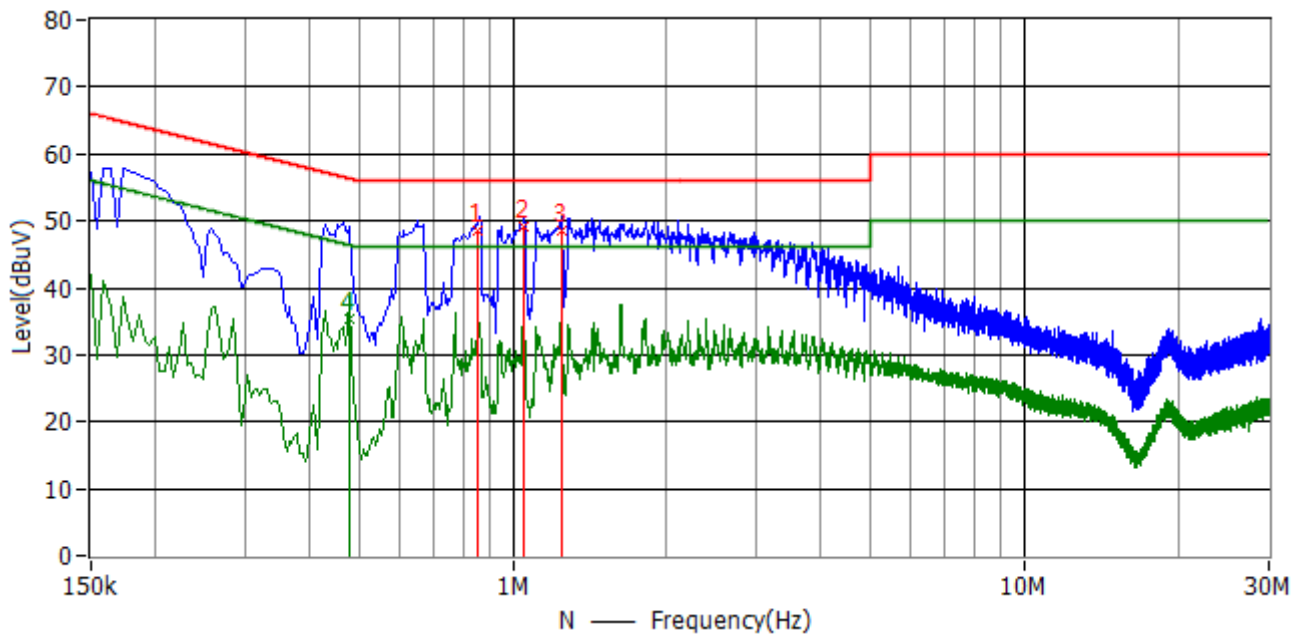

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	856.500 kHz	56.0	48.4	-7.6	9.6	QP	N
2	1.054 MHz	56.0	49.1	-6.9	9.7	QP	N
3	1.248 MHz	56.0	48.4	-7.6	9.7	QP	N
4	478.500 kHz	46.4	35.5	-10.8	9.6	CAV	N
5*	861.000 kHz	56.0	50.7	-5.3	9.6	PK	N
6*	1.054 MHz	56.0	50.8	-5.2	9.7	PK	N
7*	1.244 MHz	56.0	50.6	-5.4	9.7	PK	N
8*	478.500 kHz	46.4	38.7	-7.7	9.6	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 38V 100% load

Note:

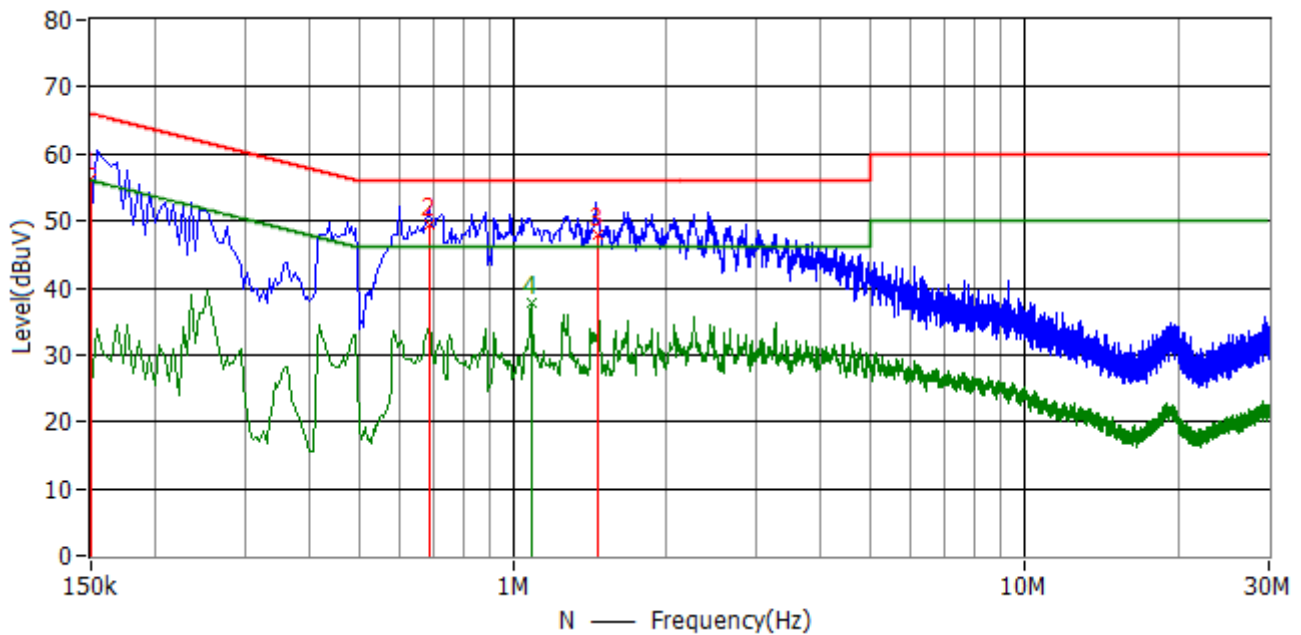

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	150.000 kHz	66.0	56.2	-9.8	9.5	QP	N
2	690.000 kHz	56.0	49.3	-6.7	9.6	QP	N
3	1.468 MHz	56.0	47.8	-8.2	9.7	QP	N
4	1.086 MHz	46.0	37.9	-8.1	9.7	CAV	N
5*	154.500 kHz	65.8	60.4	-5.3	9.5	PK	N
6*	685.500 kHz	56.0	52.1	-3.9	9.6	PK	N
7*	1.450 MHz	56.0	52.7	-3.3	9.7	PK	N
8*	1.086 MHz	46.0	37.6	-8.4	9.7	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 38V 100% load

Note:

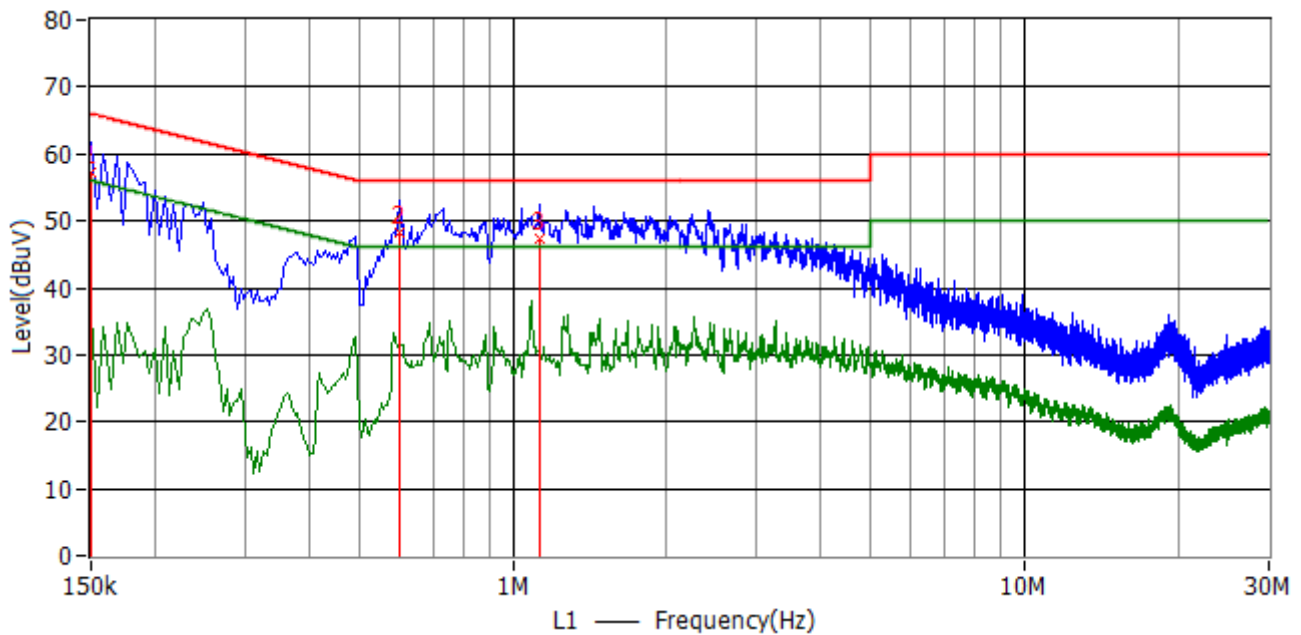

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	150.000 kHz	66.0	57.3	-8.7	9.9	QP	L1
2	600.000 kHz	56.0	48.2	-7.8	9.9	QP	L1
3	1.131 MHz	56.0	47.3	-8.7	10.0	QP	L1
4*	150.000 kHz	66.0	61.9	-4.1	9.9	PK	L1
5*	600.000 kHz	56.0	52.9	-3.1	9.9	PK	L1
6*	1.127 MHz	56.0	52.4	-3.6	10.0	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 38V 50% load

Note:

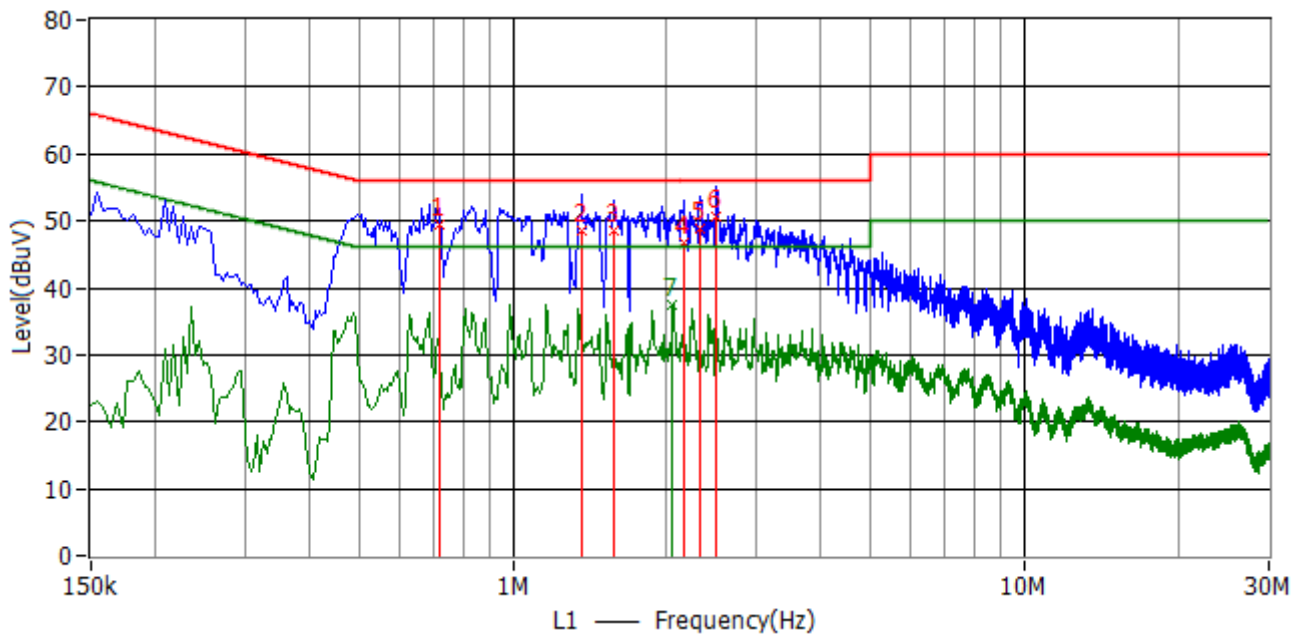

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	721.500 kHz	56.0	49.3	-6.7	9.9	QP	L1
2	1.365 MHz	56.0	48.4	-7.6	10.0	QP	L1
3	1.577 MHz	56.0	48.5	-7.5	10.0	QP	L1
4	2.152 MHz	56.0	46.7	-9.3	10.1	QP	L1
5	2.324 MHz	56.0	48.8	-7.2	10.1	QP	L1
6	2.494 MHz	56.0	50.7	-5.3	10.1	QP	L1
7	2.054 MHz	46.0	37.4	-8.6	10.1	CAV	L1
8*	721.500 kHz	56.0	51.8	-4.2	9.9	PK	L1
9*	1.365 MHz	56.0	53.9	-2.1	10.0	PK	L1
10*	1.581 MHz	56.0	53.1	-2.9	10.0	PK	L1
11*	2.157 MHz	56.0	53.0	-3.0	10.1	PK	L1
12*	2.324 MHz	56.0	53.5	-2.5	10.1	PK	L1
13*	2.499 MHz	56.0	55.1	-0.9	10.1	PK	L1
14*	2.058 MHz	46.0	37.9	-8.1	10.1	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 38V 50% load

Note:

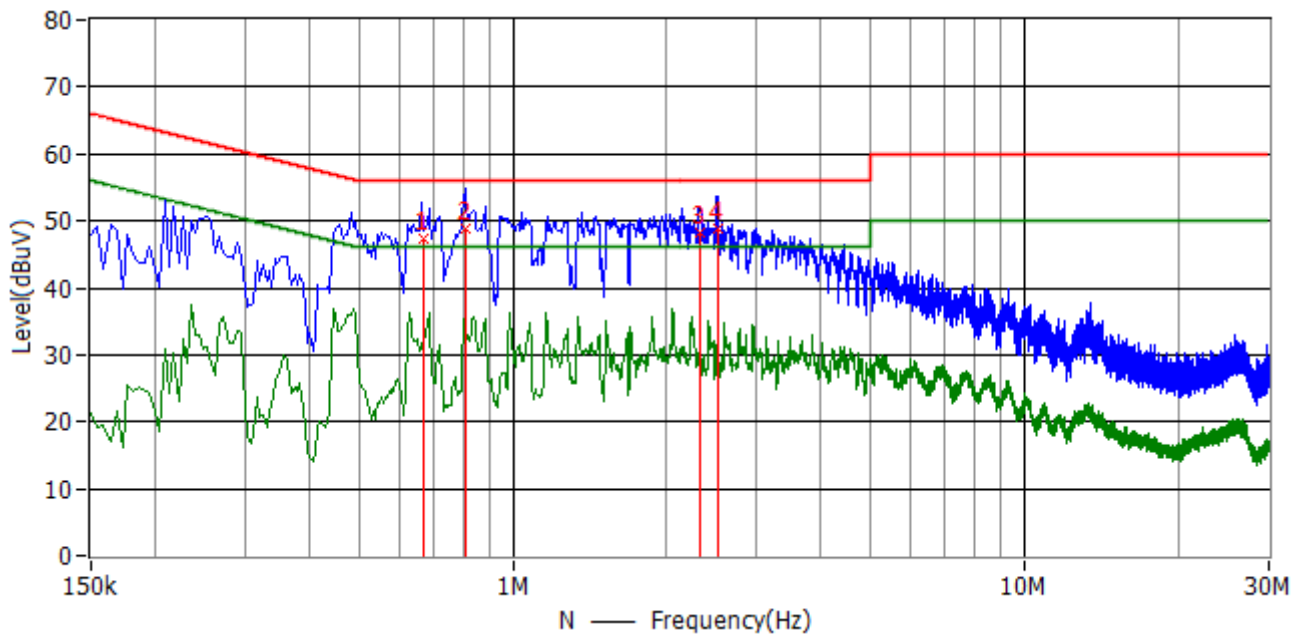

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	667.500 kHz	56.0	47.2	-8.8	9.6	QP	N
2	807.000 kHz	56.0	48.8	-7.2	9.6	QP	N
3	2.314 MHz	56.0	48.2	-7.8	9.9	QP	N
4	2.517 MHz	56.0	48.9	-7.1	9.9	QP	N
5*	663.000 kHz	56.0	52.8	-3.2	9.6	PK	N
6*	807.000 kHz	56.0	54.8	-1.2	9.6	PK	N
7*	2.314 MHz	56.0	52.1	-3.9	9.9	PK	N
8*	2.503 MHz	56.0	53.6	-2.4	9.9	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 38V 50% load

Note:

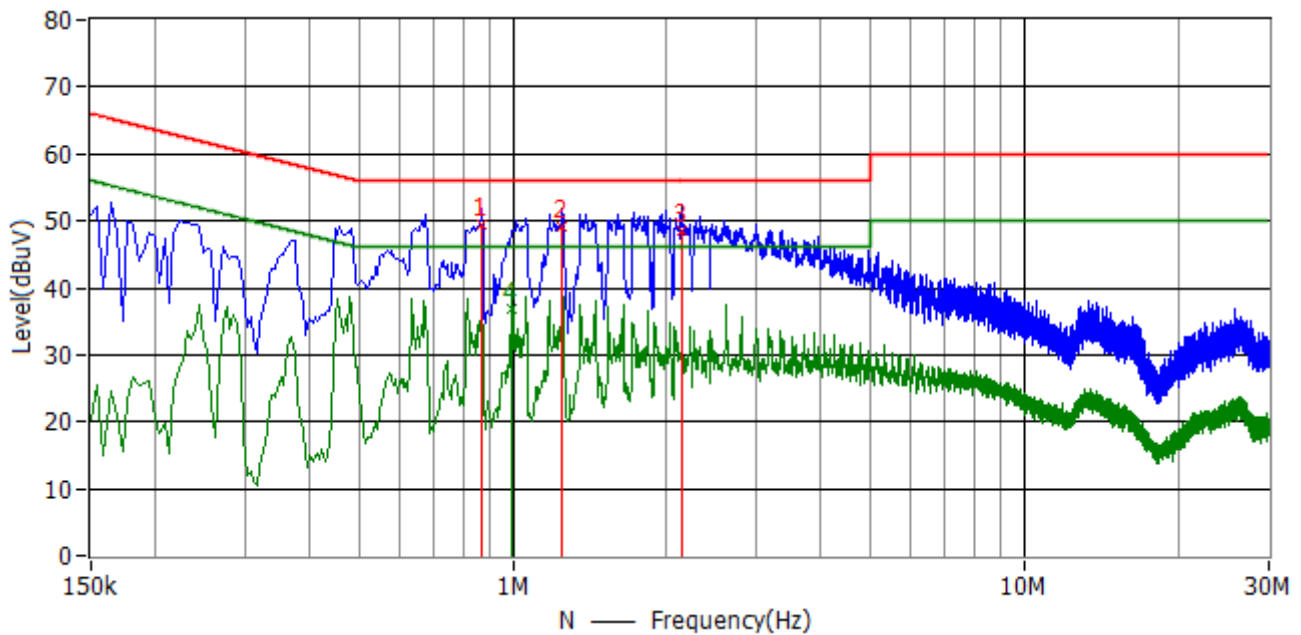

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	870.000 kHz	56.0	49.3	-6.7	9.6	QP	N
2	1.248 MHz	56.0	49.2	-6.8	9.7	QP	N
3	2.135 MHz	56.0	48.6	-7.4	9.9	QP	N
4	991.500 kHz	46.0	36.8	-9.2	9.7	CAV	N
5*	870.000 kHz	56.0	51.8	-4.2	9.6	PK	N
6*	1.248 MHz	56.0	51.8	-4.2	9.7	PK	N
7*	2.143 MHz	56.0	52.1	-3.9	9.9	PK	N
8*	996.000 kHz	46.0	39.5	-6.5	9.7	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 38V 50% load

Note:

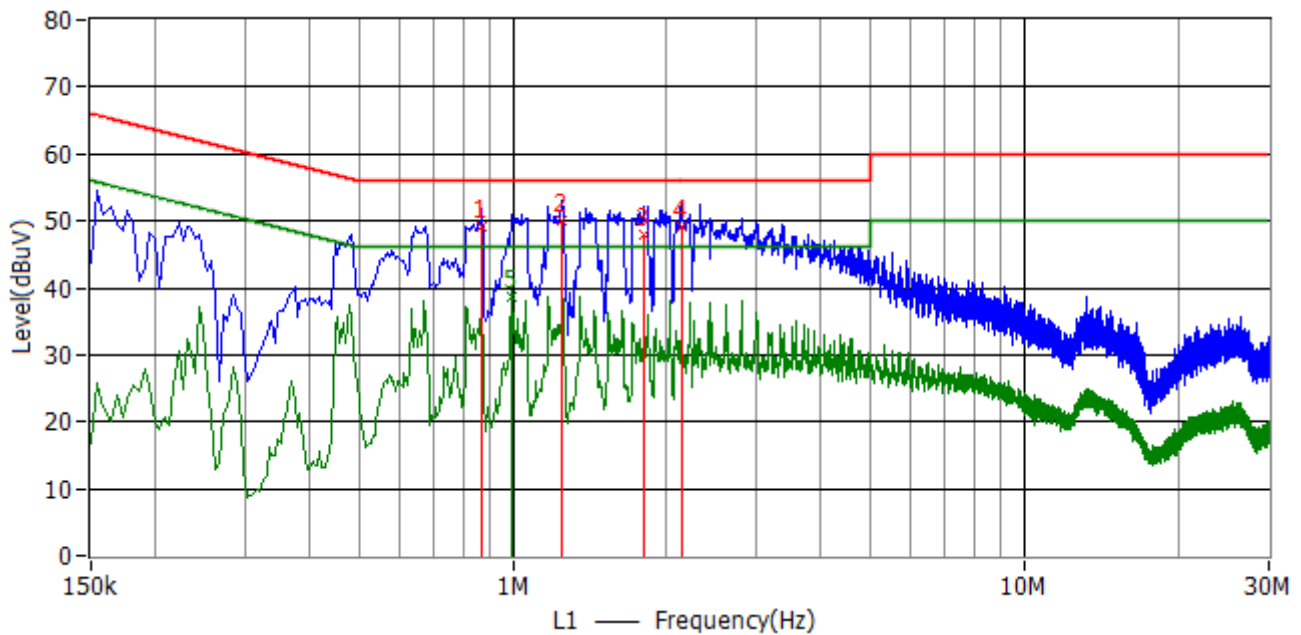

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	870.000 kHz	56.0	49.2	-6.8	9.5	QP	L1
2	1.248 MHz	56.0	49.9	-6.1	10.0	QP	L1
3	1.802 MHz	56.0	48.0	-8.0	10.0	QP	L1
4	2.143 MHz	56.0	49.2	-6.8	10.1	QP	L1
5	996.000 kHz	46.0	38.8	-7.2	10.0	CAV	L1
6*	870.000 kHz	56.0	52.0	-4.0	9.5	PK	L1
7*	1.248 MHz	56.0	53.1	-2.9	10.0	PK	L1
8*	1.802 MHz	56.0	52.1	-3.9	10.0	PK	L1
9*	2.135 MHz	56.0	53.0	-3.0	10.1	PK	L1
10*	991.500 kHz	46.0	39.5	-6.5	9.9	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 38V 25% load

Note:

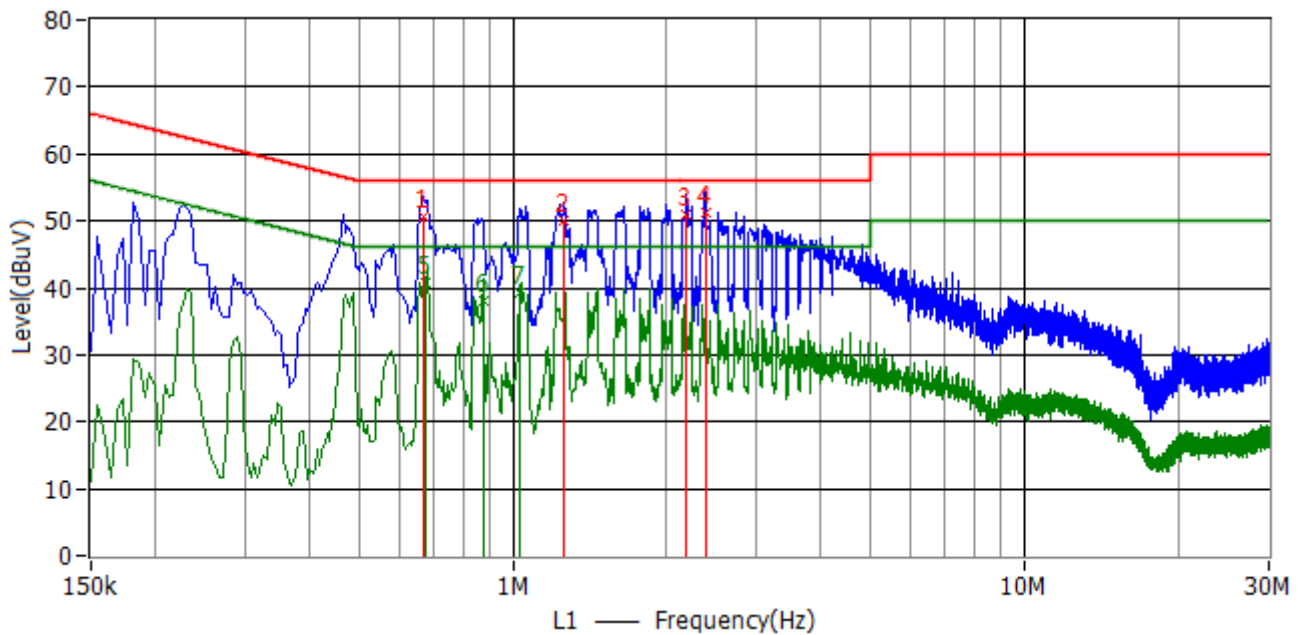

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	672.000 kHz	56.0	50.5	-5.5	9.9	QP	L1
2	1.262 MHz	56.0	50.1	-5.9	10.0	QP	L1
3	2.188 MHz	56.0	50.9	-5.1	10.1	QP	L1
4	2.377 MHz	56.0	51.2	-4.8	10.1	QP	L1
5	676.500 kHz	46.0	40.6	-5.4	9.9	CAV	L1
6	874.500 kHz	46.0	38.2	-7.8	9.5	CAV	L1
7	1.032 MHz	46.0	39.3	-6.7	10.0	CAV	L1
8*	672.000 kHz	56.0	53.7	-2.3	9.9	PK	L1
9*	1.262 MHz	56.0	52.9	-3.1	10.0	PK	L1
10*	2.188 MHz	56.0	53.9	-2.1	10.1	PK	L1
11*	2.373 MHz	56.0	54.5	-1.5	10.1	PK	L1
12*	681.000 kHz	46.0	42.9	-3.1	9.9	AV	L1
13*	874.500 kHz	46.0	41.4	-4.6	9.5	AV	L1
14*	1.046 MHz	46.0	40.6	-5.4	10.0	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 38V 25% load

Note:

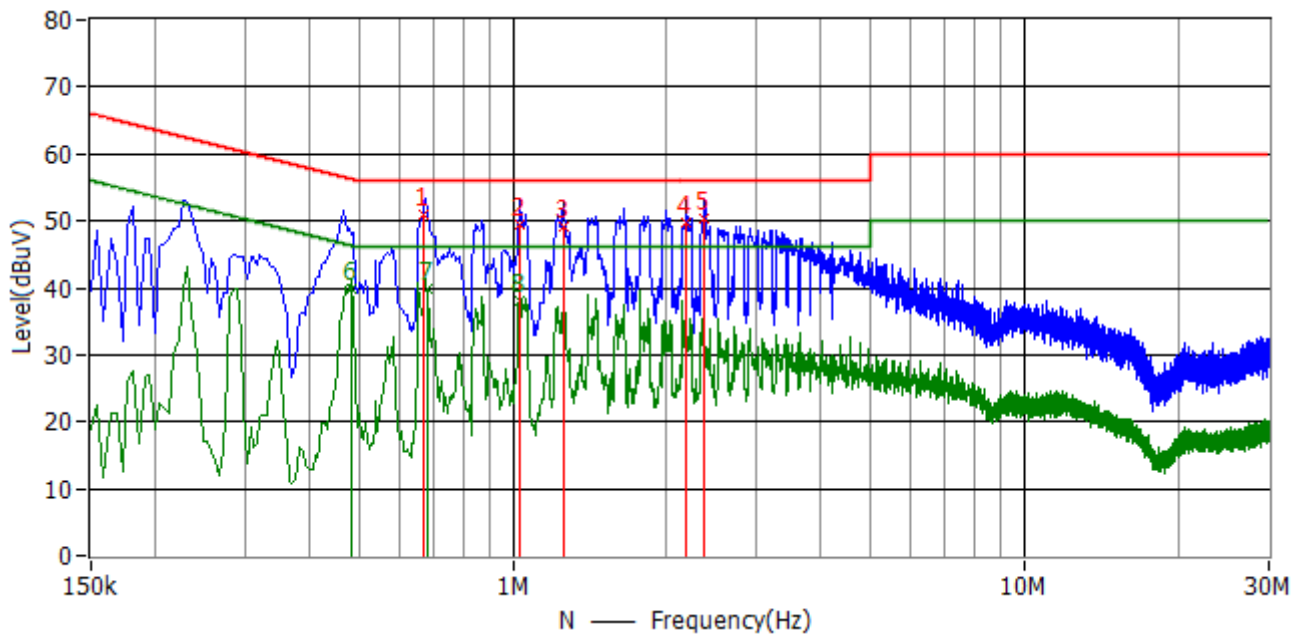

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	672.000 kHz	56.0	50.8	-5.2	9.6	QP	N
2	1.028 MHz	56.0	49.3	-6.7	9.7	QP	N
3	1.257 MHz	56.0	49.2	-6.8	9.7	QP	N
4	2.188 MHz	56.0	49.7	-6.3	9.9	QP	N
5	2.373 MHz	56.0	50.3	-5.7	9.9	QP	N
6	483.000 kHz	46.3	40.0	-6.3	9.6	CAV	N
7	681.000 kHz	46.0	39.8	-6.2	9.6	CAV	N
8	1.028 MHz	46.0	38.2	-7.8	9.7	CAV	N
9*	676.500 kHz	56.0	53.3	-2.7	9.6	PK	N
10*	1.028 MHz	56.0	53.4	-2.6	9.7	PK	N
11*	1.257 MHz	56.0	53.0	-3.0	9.7	PK	N
12*	2.179 MHz	56.0	53.0	-3.0	9.9	PK	N
13*	2.377 MHz	56.0	53.1	-2.9	9.9	PK	N
14*	483.000 kHz	46.3	41.4	-4.9	9.6	AV	N
15*	676.500 kHz	46.0	41.4	-4.6	9.6	AV	N
16*	1.028 MHz	46.0	41.2	-4.8	9.7	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 38V 25% load

Note:

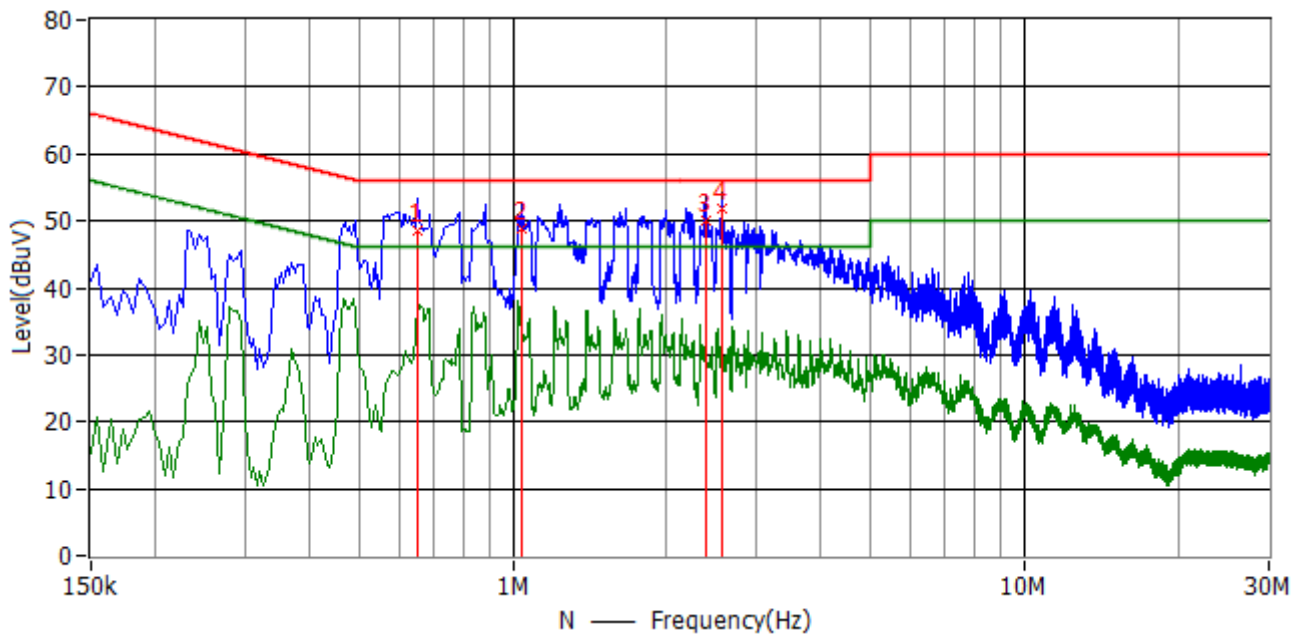

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	654.000 kHz	56.0	48.6	-7.4	9.6	QP	N
2	1.046 MHz	56.0	48.8	-7.2	9.7	QP	N
3	2.382 MHz	56.0	49.9	-6.1	9.9	QP	N
4	2.562 MHz	56.0	51.7	-4.3	9.9	QP	N
5*	654.000 kHz	56.0	53.2	-2.8	9.6	PK	N
6*	1.046 MHz	56.0	52.7	-3.3	9.7	PK	N
7*	2.377 MHz	56.0	53.6	-2.4	9.9	PK	N
8*	2.562 MHz	56.0	54.1	-1.9	9.9	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22538 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 38V 25% load

Note:

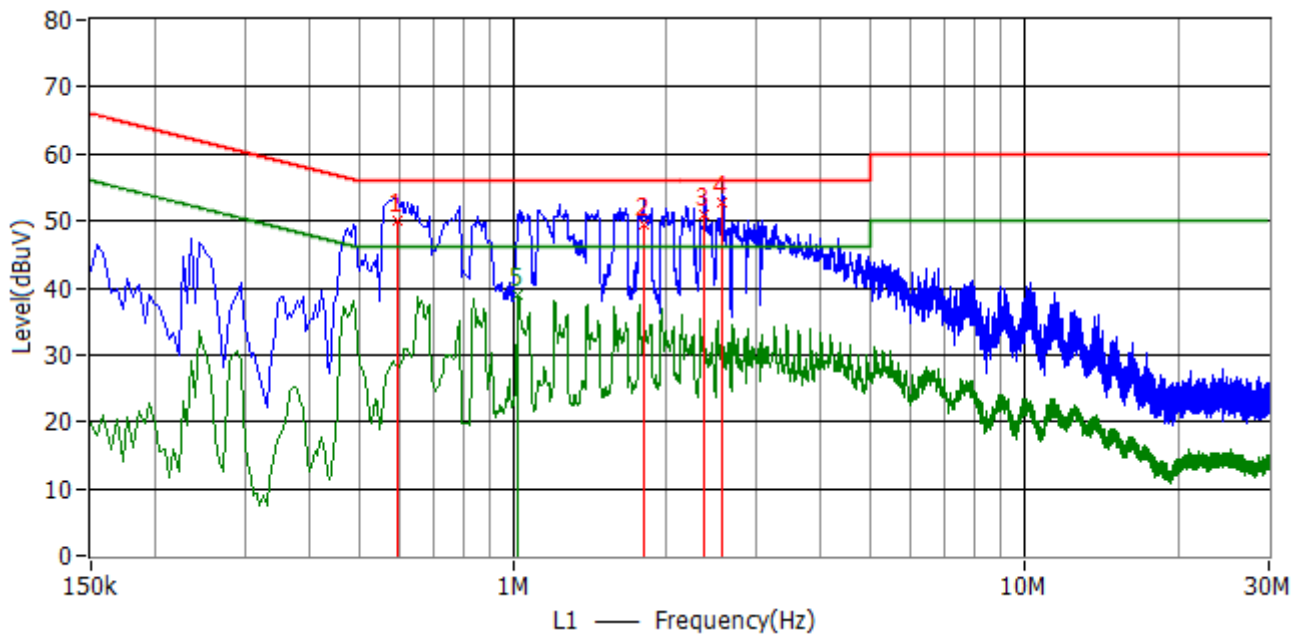

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	595.500 kHz	56.0	50.0	-6.0	9.9	QP	L1
2	1.797 MHz	56.0	49.4	-6.6	10.0	QP	L1
3	2.364 MHz	56.0	51.0	-5.0	10.1	QP	L1
4	2.567 MHz	56.0	52.8	-3.2	10.1	QP	L1
5	1.023 MHz	46.0	39.1	-6.9	10.0	CAV	L1
6*	595.500 kHz	56.0	53.3	-2.7	9.9	PK	L1
7*	1.797 MHz	56.0	52.9	-3.1	10.0	PK	L1
8*	2.364 MHz	56.0	53.9	-2.1	10.1	PK	L1
9*	2.562 MHz	56.0	56.1	0.1	10.1	PK	L1
10*	1.023 MHz	46.0	39.0	-7.0	10.0	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 54V 100% load

Note:

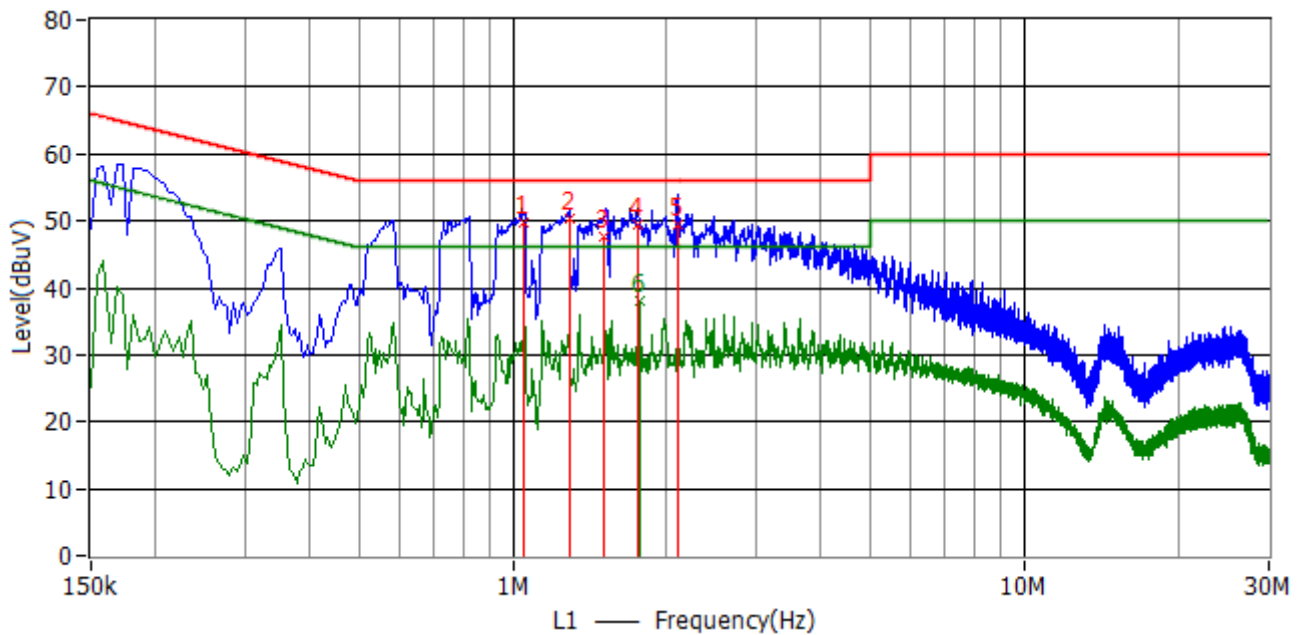

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	1.054 MHz	56.0	49.8	-6.2	10.0	QP	L1
2	1.293 MHz	56.0	50.4	-5.6	10.0	QP	L1
3	1.504 MHz	56.0	47.5	-8.5	10.0	QP	L1
4	1.761 MHz	56.0	49.5	-6.5	10.0	QP	L1
5	2.094 MHz	56.0	49.3	-6.7	10.1	QP	L1
6	1.766 MHz	46.0	38.2	-7.8	10.0	CAV	L1
7*	1.046 MHz	56.0	51.8	-4.2	10.0	PK	L1
8*	1.293 MHz	56.0	51.8	-4.2	10.0	PK	L1
9*	1.518 MHz	56.0	51.8	-4.2	10.0	PK	L1
10*	1.761 MHz	56.0	51.8	-4.2	10.0	PK	L1
11*	2.094 MHz	56.0	54.0	-2.0	10.1	PK	L1
12*	1.761 MHz	46.0	38.9	-7.1	10.0	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 54V 100% load

Note:

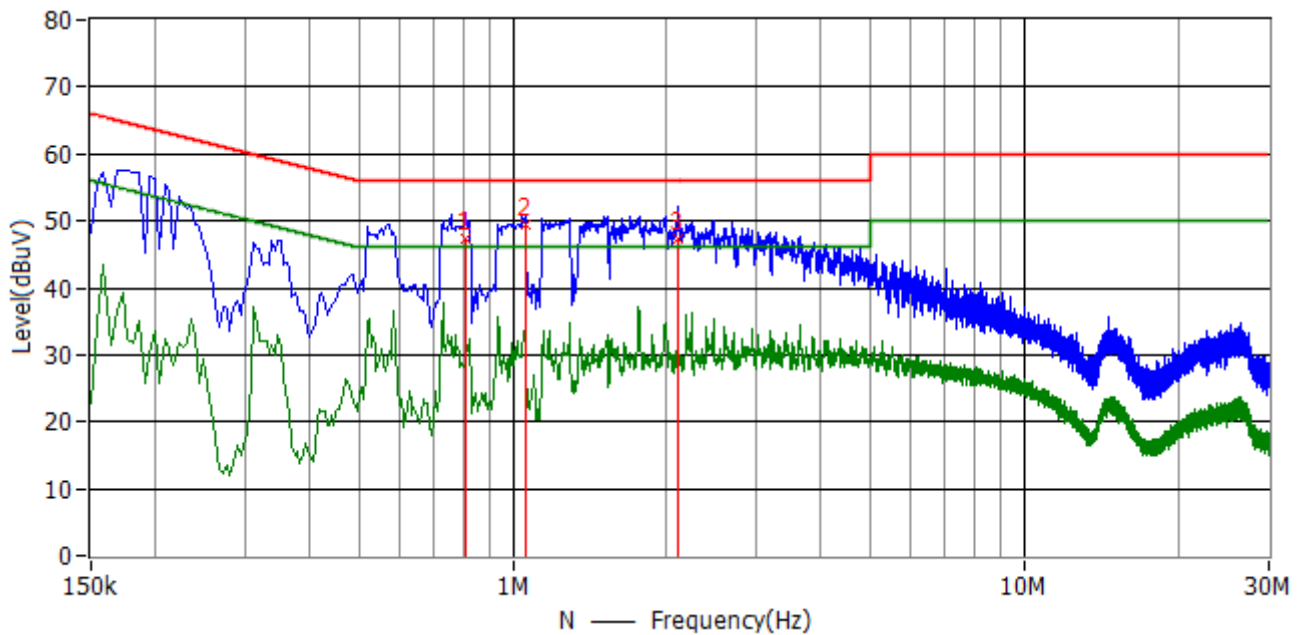

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	811.500 kHz	56.0	47.4	-8.6	9.6	QP	N
2	1.059 MHz	56.0	49.3	-6.7	9.7	QP	N
3	2.099 MHz	56.0	47.4	-8.6	9.9	QP	N
4*	811.500 kHz	56.0	51.2	-4.8	9.6	PK	N
5*	1.059 MHz	56.0	51.1	-4.9	9.7	PK	N
6*	2.099 MHz	56.0	52.1	-3.9	9.9	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 54V 100% load

Note:

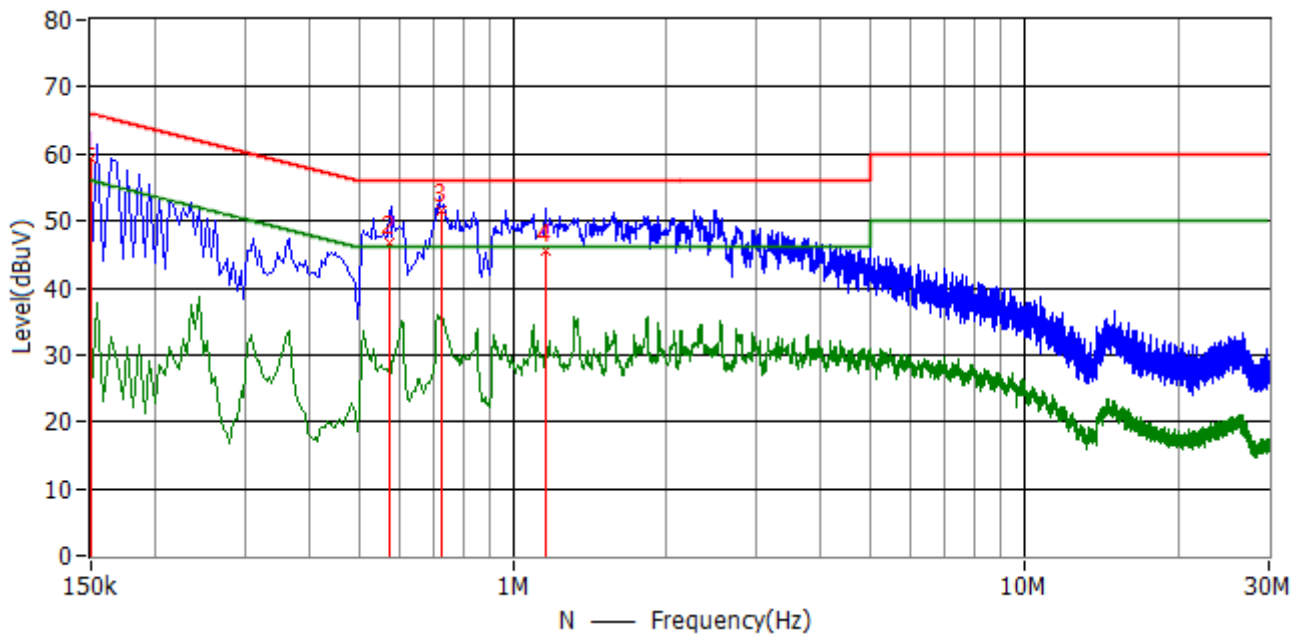

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	150.000 kHz	66.0	59.2	-6.8	9.5	QP	N
2	573.000 kHz	56.0	46.6	-9.4	9.6	QP	N
3	726.000 kHz	56.0	51.5	-4.5	9.6	QP	N
4	1.163 MHz	56.0	45.5	-10.5	9.7	QP	N
5*	154.500 kHz	65.8	61.4	-4.4	9.5	PK	N
6*	582.000 kHz	56.0	52.2	-3.8	9.6	PK	N
7*	717.000 kHz	56.0	53.6	-2.4	9.6	PK	N
8*	1.158 MHz	56.0	51.9	-4.1	9.7	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 54V 100% load

Note:

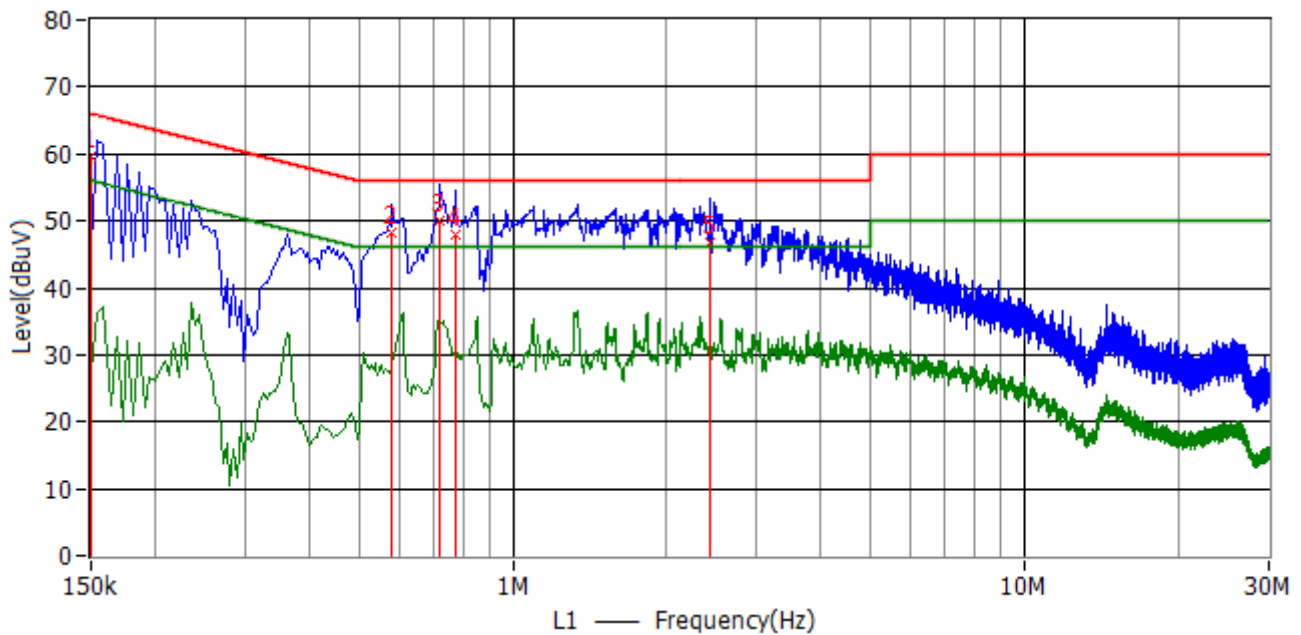

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	150.000 kHz	66.0	59.7	-6.3	9.9	QP	L1
2	577.500 kHz	56.0	48.1	-7.9	9.9	QP	L1
3	721.500 kHz	56.0	50.1	-5.9	9.9	QP	L1
4	771.000 kHz	56.0	47.9	-8.1	9.9	QP	L1
5	2.432 MHz	56.0	46.7	-9.3	10.1	QP	L1
6*	154.500 kHz	65.8	62.1	-3.7	9.9	PK	L1
7*	582.000 kHz	56.0	52.5	-3.5	9.9	PK	L1
8*	721.500 kHz	56.0	55.5	-0.5	9.9	PK	L1
9*	771.000 kHz	56.0	54.6	-1.4	9.9	PK	L1
10*	2.432 MHz	56.0	53.5	-2.5	10.1	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25℃, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 54V 50% load

Note:

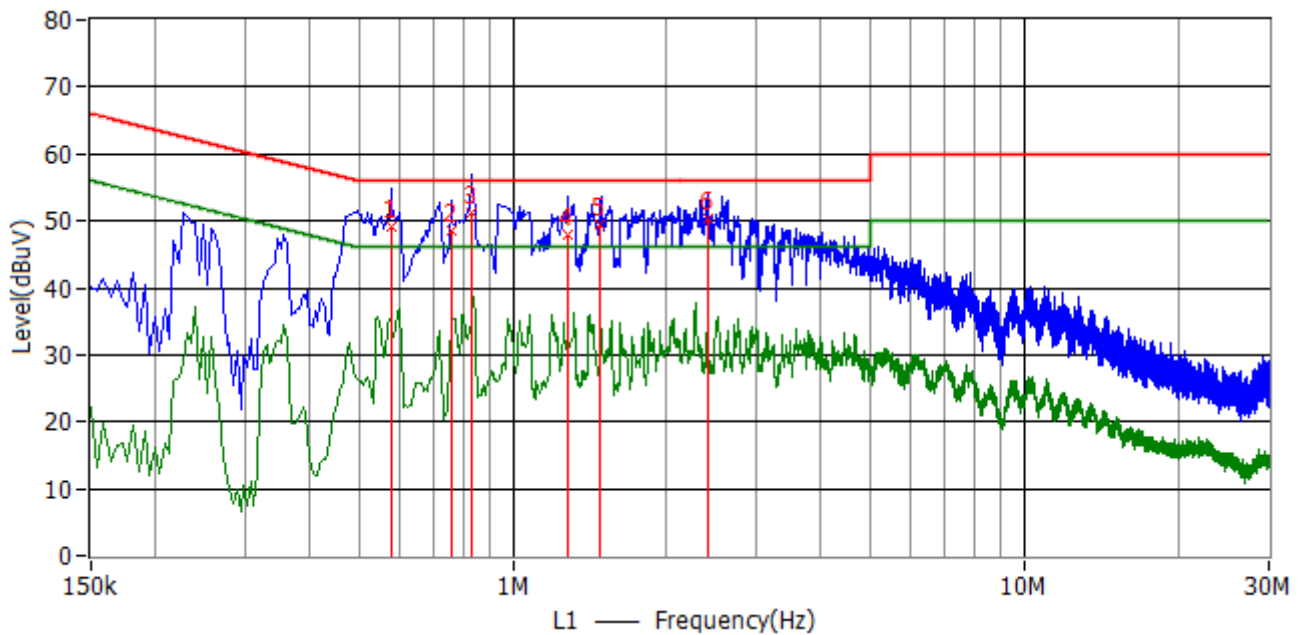

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	577.500 kHz	56.0	49.2	-6.8	9.9	QP	L1
2	757.500 kHz	56.0	48.6	-7.4	9.9	QP	L1
3	834.000 kHz	56.0	51.1	-4.9	9.7	QP	L1
4	1.275 MHz	56.0	47.9	-8.1	10.0	QP	L1
5	1.482 MHz	56.0	49.3	-6.7	10.0	QP	L1
6	2.400 MHz	56.0	50.3	-5.7	10.1	QP	L1
7*	577.500 kHz	56.0	54.7	-1.3	9.9	PK	L1
8*	757.500 kHz	56.0	52.9	-3.1	9.9	PK	L1
9*	834.000 kHz	56.0	56.9	0.9	9.7	PK	L1
10*	1.275 MHz	56.0	53.5	-2.5	10.0	PK	L1
11*	1.486 MHz	56.0	53.7	-2.3	10.0	PK	L1
12*	2.405 MHz	56.0	54.3	-1.7	10.1	PK	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 54V 50% load

Note:

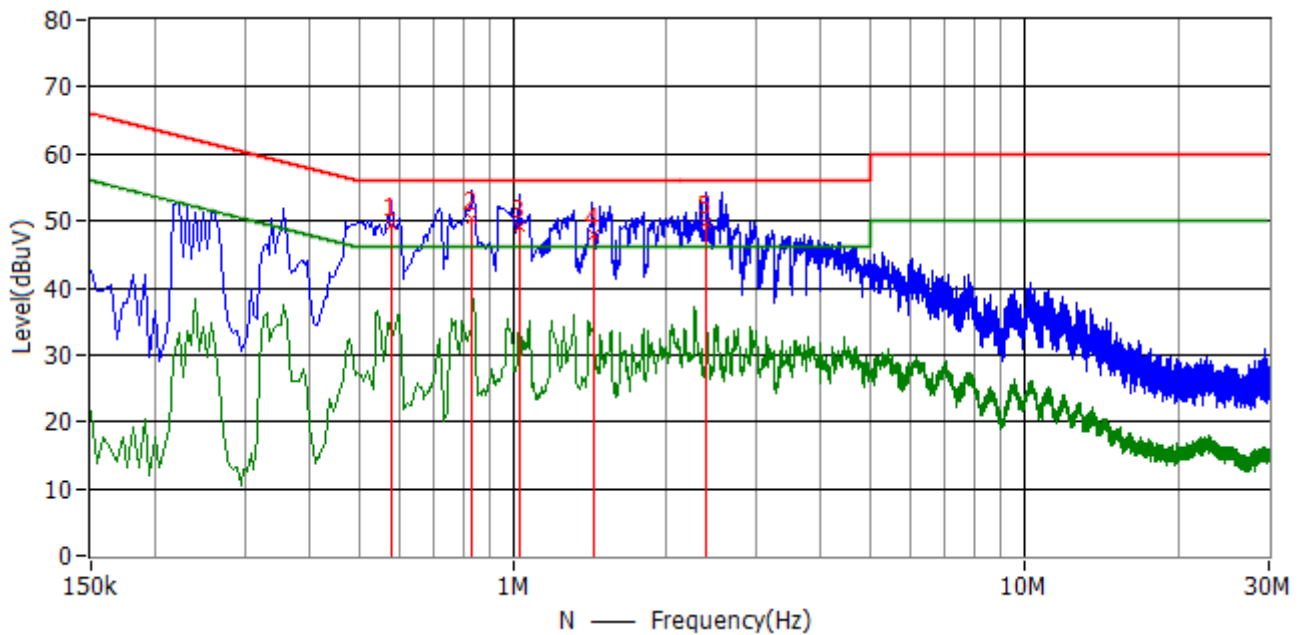

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	577.500 kHz	56.0	49.4	-6.6	9.6	QP	N
2	834.000 kHz	56.0	50.4	-5.6	9.6	QP	N
3	1.028 MHz	56.0	49.1	-6.9	9.7	QP	N
4	1.442 MHz	56.0	47.8	-8.2	9.7	QP	N
5	2.396 MHz	56.0	49.7	-6.3	9.9	QP	N
6*	582.000 kHz	56.0	53.1	-2.9	9.6	PK	N
7*	834.000 kHz	56.0	54.4	-1.6	9.6	PK	N
8*	1.028 MHz	56.0	53.9	-2.1	9.7	PK	N
9*	1.428 MHz	56.0	52.9	-3.1	9.7	PK	N
10*	2.396 MHz	56.0	54.3	-1.7	9.9	PK	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 54V 50% load

Note:

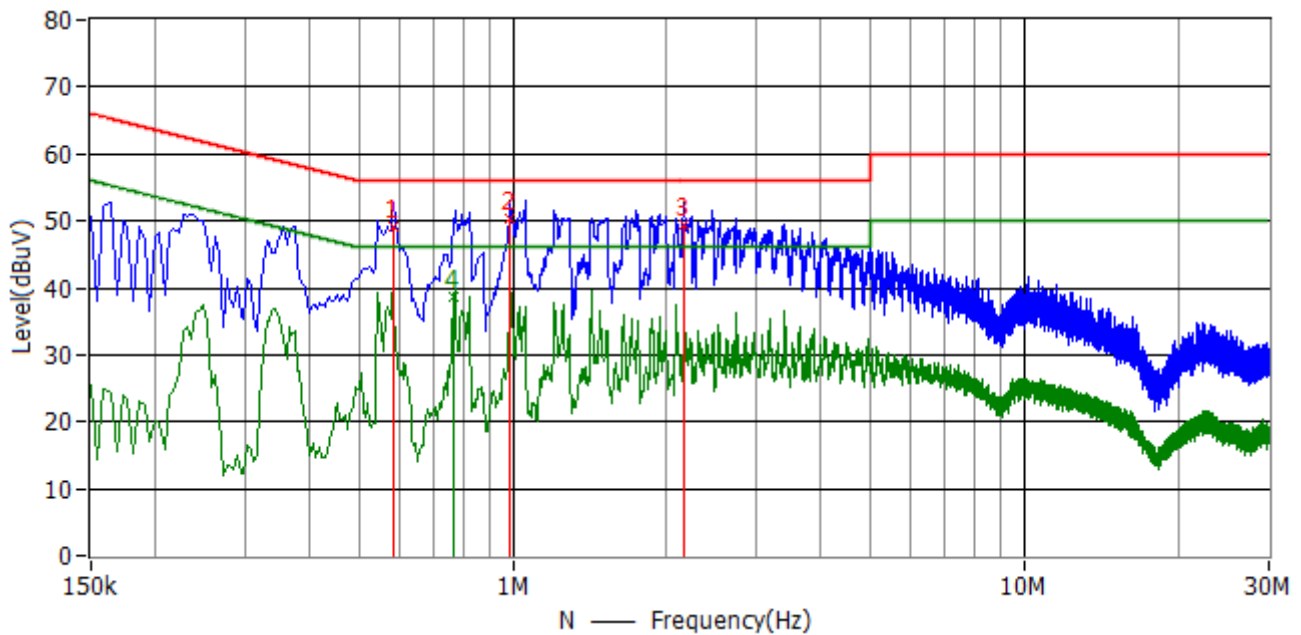

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	586.500 kHz	56.0	49.2	-6.8	9.6	QP	N
2	987.000 kHz	56.0	50.2	-5.8	9.7	QP	N
3	2.162 MHz	56.0	49.3	-6.7	9.9	QP	N
4	766.500 kHz	46.0	38.7	-7.3	9.6	CAV	N
5*	586.500 kHz	56.0	52.7	-3.3	9.6	PK	N
6*	987.000 kHz	56.0	53.2	-2.8	9.7	PK	N
7*	2.162 MHz	56.0	52.9	-3.1	9.9	PK	N
8*	771.000 kHz	46.0	39.7	-6.3	9.6	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25℃, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 54V 50% load

Note:

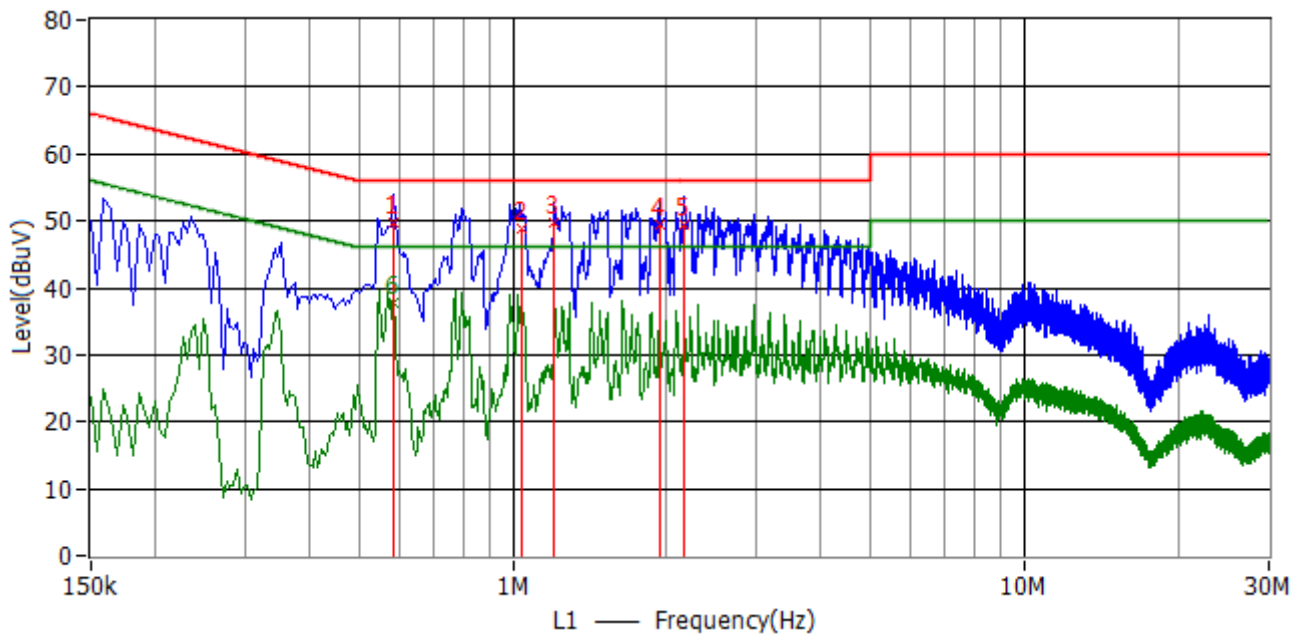

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	586.500 kHz	56.0	49.6	-6.4	9.9	QP	L1
2	1.036 MHz	56.0	48.7	-7.3	10.0	QP	L1
3	1.203 MHz	56.0	49.7	-6.3	10.0	QP	L1
4	1.937 MHz	56.0	49.3	-6.7	10.1	QP	L1
5	2.166 MHz	56.0	49.5	-6.5	10.1	QP	L1
6	586.500 kHz	46.0	37.7	-8.3	9.9	CAV	L1
7*	586.500 kHz	56.0	53.8	-2.2	9.9	PK	L1
8*	1.032 MHz	56.0	52.5	-3.5	10.0	PK	L1
9*	1.208 MHz	56.0	52.6	-3.4	10.0	PK	L1
10*	1.937 MHz	56.0	53.4	-2.6	10.1	PK	L1
11*	2.166 MHz	56.0	53.7	-2.3	10.1	PK	L1
12*	586.500 kHz	46.0	40.1	-5.9	9.9	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: L

Note: 54V 25% load

Note:

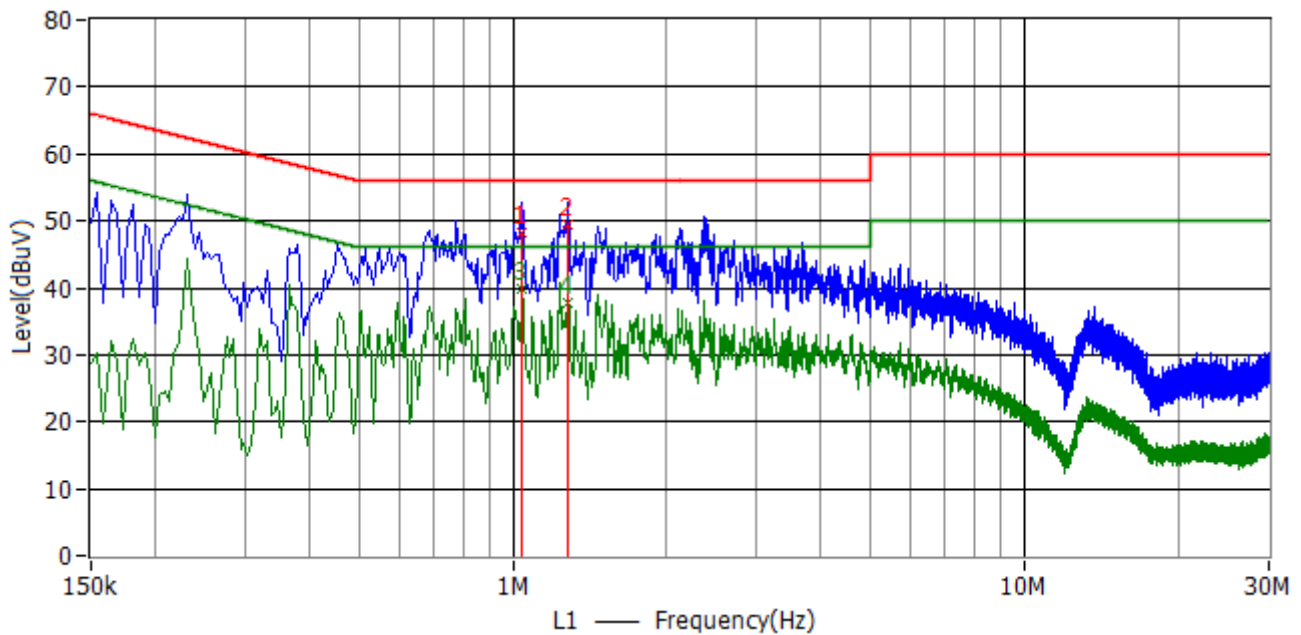

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	1.041 MHz	56.0	48.3	-7.7	10.0	QP	L1
2	1.284 MHz	56.0	49.4	-6.6	10.0	QP	L1
3	1.046 MHz	46.0	39.8	-6.2	10.0	CAV	L1
4	1.284 MHz	46.0	37.7	-8.3	10.0	CAV	L1
5*	1.046 MHz	56.0	52.8	-3.2	10.0	PK	L1
6*	1.284 MHz	56.0	52.8	-3.2	10.0	PK	L1
7*	1.046 MHz	46.0	40.8	-5.2	10.0	AV	L1
8*	1.284 MHz	46.0	40.9	-5.1	10.0	AV	L1

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 54V 25% load

Note:

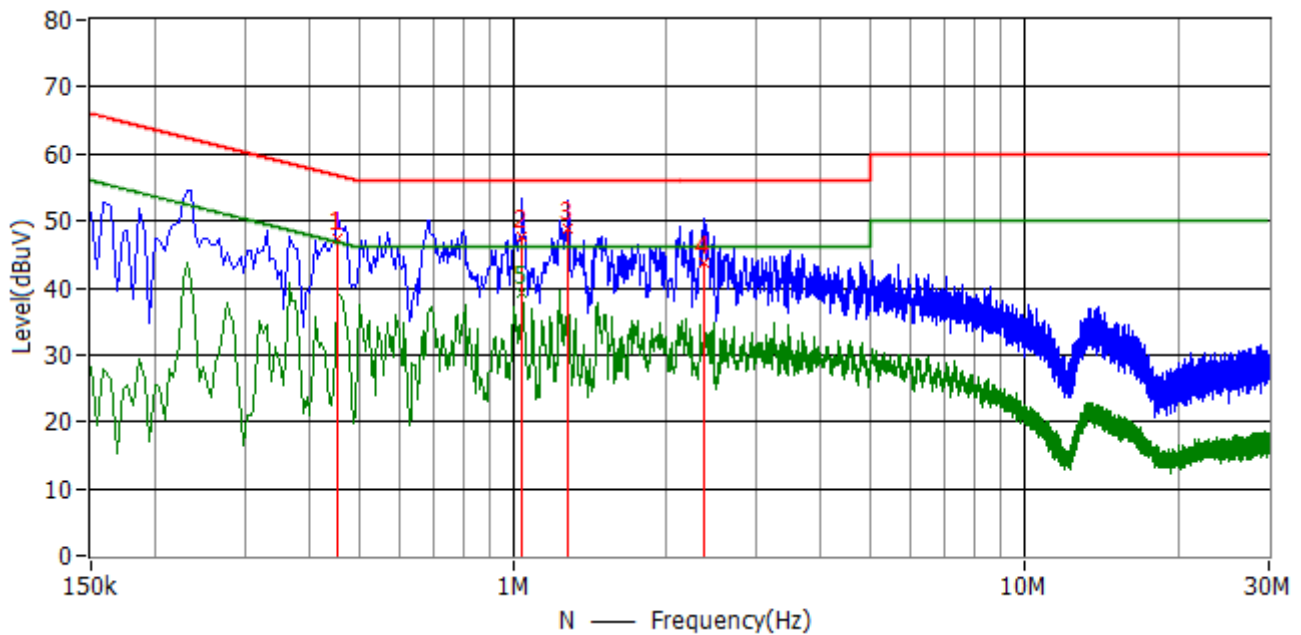

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	456.000 kHz	56.8	47.2	-9.5	9.7	QP	N
2	1.041 MHz	56.0	47.6	-8.4	9.7	QP	N
3	1.284 MHz	56.0	48.8	-7.2	9.7	QP	N
4	2.369 MHz	56.0	43.7	-12.3	9.9	QP	N
5	1.046 MHz	46.0	39.3	-6.7	9.7	CAV	N
6*	456.000 kHz	56.8	51.3	-5.4	9.7	PK	N
7*	1.046 MHz	56.0	53.5	-2.5	9.7	PK	N
8*	1.284 MHz	56.0	52.9	-3.1	9.7	PK	N
9*	2.364 MHz	56.0	50.5	-5.5	9.9	PK	N
10*	1.046 MHz	46.0	39.9	-6.1	9.7	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: N

Note: 54V 25% load

Note:

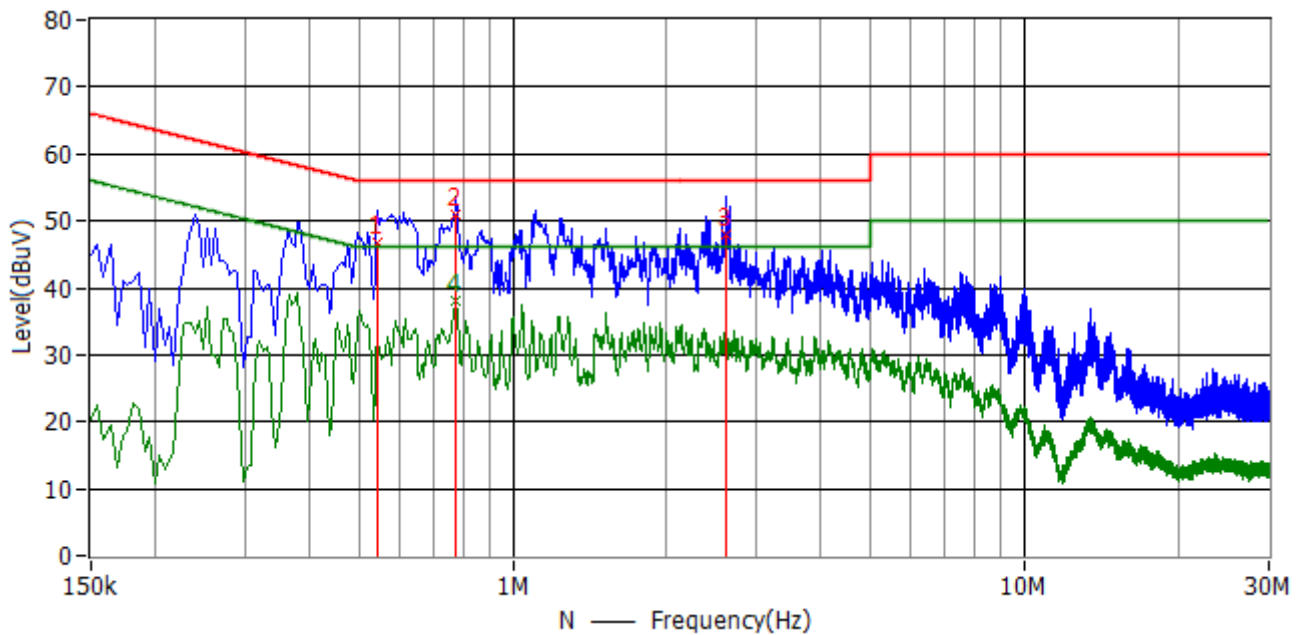

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	546.000 kHz	56.0	46.8	-9.2	9.6	QP	N
2	775.500 kHz	56.0	50.8	-5.2	9.6	QP	N
3	2.611 MHz	56.0	47.9	-8.1	9.9	QP	N
4	775.500 kHz	46.0	38.0	-8.0	9.6	CAV	N
5*	546.000 kHz	56.0	51.5	-4.5	9.6	PK	N
6*	775.500 kHz	56.0	53.8	-2.2	9.6	PK	N
7*	2.616 MHz	56.0	53.5	-2.5	9.9	PK	N
8*	775.500 kHz	46.0	38.3	-7.7	9.6	AV	N

Lab: Suzhou EPIN Electrical Testing Technology Co., Ltd.

Project: 20200914 环球特科

Engineer: Tony

Temperature & Humidity: 25°C, 55%RH

EUT: GTM962250P22554 F2


Voltage: AC 220V/50Hz

Test Mode: Normal Operation Mode

Polarity: L


Note: 54V 25% load

Note:

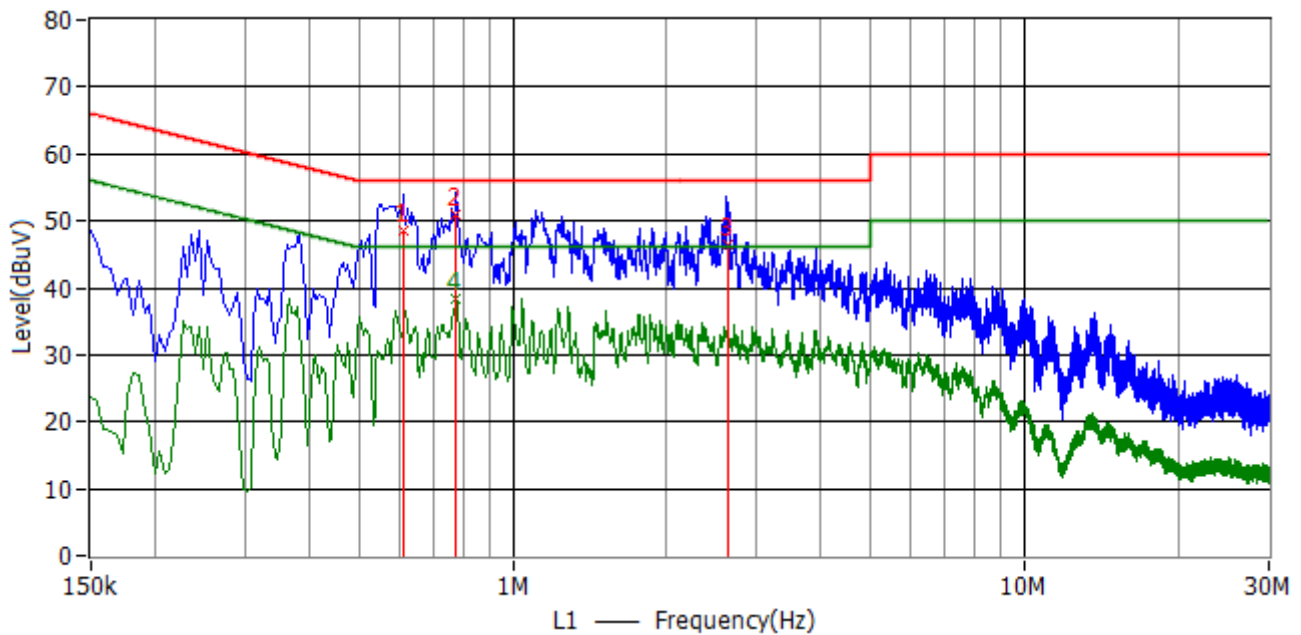


No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1	609.000 kHz	56.0	48.6	-7.4	9.9	QP	L1
2	775.500 kHz	56.0	50.9	-5.1	9.9	QP	L1
3	2.630 MHz	56.0	46.4	-9.6	10.0	QP	L1
4	775.500 kHz	46.0	38.4	-7.6	9.9	CAV	L1
5*	609.000 kHz	56.0	54.1	-1.9	9.9	PK	L1
6*	775.500 kHz	56.0	54.3	-1.7	9.9	PK	L1
7*	2.620 MHz	56.0	53.7	-2.3	10.1	PK	L1
8*	775.500 kHz	46.0	38.7	-7.3	9.9	AV	L1

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 12V 100% Load
Note2:
Polarity: V

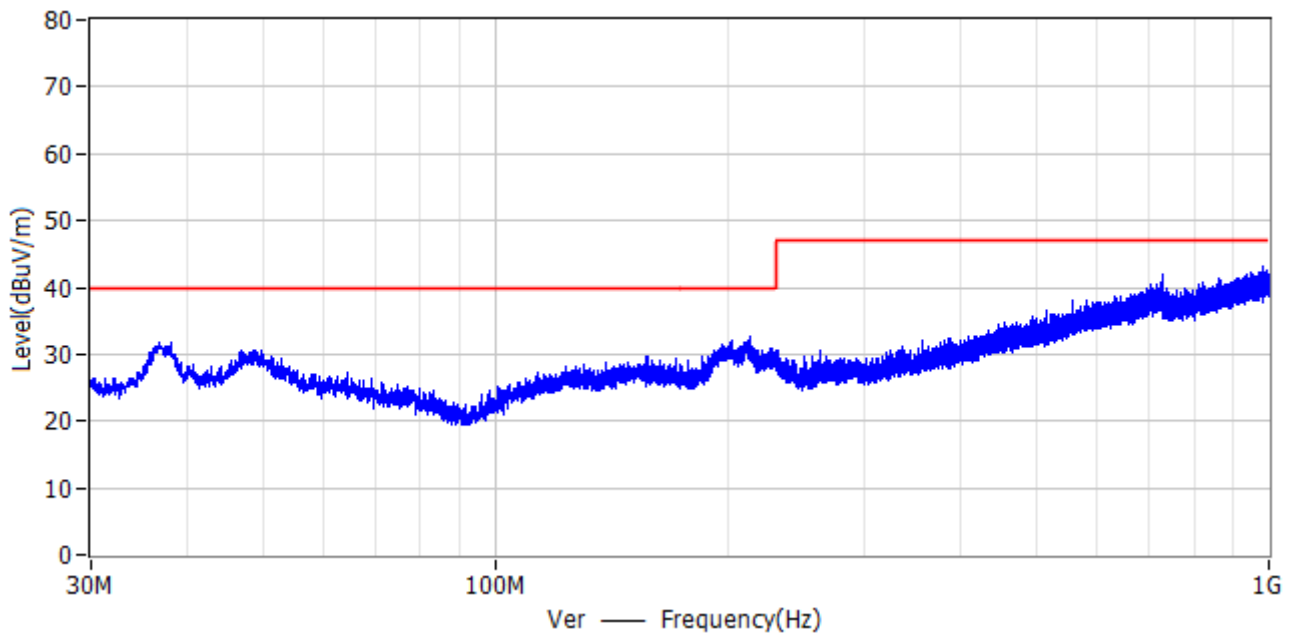


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	36.700 MHz	40.0	31.7	-8.3	19.2	PK	Ver	100.0	358.0
2*	48.800 MHz	40.0	30.7	-9.3	20.1	PK	Ver	100.0	111.0
3*	213.050 MHz	40.0	32.5	-7.5	16.9	PK	Ver	100.0	0.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 12V 100% Load
Note2:
Polarity: H

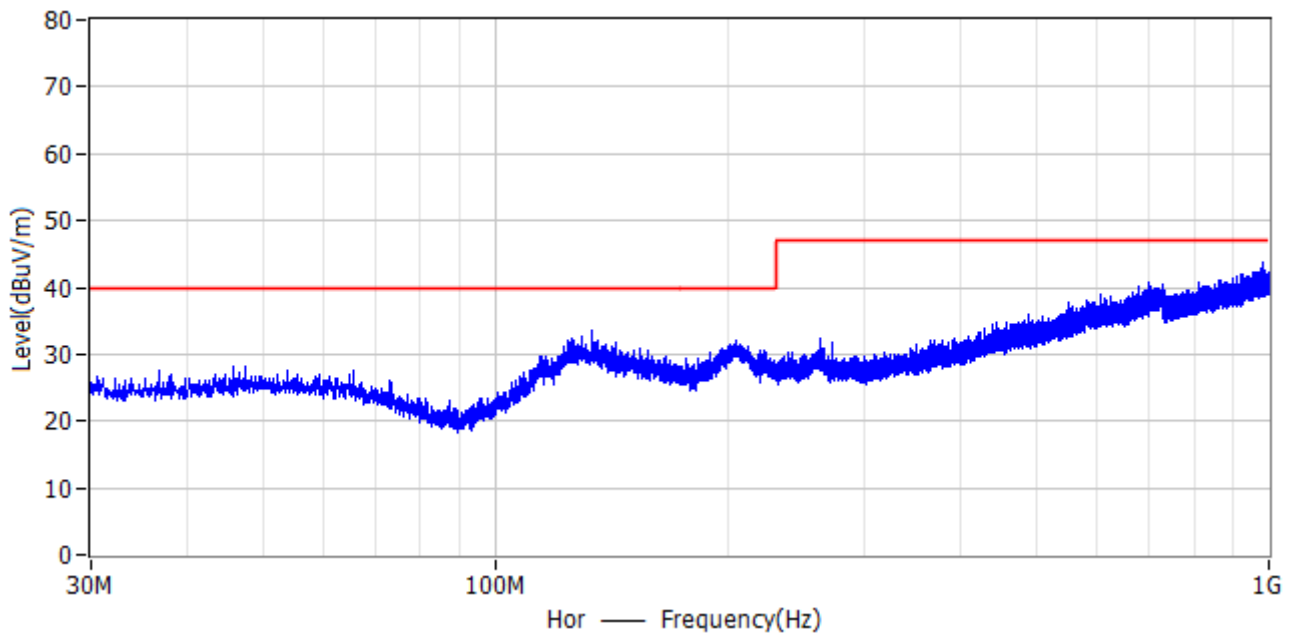


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	125.400 MHz	40.0	32.3	-7.7	18.3	PK	Hor	200.0	151.0
2*	133.450 MHz	40.0	33.5	-6.5	19.1	PK	Hor	164.0	0.0
3*	204.100 MHz	40.0	31.9	-8.1	16.7	PK	Hor	200.0	204.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 12V 100% Load
Note2:
Polarity: H

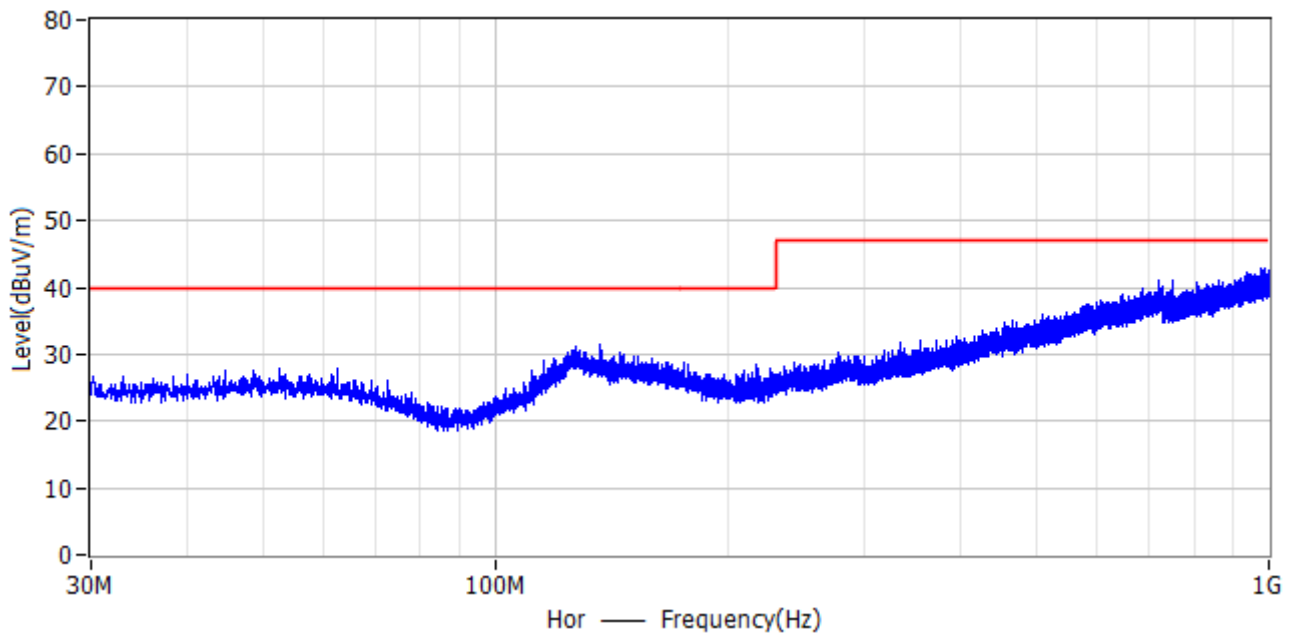


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	126.850 MHz	40.0	31.1	-8.9	18.5	PK	Hor	200.0	356.0
2*	136.050 MHz	40.0	31.6	-8.4	19.3	PK	Hor	200.0	360.0
3*	144.750 MHz	40.0	30.3	-9.7	20.0	PK	Hor	200.0	340.0
4*	722.150 MHz	47.0	41.0	-6.0	30.1	PK	Hor	200.0	64.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 12V 100% Load
Note2:
Polarity: V

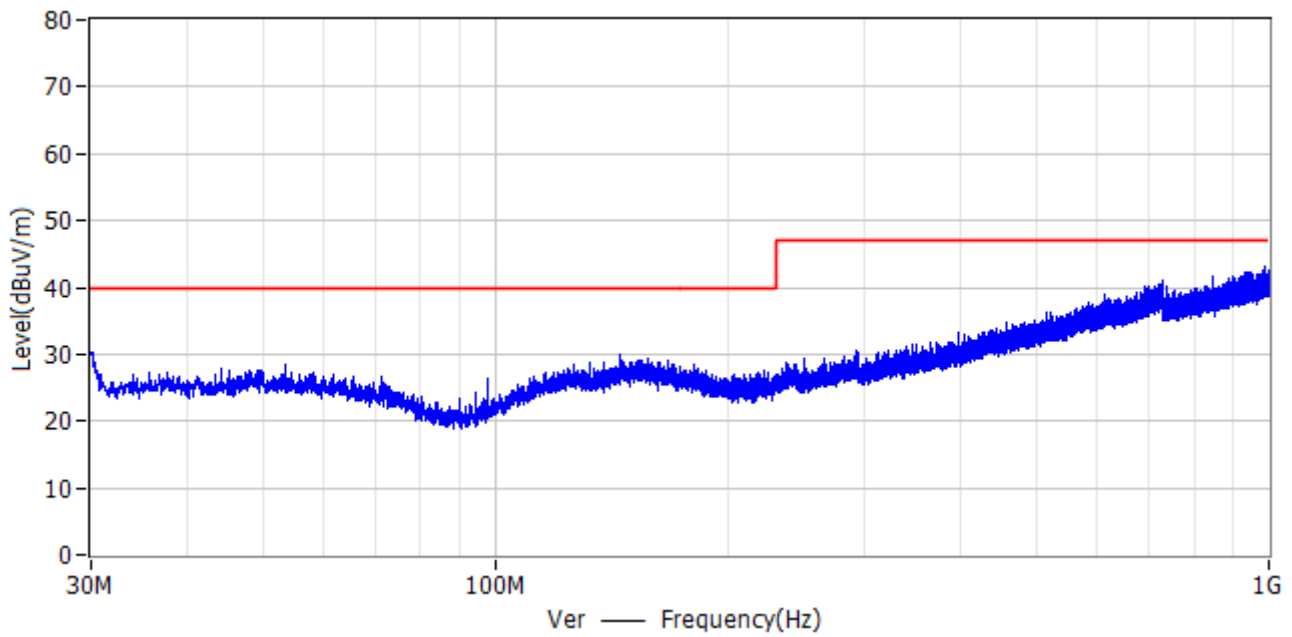


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	30.050 MHz	40.0	30.3	-9.7	18.8	PK	Ver	124.0	360.0
2*	53.400 MHz	40.0	28.5	-11.5	20.1	PK	Ver	100.0	25.0
3*	728.800 MHz	47.0	40.9	-6.1	30.3	PK	Ver	100.0	336.0
4*	844.150 MHz	47.0	41.5	-5.5	31.5	PK	Ver	100.0	178.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 12V 50% Load
Note2:
Polarity: V

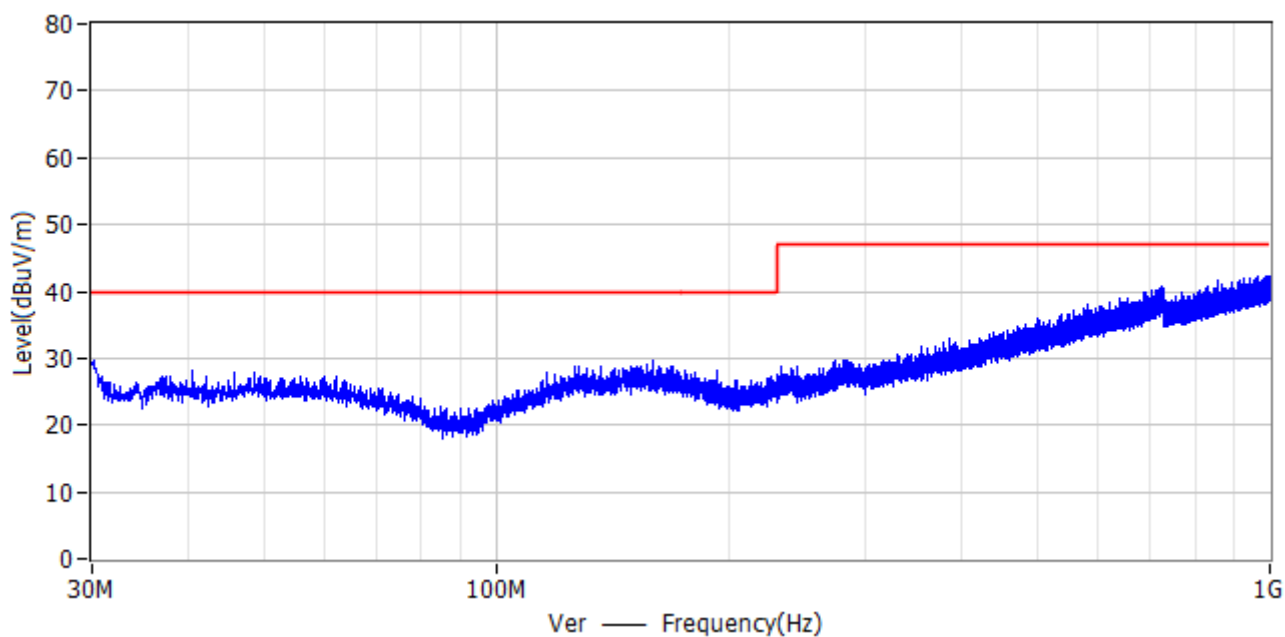


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	30.100 MHz	40.0	29.6	-10.4	18.8	PK	Ver	100.0	132.0
2*	724.050 MHz	47.0	40.9	-6.1	30.1	PK	Ver	100.0	0.0
3*	858.600 MHz	47.0	41.7	-5.3	31.6	PK	Ver	100.0	12.0

Lab: EPIN Electrical Laboratory
 Project: 20200914 环球特科
 Engineer: Pan
 Temperature & Humidity: 25°C, 45%RH
 EUT: GTM962250P22512 F2
 Voltage: AC 230V/50Hz
 Test Mode: Normal Operation Mode
 Note1: 12V 50% Load
 Note2:
 Polarity: H

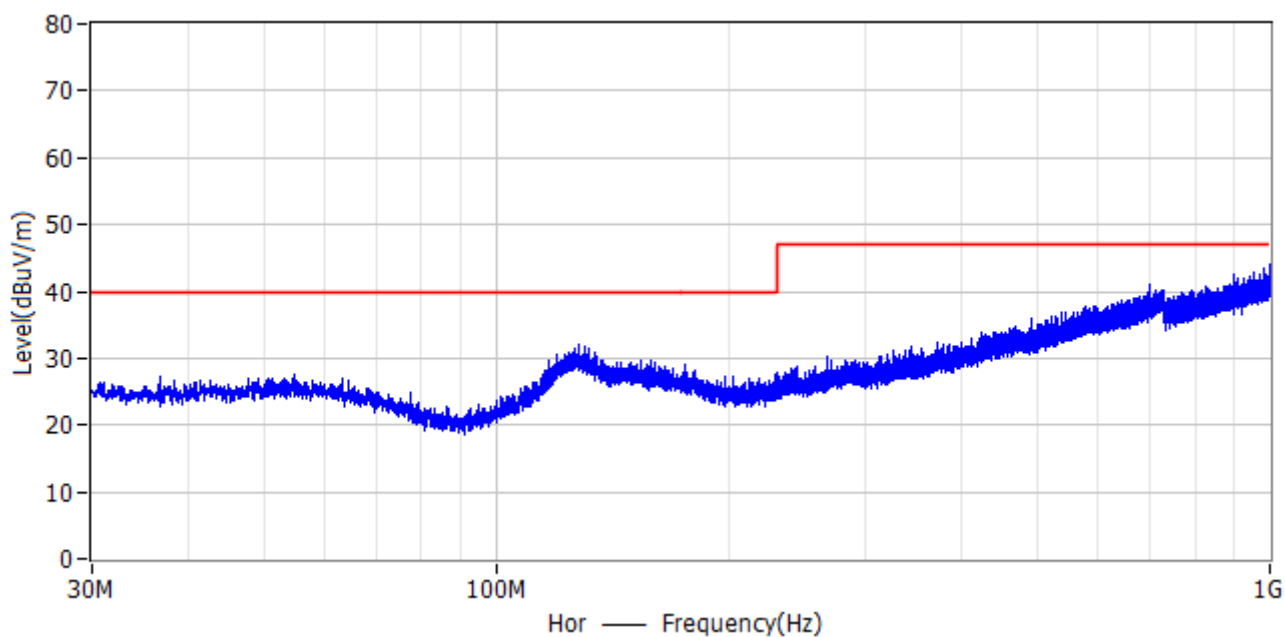


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	127.950 MHz	40.0	32.0	-8.0	18.6	PK	Hor	200.0	12.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 12V 50% Load
Note2:
Polarity: H

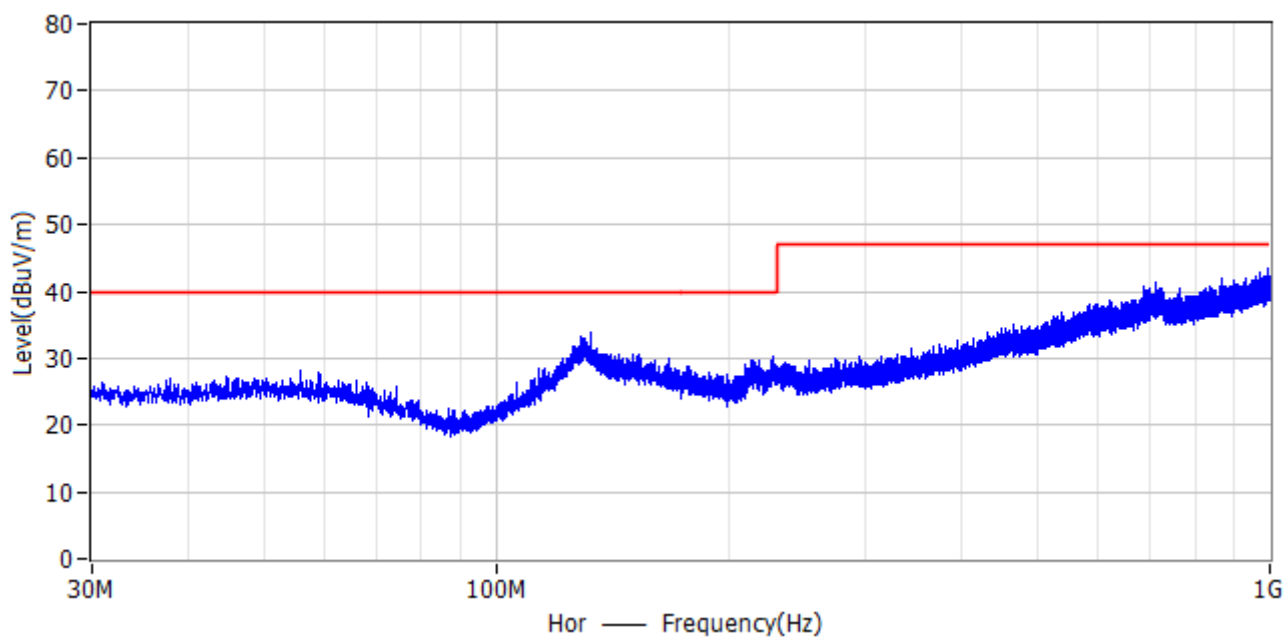


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	132.650 MHz	40.0	33.7	-6.3	19.0	PK	Hor	200.0	351.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 12V 50% Load
Note2:
Polarity: V

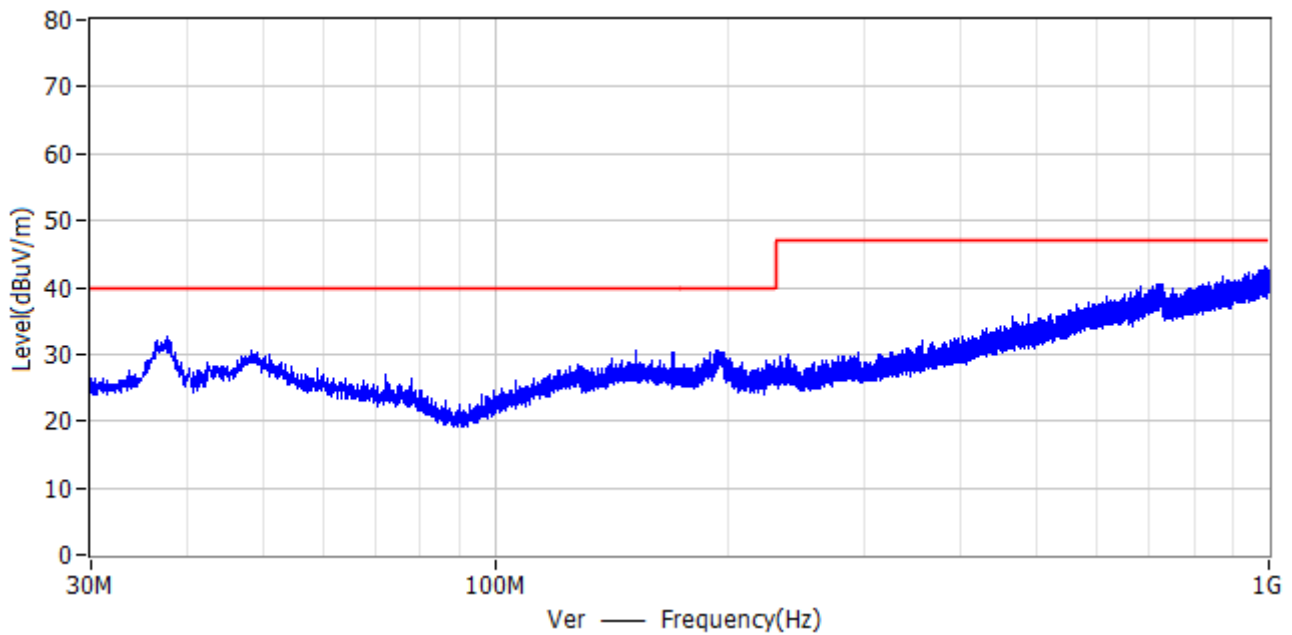


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.550 MHz	40.0	32.6	-7.4	19.3	PK	Ver	100.0	0.0
2*	48.400 MHz	40.0	30.5	-9.5	20.1	PK	Ver	100.0	359.0
3*	194.400 MHz	40.0	30.6	-9.4	17.1	PK	Ver	100.0	360.0
4*	723.400 MHz	47.0	40.4	-6.6	30.1	PK	Ver	100.0	282.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 12V 25% Load
Note2:
Polarity: H

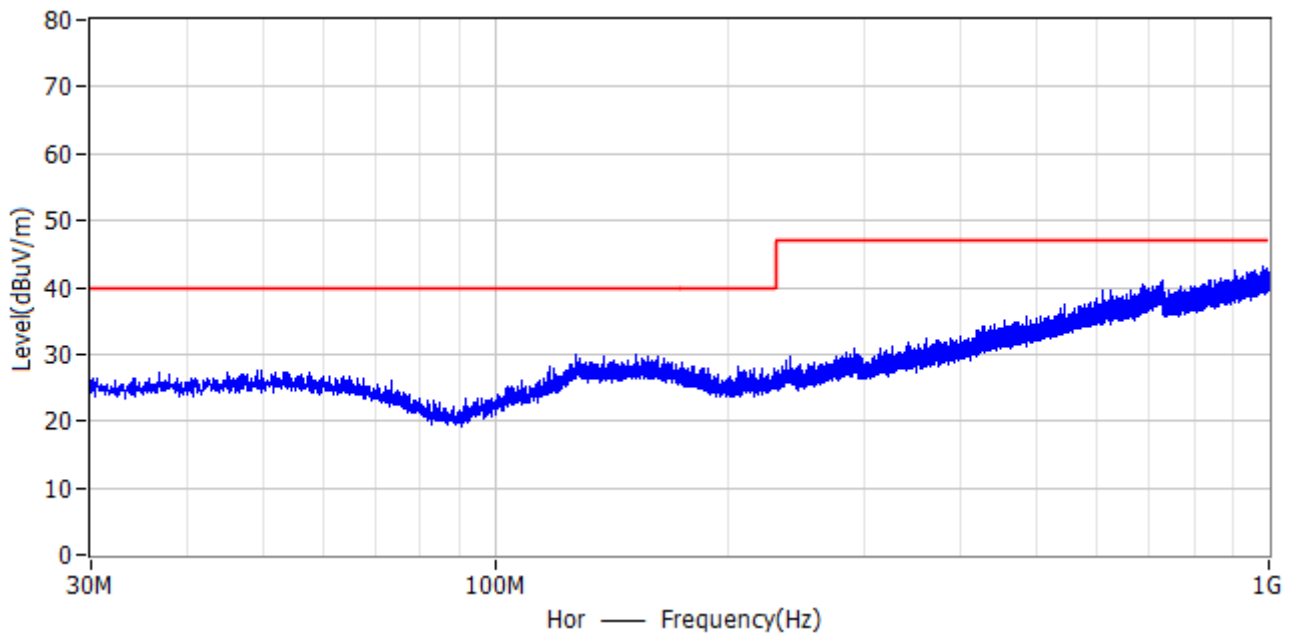


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	36.700 MHz	40.0	27.3	-12.7	19.2	PK	Hor	200.0	51.0
2*	49.300 MHz	40.0	27.5	-12.5	20.1	PK	Hor	110.0	0.0
3*	127.100 MHz	40.0	30.0	-10.0	18.5	PK	Hor	176.0	0.0
4*	727.550 MHz	47.0	40.9	-6.1	30.2	PK	Hor	100.0	247.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 12V 25% Load
Note2:
Polarity: V

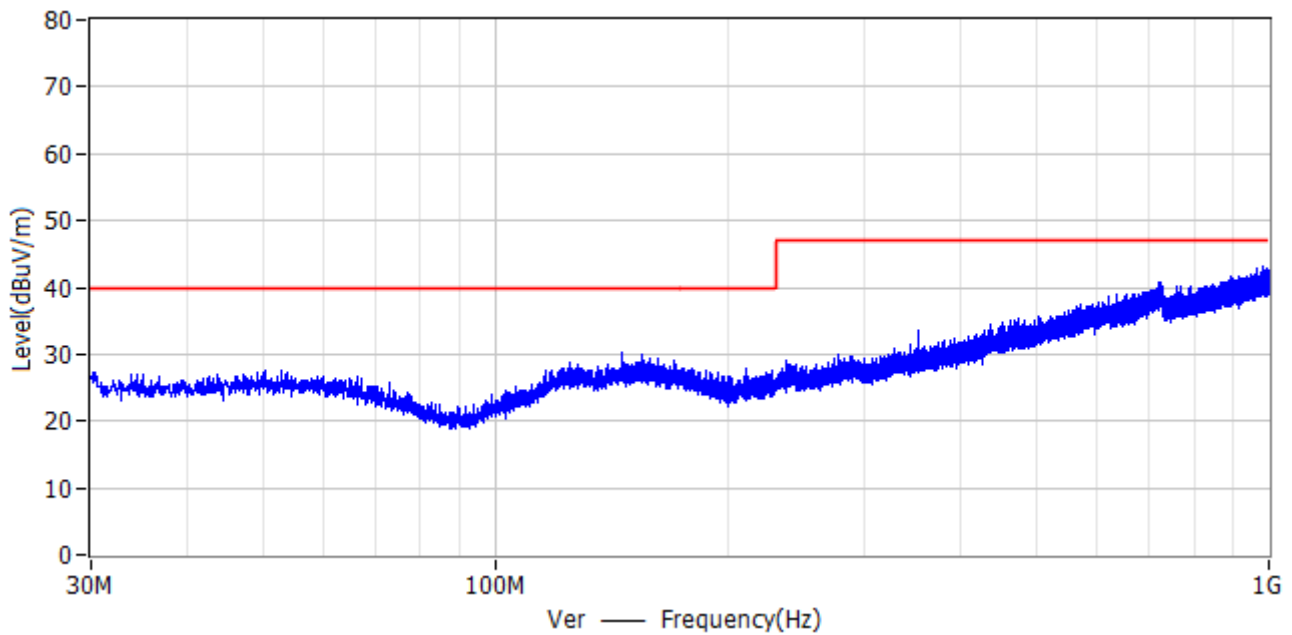


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	52.800 MHz	40.0	27.6	-12.4	20.1	PK	Ver	100.0	0.0
2*	145.400 MHz	40.0	30.4	-9.6	20.0	PK	Ver	100.0	299.0
3*	570.050 MHz	47.0	37.6	-9.4	27.3	PK	Ver	100.0	102.0
4*	637.100 MHz	47.0	38.9	-8.1	28.9	PK	Ver	100.0	191.0
5*	725.850 MHz	47.0	40.9	-6.1	30.2	PK	Ver	100.0	68.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 12V 25% Load
Note2:
Polarity: V

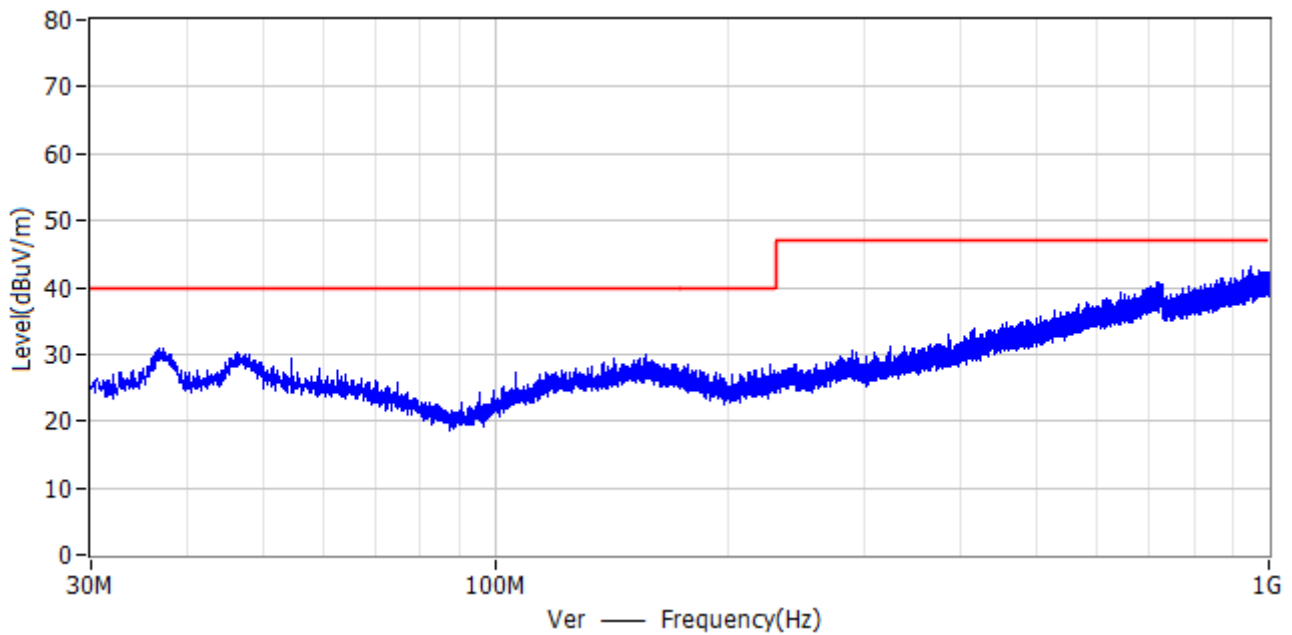


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.250 MHz	40.0	31.0	-9.0	19.2	PK	Ver	100.0	165.0
2*	46.400 MHz	40.0	30.4	-9.6	20.0	PK	Ver	100.0	1.0
3*	54.550 MHz	40.0	29.4	-10.6	20.0	PK	Ver	100.0	197.0
4*	720.100 MHz	47.0	40.7	-6.3	30.0	PK	Ver	100.0	146.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22512 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 12V 25% Load
Note2:
Polarity: H

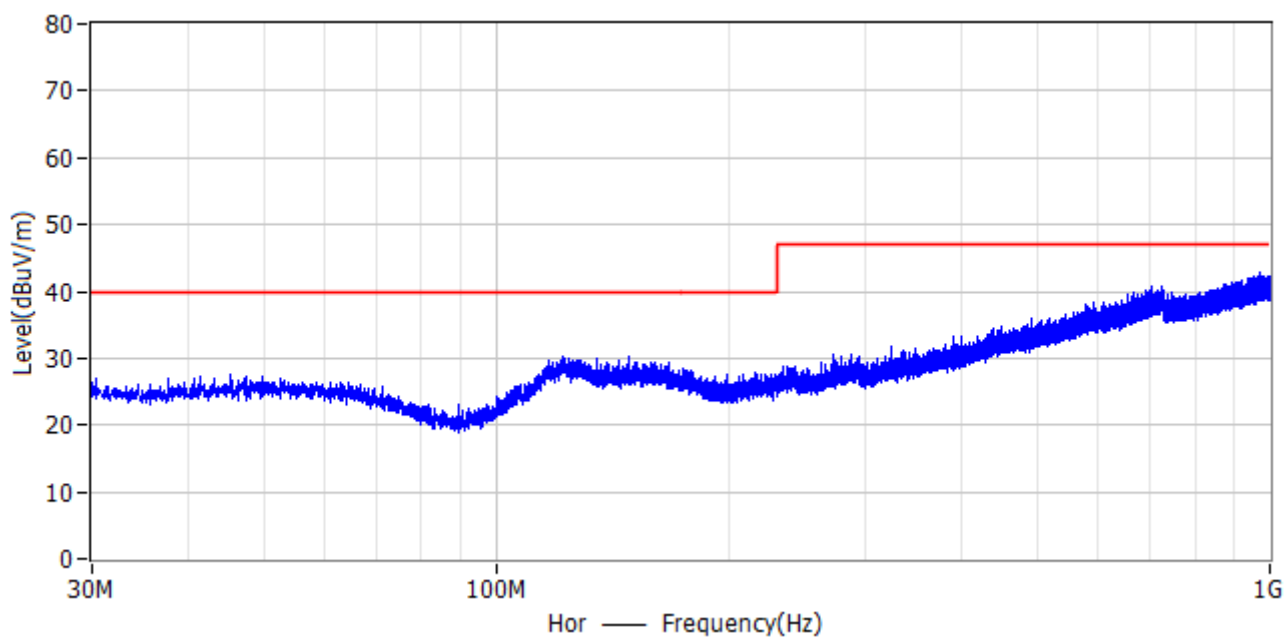


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	45.350 MHz	40.0	27.4	-12.6	19.9	PK	Hor	200.0	0.0
2*	121.750 MHz	40.0	30.1	-9.9	18.0	PK	Hor	200.0	0.0
3*	723.900 MHz	47.0	40.8	-6.2	30.1	PK	Hor	200.0	0.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 24V 100% Load
Note2:
Polarity: H

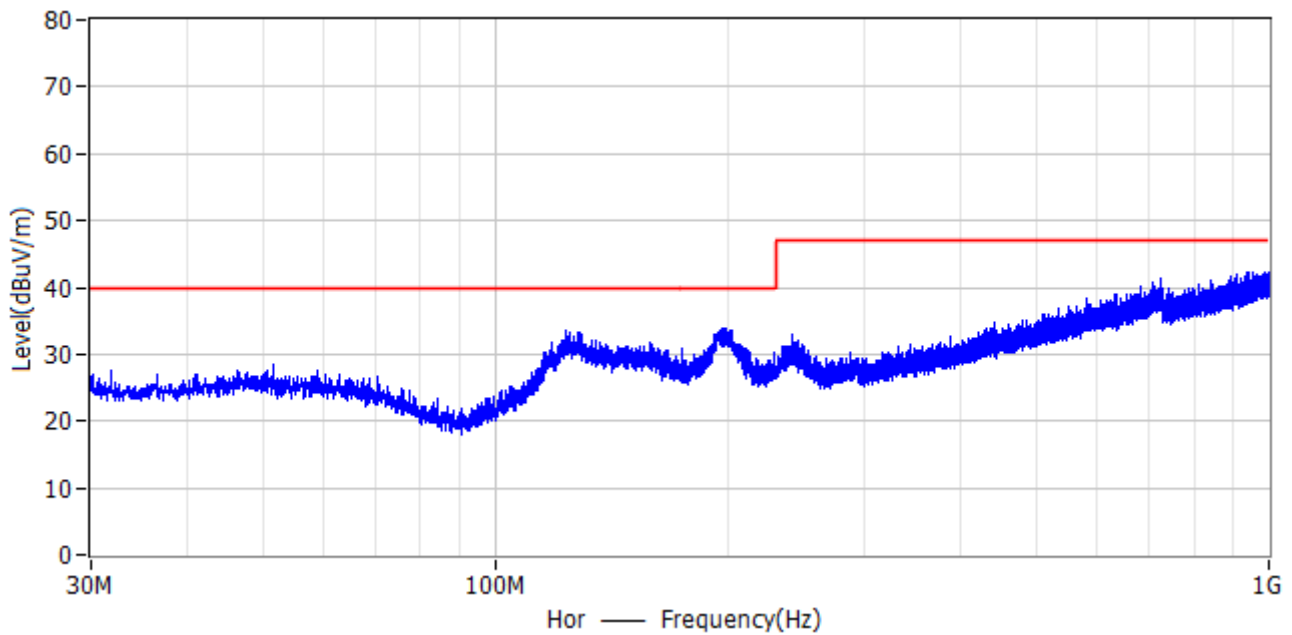


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	123.550 MHz	40.0	33.5	-6.5	18.1	PK	Hor	200.0	358.0
2*	196.850 MHz	40.0	34.0	-6.0	17.0	PK	Hor	200.0	160.0
3*	723.500 MHz	47.0	41.4	-5.6	30.1	PK	Hor	200.0	150.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 24V 100% Load
Note2:
Polarity: V

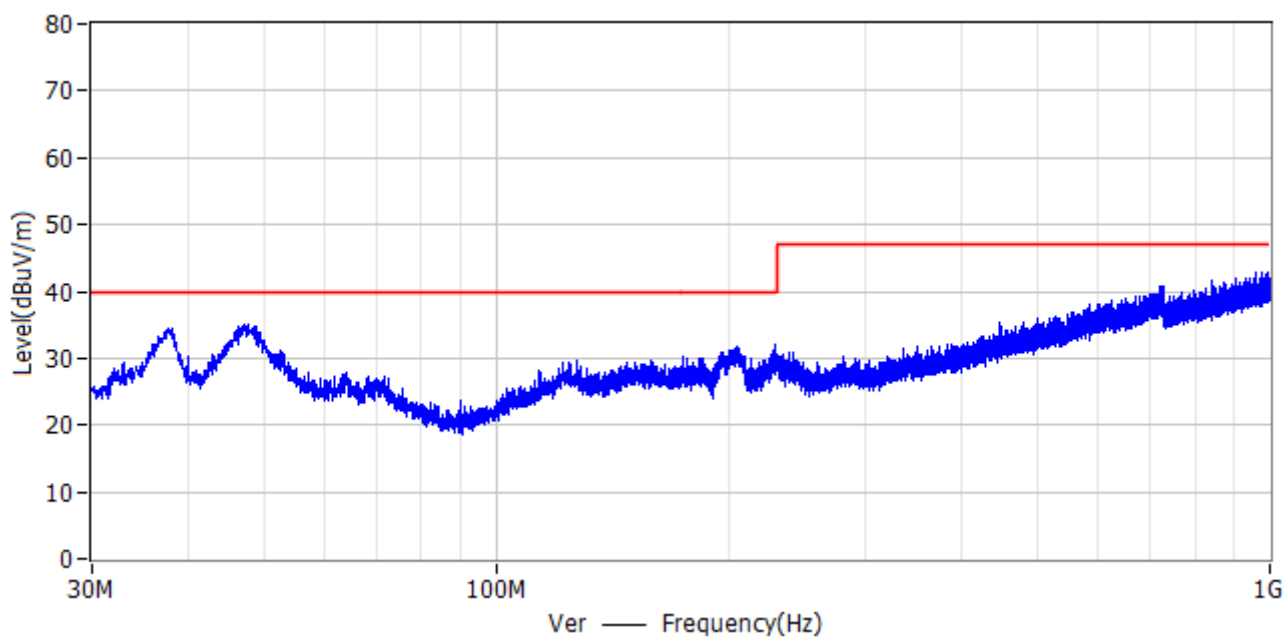


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	38.150 MHz	40.0	34.5	-5.5	19.3	PK	Ver	100.0	24.0
2*	47.650 MHz	40.0	35.2	-4.8	20.0	PK	Ver	100.0	239.0
3*	204.300 MHz	40.0	31.9	-8.1	16.7	PK	Ver	100.0	172.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 24V 100% Load
Note2:
Polarity: V

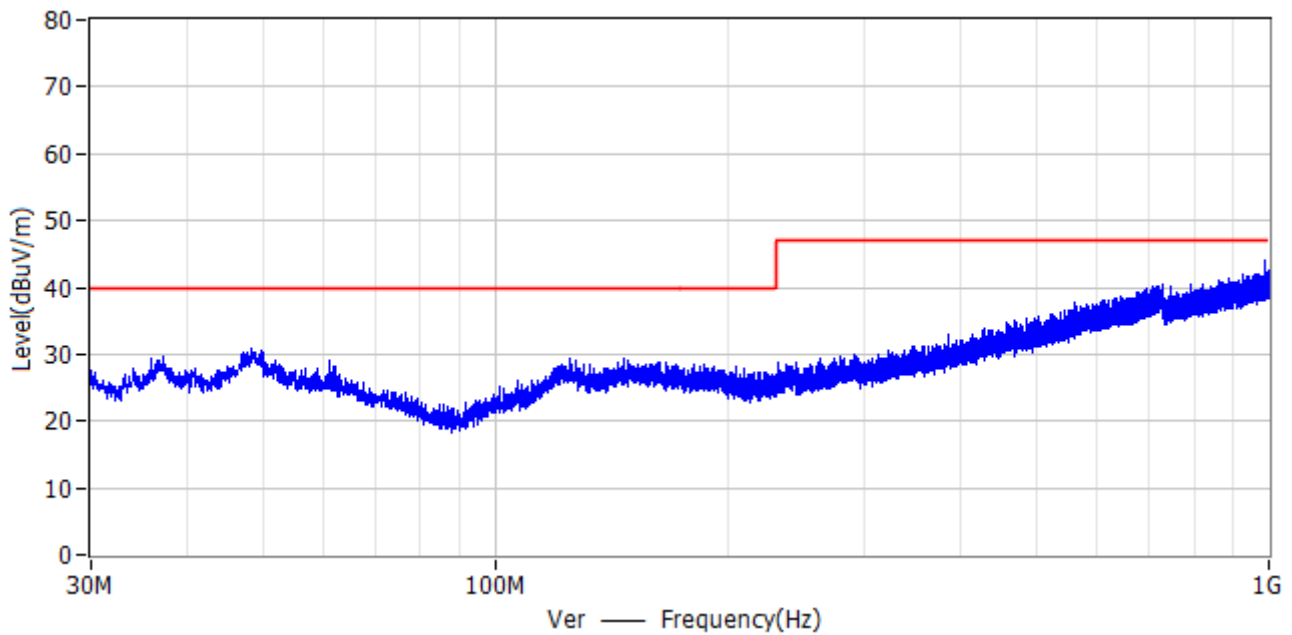


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.100 MHz	40.0	29.6	-10.4	19.2	PK	Ver	100.0	181.0
2*	48.300 MHz	40.0	30.8	-9.2	20.1	PK	Ver	100.0	123.0
3*	61.000 MHz	40.0	28.9	-11.1	19.5	PK	Ver	100.0	28.0
4*	124.600 MHz	40.0	29.3	-10.7	18.2	PK	Ver	100.0	164.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 24V 100% Load
Note2:
Polarity: H

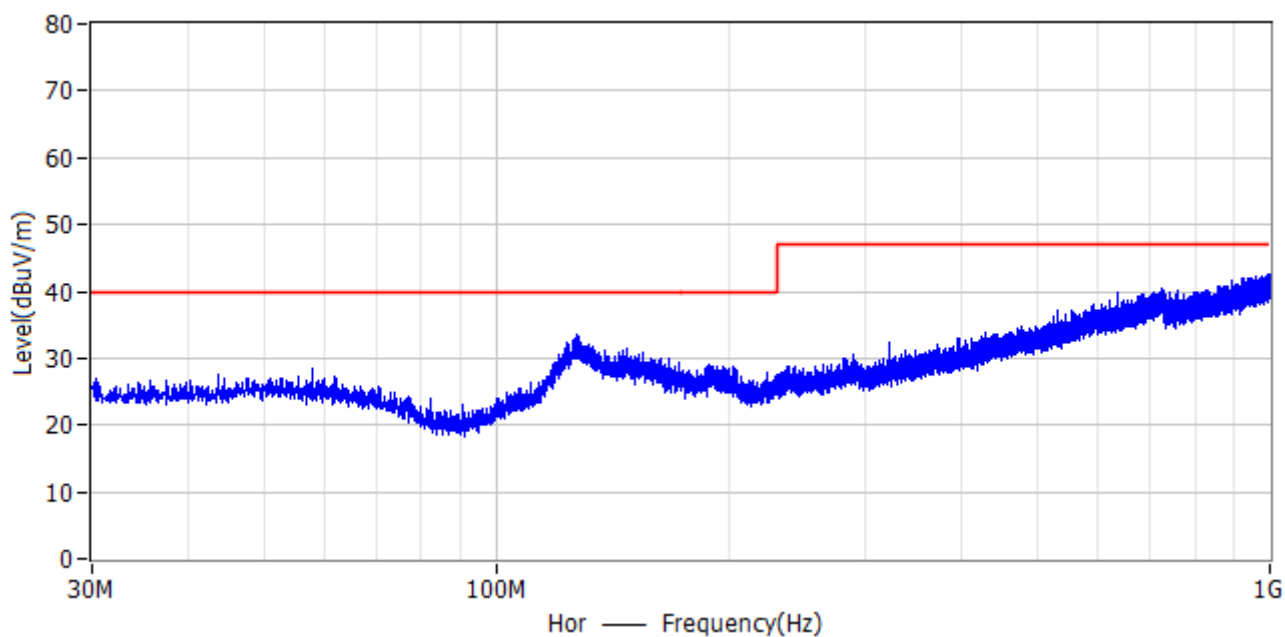


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	127.400 MHz	40.0	33.5	-6.5	18.5	PK	Hor	199.0	0.0
2*	634.800 MHz	47.0	39.7	-7.3	28.9	PK	Hor	189.0	0.0
3*	725.550 MHz	47.0	40.3	-6.7	30.2	PK	Hor	196.0	0.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 24V 50% Load
Note2:
Polarity: H

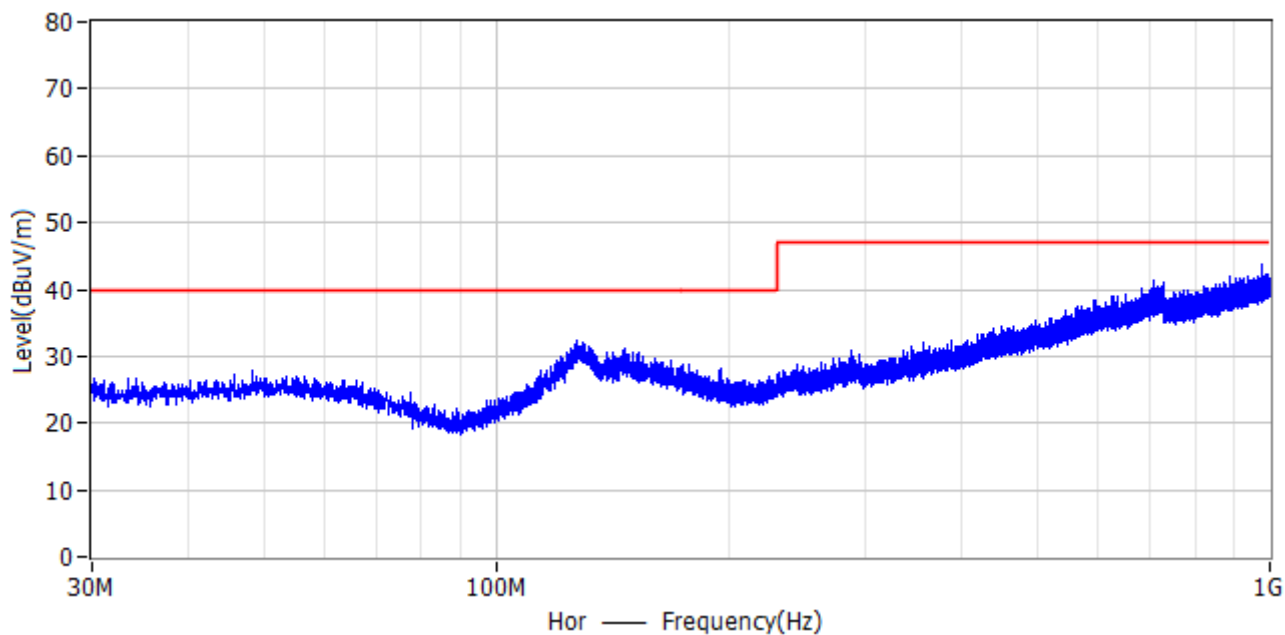


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	127.150 MHz	40.0	32.4	-7.6	18.5	PK	Hor	200.0	195.0
2*	146.700 MHz	40.0	31.3	-8.7	20.1	PK	Hor	200.0	178.0
3*	709.000 MHz	47.0	41.2	-5.8	29.7	PK	Hor	200.0	290.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 24V 50% Load
Note2:
Polarity: V

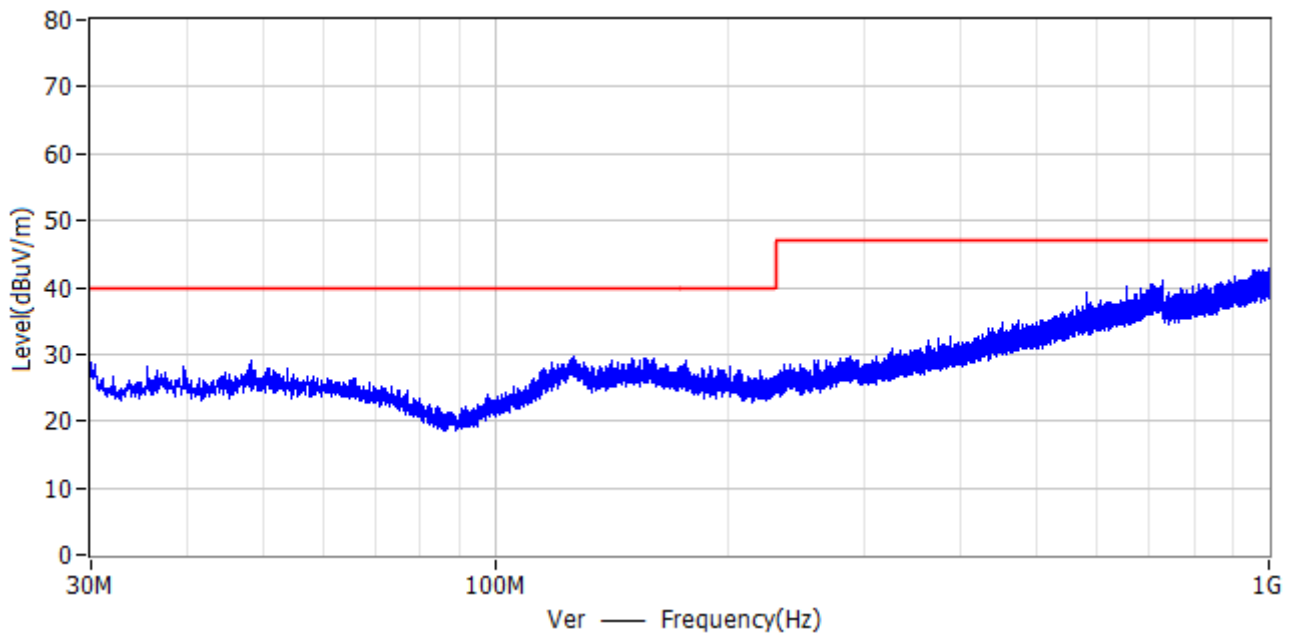


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	30.000 MHz	40.0	28.6	-11.4	18.8	PK	Ver	100.0	224.0
2*	35.500 MHz	40.0	28.3	-11.7	19.0	PK	Ver	100.0	329.0
3*	48.200 MHz	40.0	29.0	-11.0	20.1	PK	Ver	100.0	304.0
4*	126.300 MHz	40.0	29.7	-10.3	18.4	PK	Ver	100.0	2.0
5*	727.000 MHz	47.0	40.9	-6.1	30.2	PK	Ver	100.0	83.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 24V 50% Load
Note2:
Polarity: V

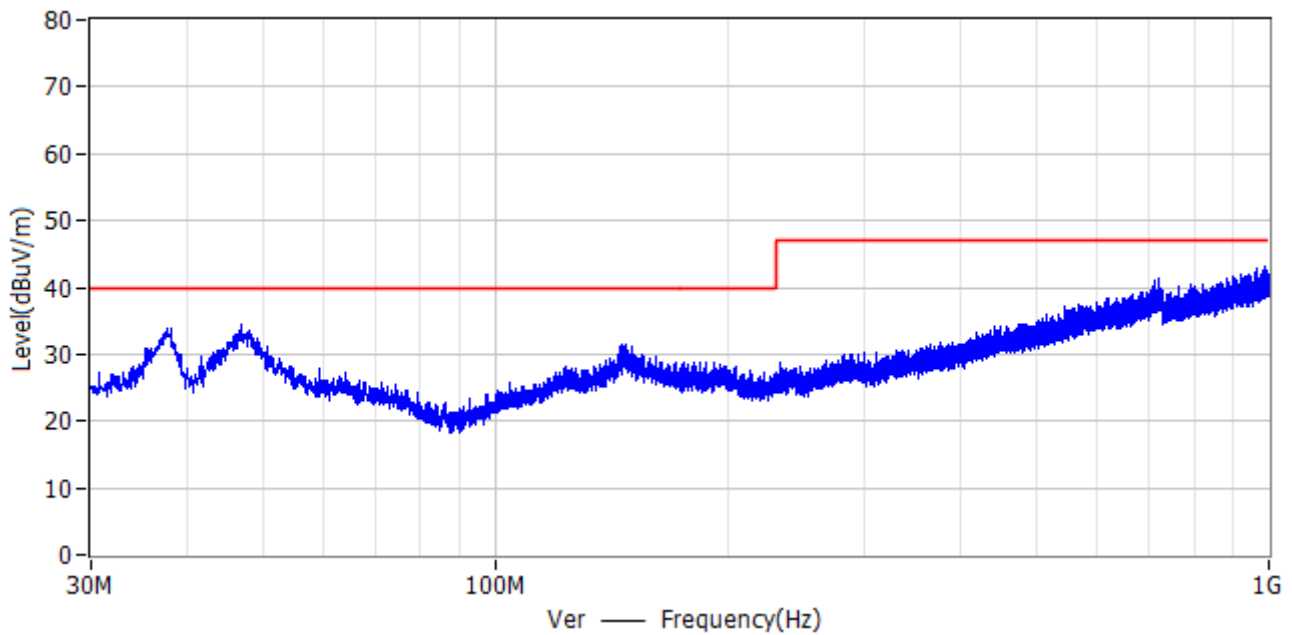

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	38.050 MHz	40.0	33.9	-6.1	19.3	PK	Ver	100.0	15.0
2*	46.900 MHz	40.0	34.4	-5.6	20.0	PK	Ver	100.0	8.0
3*	147.250 MHz	40.0	31.5	-8.5	20.1	PK	Ver	100.0	28.0
4*	720.250 MHz	47.0	41.5	-5.5	30.0	PK	Ver	100.0	354.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 24V 50% Load
Note2:
Polarity: H

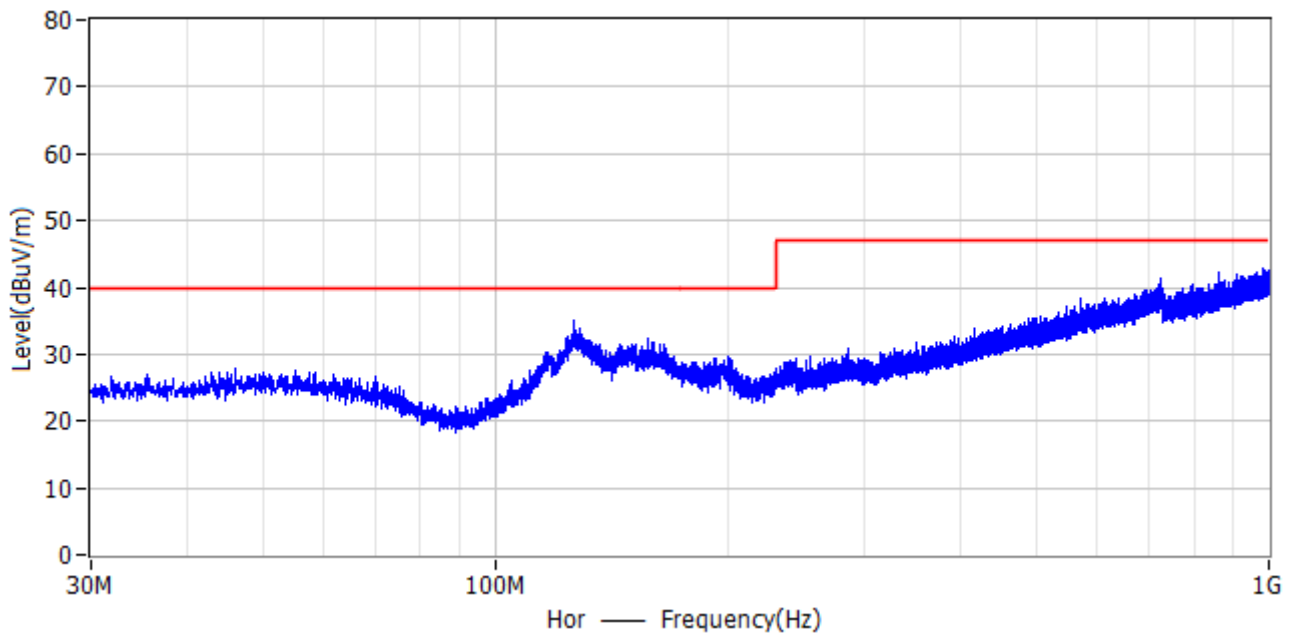

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	126.500 MHz	40.0	35.2	-4.8	18.4	PK	Hor	159.0	0.0
2*	157.700 MHz	40.0	32.2	-7.8	20.2	PK	Hor	200.0	158.0
3*	725.100 MHz	47.0	41.4	-5.6	30.2	PK	Hor	175.0	0.0

Lab: EPIN Electrical Laboratory

Project: 20200914 环球特科

Engineer: Pan

Temperature & Humidity: 25°C, 45%RH

EUT: GTM962250P22524 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Note1: 24V 25% Load


Note2:

Polarity: H

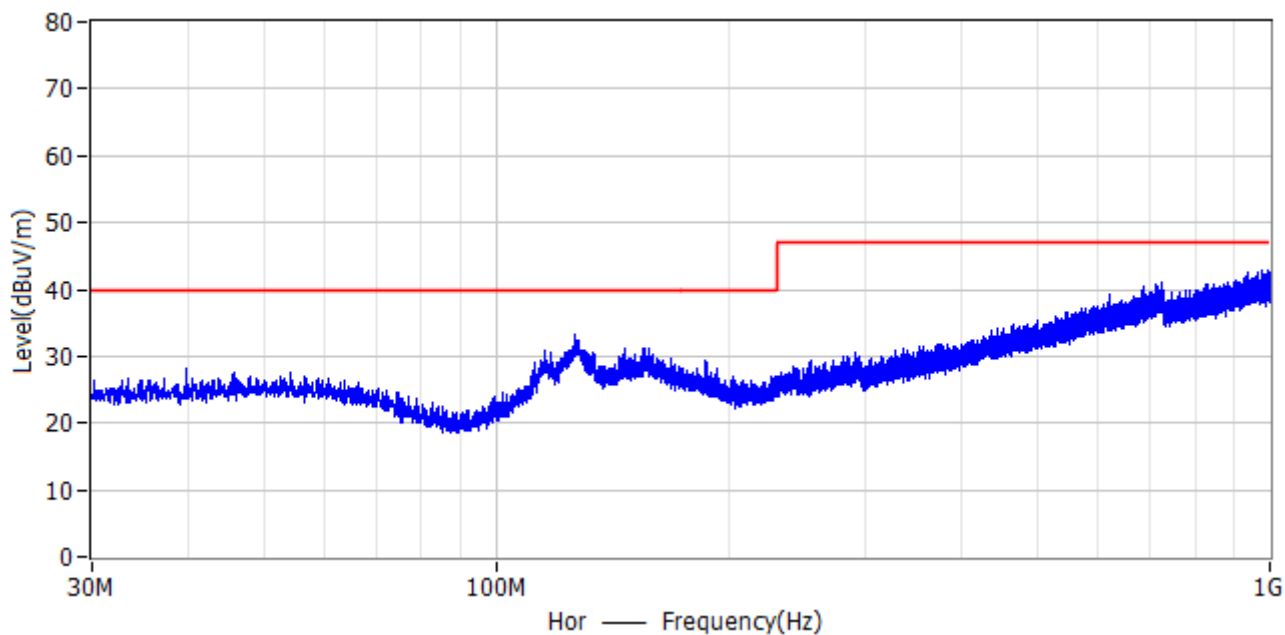


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	126.350 MHz	40.0	33.1	-6.9	18.4	PK	Hor	200.0	159.0
2*	154.350 MHz	40.0	31.2	-8.8	20.3	PK	Hor	200.0	192.0
3*	709.950 MHz	47.0	40.7	-6.3	29.8	PK	Hor	200.0	220.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 24V 25% Load
Note2:
Polarity: V

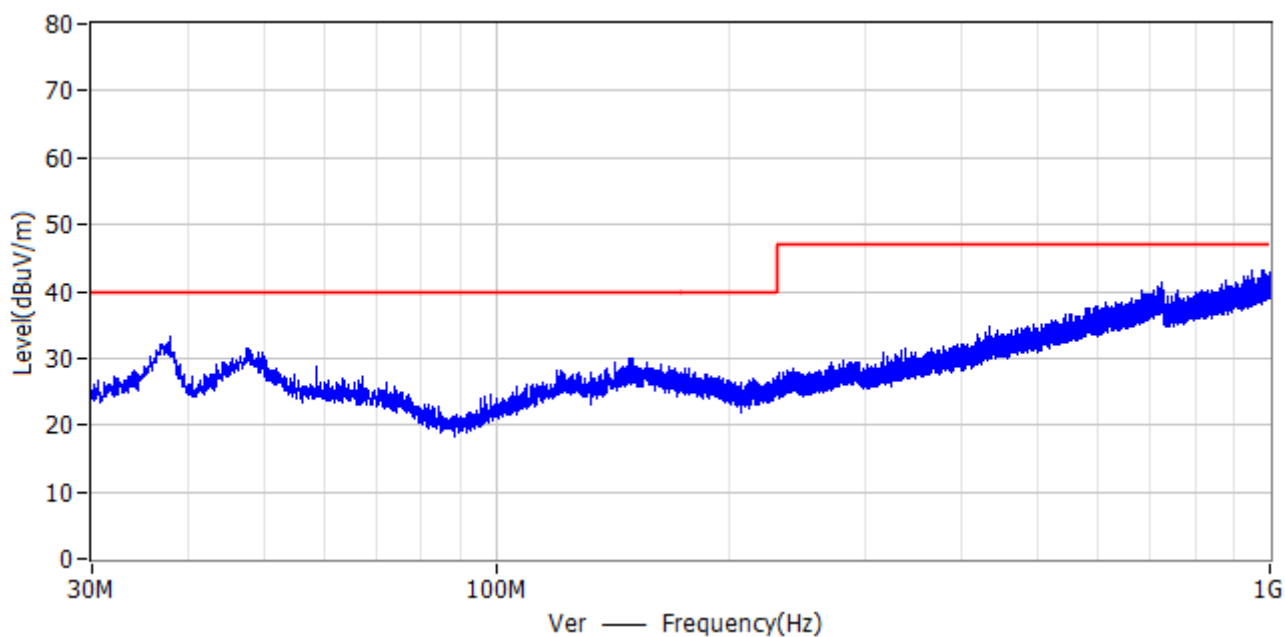


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.800 MHz	40.0	33.3	-6.7	19.3	PK	Ver	100.0	310.0
2*	47.800 MHz	40.0	31.6	-8.4	20.0	PK	Ver	100.0	216.0
3*	725.950 MHz	47.0	41.2	-5.8	30.2	PK	Ver	100.0	117.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 24V 25% Load
Note2:
Polarity: V

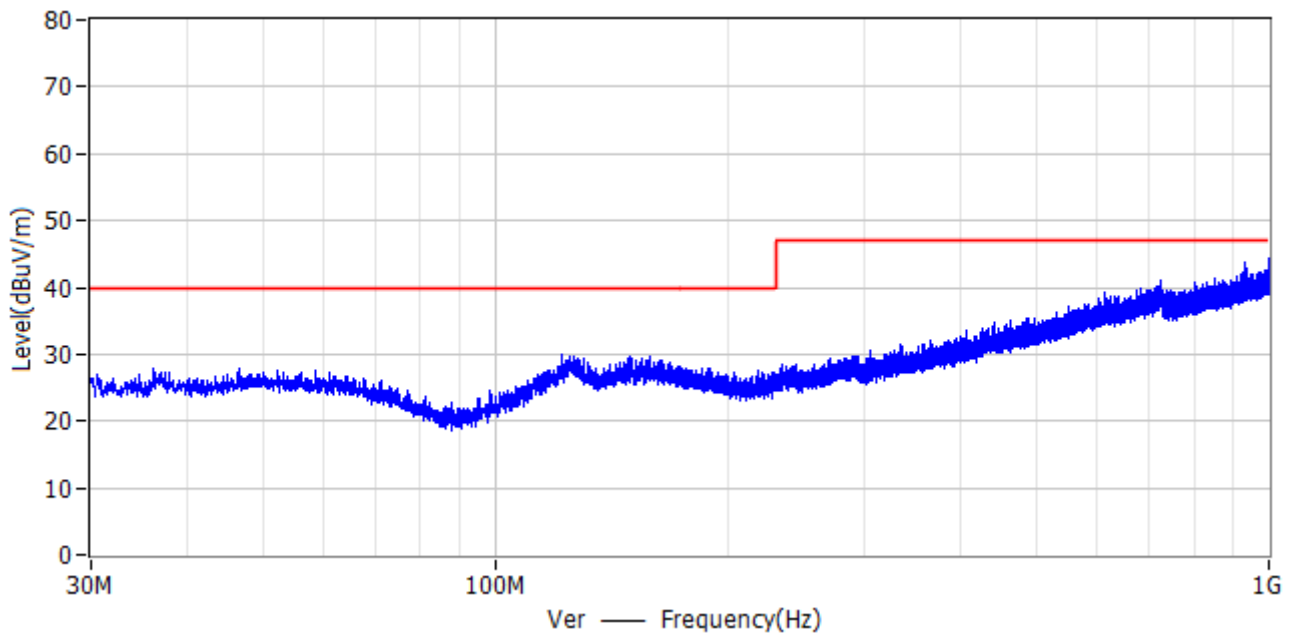


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	121.650 MHz	40.0	29.9	-10.1	18.0	PK	Ver	100.0	0.0
2*	149.650 MHz	40.0	29.5	-10.5	20.2	PK	Ver	100.0	238.0
3*	158.000 MHz	40.0	29.8	-10.2	20.2	PK	Ver	100.0	116.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22524 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 24V 25% Load
Note2:
Polarity: H

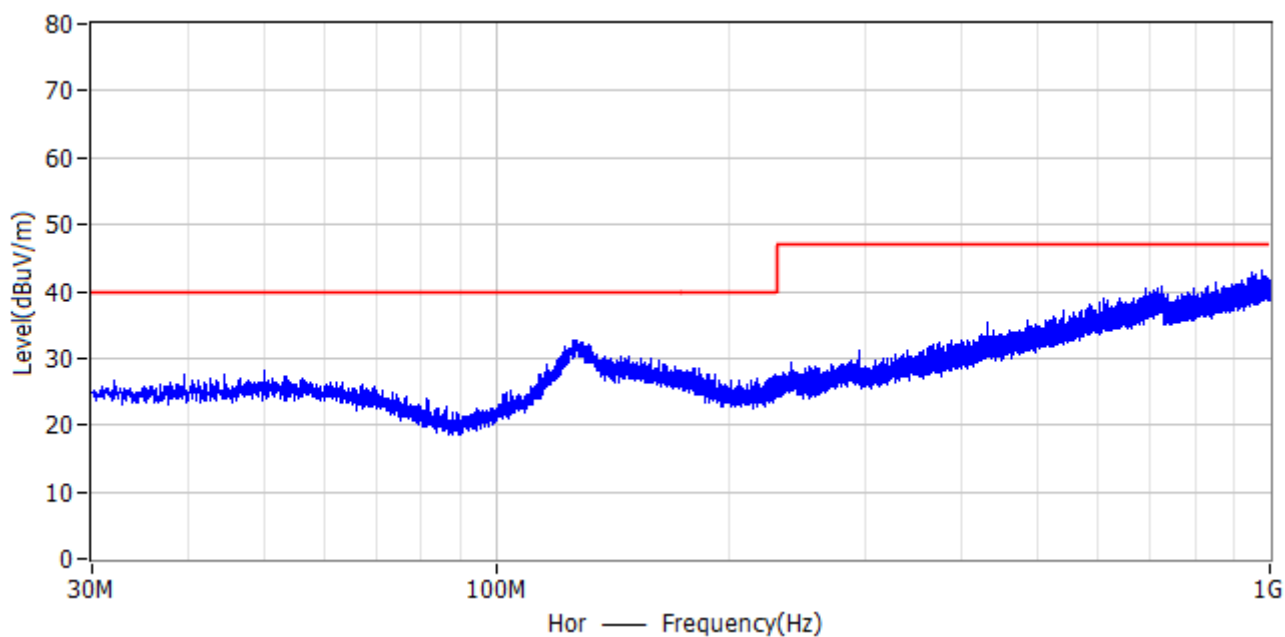


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	125.900 MHz	40.0	32.7	-7.3	18.4	PK	Hor	154.0	0.0
2*	726.650 MHz	47.0	40.9	-6.1	30.2	PK	Hor	200.0	113.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 38V 100% Load
Note2:
Polarity: V

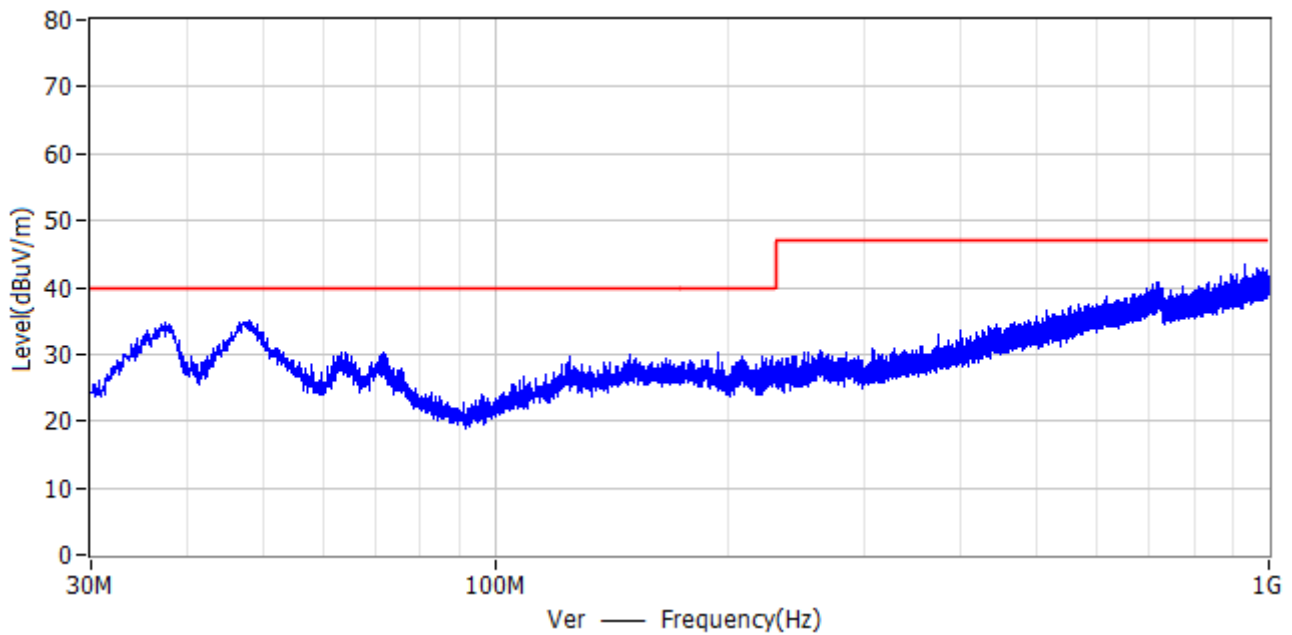


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.400 MHz	40.0	34.8	-5.2	19.2	PK	Ver	100.0	44.0
2*	48.100 MHz	40.0	35.0	-5.0	20.1	PK	Ver	100.0	50.0
3*	64.100 MHz	40.0	30.3	-9.7	19.1	PK	Ver	100.0	271.0
4*	71.700 MHz	40.0	30.2	-9.8	17.6	PK	Ver	100.0	243.0
5*	716.500 MHz	47.0	40.7	-6.3	29.9	PK	Ver	100.0	210.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 38V 100% Load
Note2:
Polarity: H

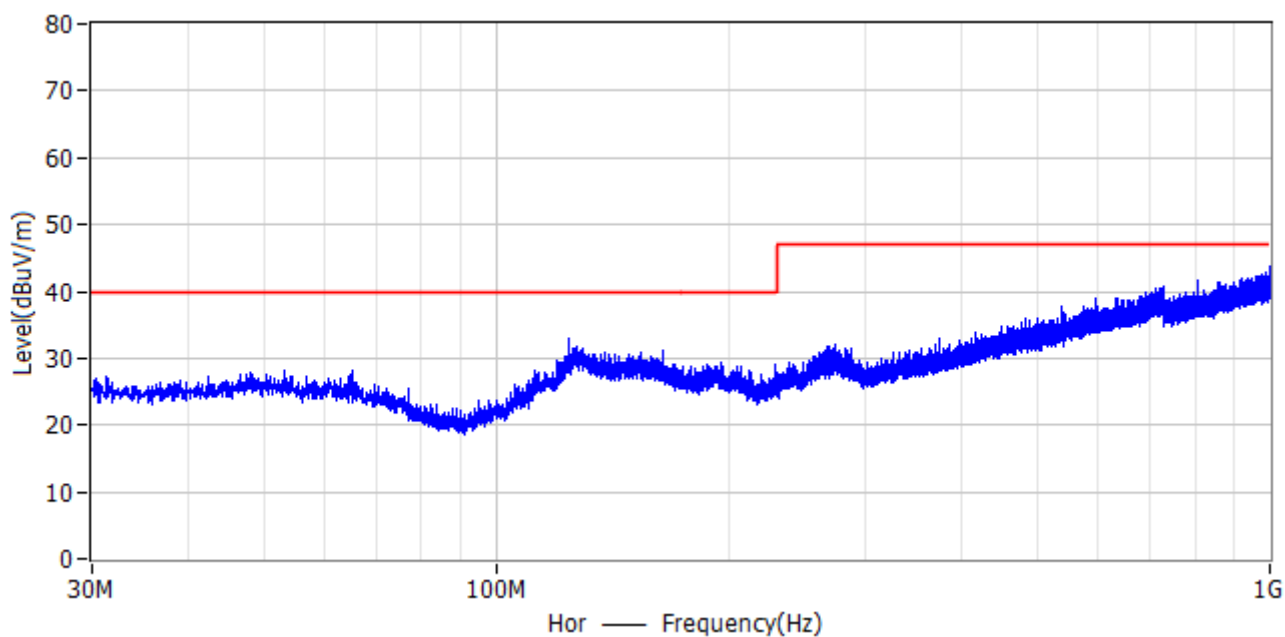


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	123.850 MHz	40.0	33.0	-7.0	18.2	PK	Hor	200.0	0.0
2*	596.150 MHz	47.0	39.0	-8.0	28.2	PK	Hor	200.0	103.0
3*	727.500 MHz	47.0	40.7	-6.3	30.2	PK	Hor	200.0	318.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 38V 100% Load
Note2:
Polarity: H

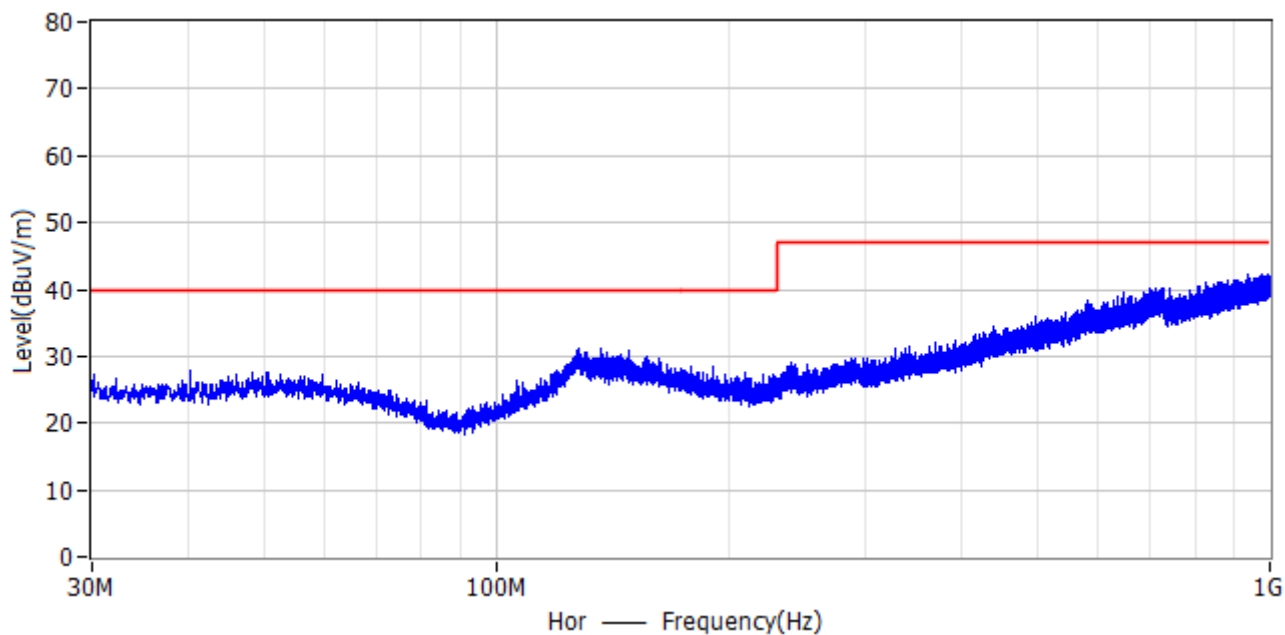


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	127.950 MHz	40.0	31.3	-8.7	18.6	PK	Hor	200.0	4.0
2*	136.150 MHz	40.0	31.1	-8.9	19.4	PK	Hor	200.0	20.0
3*	148.300 MHz	40.0	30.9	-9.1	20.2	PK	Hor	200.0	24.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 38V 100% Load
Note2:
Polarity: V

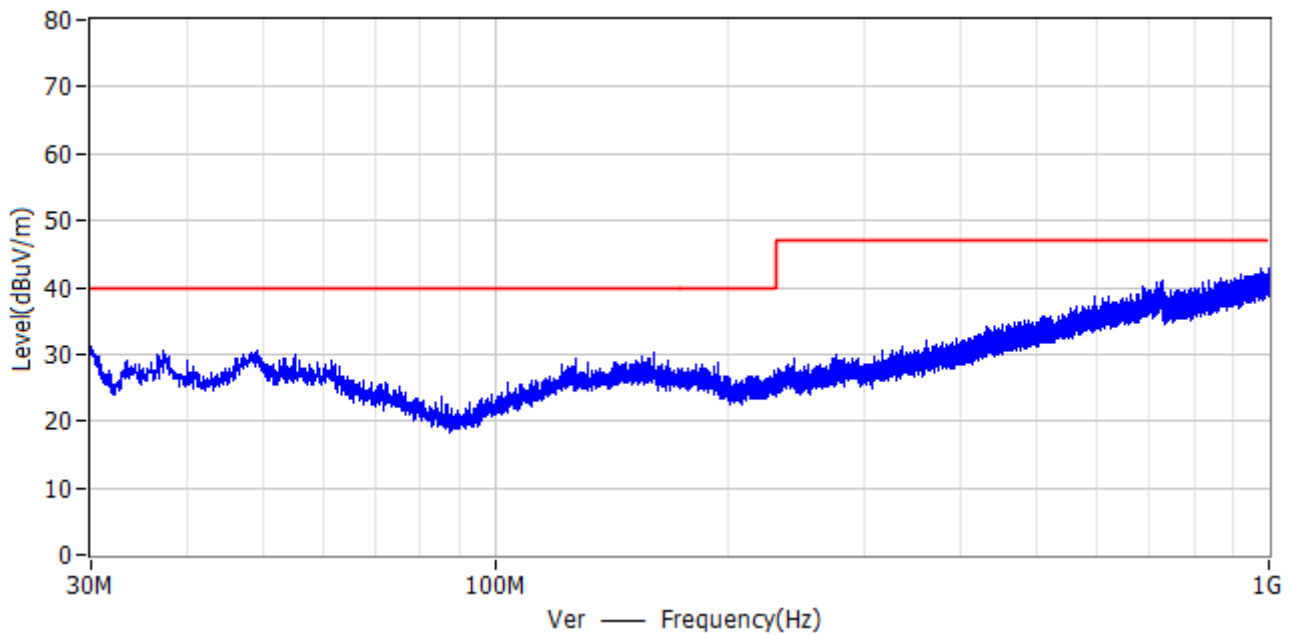


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	30.000 MHz	40.0	31.1	-8.9	18.8	PK	Ver	100.0	304.0
2*	37.250 MHz	40.0	30.5	-9.5	19.2	PK	Ver	100.0	12.0
3*	49.150 MHz	40.0	30.6	-9.4	20.1	PK	Ver	100.0	270.0
4*	728.850 MHz	47.0	41.2	-5.8	30.3	PK	Ver	100.0	102.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 38V 50% Load
Note2:
Polarity: V

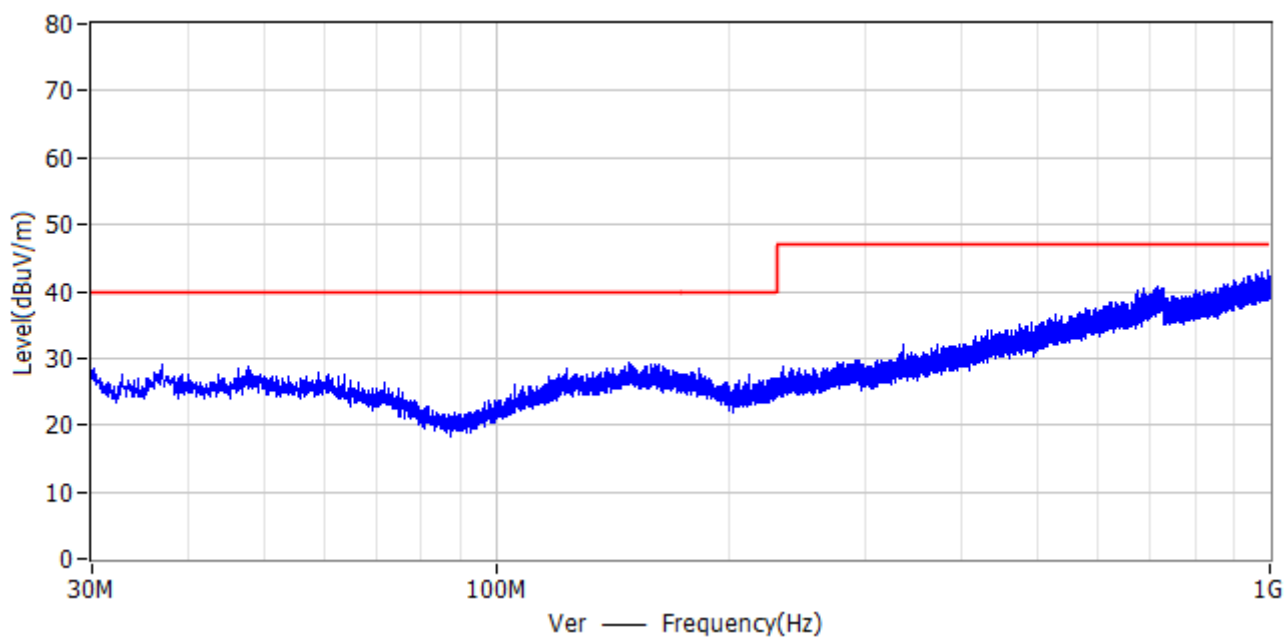


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	30.150 MHz	40.0	28.5	-11.5	18.8	PK	Ver	100.0	203.0
2*	36.950 MHz	40.0	28.9	-11.1	19.2	PK	Ver	100.0	0.0
3*	47.750 MHz	40.0	28.9	-11.1	20.0	PK	Ver	100.0	359.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 38V 50% Load
Note2:
Polarity: H

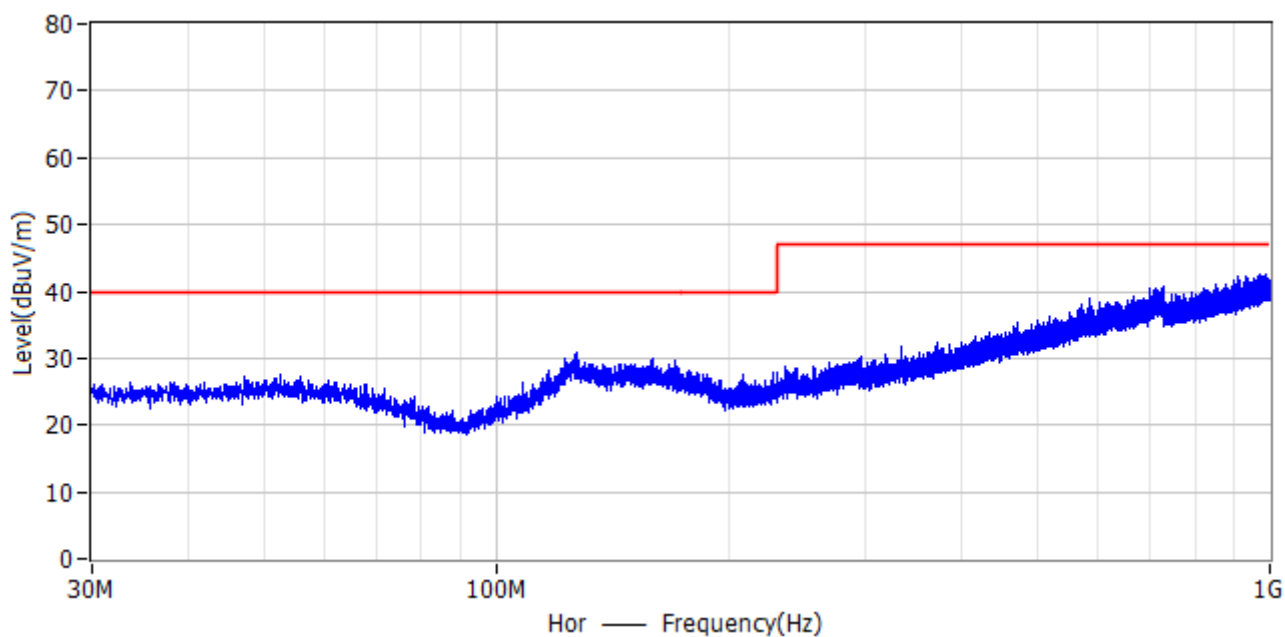


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	126.650 MHz	40.0	30.8	-9.2	18.4	PK	Hor	200.0	340.0
2*	159.000 MHz	40.0	29.9	-10.1	20.2	PK	Hor	200.0	326.0
3*	169.750 MHz	40.0	29.7	-10.3	19.7	PK	Hor	200.0	326.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 38V 50% Load
Note2:
Polarity: H

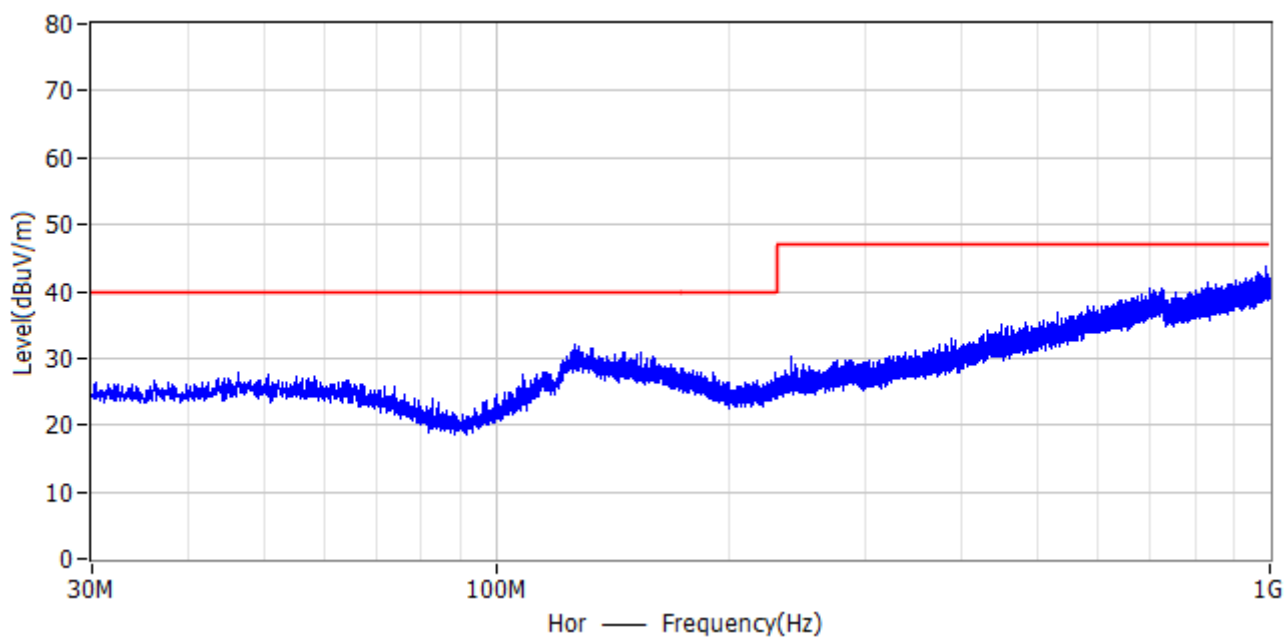


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	126.000 MHz	40.0	32.0	-8.0	18.4	PK	Hor	200.0	0.0
2*	132.150 MHz	40.0	31.6	-8.4	19.0	PK	Hor	200.0	335.0
3*	698.650 MHz	47.0	40.3	-6.7	29.6	PK	Hor	200.0	360.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 38V 50% Load
Note2:
Polarity: V

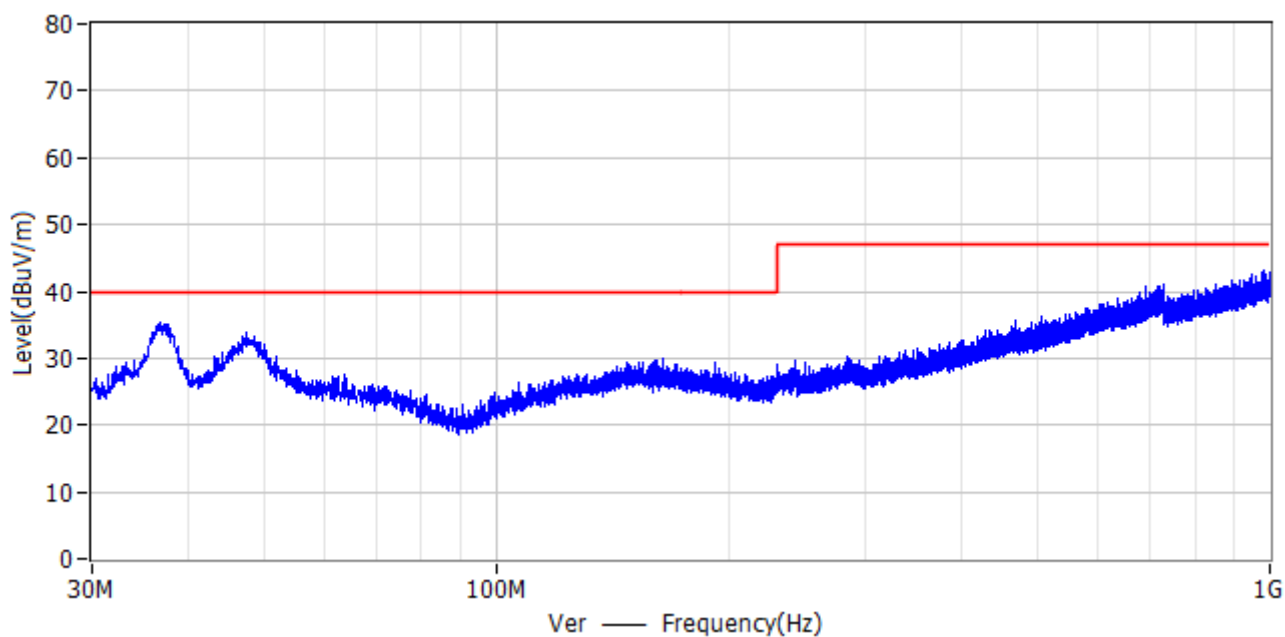


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	36.750 MHz	40.0	35.3	-4.7	19.2	PK	Ver	100.0	0.0
2*	47.450 MHz	40.0	33.7	-6.3	20.0	PK	Ver	100.0	0.0
3*	727.450 MHz	47.0	41.0	-6.0	30.2	PK	Ver	100.0	0.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 38V 25% Load
Note2:
Polarity: V

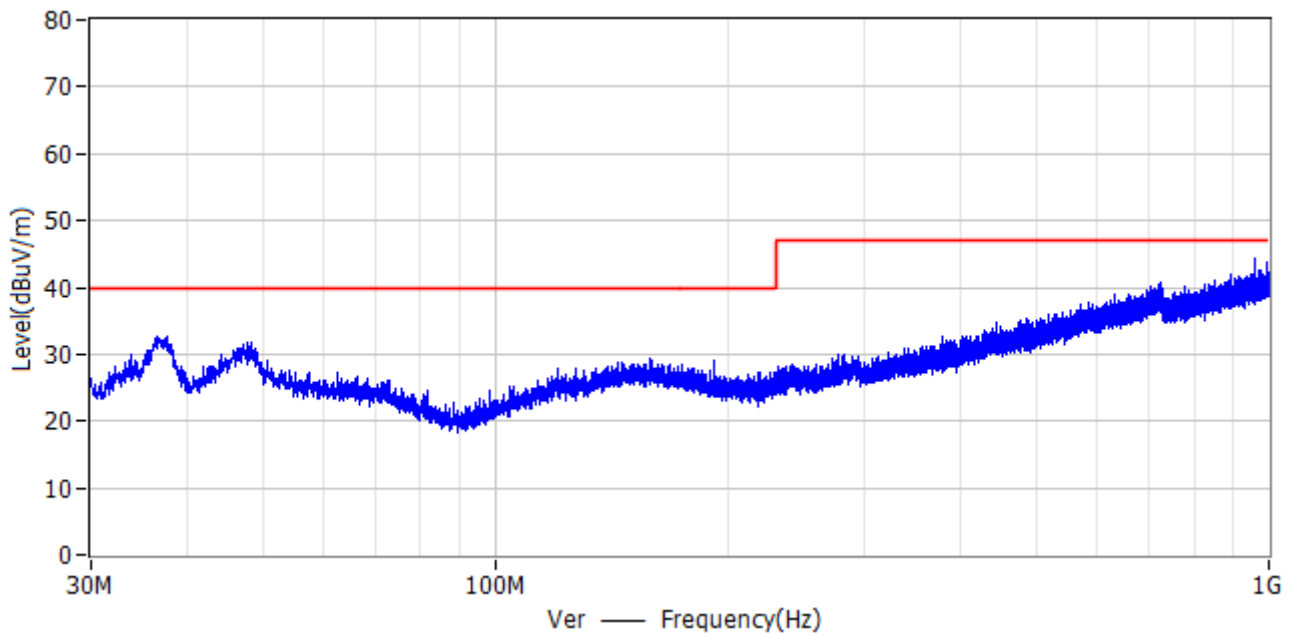


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	36.600 MHz	40.0	32.6	-7.4	19.2	PK	Ver	100.0	49.0
2*	47.700 MHz	40.0	31.6	-8.4	20.0	PK	Ver	100.0	338.0
3*	191.950 MHz	40.0	29.1	-10.9	17.3	PK	Ver	100.0	326.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 38V 25% Load
Note2:
Polarity: H

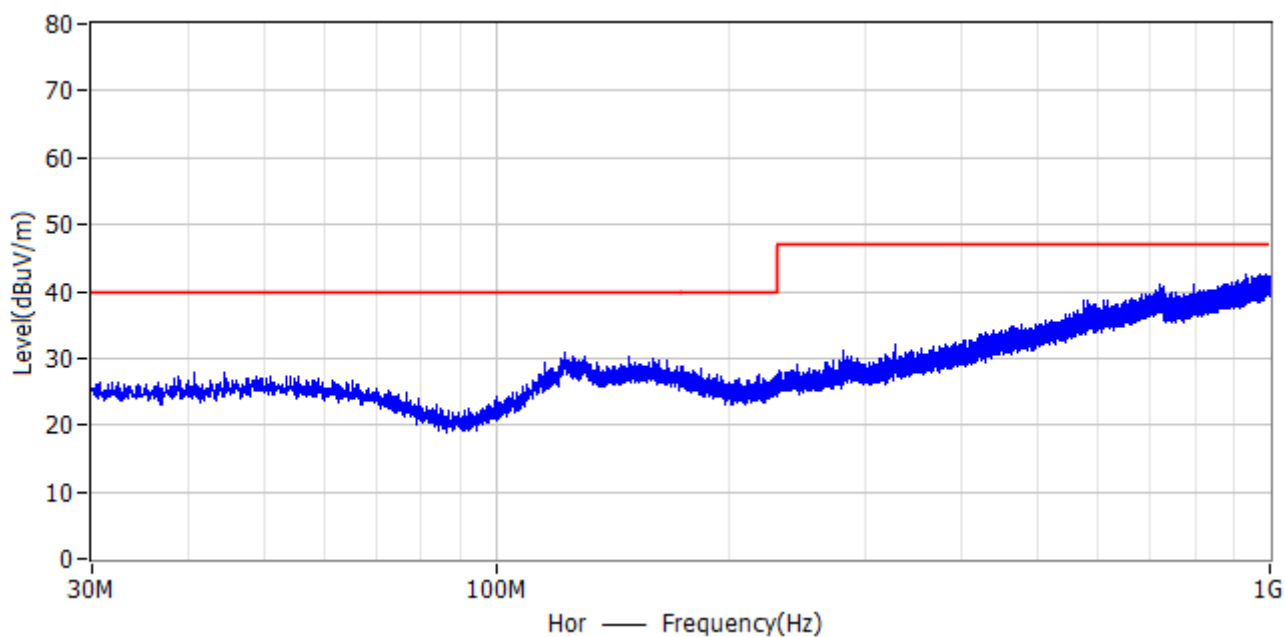


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	122.550 MHz	40.0	30.9	-9.1	18.1	PK	Hor	152.0	0.0
2*	148.650 MHz	40.0	30.2	-9.8	20.2	PK	Hor	116.0	0.0
3*	159.500 MHz	40.0	30.0	-10.0	20.1	PK	Hor	120.0	0.0

Lab: EPIN Electrical Laboratory
 Project: 20200914 环球特科
 Engineer: Pan
 Temperature & Humidity: 25°C, 45%RH
 EUT: GTM962250P22538 F2
 Voltage: AC 230V/50Hz
 Test Mode: Normal Operation Mode
 Note1: 38V 25% Load
 Note2:
 Polarity: H

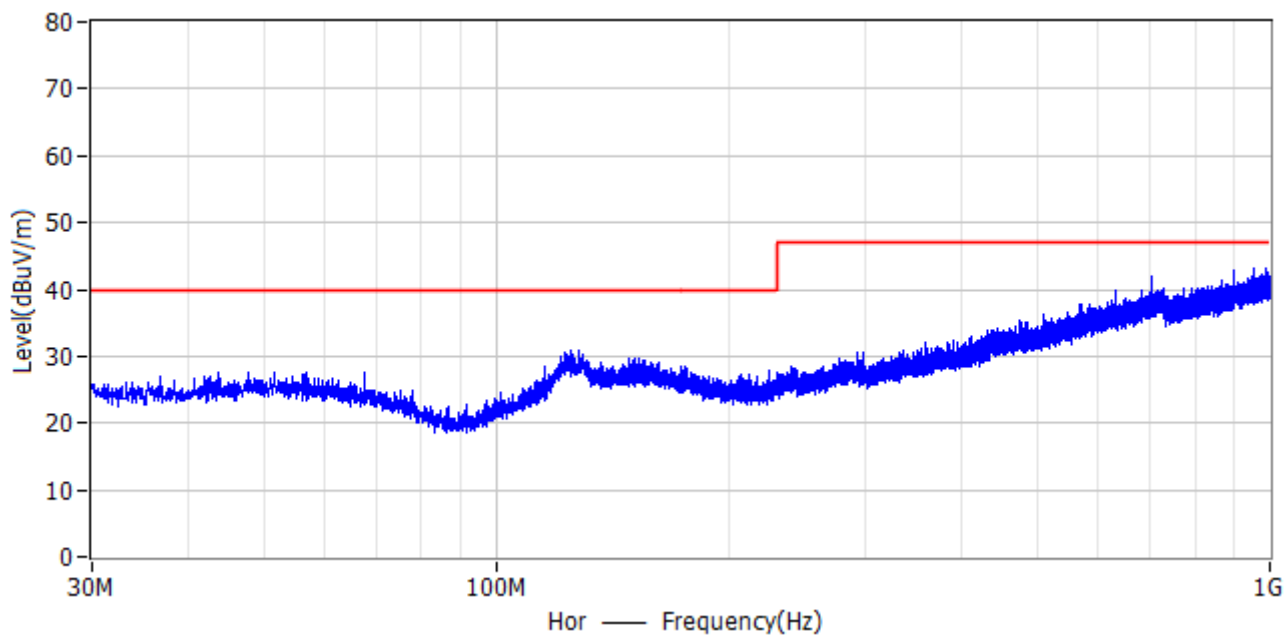


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	124.900 MHz	40.0	30.8	-9.2	18.3	PK	Hor	200.0	360.0
2*	701.350 MHz	47.0	41.9	-5.1	29.7	PK	Hor	200.0	164.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22538 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 38V 25% Load
Note2:
Polarity: V

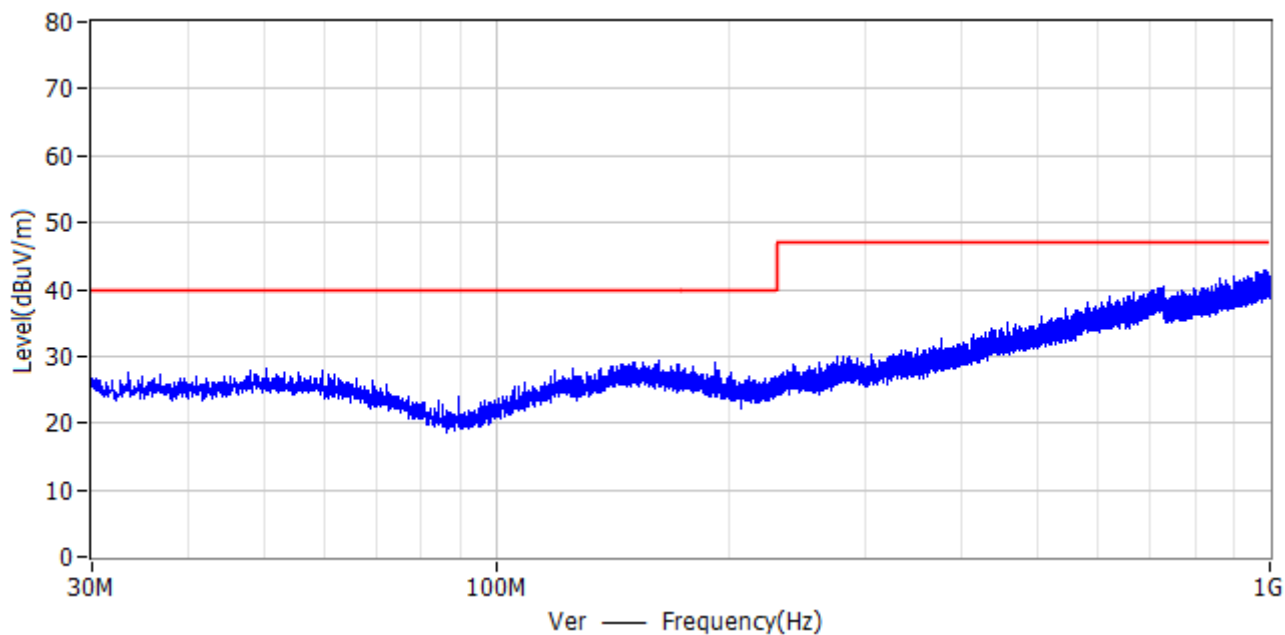


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	150.800 MHz	40.0	29.2	-10.8	20.3	PK	Ver	100.0	124.0
2*	191.700 MHz	40.0	28.9	-11.1	17.3	PK	Ver	100.0	272.0
3*	727.700 MHz	47.0	40.5	-6.5	30.2	PK	Ver	100.0	24.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 54V 100% Load
Note2:
Polarity: H

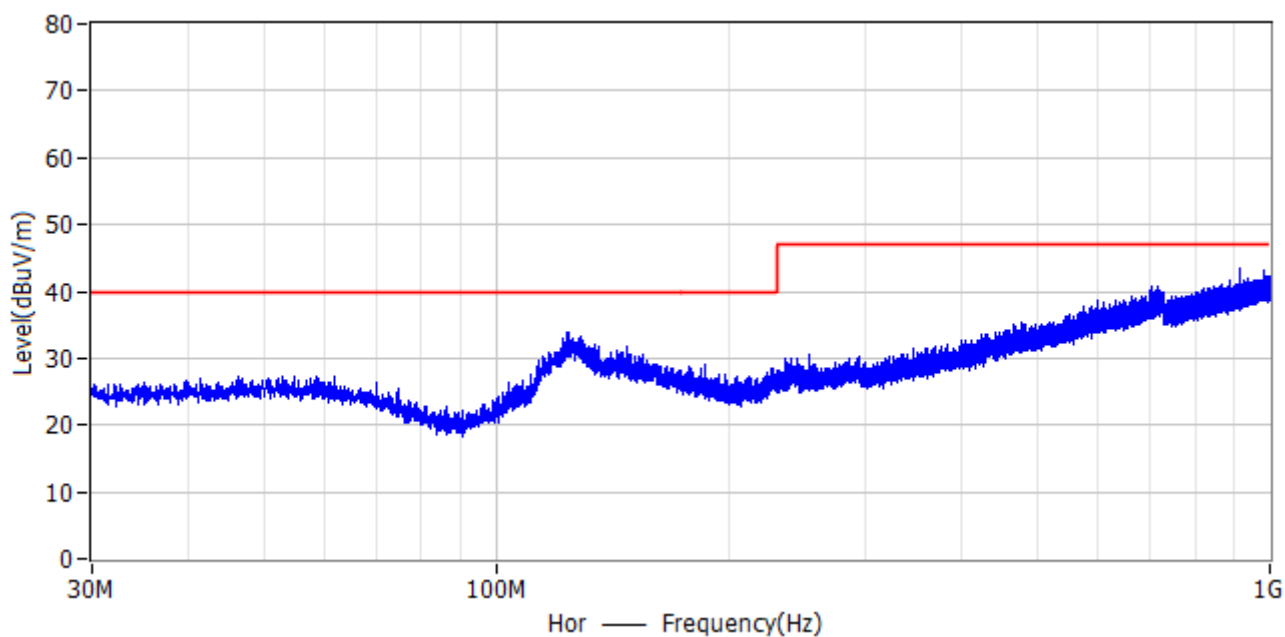


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	123.650 MHz	40.0	33.9	-6.1	18.1	PK	Hor	200.0	341.0
2*	912.150 MHz	47.0	43.5	-3.5	32.4	PK	Hor	200.0	322.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 54V 100% Load
Note2:
Polarity: V

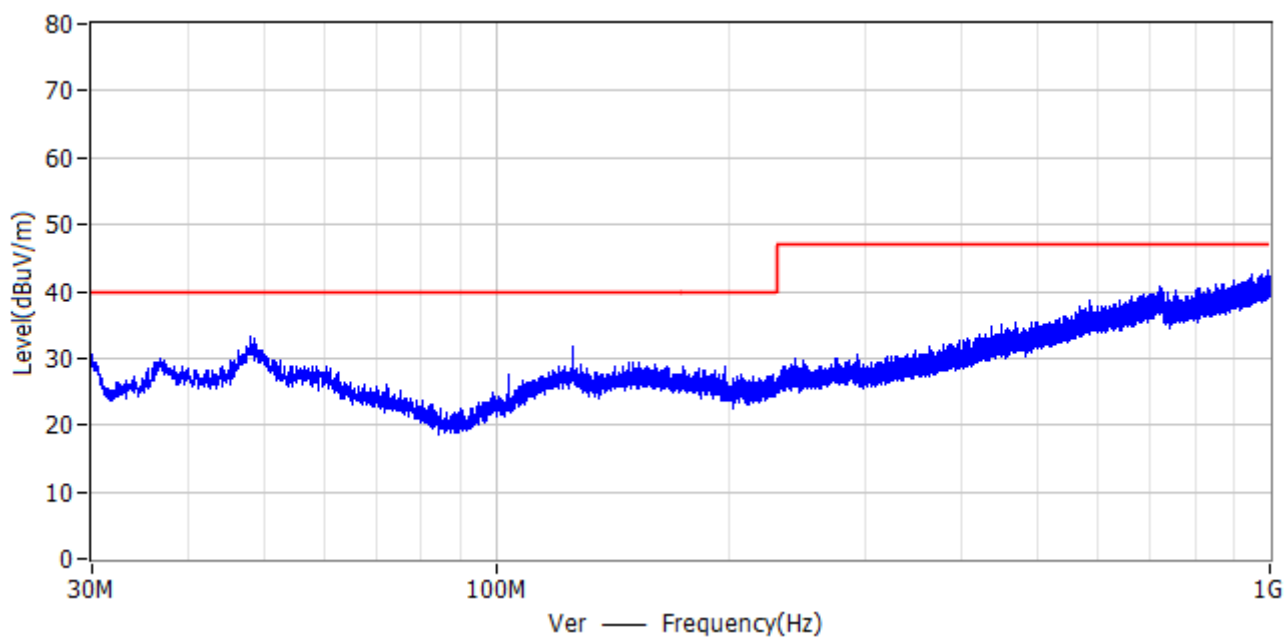

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	48.150 MHz	40.0	33.2	-6.8	20.1	PK	Ver	100.0	335.0
2*	125.400 MHz	40.0	31.9	-8.1	18.3	PK	Ver	100.0	12.0
3*	584.650 MHz	47.0	38.6	-8.4	27.8	PK	Ver	100.0	50.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 54V 100% Load
Note2:
Polarity: V

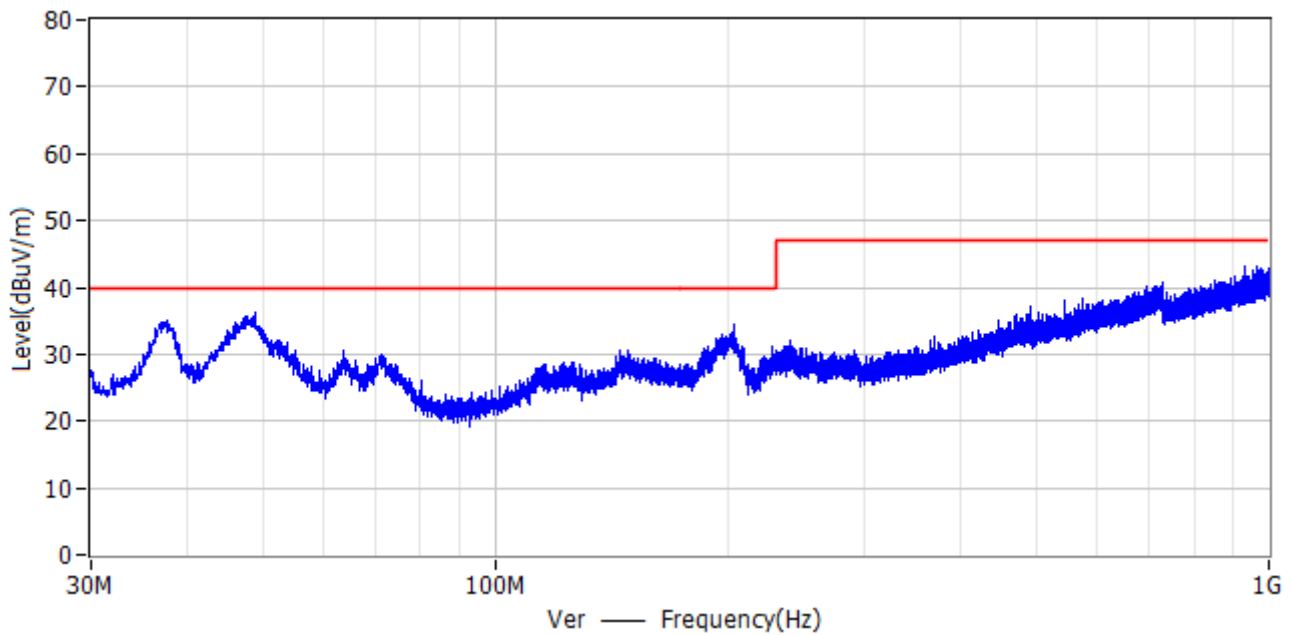

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.550 MHz	40.0	35.1	-4.9	19.3	PK	Ver	100.0	77.0
2*	48.850 MHz	40.0	36.4	-3.6	20.1	PK	Ver	100.0	192.0
3*	203.100 MHz	40.0	34.4	-5.6	16.7	PK	Ver	100.0	198.0

Lab: EPIN Electrical Laboratory

Project: 20200914 环球特科

Engineer: Pan

Temperature & Humidity: 25°C, 45%RH

EUT: GTM962250P22554 F2


Voltage: AC 120V/60Hz

Test Mode: Normal Operation Mode

Note1: 54V 100% Load


Note2:

Polarity: H

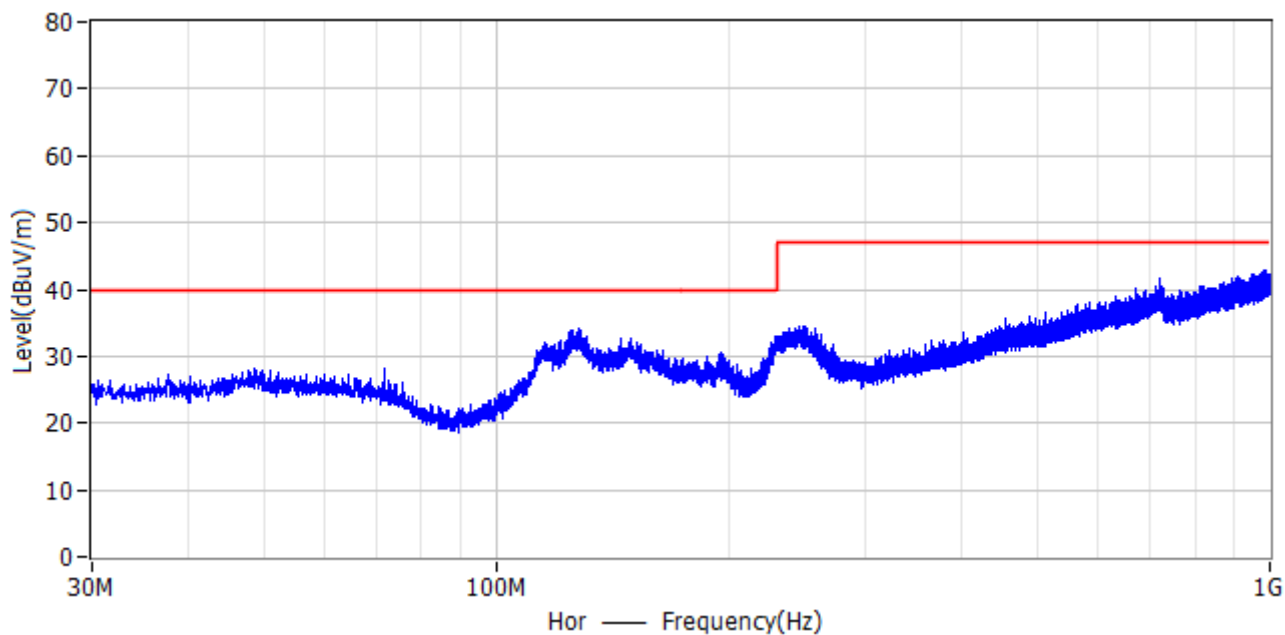


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	128.150 MHz	40.0	34.1	-5.9	18.6	PK	Hor	197.0	0.0
2*	149.350 MHz	40.0	32.7	-7.3	20.2	PK	Hor	200.0	0.0
3*	718.350 MHz	47.0	41.7	-5.3	30.0	PK	Hor	200.0	0.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 54V 50% Load
Note2:
Polarity: H

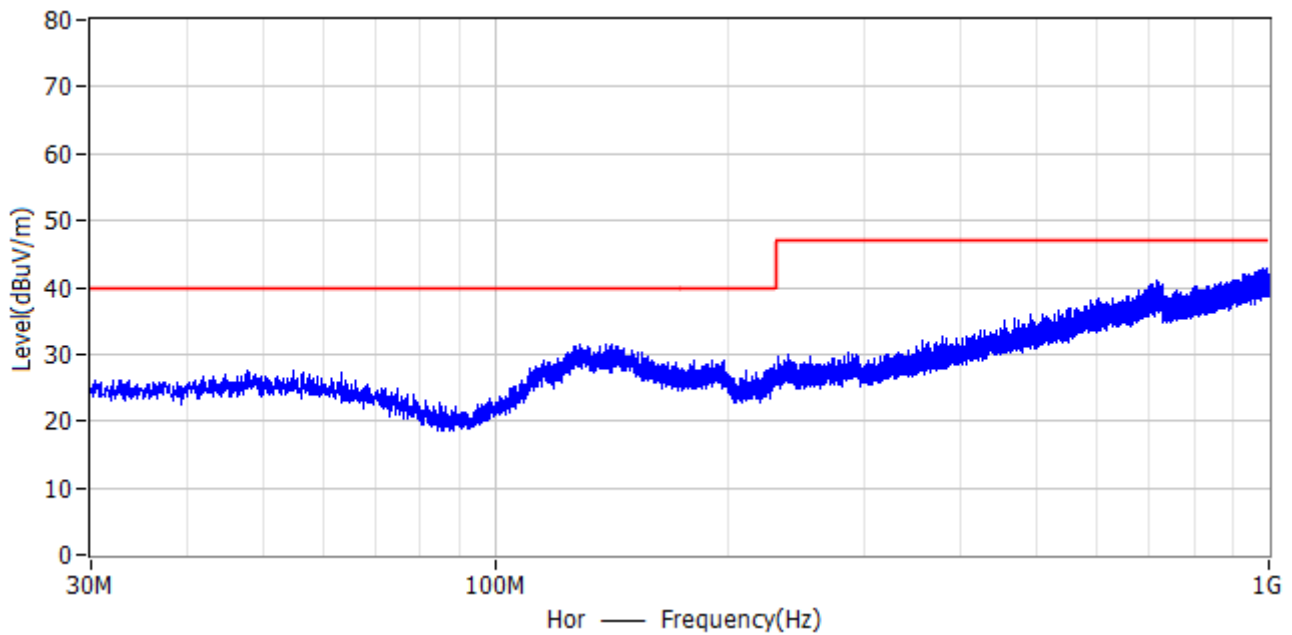

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	128.500 MHz	40.0	31.5	-8.5	18.6	PK	Hor	200.0	13.0
2*	141.500 MHz	40.0	31.6	-8.4	19.8	PK	Hor	200.0	170.0
3*	150.350 MHz	40.0	30.5	-9.5	20.3	PK	Hor	200.0	0.0
4*	716.000 MHz	47.0	41.0	-6.0	29.9	PK	Hor	200.0	359.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 54V 50% Load
Note2:
Polarity: V

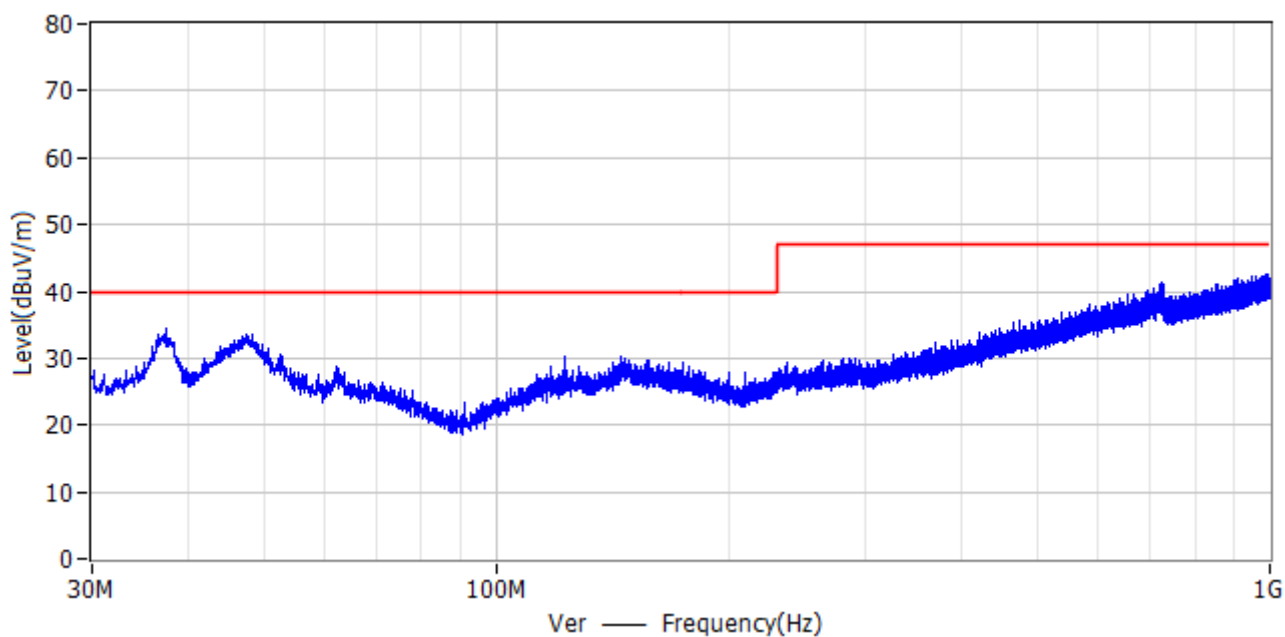

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.400 MHz	40.0	34.6	-5.4	19.2	PK	Ver	100.0	13.0
2*	48.350 MHz	40.0	33.7	-6.3	20.1	PK	Ver	100.0	286.0
3*	725.700 MHz	47.0	41.5	-5.5	30.2	PK	Ver	100.0	0.0

Lab: EPIN Electrical Laboratory

Project: 20200914 环球特科

Engineer: Pan

Temperature & Humidity: 25°C, 45%RH

EUT: GTM962250P22554 F2


Voltage: AC 230V/50Hz

Test Mode: Normal Operation Mode

Note1: 54V 50% Load


Note2:

Polarity: V

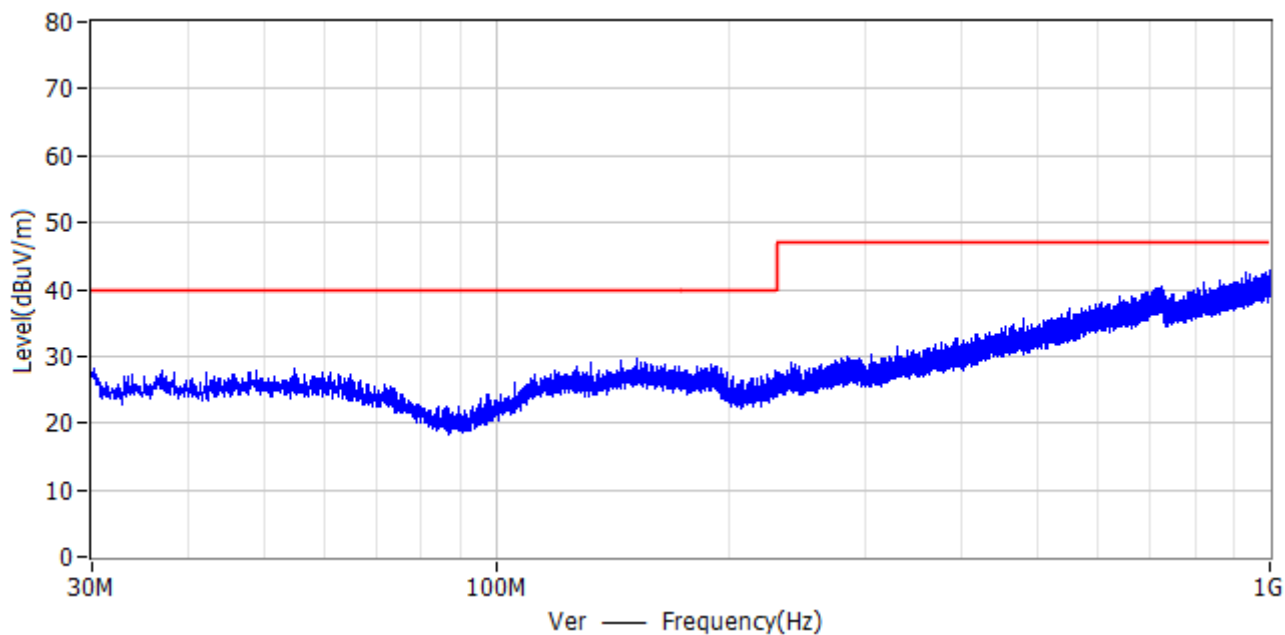


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	30.250 MHz	40.0	28.2	-11.8	18.8	PK	Ver	100.0	125.0
2*	132.100 MHz	40.0	29.1	-10.9	19.0	PK	Ver	100.0	0.0
3*	152.100 MHz	40.0	29.6	-10.4	20.3	PK	Ver	100.0	6.0
4*	725.700 MHz	47.0	40.3	-6.7	30.2	PK	Ver	100.0	54.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 54V 50% Load
Note2:
Polarity: H

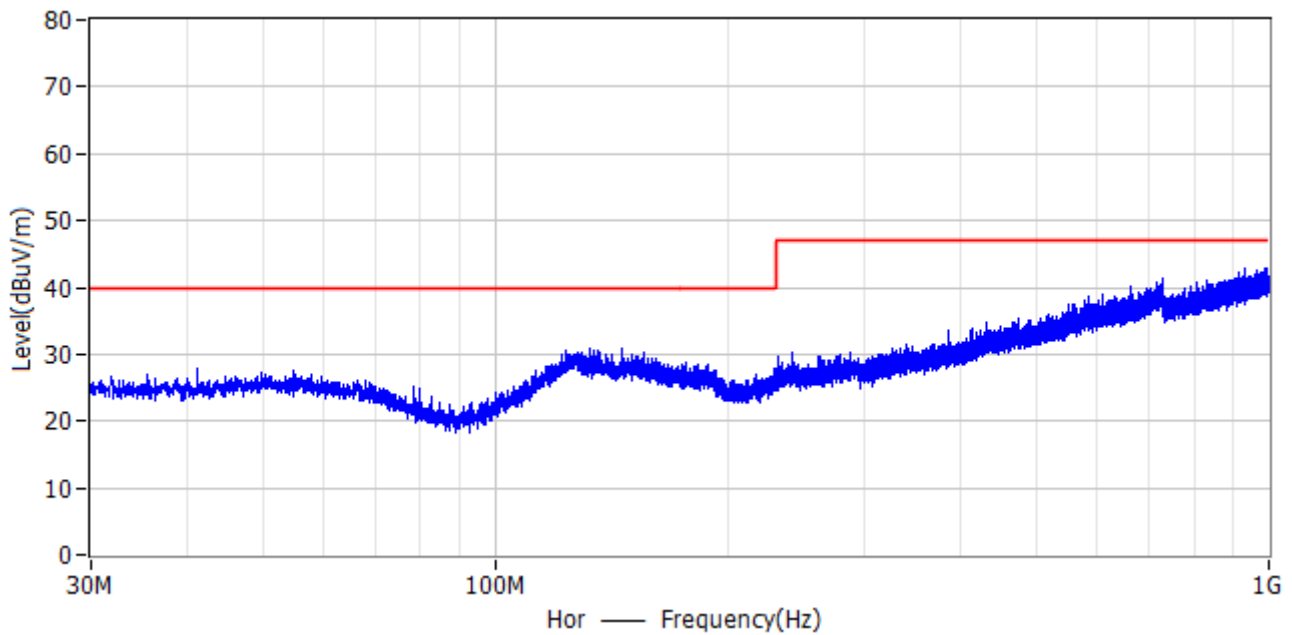


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	123.200 MHz	40.0	30.7	-9.3	18.1	PK	Hor	200.0	0.0
2*	132.500 MHz	40.0	30.8	-9.2	19.0	PK	Hor	200.0	0.0
3*	145.750 MHz	40.0	30.7	-9.3	20.1	PK	Hor	199.0	0.0
4*	727.850 MHz	47.0	41.3	-5.7	30.2	PK	Hor	200.0	76.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 54V 25% Load
Note2:
Polarity: H

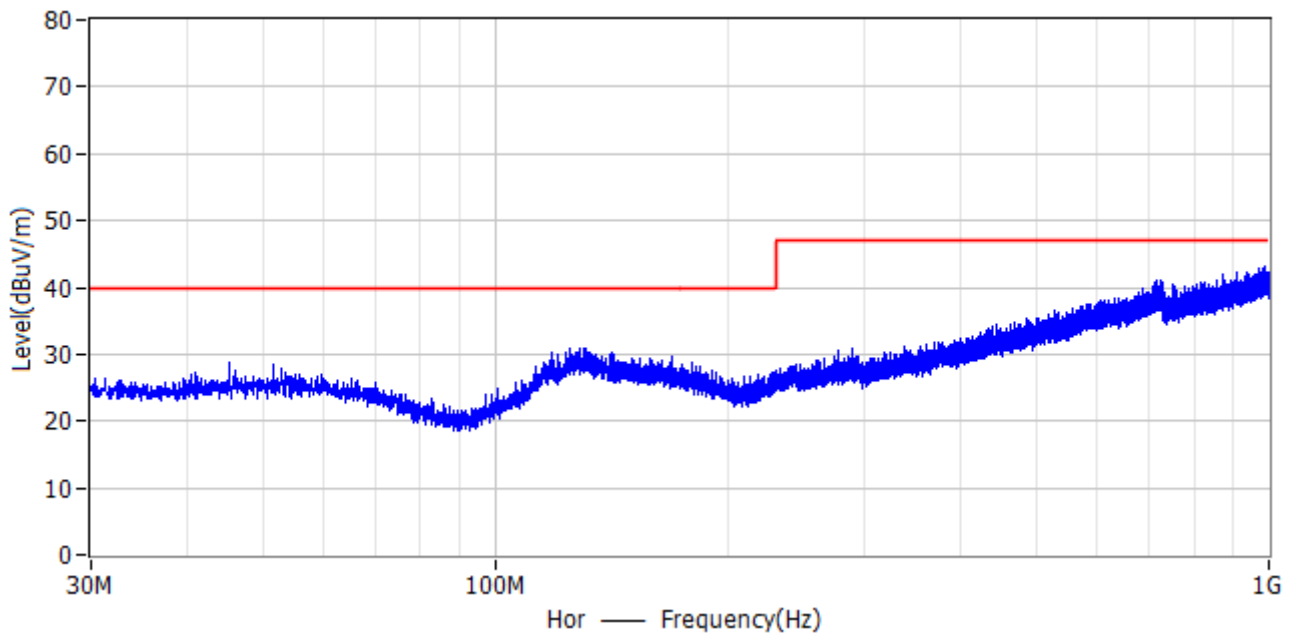


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	45.200 MHz	40.0	28.8	-11.2	19.9	PK	Hor	200.0	96.0
2*	51.750 MHz	40.0	28.6	-11.4	20.1	PK	Hor	200.0	164.0
3*	130.300 MHz	40.0	31.0	-9.0	18.8	PK	Hor	200.0	179.0
4*	725.950 MHz	47.0	41.1	-5.9	30.2	PK	Hor	200.0	170.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 230V/50Hz
Test Mode: Normal Operation Mode
Note1: 54V 25% Load
Note2:
Polarity: V

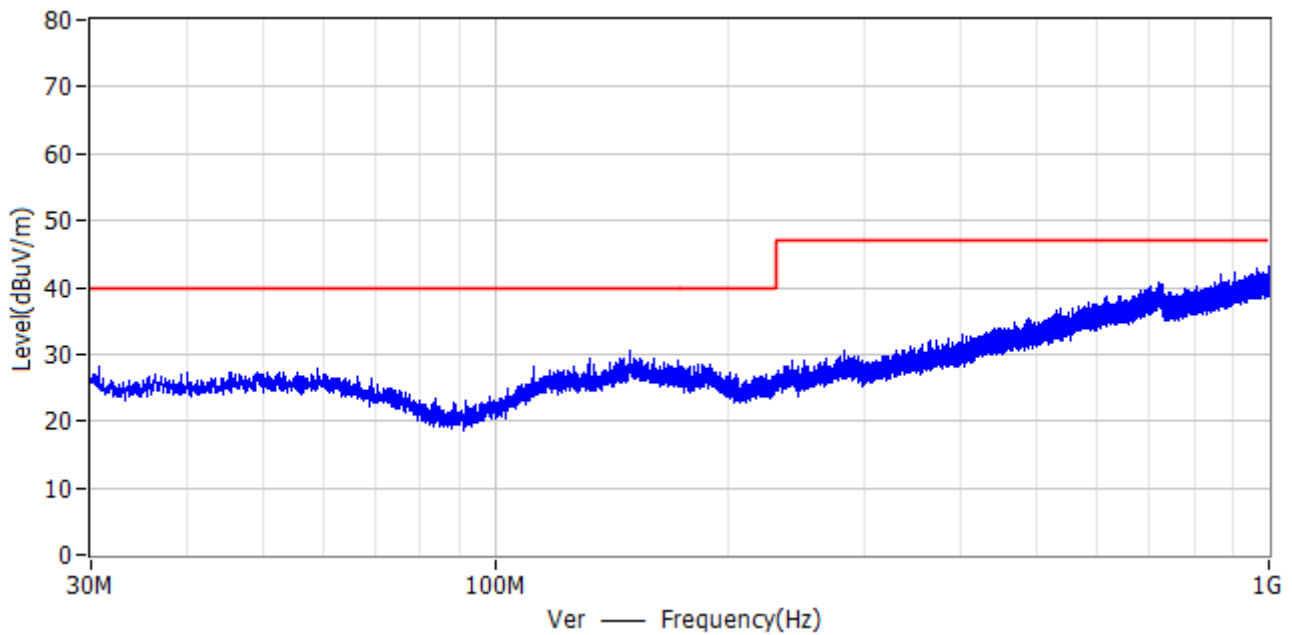


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	30.650 MHz	40.0	28.0	-12.0	18.8	PK	Ver	100.0	297.0
2*	132.600 MHz	40.0	29.4	-10.6	19.0	PK	Ver	100.0	0.0
3*	149.300 MHz	40.0	30.4	-9.6	20.2	PK	Ver	100.0	2.0
4*	721.050 MHz	47.0	40.7	-6.3	30.1	PK	Ver	100.0	351.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 54V 25% Load
Note2:
Polarity: V

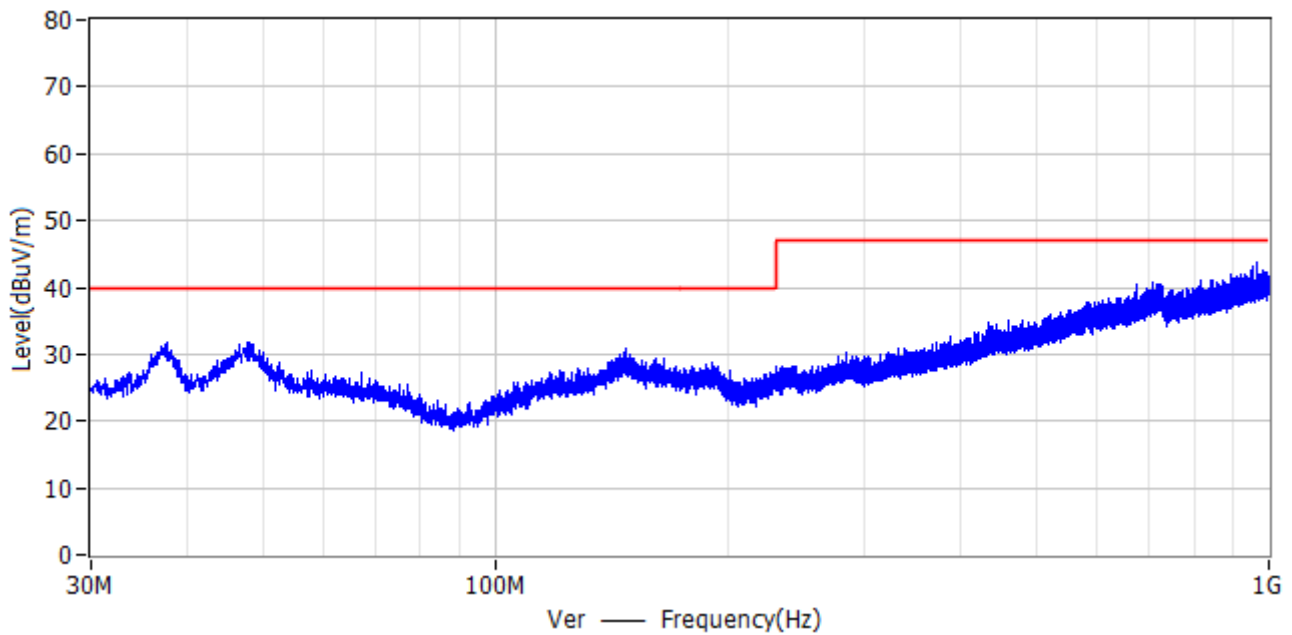

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.550 MHz	40.0	31.7	-8.3	19.3	PK	Ver	100.0	345.0
2*	47.900 MHz	40.0	31.9	-8.1	20.0	PK	Ver	100.0	121.0
3*	147.450 MHz	40.0	31.0	-9.0	20.1	PK	Ver	100.0	0.0
4*	674.500 MHz	47.0	40.3	-6.7	29.2	PK	Ver	100.0	163.0

Lab: EPIN Electrical Laboratory
Project: 20200914 环球特科
Engineer: Pan
Temperature & Humidity: 25°C, 45%RH
EUT: GTM962250P22554 F2
Voltage: AC 120V/60Hz
Test Mode: Normal Operation Mode
Note1: 54V 25% Load
Note2:
Polarity: H

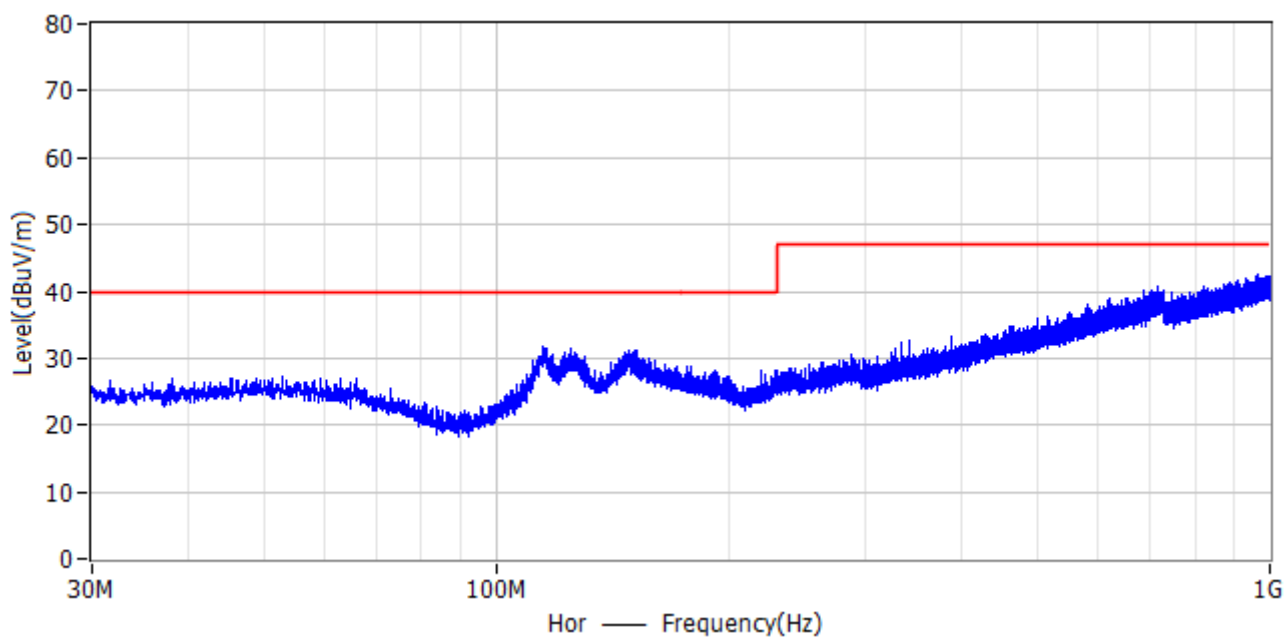

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	114.900 MHz	40.0	31.7	-8.3	17.5	PK	Hor	200.0	6.0
2*	125.000 MHz	40.0	31.4	-8.6	18.3	PK	Hor	172.0	0.0
3*	151.500 MHz	40.0	31.1	-8.9	20.3	PK	Hor	200.0	179.0
4*	715.900 MHz	47.0	40.7	-6.3	29.9	PK	Hor	200.0	109.0