



Test Report issued under the responsibility of:

Intertek

TEST REPORT

IEC 62368-1

Audio/video, information and communication technology equipment

Part 1: Safety requirements

Report Number : 151100940SHA-001

Date of issue : 2017-05-15

Total number of pages : 141

Applicant's name : GlobTek, Inc.

Address : 186 Veterans Dr. Northvale, NJ 07647 USA

Test specification:

Standard..... : IEC 62368-1:2014 (Second Edition)

Test procedure : CB Scheme

Non-standard test method : N/A

Test Report Form No. : IEC62368_1B

Test Report Form(s) Originator..... : UL(US)

Master TRF : 2014-03

Copyright © 2014 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.


Test Item description	ITE POWER SUPPLY
Trade Mark	
Manufacturer	Same as applicant
Model/Type reference	GT*96180-*****, GT*96300-*****, GT*91120-*****, GTM91128LI1CEL, GTM91128LI2CEL, GTM91128LI3CEL (See pages 8 for details)
Ratings	Input: 100-240V~, 50-60Hz, 0.6A / 1.0A / 1.5A; Output: 5-56VDC, Max. 4.5A, Max. 36W (See pages 8-10 for details)

Testing procedure and testing location:		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	Intertek Testing Services Shanghai.
Testing location/ address		Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address.....		
Tested by (name + signature).....:		Albert Zhou (Engineer)
Approved by (name + signature)		Will Wang (Mandated Reviewer)
		Albert Zhou
		Will Wang
<input type="checkbox"/>	Testing procedure: TMP/CTF Stage 1	
Testing location/ address.....		
Tested by (name + signature).....:		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: WMT/CTF Stage 2	
Testing location/ address.....		
Tested by (name + signature).....:		
Witnessed by (name + signature).....:		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: SMT/CTF Stage 3 or 4	
Testing location/ address.....		
Tested by (name + signature).....:		
Approved by (name + signature)		
Supervised by (name + signature).....:		

List of Attachments (including a total number of pages in each attachment): Appendix No.1: Photos of product Appendix No.2: Group differences for the CENELEC countries and national differences for USA and Canada Appendix 3 to 6: Supplementary tests on plug portion Appendix No.7: Mechanical durability test for non-standard interchangeable plug adapters according IEC 61984: 2008	
Summary of testing: From the result of our examination and tests in the submitted samples, conclude they comply with the requirements of the standard IEC 62368-1:2014 (Second Edition) & EN 62368-1:2014.	
Tests performed (name of test and test clause): 5.2 Classification and limits of electrical energy sources 5.4.1.8 Determination of working voltage 5.4.1.10.3 Ball pressure test 5.4.2 Clearances 5.4.3 Creepage distances 5.4.8 Humidity conditioning 5.4.9 Electric strength test 5.7.2.1 Measurement of touch current 6.2.2.2 Power measurement for worst-case load fault 6.2.2.3 Power measurement for worst-case source fault 6.4.3.3 Single Fault Conditions test B.2.5 Input test B.3.5 Maximum load at output terminals F.3.10 Permanence of markings G.5.3.3 Overload test of Transformers T.2 Steady force test, 10 N T.4 Steady force test, 100 N T.7 Drop test T.8 Stress relief test Remark: From the result of our examination and tests in the submitted samples, conclude they comply with the requirements of the standard IEC 62368-1:2014 (Second Edition)	Testing location: Intertek Testing Services Shanghai Building No.86, 1198 Qinzhou Road (North), 200233 Shanghai, China
Summary of compliance with National Differences: List of countries addressed Group difference for CENELEC countries and national differences USA and Canada are considered.	
<input checked="" type="checkbox"/> The product fulfils the requirements of IEC 62368-1:2014 (Second Edition) & EN 62368-1:2014.	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

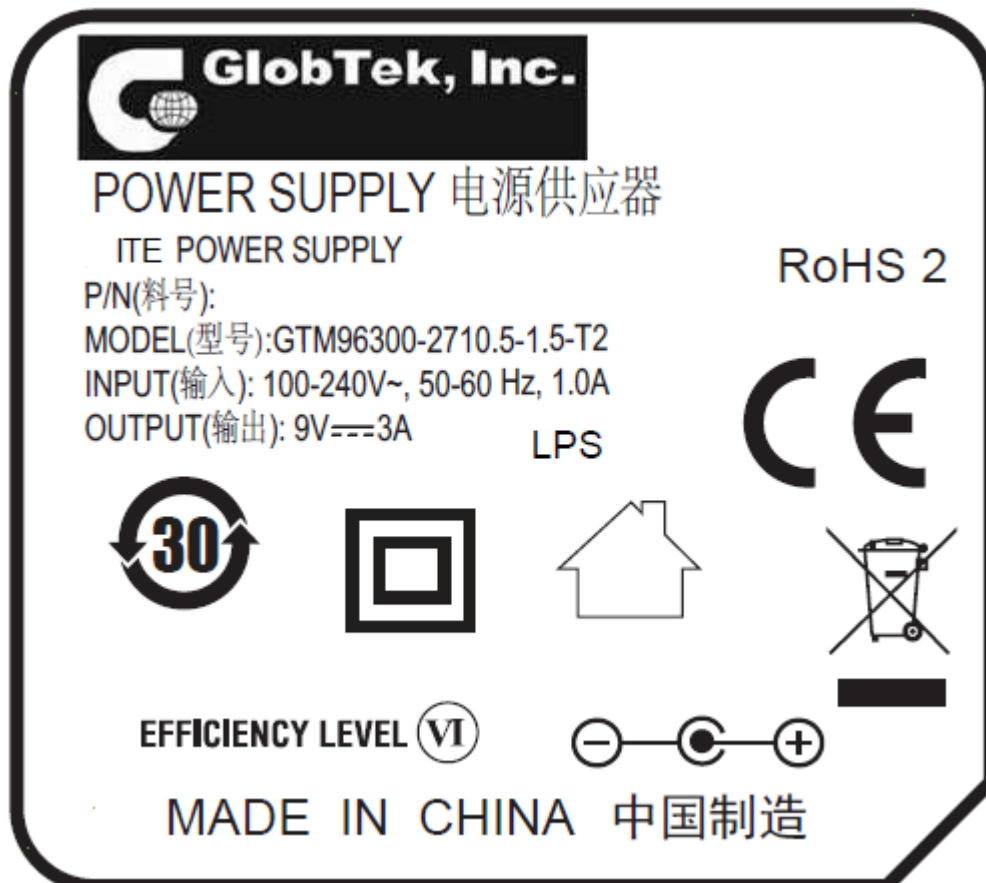

Note: The above markings are the minimum requirements required by the safety standard. For the final production samples, the additional markings which do not give rise to misunderstanding may be added.

Other models are with similar label as corresponding above models except different model name and output ratings.

TEST ITEM PARTICULARS:	
Classification of use by	<input checked="" type="checkbox"/> Ordinary person <input type="checkbox"/> Instructed person <input type="checkbox"/> Skilled person <input type="checkbox"/> Children likely to be present
Supply Connection.....	<input checked="" type="checkbox"/> AC Mains <input type="checkbox"/> DC Mains <input type="checkbox"/> External Circuit - not Mains connected - <input type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply % Tolerance	<input checked="" type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> +____%/ -____% <input type="checkbox"/> None
Supply Connection – Type	<input checked="" type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input checked="" type="checkbox"/> appliance coupler <input checked="" type="checkbox"/> direct plug-in <input type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input type="checkbox"/> other:_____
Considered current rating of protective device as part of building or equipment installation	16 A (20A for North America); Installation location: <input checked="" type="checkbox"/> building; <input type="checkbox"/> equipment
Equipment mobility	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input checked="" type="checkbox"/> transportable <input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input checked="" type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input type="checkbox"/> wall-mounted
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other: _____
Class of equipment	<input checked="" type="checkbox"/> Class I <input checked="" type="checkbox"/> Class II <input type="checkbox"/> Class III
Access location	<input type="checkbox"/> restricted access location <input checked="" type="checkbox"/> N/A
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified maximum operating ambient:	40°C
IP protection class	<input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP____
Power Systems	<input checked="" type="checkbox"/> TN <input type="checkbox"/> TT <input checked="" type="checkbox"/> IT - 230 V _{L-L}
Altitude during operation (m)	<input type="checkbox"/> 2000 m or less <input checked="" type="checkbox"/> <5000 m
Altitude of test laboratory (m)	<input type="checkbox"/> 2000 m or less <input checked="" type="checkbox"/> <50 m
Mass of equipment (kg)	<input checked="" type="checkbox"/> Max. 0.058 kg
POSSIBLE TEST CASE VERDICTS:	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement	P (Pass)

- test object does not meet the requirement	F (Fail)
TESTING:	
Date of receipt of test item	2015-11-18
Date (s) of performance of tests	2015-11-19 to 2016-06-07
GENERAL REMARKS:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p> <p>Through the report, model GTM96180-1807-2.0-T2, GTM96180-1817.9-5.9-T2, GTM96180-1838-2.0-T2, GTM96180-1848-T2, GTM96300-2307.5-2.5-R3A, GTM96300-3614.5-2.5-R3A, GTM96300-3624-R3A, GTM96300-3648-R3A, GTM91120-2007.5-2.5-T2, GTM91120-3014.5-2.5-T2, GTM91120-3024-T3A and GTM91120-3048-T2 were tested as typical models for all tests, model GTM96180-1807-2.0 also perform the plug portion test and mechanical durability test.</p> <p>This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC60335-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	<p>1. GlobTek (Suzhou) Co., Ltd Building 4, No. 76 JinLing East Road, Suzhou Industrial Park, Suzhou, JiangSu, 215021, China</p> <p>2. GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 USA</p>
GENERAL PRODUCT INFORMATION:	
<p>Product Description:</p> <p>Product covered by this report is ITE power supply module. Desktop / direct plug-in power supplies are provided with suitable external enclosure. The top and bottom parts of the enclosure are ultrasonic welded. The products were tested to be suitable for connection to ≤ 16 A (IEC) and ≤ 20 A (USA) branch circuit in series. The unit is approved for TN mains star connections. The unit provides internally two fuses. The power supplies are rated class I or class II. Open frame and encapsulated class I power supplies shall be properly bonded to the main protective bonding termination in the end product. All the types are designed for continuous operation.</p> <p>The model series GT*96180-***** wall plug in with interchangeable blade and desktop type have same enclosure and PCB layout size respectively, The model series GT*96300-***** have same enclosure with smooth surface or groove surface and PCB Layout size, The model series GT*91120-***** and GTM91128 series have same</p>	

enclosure with groove surface and PCB Layout size; The transformer with EE16 core used in GT*96180-***** have the same primary windings but different with secondary windings and constructions. The transformer with EE22 core used in GT*96300-*****, GT*91120-***** and GTM91128 series have the same primary windings but different with secondary windings and constructions.

Model Differences:

GT*96180-*****,

The 1st “*” part can be ‘M’ or ‘-’ or ‘H’ for market identification and not related to safety.

The 2nd “*” denotes the rated output wattage designation, which can be “01” to “18”, with interval of 1.

The 3rd “*” denotes the standard rated output voltage designation, which can be “07”, “11”, “17.9”, “30”, “38”, “48”, “54” or “56”;

The 4th “*” is optional deviation, subtracted from standard output voltage, which can be “-0.01” to “-12.0” with interval of 0.01, or blank to indicate no voltage different.

The 3rd “*” and 4th “*” together denote the output voltage, with a range of 5 - 56 volts.

The 5th “*” = blank, it means wall plug in with interchangeable blade

=T2 means desktop class II with C8 AC inlet

=T2A means desktop class II with C18 AC inlet

=T3 means desktop class I with C14 AC inlet

=T3A means desktop class I with C6 AC inlet

The 6th “*” = Blank or -AP or -PP or -SP

The last * denote any six character = 0-9 or A-Z or ()[] or – or blank for marketing purposes.

GT*96300-***** and GT*91120-*****

The 1st “*” part can be ‘M’ or ‘-’ or ‘H’ for market identification and not related to safety.

The 2nd “*” denotes the rated output wattage designation, which can be “01” to “36”, with interval of 1.

The 3rd “*” denotes the standard rated output voltage designation, which can be “07.5”, “10.5”, “14.5”, “19.5”, “24”, “36”, “48”, “54” or “56”;

The 4th “*” is optional deviation, subtracted from standard output voltage, which can be “-0.01” to “-11.9” with interval of 0.01, or blank to indicate no voltage different.

The 3rd “*” and 4th “*” together denote the output voltage, with a range of 5 - 56 volts.

The 5th “*” =T2 means desktop class II with C8 AC inlet

=T2A means desktop class II with C18 AC inlet

=T3 means desktop class I with C14 AC inlet

=T3A means desktop class I with C6 AC inlet

=R2 means hybrid desktop housing class II with C8 AC inlet

=R3A means hybrid desktop housing class I with C6 AC inlet

The 6th “*” = Blank or -AP or -PP or -SP

The last * denote any six character = 0-9 or A-Z or ()[] or – or blank for marketing purposes.

Ratings

When the 6th “*” is blank:

GT*96180-*****, Input: 100-240V~, 50-60Hz, 0.6A, Output: 5-48Vdc, Max. 3.6A, Max. 18W

GT*96300-*****, Input: 100-240V~, 50-60Hz, 1.0A, Output: 5-48Vdc, Max. 4.5A, Max. 36W

GT*91120-*****, Input: 100-240V~, 50-60Hz, 1.5A, Output: 5-48Vdc, Max. 4A, Max. 30W

When the 6th “*” = -AP or -PP or -SP:

GT*96180-*****, Input: 100-240V~, 50-60Hz, 0.6A, Output: 18-56Vdc, Max. 1.0A, Max. 18W

GT*96300-*****, Input: 100-240V~, 50-60Hz, 1.0A, Output: 18-56Vdc, Max. 2.0A, Max. 36W

GTM91128LI1CEL, Input : 100-240V~, 50-60Hz, 1.5A, Output: 4.2Vdc, 1.0A

GTM91128LI2CEL, Input : 100-240V~, 50-60Hz, 1.5A, Output: 8.4Vdc, 1.0A

GTM91128LI3CEL, Input : 100-240V~, 50-60Hz, 1.5A, Output: 12.6Vdc, 1.0A

Model list:

GT*96180-**** Interchangeable plug models

Model	Output Voltage	Max. output current	Max. output power
GT*96180-*07**	5-7V	3.6A	18W
GT*96180-*11**	7.1-11V	2.53A	18W
GT*96180-*17.9**	11.1-17.9V	1.62A	18W

GT*96180-*30**	18-30V	1.0A	18W
GT*96180-*38**	30.1-38V	0.6A	18W
GT*96180-*48**	38.1-48V	0.47A	18W

GT*96180-*-T2/T2A/T3/T3A* Desktop models**

Model	Output Voltage	Max. output current	Max. output power
GT*96180-*07*-T2/T2A/T3/T3A*	5-7V	3.6A	18W
GT*96180-*11*-T2/T2A/T3/T3A*	7.1-11V	2.53A	18W
GT*96180-*17.9*-T2/T2A/T3/T3A*	11.1-17.9V	1.62A	18W
GT*96180-*30*-T2/T2A/T3/T3A*	18-30V	1.0A	18W
GT*96180-*38*-T2/T2A/T3/T3A*	30.1-38V	0.6A	18W
GT*96180-*48*-T2/T2A/T3/T3A*	38.1-48V	0.47A	18W

GT*96300-*-T2/T2A/T3/T3A/R2/R3A* Desktop models**

Model	Output Voltage	Max. output current	Max. output power
GT*96300-*07.5*-T2/T2A/T3/T3A/R2/R3A*	5-7.5V	4.5A	22.5W
GT*96300-*10.5*-T2/T2A/T3/T3A/R2/R3A*	7.6-9V	3.94A	30W
GT*96300-*10.5*-T2/T2A/T3/T3A/R2/R3A*	9.1-10.5V	3.95A	36W
GT*96300-*14.5*-T2/T2A/T3/T3A/R2/R3A*	10.6-14.5V	3.39A	36W
GT*96300-*19.5*-T2/T2A/T3/T3A/R2/R3A*	14.6-19.5V	2.46A	36W
GT*96300-*24*-T2/T2A/T3/T3A/R2/R3A*	19.6-24V	1.83A	36W
GT*96300-*36*-T2/T2A/T3/T3A/R2/R3A*	24.1-36V	1.49A	36W
GT*96300-*48*-T2/T2A/T3/T3A/R2/R3A*	36.1-48V	0.99A	36W

GT*91120-*-T2/T3A/F/FW/P2/P3* External/Hybrid desktop or direct plug-in model**

Model	Output Voltage	Max. output current	Max. output power
GT*91120-*07.5*-T2/T3A*	5-7.5V	4A	30W
GT*91120-*10.5*-T2/T3A*	7.6-10.5V	3.94A	30W
GT*91120-*14.5*-T2/T3A*	10.6-14.5V	2.83A	30W
GT*91120-*19.5*-T2/T3A*	14.6-19.5V	2A	30W
GT*91120-*24*-T2/T3A*	19.6-24V	1.6A	30W
GT*91120-*36*-T2/T3A*	24.1-36V	1.25A	30W
GT*91120-*48*-T2/T3A*	36.1-48V	0.83A	30W

GT*96180-*-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP**

Model	Output Voltage	Max. output current	Max. output power
GT-96180-*30-12.0-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	18V	1A	18W
GT-96180-*30-6.0-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	24V	0.75A	18W
GT-96180-*38-2.0-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	36V	0.5A	18W
GT-96180-*48-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	48V	0.375A	18W
GT-96180-*54-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	54V	0.33A	18W
GT-96180-*56-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	56V	0.32A	18W

GT*96300-*-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP**

Model	Output Voltage	Max. output current	Max. output power
GT-96300-*19.5-1.5-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	18V	2A	36W
GT-96300-*24-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	24V	1.5A	36W
GT-96300-*36-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	36V	1A	36W
GT-96300-*48-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	48V	0.75A	36W
GT-96300-*54-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	54V	0.66A	36W
GT-96300-*56-T2/T2A/T3/T3A/R2/R3A-AP/PP/SP*	56V	0.64A	36W

Additional application considerations:

- | | | |
|--------------------------------------|------|---------------------------------|
| - normal conditions | N.C. | - single fault conditions S.F.C |
| - functional insulation | FI | - basic insulation BI |
| - double insulation | DI | - supplementary insulation SI |
| - between parts of opposite polarity | BOP | - reinforced insulation RI |
| - short circuit | SC | - open circuit OC |
| - overload | O/L | |

Indicate used abbreviations (if any)

N/A

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:

(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.)

(Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.)

Electrically-caused injury (Clause 5):

(Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification)

Example: +5 V dc input

ES1

Source of electrical energy	Corresponding classification (ES)
Primary circuit	ES3
Output circuit	ES1

Electrically-caused fire (Clause 6):

(Note: List sub-assembly or circuit designation and corresponding energy source classification)

Example: Battery pack (maximum 85 watts):

PS2

Source of power or PIS	Corresponding classification (PS)
Primary circuit	PS3
Output circuit	PS2

Injury caused by hazardous substances (Clause 7)

(Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.)

Example: Liquid in filled component

Glycol

Source of hazardous substances	Corresponding chemical
N/A	N/A
N/A	N/A

Mechanically-caused injury (Clause 8)

(Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.)

Example: Wall mount unit

MS2

Source of kinetic/mechanical energy	Corresponding classification (MS)
Edges and corners of enclosure	MS1
Mass of the unit	MS1

Thermal burn injury (Clause 9)

(Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.)

Example: Hand-held scanner – thermoplastic enclosure

TS1

Source of thermal energy	Corresponding classification (TS)
External surfaces	TS1 for accessible part

Radiation (Clause 10)

(Note: List the types of radiation present in the product and the corresponding energy source classification.)

Example: DVD – Class 1 Laser Product

RS1

Type of radiation	Corresponding classification (RS)
N/A	N/A

Indicate which energy sources are included in the energy source diagram. Insert diagram below

The schematic diagram illustrates a power supply circuit for a motor control system. It begins with a three-phase AC input (L, N, F) connected through fuses F1 and F2 (3.15A/250V(30W)) to a main switch MOV1 (300VAC). The circuit then passes through a current transformer CT1 (0.21U/275V) and a fuse LF1 (30mA) before reaching a bridge rectifier BD1 (2A through-hole). A large electrolytic capacitor C1 (6800μF/50V) filters the DC output. This output is connected to a MOSFET driver stage consisting of a gate resistor R1 (1MΩ), a gate-source resistor R2 (1MΩ), and a MOSFET D1 (IRF540). The MOSFET's drain is connected to the positive terminal of a 24V battery T1A. The negative terminal of T1A is connected to the common ground of the system. The MOSFET's source is connected to the negative terminal of a 24V battery T1B. The MOSFET's gate is driven by a pulse-width modulated signal from a microcontroller unit U1 (PF6116). The microcontroller's VCC pin is connected to a 5V regulator IC U2 (LM7805), which is powered from a 24V battery T1C. The microcontroller's GND pin is connected to the common ground. The microcontroller's CS pin is connected to a 10kΩ pull-up resistor R9. The microcontroller's FB pin is connected to a feedback network consisting of resistors R10 (10kΩ) and R11 (10kΩ), and capacitors C2 (100nF) and C3 (100nF). The microcontroller's GD pin is connected to a 10kΩ pull-up resistor R12. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R13. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R14. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R15. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R16. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R17. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R18. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R19. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R20. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R21. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R22. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R23. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R24. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R25. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R26. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R27. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R28. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R29. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R30. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R31. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R32. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R33. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R34. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R35. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R36. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R37. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R38. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R39. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R40. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R41. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R42. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R43. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R44. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R45. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R46. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R47. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R48. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R49. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R50. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R51. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R52. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R53. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R54. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R55. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R56. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R57. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R58. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R59. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R60. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R61. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R62. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R63. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R64. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R65. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R66. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R67. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R68. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R69. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R70. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R71. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R72. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R73. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R74. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R75. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R76. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R77. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R78. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R79. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R80. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R81. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R82. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R83. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R84. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R85. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R86. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R87. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R88. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R89. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R90. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R91. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R92. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R93. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R94. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R95. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R96. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R97. The microcontroller's FB pin is also connected to a 10kΩ pull-up resistor R98. The microcontroller's GD pin is also connected to a 10kΩ pull-up resistor R99. The microcontroller's CS pin is also connected to a 10kΩ pull-up resistor R100.

[illegible]

☒ ES ☐ PS ☐ MS ☐ TS ☐ RS

OVERVIEW OF EMPLOYED SAFEGUARDS				
Clause	Possible Hazard			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary	ES3: primary circuit	N/A	N/A	Enclosure
Ordinary	ES1: Secondary output circuit	N/A	N/A	N/A
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
All combustible materials within equipment fire enclosure	PS3: All primary circuits and secondary circuits inside the equipment enclosure	No excessive temperature	Suitable Material	N/A
No such part	PS2: Output circuit	No excessive temperature	N/A	N/A
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary	MS1: Sharp edges and corners	N/A	N/A	N/A
Ordinary	MS1: Equipment mass	N/A	N/A	N/A
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	TS1: Accessible surfaces	N/A	N/A	N/A
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
Supplementary Information:				
(1) See attached energy source diagram for additional details.				
(2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4	GENERAL REQUIREMENTS		P
4.1.1	Acceptance of materials, components and subassemblies	(See appended table 4.1.2)	P
4.1.2	Use of components	(See appended table 4.1.2)	P
4.1.3	Equipment design and construction		P
4.1.15	Markings and instructions.....:	(See Annex F)	P
4.4.4	Safeguard robustness		P
4.4.4.2	Steady force tests.....:	(See Annex T.4, T.5)	P
4.4.4.3	Drop tests.....:	(See Annex T.7)	P
4.4.4.4	Impact tests.....:	(See Annex T.6)	N/A
4.4.4.5	Internal accessible safeguard enclosure and barrier tests.....:	The external enclosure cannot be opened without damaging the product.	N/A
4.4.4.6	Glass Impact tests.....:	No such glass used.	N/A
4.4.4.74	Thermoplastic material tests.....:	(See Annex T.8)	P
4.4.4.8	Air comprising a safeguard.....:	(See Annex T)	P
4.4.4.9	Accessibility and safeguard effectiveness	After tests of 4.4.4.2, 4.4.4.3, 4.4.4.7, no safeguard damaged.	P
4.5	Explosion	No explosion occurs during normal/abnormal operation and single fault conditions	P
4.6	Fixing of conductors		P
4.6.1	Fix conductors not to defeat a safeguard		P
4.6.2	10 N force test applied to.....:	Internal components and wiring.	P
4.7	Equipment for direct insertion into mains socket - outlets	For direct plug-in models	P
4.7.2	Mains plug part complies with the relevant standard.....:	(See Evaluation sheet for plug portion)	P
4.7.3	Torque (Nm).....:	Max. 0.131 Nm	P
4.8	Products containing coin/button cell batteries	No coin/button cell batteries used.	N/A
4.8.2	Instructional safeguard		N/A
4.8.3	Battery Compartment Construction	No battery	N/A
	Means to reduce the possibility of children removing the battery.....:		—
4.8.4	Battery Compartment Mechanical Tests.....:	(See Table 4.8.4)	N/A
4.8.5	Battery Accessibility		N/A
4.9	Likelihood of fire or shock due to entry of conductive object.....:	No likelihood of conductive object entering into enclosure.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5	ELECTRICALLY-CAUSED INJURY		P
5.2.1	Electrical energy source classifications..... :	ES3: All primary circuit of power supply ES1: Output circuit	P
5.2.2	ES1, ES2 and ES3 limits		P
5.2.2.2	Steady-state voltage and current..... :	See appended table 5.2)	P
5.2.2.3	Capacitance limits		N/A
5.2.2.4	Single pulse limits	No such single pulses generated in the EUT or applied to it.	N/A
5.2.2.5	Limits for repetitive pulses	No such repetitive pulses within the EUT	N/A
5.2.2.6	Ringing signals	No such ringing signals within the EUT	N/A
5.2.2.7	Audio signals	No such audio signals	N/A
5.3	Protection against electrical energy sources	See table "OVERVIEW OF EMPLOYED SAFEGUARDS"	P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		P
5.3.2.1	Accessibility to electrical energy sources and safeguards		P
5.3.2.2	Contact requirements		P
	a) Test with test probe from Annex V	No access with test probe to any ES3 circuit or parts.	P
	b) Electric strength test potential (V)		N/A
	c) Air gap (mm)		N/A
5.3.2.4	Terminals for connecting stripped wire	No stripped wire used.	N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material		P
5.4.1.3	Humidity conditioning	No hygroscopic material used.	N/A
5.4.1.4	Maximum operating temperature for insulating materials	Considered to be class 130 (B)	P
5.4.1.5	Pollution degree	2	—
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling		N/A
5.4.1.6	Insulation in transformers with varying dimensions	No such transformer.	N/A
5.4.1.7	Insulation in circuits generating starting pulses	No such starting pulses.	N/A
5.4.1.8	Determination of working voltage	(See appended table 5.4.1.8)	P
5.4.1.9	Insulating surfaces		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		P
5.4.1.10.2	Vicat softening temperature..... :		N/A
5.4.1.10.3	Ball pressure :	(See appended table 5.4.1.10.3)	P
5.4.2	Clearances		P
5.4.2.2	Determining clearance using peak working voltage	(See appended table 5.4.2.2)	P
5.4.2.3	Determining clearance using required withstand voltage :	(See appended table 5.4.2.3)	P
	a) a.c. mains transient voltage :	2500Vpeak	—
	b) d.c. mains transient voltage :	Not d.c. mains.	—
	c) external circuit transient voltage :	No such transient	—
	d) transient voltage determined by measurement ... :		—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	(See appended table 5.4.2.4)	N/A
5.4.2.5	Multiplication factors for clearances and test voltages :	1.48 for clearances	P
5.4.3	Creepage distances :	(See appended table 5.4.3)	P
5.4.3.1	General		P
5.4.3.3	Material Group :	Material group IIIb is used	—
5.4.4	Solid insulation		P
5.4.4.2	Minimum distance through insulation :	(See appended table 5.4.4.2)	P
5.4.4.3	Insulation compound forming solid insulation	Approved Opto-coupler used	P
5.4.4.4	Solid insulation in semiconductor devices	Approved Opto-coupler used	P
5.4.4.5	Cemented joints		N/A
5.4.4.6	Thin sheet material	The thin sheet materials of polyester tape used in transformers.	P
5.4.4.6.1	General requirements		P
5.4.4.6.2	Separable thin sheet material		P
	Number of layers (pcs) :	2 layers	P
5.4.4.6.3	Non-separable thin sheet material	Triple-insulating winding	P
5.4.4.6.4	Standard test procedure for non-separable thin sheet material :	Approved TIW used	N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		P
5.4.4.9	Solid insulation at frequencies >30 kHz :	(See appended Table 5.4.4.9)	P
5.4.5	Antenna terminal insulation	No antenna terminal used.	N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Insulation resistance (MΩ).....:		—
5.4.6	Insulation of internal wire as part of supplementary safeguard	No such insulation of internal wire as part of supplementary safeguard.	N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning		P
	Relative humidity (%).....:	93	—
	Temperature (°C)	40	—
	Duration (h)	120 (as client's requirement)	—
5.4.9	Electric strength test	(See appended table 5.4.9)	P
5.4.9.1	Test procedure for a solid insulation type test		P
5.4.9.2	Test procedure for routine tests	Should be considered and conducted during production at factory.	N/A
5.4.10	Protection against transient voltages between external circuit	No such external circuits	N/A
5.4.10.1	Parts and circuits separated from external circuits	(See appended table 5.4.9)	N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test	(See appended table 5.4.9)	N/A
5.4.10.2.3	Steady-state test.....	(See appended table 5.4.9)	N/A
5.4.11	Insulation between external circuits and earthed circuitry	(See appended table 5.4.9)	N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	Rated operating voltage U_{op} (V).....:		—
	Nominal voltage U_{peak} (V).....:		—
	Max increase due to variation U_{sp}		—
	Max increase due to ageing ΔU_{sa}		—
	$U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$		—
5.5	Components as safeguards		
5.5.1	General		P
5.5.2	Capacitors and RC units		P
5.5.2.1	General requirement		P
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector.....:	(See appended table 5.5.2.2)	N/A
5.5.3	Transformers	(See Annex G.5.3)	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.4	Optocouplers	Approved optocoupler used	P
5.5.5	Relays	No relays	N/A
5.5.6	Resistors	(See Annex G.10)	N/A
5.5.7	SPD's	VDR used between L and N	P
5.5.7.1	Use of an SPD connected to reliable earthing	No such use	N/A
5.5.7.2	Use of an SPD between mains and protective earth		N/A
5.5.8	Insulation between the mains and external circuit consisting of a coaxial cable.....:	(See Annex G.10.3)	N/A
5.6	Protective conductor		P
5.6.2	Requirement for protective conductors	Class I AC inlet used for models GT**_***-T3/T3A/R3A*	P
5.6.2.1	General requirements		P
5.6.2.2	Colour of insulation	Green/Yellow wire used	P
5.6.3	Requirement for protective earthing conductors		P
	Protective earthing conductor size (mm ²)	AC inlet used	—
5.6.4	Requirement for protective bonding conductors		P
5.6.4.1	Protective bonding conductors		P
	Protective bonding conductor size (mm ²).:	See appended table used	—
	Protective current rating (A)	16A (20A for US and CA)	—
5.6.4.3	Current limiting and overcurrent protective devices		P
5.6.5	Terminals for protective conductors	AC inlet direct connect to protective bonding wire	N/A
5.6.5.1	Requirement		N/A
	Conductor size (mm ²), nominal thread diameter (mm).:		N/A
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective system		P
5.6.6.1	Requirements		P
5.6.6.2	Test Method Resistance (Ω).....:	69mΩ, 0.8V, 40A, 2mins	P
5.6.7	Reliable earthing		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		P
5.7.2	Measuring devices and networks		P
5.7.2.1	Measurement of touch current	(See appended table 5.7.4)	P
5.7.2.2	Measurement of prospective touch voltage		N/A
5.7.3	Equipment set-up, supply connections and earth connections		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	System of interconnected equipment (separate connections/single connection)		—
	Multiple connections to mains (one connection at a time/simultaneous connections)		—
5.7.4	Earthed conductive accessible parts	Considered only for model GT**_***-T3/T3A/R3A** (See appended Table 5.7.4)	P
5.7.5	Protective conductor current		P
	Supply Voltage (V)	See appended table	—
	Measured current (mA)	See appended table	—
	Instructional Safeguard	(See F.4 and F.5)	N/A
5.7.6	Prospective touch voltage and touch current due to external circuits	No external circuits.	N/A
5.7.6.1	Touch current from coaxial cables		N/A
5.7.6.2	Prospective touch voltage and touch current from external circuits		N/A
5.7.7	Summation of touch currents from external circuits	No external circuits.	N/A
	a) Equipment with earthed external circuits Measured current (mA)		N/A
	b) Equipment whose external circuits are not referenced to earth. Measured current (mA)		N/A

6	ELECTRICALLY- CAUSED FIRE		P
6.2	Classification of power sources (PS) and potential ignition sources (PIS)		P
6.2.2	Power source circuit classifications		P
6.2.2.1	General		P
6.2.2.2	Power measurement for worst-case load fault ... :	(See appended table 6.2.2)	P
6.2.2.3	Power measurement for worst-case power source fault	(See appended table 6.2.2)	P
6.2.2.4	PS1	No such circuit	N/A
6.2.2.5	PS2	Output circuit	P
6.2.2.6	PS3	Primary circuit	P
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS	No Arcing PIS	N/A
6.2.3.2	Resistive PIS	All circuits are considered as resistive PIS	P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P
6.3.1 (a)	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials	(See appended table 5.4.1.5, 6.3.2, 9.0, B.2.6)	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.3.1 (b)	Combustible materials outside fire enclosure	Only output wire and connector complying to 6.4.5.	N/A
6.4	Safeguards against fire under single fault conditions		P
6.4.1	Safeguard Method	Method by control of fire spread applied, Fire enclosure provided.	P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		N/A
6.4.3.1	General		N/A
6.4.3.2	Supplementary Safeguards		N/A
	Special conditions if conductors on printed boards are opened or peeled		N/A
6.4.3.3	Single Fault Conditions :	(See appended table 6.4.3)	N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		N/A
6.4.5	Control of fire spread in PS2 circuits	Compliance detailed as follows: - Printed board: rated min. V-1 - Wire insulation (tubing): complying with Clause 6 (See Table 4.1.2 for wiring used). - All other components: at least V-2 except for mounted on min. V-1 material or small parts of combustible material. - Isolating transformer: complying with G.5.3.	P
6.4.5.2	Supplementary safeguards :	(See appended tables 4.1.2 and Annex G)	P
6.4.6	Control of fire spread in PS3 circuit	Compliance detailed as follows: - Parts as in 6.4.5 above including wiring - Fire enclosure rated V-0 used.	P
6.4.7	Separation of combustible materials from a PIS	Fire enclosure provided.	N/A
6.4.7.1	General :	(See tables 6.2.3.1 and 6.2.3.2)	N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier	No specific barrier provided.	N/A
6.4.8	Fire enclosures and fire barriers		P
6.4.8.1	Fire enclosure and fire barrier material properties	The V-0 fire enclosure is used the overall enclosure.	P
6.4.8.2.1	Requirements for a fire barrier	No fire barrier used.	N/A
6.4.8.2.2	Requirements for a fire enclosure	The V-0 fire enclosure is used the overall enclosure as above.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		P
6.4.8.3.1	Fire enclosure and fire barrier openings		P
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top Openings in Fire Enclosure: dimensions (mm)	No openings	P
	Needle Flame test		N/A
6.4.8.3.4	Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm)	No openings	P
	Flammability tests for the bottom of a fire enclosure		N/A
6.4.8.3.5	Integrity of the fire enclosure, condition met: a), b) or c)		N/A
6.4.8.4	Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating	Fire enclosure is made of V-0 material.	N/A
6.5	Internal and external wiring		P
6.5.1	Requirements	Output cord provided.	P
6.5.2	Cross-sectional area (mm ²)	Less than 0.5 mm ² UL Approved output cord used.	—
6.5.3	Requirements for interconnection to building wiring	(See Annex Q.)	N/A
6.6	Safeguards against fire due to connection to additional equipment		P
	External port limited to PS2 or complies with Clause Q.1		P

7	INJURY CAUSED BY HAZARDOUS SUBSTANCES		P
7.2	Reduction of exposure to hazardous substances	No hazardous chemicals within the equipment.	P
7.3	Ozone exposure	No ozone production within the equipment.	N/A
7.4	Use of personal safeguards (PPE)		N/A
	Personal safeguards and instructions		—
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010)		—
7.6	Batteries.....	No battery used.	N/A

8	MECHANICALLY-CAUSED INJURY		P
8.1	General		P
8.2	Mechanical energy source classifications	MS1	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.3	Safeguards against mechanical energy sources		P
8.4	Safeguards against parts with sharp edges and corners		P
8.4.1	Safeguards	MS1	N/A
8.5	Safeguards against moving parts	No moving parts.	N/A
8.5.1	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
8.5.2	Instructional Safeguard		—
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	Large data storage equipment		N/A
8.5.4.2	Equipment having electromechanical device for destruction of media		N/A
8.5.4.2.1	Safeguards and Safety Interlocks	(See Annex F.4 and Annex K)	N/A
8.5.4.2.2	Instructional safeguards against moving parts		N/A
	Instructional Safeguard		—
8.5.4.2.3	Disconnection from the supply		N/A
8.5.4.2.4	Probe type and force (N)		N/A
8.5.5	High Pressure Lamps		N/A
8.5.5.1	Energy Source Classification		N/A
8.5.5.2	High Pressure Lamp Explosion Test	(See appended table 8.5.5.2)	N/A
8.6	Stability	Classification MS1 according to table 35, line 5 and no stability requirements.	N/A
8.6.1	Product classification		N/A
	Instructional Safeguard		—
8.6.2	Static stability		N/A
8.6.2.2	Static stability test		N/A
	Applied Force		—
8.6.2.3	Downward Force Test		N/A
8.6.3	Relocation stability test		N/A
	Unit configuration during 10° tilt		—
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test (Applied Force)		N/A
	Position of feet or movable parts		—
8.7	Equipment mounted to wall or ceiling		N/A
8.7.1	Mounting Means (Length of screws (mm) and mounting surface)		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.7.2	Direction and applied force.....:		N/A
8.8	Handles strength		N/A
8.8.1	Classification		N/A
8.8.2	Applied Force		N/A
8.9	Wheels or casters attachment requirements		N/A
8.9.1	Classification		N/A
8.9.2	Applied force		—
8.10	Carts, stands and similar carriers		N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A
	Instructional Safeguard.....:		—
8.10.3	Cart, stand or carrier loading test and compliance		N/A
	Applied force		—
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Applied horizontal force (N)		—
8.10.6	Thermoplastic temperature stability (°C).....:		N/A
8.11	Mounting means for rack mounted equipment		N/A
8.11.1	General		N/A
8.11.2	Product Classification		N/A
8.11.3	Mechanical strength test, variable <i>N</i>		N/A
8.11.4	Mechanical strength test 250N, including end stops		N/A
8.12	Telescoping or rod antennas.....	(See Annex T)	N/A
	Button/Ball diameter (mm).....:		—

9	THERMAL BURN INJURY		P
9.2	Thermal energy source classifications	TS1 for Accessible surfaces. The equipment evaluated by temperature test	P
9.3	Safeguard against thermal energy sources		N/A
9.4	Requirements for safeguards		N/A
9.4.1	Equipment safeguard		N/A
9.4.2	Instructional safeguard		N/A

10	RADIATION		N/A
10.2	Radiation energy source classification	Only indication LED ued, No such radiation generated from	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
		the equipment.	
10.2.1	General classification		N/A
10.3	Protection against laser radiation	No such radiation generated from the equipment.	N/A
	Laser radiation that exists equipment:		—
	Normal, abnormal, single-fault..... :	(See attached laser test report)	N/A
	Instructional safeguard :		—
	Tool..... :		—
10.4	Protection against visible, infrared, and UV radiation	No such radiation generated from the equipment.	N/A
10.4.1	General		N/A
10.4.1.a)	RS3 for Ordinary and instructed persons :		N/A
10.4.1.b)	RS3 accessible to a skilled person..... :		N/A
	Personal safeguard (PPE) instructional safeguard..... :		—
10.4.1.c)	Equipment visible, IR, UV does not exceed RS1 . :		N/A
10.4.1.d)	Normal, abnormal, single-fault conditions :	(See appended table B.3 & B.4)	N/A
10.4.1.e)	Enclosure material employed as safeguard is opaque..... :		N/A
10.4.1.f)	UV attenuation..... :		N/A
10.4.1.g)	Materials resistant to degradation UV :		N/A
10.4.1.h)	Enclosure containment of optical radiation..... :		N/A
10.4.1.i)	Exempt Group under normal operating conditions..... :		N/A
10.4.2	Instructional safeguard :		N/A
10.5	Protection against x-radiation	No such x-radiation generated from the equipment	N/A
10.5.1	X- radiation energy source that exists equipment : :	(See appended table B.3 & B.4)	N/A
	Normal, abnormal, single fault conditions		N/A
	Equipment safeguards..... :		N/A
	Instructional safeguard for skilled person..... :		N/A
10.5.3	Most unfavourable supply voltage to give maximum radiation :		—
	Abnormal and single-fault condition :	(See appended table B.3 & B.4)	N/A
	Maximum radiation (pA/kg)..... :		N/A
10.6	Protection against acoustic energy sources	Not such an equipment.	N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output, dB(A)..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Output voltage, unweighted r.m.s..... :		N/A
10.6.4	Protection of persons		N/A
	Instructional safeguards		N/A
	Equipment safeguard prevent ordinary person to RS2..... :		—
	Means to actively inform user of increase sound pressure..... :		—
	Equipment safeguard prevent ordinary person to RS2..... :		—
10.6.5	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.5.1	Corded passive listening devices with analog input		N/A
	Input voltage with 94 dB(A) L_{Aeq} acoustic pressure output..... :		—
10.6.5.2	Corded listening devices with digital input		N/A
	Maximum dB(A)		—
10.6.5.3	Cordless listening device		N/A
	Maximum dB(A)		—

B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		P
B.2	Normal Operating Conditions		P
B.2.1	General requirements..... :	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers	Not such equipment.	N/A
B.2.3	Supply voltage and tolerances		P
B.2.5	Input test..... :	(See appended table B.2.5)	P
B.3	Simulated abnormal operating conditions		P
B.3.1	General requirements..... :	(See appended table B.3)	P
B.3.2	Covering of ventilation openings		N/A
B.3.3	D.C. mains polarity test	The EUT is not connected to a D.C. mains	N/A
B.3.4	Setting of voltage selector	No voltage selector was used.	N/A
B.3.5	Maximum load at output terminals		P
B.3.6	Reverse battery polarity	No battery within the EUT	N/A
B.3.7	Abnormal operating conditions as specified in Clause E.2.	Not such equipment.	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.3.8	Safeguards functional during and after abnormal operating conditions	All safeguards remained effective.	P
B.4	Simulated single fault conditions		P
B.4.2	Temperature controlling device open or short-circuited	No such device used.	N/A
B.4.3	Motor tests	No motors used.	N/A
B.4.3.1	Motor blocked or rotor locked increasing the internal ambient temperature	(See Clause G.5)	N/A
B.4.4	Short circuit of functional insulation		P
B.4.4.1	Short circuit of clearances for functional insulation	(See appended table B.3 & B.4)	P
B.4.4.2	Short circuit of creepage distances for functional insulation	(See appended table B.3 & B.4)	P
B.4.4.3	Short circuit of functional insulation on coated printed boards	No coated printed boards used.	N/A
B.4.5	Short circuit and interruption of electrodes in tubes and semiconductors	(See appended table B.3 & B.4)	P
B.4.6	Short circuit or disconnect of passive components	(See appended table B.3 & B.4)	P
B.4.7	Continuous operation of components		N/A
B.4.8	Class 1 and Class 2 energy sources within limits during and after single fault conditions		P
B.4.9	Battery charging under single fault conditions ... :	(See Annex M)	N/A
C	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV radiation	No UV generated from the equipment.	N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure apparatus		N/A
C.2.4	Xenon-arc light exposure apparatus		N/A
D	TEST GENERATORS		N/A
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A
E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS		N/A
E.1	Audio amplifier normal operating conditions	Not such equipment.	N/A
	Audio signal voltage (V)		—
	Rated load impedance (Ω)		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
E.2	Audio amplifier abnormal operating conditions		N/A
F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS		P
F.1	General requirements		P
	Instructions – Language: English		—
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1		P
F.2.2	Graphic symbols IEC, ISO or manufacturer specific		P
F.3	Equipment markings		P
F.3.1	Equipment marking locations		P
F.3.2	Equipment identification markings		P
F.3.2.1	Manufacturer identification: See marking plate		—
F.3.2.2	Model identification: See marking plate		—
F.3.3	Equipment rating markings		P
F.3.3.1	Equipment with direct connection to mains		P
F.3.3.2	Equipment without direct connection to mains		N/A
F.3.3.3	Nature of supply voltage.....: See marking plate		—
F.3.3.4	Rated voltage: See marking plate		—
F.3.3.4	Rated frequency: See marking plate		—
F.3.3.6	Rated current or rated power: See marking plate		—
F.3.3.7	Equipment with multiple supply connections		N/A
F.3.4	Voltage setting device		N/A
F.3.5	Terminals and operating devices		N/A
F.3.5.1	Mains appliance outlet and socket-outlet markings.....:		N/A
F.3.5.2	Switch position identification marking:		N/A
F.3.5.3	Replacement fuse identification and rating markings.....:	The fuse is located within the equipment and not replaceable by an ordinary person or an instructed person. The fuse is marked with F1,F2: T3.15A 250V	P
F.3.5.4	Replacement battery identification marking:	No battery	N/A
F.3.5.5	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		P
F.3.6.1	Class I Equipment	For models GT**-***-T3/T3A/R3A**	P
F.3.6.1.1	Protective earthing conductor terminal		P
F.3.6.1.2	Neutral conductor terminal		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.6.1.3	Protective bonding conductor terminals		P
F.3.6.2	Class II equipment (IEC60417-5172)	For models GT**-***-T2/T2A/R2** and GTM91128LI1CEL, GTM91128LI2CEL, GTM91128LI3CEL	P
F.3.6.2.1	Class II equipment with or without functional earth		P
F.3.6.2.2	Class II equipment with functional earth terminal marking		N/A
F.3.7	Equipment IP rating marking :	IPX0	—
F.3.8	External power supply output marking	See marking plate	P
F.3.9	Durability, legibility and permanence of marking		P
F.3.10	Test for permanence of markings		P
F.4	Instructions		P
	a) Equipment for use in locations where children not likely to be present - marking		N/A
	b) Instructions given for installation or initial use		P
	c) Equipment intended to be fastened in place		N/A
	d) Equipment intended for use only in restricted access area		N/A
	e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1		N/A
	f) Protective earthing employed as safeguard		N/A
	g) Protective earthing conductor current exceeding ES 2 limits		N/A
	h) Symbols used on equipment	No such symbols used as a safeguard considered.	N/A
	i) Permanently connected equipment not provided with all-pole mains switch		N/A
j)	j) Replaceable components or modules providing safeguard function		N/A
F.5	Instructional safeguards		N/A
	Where “instructional safeguard” is referenced in the test report it specifies the required elements, location of marking and/or instruction		N/A
G	COMPONENTS		P
G.1	Switches		N/A
G.1.1	General requirements	No switch used.	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.2	Relays		N/A
G.2.1	General requirements	No relay used.	N/A
G.2.2	Overload test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.2.3	Relay controlling connectors supply power		N/A
G.2.4	Mains relay, modified as stated in G.2		N/A
G.3	Protection Devices		P
G.3.1	Thermal cut-offs	No thermal cut-off used.	N/A
G.3.1.1a) &b)	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
G.3.1.1c)	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Thermal cut-off connections maintained and secure		N/A
G.3.2	Thermal links		N/A
G.3.2.1a)	Thermal links separately tested with IEC 60691	No thermal link used.	N/A
G.3.2.1b)	Thermal links tested as part of the equipment		N/A
	Aging hours (H)		—
	Single Fault Condition		—
	Test Voltage (V) and Insulation Resistance (Ω) :		—
G.3.3	PTC Thermistors	No PTC thermistor used.	N/A
G.3.4	Overcurrent protection devices	Fuse provided, see only G.3.5.	N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.5		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions.....	(See appended Table B.4)	N/A
G.4	Connectors		P
G.4.1	Spacings	See below	P
G.4.2	Mains connector configuration	Approved AC inlet used	P
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely	Output connector can not insertion into mains socket outlet	P
G.5	Wound Components		P
G.5.1	Wire insulation in wound components.....	Approved Insulated wire used as Reinforced insulation for secondary winding of T1.	P
G.5.1.2 a)	Two wires in contact inside wound component, angle between 45° and 90°	Separated by tube or tape, See photo document for details.	P
G.5.1.2 b)	Construction subject to routine testing	The routine tests are to be considered for the production based on the relevant approval	P
G.5.2	Endurance test on wound components	Not applied for.	N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Time (s)		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Temperature (°C)		—
G.5.2.3	Wound Components supplied by mains		N/A
G.5.3	Transformers		P
G.5.3.1	Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1).....	The transformer meets the requirements given in G.5.3.2 and G.5.3.3.	P
	Position	T1	—
	Method of protection	See G.5.3.3.	—
G.5.3.2	Insulation	Primary windings and secondary windings are separated by Reinforced insulation (The core is considered as primary part as it is not isolated from Primary)	P
	Protection from displacement of windings.....	The end-turn of each winding is fixed by insulating tape	—
G.5.3.3	Overload test	(See appended table B.3&B.4)	P
G.5.3.3.1	Test conditions	Tested in the complete equipment as an SMPS.	P
G.5.3.3.2	Winding Temperatures testing in the unit	(See appended table B.3&B.4)	P
G.5.3.3.3	Winding Temperatures - Alternative test method	Alternative test method was not considered.	N/A
G.5.4	Motors		N/A
G.5.4.1	General requirements	No motor used.	N/A
	Position		—
G.5.4.2	Test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days)		—
G.5.4.5	Running overload test for d.c. motors in secondary circuits		N/A
G.5.4.5.2	Tested in the unit		N/A
	Electric strength test (V)		—
G.5.4.5.3	Tested on the Bench - Alternative test method; test time (h)		N/A
	Electric strength test (V)		—
G.5.4.6	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Electric strength test (V)		N/A
G.5.4.6.3	Tested on the bench - Alternative test method; test time (h)		N/A
	Electric strength test (V)		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage		—
G.6	Wire Insulation		P
G.6.1	General	Triple insulated winding in T1 secondary windings used as reinforced safeguard in the isolating transformer that has separately complied with Annex J. See Appended table 4.1.2. No other wires used in the EUT.	P
G.6.2	Solvent-based enamel wiring insulation	Insulation does not rely on solvent-based enamel.	P
G.7	Mains supply cords		N/A
G.7.1	General requirements		N/A
	Type.....		—
	Rated current (A)		—
	Cross-sectional area (mm ²), (AWG).....		—
G.7.2	Compliance and test method		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N)		—
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm).....		—
G.7.3.2.4	Strain relief comprised of polymeric material		N/A
G.7.4	Cord Entry	(See appended table 5.4.11.1)	N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Mass (g)		—
	Diameter (m)		—
	Temperature (°C)		—
G.7.6	Supply wiring space		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.6.2	Stranded wire	No such wire.	N/A
G.7.6.2.1	Test with 8 mm strand		N/A
G.8	Varistors		P
G.8.1	General requirements		P
G.8.2	Safeguard against shock	(see appended table 4.1.2)	P
G.8.3	Safeguard against fire		N/A
G.8.3.2	Varistor overload test	Clause 6.4.1 is not applicable.	N/A
G.8.3.3	Temporary overvoltage		N/A
G.9	Integrated Circuit (IC) Current Limiters		N/A
G.9.1 a)	Manufacturer defines limit at max. 5A.	No IC current limiter provided within the equipment.	N/A
G.9.1 b)	Limiters do not have manual operator or reset		N/A
G.9.1 c)	Supply source does not exceed 250 VA		—
G.9.1 d)	IC limiter output current (max. 5A)		—
G.9.1 e)	Manufacturers' defined drift		—
G.9.2	Test Program 1		N/A
G.9.3	Test Program 2		N/A
G.9.4	Test Program 3		N/A
G.10	Resistors		N/A
G.10.1	General requirements	No such resistor as safeguard used	N/A
G.10.2	Resistor test		N/A
G.10.3	Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable		N/A
G.10.3.1	General requirements		N/A
G.10.3.2	Voltage surge test		N/A
G.10.3.3	Impulse test		N/A
G.11	Capacitor and RC units		P
G.11.1	General requirements	(see appended table 4.1.2) Y1-capacitor used as Reinforced safeguard which complies with IEC/EN 60384-14.	P
G.11.2	Conditioning of capacitors and RC units	Y1 capacitor complied as environmental category at least 40/100/21 (21 days humidity) or 30/125/56 (56 days humidity) and in any case at 40°C	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.11.3	Rules for selecting capacitors	The selection followed with tables G.9 and G.12. Y1 capacitor bridging Reinforced insulation with rated voltage at least 250V tested with impulse 8kV peak and 4kV rms	P
G.12	Optocouplers		P
	Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results)		P
	Type test voltage Vini	(see appended table 4.1.2)	—
	Routine test voltage, Vini,b	(see appended table 4.1.2)	—
G.13	Printed boards		P
G.13.1	General requirements	See the following details.	P
G.13.2	Uncoated printed boards	The insulation between conductors on the outer surfaces of an uncoated printed board complied with the minimum clearance and creepage requirements	P
G.13.3	Coated printed boards	No coated printed board or multilayer board applied for within the equipment.	N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
	Compliance with cemented joint requirements (Specify construction)		—
G.13.5	Insulation between conductors on different surfaces		P
	Distance through insulation	Min. 0.4mm	P
	Number of insulation layers (pcs)		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2a)	Thermal conditioning		N/A
G.13.6.2b)	Electric strength test		N/A
G.13.6.2c)	Abrasion resistance test		N/A
G.14	Coating on components terminals		N/A
G.14.1	Requirements	No coating on component terminals considered to affect creepage or clearances.	N/A
G.15	Liquid filled components		N/A
G.15.1	General requirements	No such device provided within the equipment.	N/A
G.15.2	Requirements		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.15.3	Compliance and test methods		N/A
G.15.3.1	Hydrostatic pressure test		N/A
G.15.3.2	Creep resistance test		N/A
G.15.3.3	Tubing and fittings compatibility test		N/A
G.15.3.4	Vibration test		N/A
G.15.3.5	Thermal cycling test		N/A
G.15.3.6	Force test		N/A
G.15.4	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
a)	Humidity treatment in accordance with sc5.4.8 – 120 hours		N/A
b)	Impulse test using circuit 2 with U_c = to transient voltage		N/A
C1)	Application of ac voltage at 110% of rated voltage for 2.5 minutes		N/A
C2)	Test voltage		—
D1)	10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer		N/A
D2)	Capacitance		—
D3)	Resistance		—
H	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General	No telephone ringing signal generated within the equipment.	N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringing signal		N/A
H.3.1.1	Frequency (Hz)		—
H.3.1.2	Voltage (V)		—
H.3.1.3	Cadence; time (s) and voltage (V)		—
H.3.1.4	Single fault current (mA):.....		—
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage complied with		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V)		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION		P
	General requirements	Triple insulated winding wiring used as reinforced safeguard in the isolating transformer that has been evaluated to Annex J as follows: Requirements of Annex U of IEC 60950-1/A2 are identical to Annex J of this standard (for wires providing Reinforced insulation). See Table 4.1.2.	P
K	SAFETY INTERLOCKS		N/A
K.1	General requirements	No safety interlock provided.	N/A
K.2	Components of safety interlock safeguard mechanism	(See Annex G)	N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
	Compliance	(See appended table B.4)	N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Compliance and Test method		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements (type and circuit location)		N/A
K.7.2	Overload test, Current (A)		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test	(See appended table 5.4.11)	N/A
L	DISCONNECT DEVICES		P
L.1	General requirements	AC mains plug used as disconnect device.	P
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized	When AC plug is disconnected no hazardous voltage in the equipment.	P
L.4	Single phase equipment	The mains plug disconnects both poles simultaneously.	P
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		P
L.8	Multiple power sources	Only one a.c. mains connection.	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		N/A
M.1	General requirements	No battery used.	N/A
M.2	Safety of batteries and their cells		N/A
M.2.1	Requirements		N/A
M.2.2	Compliance and test method (identify method) .. :		N/A
M.3	Protection circuits		N/A
M.3.1	Requirements		N/A
M.3.2	Tests		N/A
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		N/A
M.3.3	Compliance	(See appended Tables and Annex M and M.4)	N/A
M.4	Additional safeguards for equipment containing secondary lithium battery		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Charging operating limits		N/A
M.4.2.2a)	Charging voltage, current and temperature	(See Table M.4)	—
M.4.2.2 b)	Single faults in charging circuitry	(See Annex B.4)	—
M.4.3	Fire Enclosure		N/A
M.4.4	Endurance of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation		N/A
M.4.4.3	Drop and charge/discharge function tests		N/A
	Drop		N/A
	Charge		N/A
	Discharge		N/A
M.4.4.4	Charge-discharge cycle test		N/A
M.4.4.5	Result of charge-discharge cycle test		N/A
M.5	Risk of burn due to short circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Compliance and Test Method (Test of P.2.3)		N/A
M.6	Prevention of short circuits and protection from other effects of electric current		N/A
M.6.1	Short circuits		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.6.1.1	General requirements		N/A
M.6.1.2	Test method to simulate an internal fault		N/A
M.6.1.3	Compliance (Specify M.6.1.2 or alternative method)		N/A
M.6.2	Leakage current (mA)		N/A
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
M.7.2	Compliance and test method		N/A
M.8	Protection against internal ignition from external spark sources of lead acid batteries		N/A
M.8.1	General requirements		N/A
M.8.2	Test method		N/A
M.8.2.1	General requirements		N/A
M.8.2.2	Estimation of hypothetical volume V_z (m ³ /s).....		—
M.8.2.3	Correction factors.....		—
M.8.2.4	Calculation of distance d (mm)		—
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing)		N/A
N	ELECTROCHEMICAL POTENTIALS		N/A
	Metal(s) used		—
O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES		P
	Figures O.1 to O.20 of this Annex applied	Considered	—
P	SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS		N/A
P.1	General requirements		N/A
P.2.2	Safeguards against entry of foreign object	No opening	N/A
	Location and Dimensions (mm)		—
P.2.3	Safeguard against the consequences of entry of foreign object		N/A
P.2.3.1	Safeguards against the entry of a foreign object		N/A
	Openings in transportable equipment		N/A
	Transportable equipment with metalized plastic parts		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
P.2.3.2	Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard)		N/A
P.3	Safeguards against spillage of internal liquids	No such liquids.	N/A
P.3.1	General requirements		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Safeguards effectiveness		N/A
P.4	Metallized coatings and adhesive securing parts	No such construction.	N/A
P.4.2 a)	Conditioning testing		N/A
	T _c (°C)		—
	T _r (°C)		—
	T _a (°C)		—
P.4.2 b)	Abrasion testing	(See G.13.6.2)	N/A
P.4.2 c)	Mechanical strength testing	(See Annex T)	N/A
Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		P
Q.1	Limited power sources	See appended table Annex Q.1	P
Q.1.1 a)	Inherently limited output		N/A
Q.1.1 b)	Impedance limited output		P
	- Regulating network limited output under normal operating and simulated single fault condition	A regulating network limits the output in compliance with table Q.1 both under normal operating conditions and after any single fault.	P
Q.1.1 c)	Overcurrent protective device limited output		N/A
Q.1.1 d)	IC current limiter complying with G.9		N/A
Q.1.2	Compliance and test method	See appended table Annex Q.1	P
Q.2	Test for external circuits – paired conductor cable	No such circuit for connection to the EUT	N/A
	Maximum output current (A)		—
	Current limiting method		—
R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General requirements	No such consideration.	N/A
R.2	Determination of the overcurrent protective device and circuit		N/A
R.3	Test method Supply voltage (V) and short-circuit current (A)).		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
S	TESTS FOR RESISTANCE TO HEAT AND FIRE		P
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W	Approved fire enclosure with V-0 material used.	P
	Samples, material		—
	Wall thickness (mm)		—
	Conditioning (°C)		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material		—
	Wall thickness (mm)		—
	Conditioning (°C)		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	Test specimen does not show any additional hole		N/A
S.3	Flammability test for the bottom of a fire enclosure		N/A
	Samples, material		—
	Wall thickness (mm)		—
	Cheesecloth did not ignite		N/A
S.4	Flammability classification of materials	See Table 4.1.2 only.	P
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material		—
	Wall thickness (mm)		—
	Conditioning (test condition), (°C)		—
	Test flame according to IEC 60695-11-20 with conditions as set out		N/A
	After every test specimen was not consumed completely		N/A
	After fifth flame application, flame extinguished within 1 min		N/A
T	MECHANICAL STRENGTH TESTS		P
T.1	General requirements		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
T.2	Steady force test, 10 N	(See appended table T.2)	P
T.3	Steady force test, 30 N	(See appended table T3)	N/A
T.4	Steady force test, 100 N	(See appended table T4)	P
T.5	Steady force test, 250 N	(See appended table T5)	N/A
T.6	Enclosure impact test	(See appended table T6)	N/A
	Fall test		N/A
	Swing test		N/A
T.7	Drop test	(See appended table T7)	P
T.8	Stress relief test	(See appended table T8)	N/A
T.9	Impact Test (glass)		N/A
T.9.1	General requirements		N/A
T.9.2	Impact test and compliance		N/A
	Impact energy (J)		—
	Height (m)		—
T.10	Glass fragmentation test	(See sub-clause 4.4.4.9)	N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm)		—
U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
U.1	General requirements	No CRT provided.	N/A
U.2	Compliance and test method for non-intrinsically protected CRTs		N/A
U.3	Protective Screen.....	(See Annex T)	N/A
V	DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)		P
V.1	Accessible parts of equipment	No access with test probes to any hazardous parts	P
V.2	Accessible part criterion		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.1.2	TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾	
PCB	WALEX ELECTRONIC (WUXI) CO LTD	T2, T2A, T2B T4	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E154355	
Alt. use	DONGGUAN HE TONG ELECTRONICS CO LTD	CEM1 2V0 FR4	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E243157	
Alt. use	CHEERFUL ELECTRONIC (HK) LTD	02 03 03A	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E199724	
Alt. use	DONGGUAN DAYSUN ELECTRONIC CO LTD	DS2	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E251754	
Alt. use	SUZHOU CITY YILIHUA ELECTRONICS CO LTD	YLH-1	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E251781	
Alt. use	SHANGHAI AREX PRECISION ELECTRONIC CO LTD	02V0 04V0	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E186016	
Alt. use	BRITE PLUS ELECTRONICS (SUZHOU) CO LTD	DKV0-3A DGV0-3A	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E177671	
Alt. use	KUOTIANG ENT LTD	C-2 C-2A	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E227299	
Alt. use	SHENZHEN TONGCHUANGXI N ELECTRONICS CO LTD	TCX	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E250336	
Alt. use	PACIFIC WIN INDUSTRIAL LTD	PW-02 PW-03	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E228070	

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Alt. use	YUANMAN PRINTED CIRCUIT CO LTD	1V0	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E74757
Alt. use	SUZHOU XINKE ELECTRONICS CO LTD	XK-2, XK-3	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E231590
Alt. use	KUNSHAN CITY HUA SHENG CIRCUIT BOARD CO LTD	HS-S	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E229877
Alt. use	JIANGSU DIFEIDA ELECTRONICS CO LTD	DFD-1	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E213009
Alt. use	HUIZHOU SHUNJIA ELECTRONICS CO LTD	SJ-B	Min. 1,6 mm thickness, min. V- 0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E320884
Fuse (F1,F2) (F2 is optional)	Conquer Electronics Co., Ltd.	MST series	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40017118 UL E82636
Alt. use	Ever Island Electric Co., Ltd. And Walter Electric	2010, ICP	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40018781 UL E220181
Alt. use	Bel Fuse Ltd.	RST-Serie(s)	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40011144 UL E20624
Alt. use	Cooper Bussmann LLC	SS-5	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40015513 UL E19180
Alt. use	Shenzhen Lanson Electronics Co. Ltd.	SMT	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40012592 UL E221465

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Alt. use	Das & Sons International Ltd.	385T series	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40008524 UL E205718
Alt. use	Dongguan Better Electronics Technology Co., Ltd.	932	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40033369 UL E300003
Alt. use	Hollyland Company Limited	5ET	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40015669 UL E156471
Alt. use	Sunny East Enterprise Co. Ltd.	CFD-Serie(s)	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40030246 UL E133774
Alt. use	Conquer Electronics Co., Ltd.	MET series	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40017157 UL E82636
Alt. use	Zhongshan Lanbao Electrical Appliances Co., Ltd.	RTI-10 Serie(s)	T1.6A, 250V; T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40017009 UL E213695
Bridging resistor (Optional)	TY-Ohm Suzhou Electronic Works Co. Ltd	RT	10M Ω , 1W	IEC/EN 60950-1	VDE 40031266 UL E321764
Alt. use	Yageo Components (Suzhou) Co. Ltd	HHV	10M Ω , 1W	IEC/EN 60950-1	VDE 40031974 UL E333286
Y capacitor (CY1, CY2) (Optional)	TDK-EPC Corporation, Capacitors Group Circuit Devices Business Group	CD	Y1, AC250V, max 2200pF, 25/085/21/B	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 138526 UL E37861
Alt. use	Success Electronics Co., Ltd.	SE	Y1, AC250V, or AC500V, max 2200pF, 40/125/56/C	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40037211 VDE 40020002 UL E114280

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Alt. use	Success Electronics Co., Ltd.	SB	Y1, AC250V, max 2200pF, 40/125/56/C	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40037221 VDE 40020001 UL E114280
Alt. use	Murata Mfg. Co., Ltd.	KX	Y1, AC250V, max 2200pF, 25/125/21/B	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40002831 UL E37921
Alt. use	Walsin Technology Corp.	AH	Y1, AC250V, max 2200pF, 25/125/21/C	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40001804 UL E146544
Alt. use	JYA-NAY Co., Ltd.	JN	Y1, AC250V, max 2200pF, 25/125/21/C	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40001831 UL E201384
Alt. use	Haohua Electronic Co.	CT 7	Y1, AC250V, max 2200pF, 30/125/56/C	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40003902 UL E233106
Alt. use	Jyh Chung Electronic Co., Ltd.	JD	Y1, AC250V, max 2200pF, 40/085/21/C	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 137027 UL E187963
Alt. use	Jerro Electronics Corp.	JX-series	Y1, AC250V, max 2200pF, 40/125/21/C	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40032158 UL E333001
X capacitor (CX1) (Optional)	Cheng Tung Industrial Co., Ltd.	CTX	Min. 300VAC, Max. 0.47μF, 110 °C, X1 or X2	IEC 62368-1 UL 60384-14 UL 1414	Tested with appliance UL E193049
Alt. use	Tenta Electric Industrial Co. Ltd.	MEX	Min. 250VAC, Max. 0.47μF, 40/100/21/B, X1 or X2	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 119119 UL E222911
Alt. use	Joey Electronics (Dong Guan) Co., Ltd.	MPX	Min. 250VAC, Max. 0.47μF, 40/105/21/B, X1 or X2	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40032481 UL E216807

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Alt. use	Ultra Tech Xiphi Enterprise Co. Ltd.	HQX	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40015608 UL E183780
Alt. use	Yuan Yu Electronics Co. Ltd.	MPX	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40032392 UL E200119
Alt. use	Sinhua Electronics (Huzhou) Co., Ltd.	MPX	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40014686 UL E237560
Alt. use	Jiangsu Xinghua Huayu Electronics Co., Ltd.	MPX - Series	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40022417 UL E311166
Alt. use	Dain Electronics Co., Ltd.	MEX, MPX, NPX	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40018798 UL E147776
Alt. use	Shenzhen Jinghao Capacitor Co., Ltd.	CBB62B	Min. 250VAC, Max. 0.47μF, 40/110/56/B, X1 or X2	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40018690 UL E252286
Photo coupler (U2/U3) (U2 for GTM91120 series)	Everlight Electronics Co., Ltd.	EL817	Dti=0.5mm Int. , dcr=6.0mm EXT.dcr=7.7mm, thermal cycling test, 110°C	IEC/EN 60747-5-2	VDE 132249
Alt. use	COSMO Electronics Corporation	K1010 / KP1010	Dti=0.6mm Int. , dcr=4.0mm EXT.dcr=5.0mm, thermal cycling test, 115°C	IEC/EN 60747-5-2	VDE 101347
Alt. use	Lite-On Technology Corporation	LTV-817	Dti=0.8mm Int. , EXT.dcr=7.8mm, thermal cycling test, 100°C	IEC/EN 60747-5-2	VDE 40015248

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Alt. use	Fairchild Semiconductor Pte Ltd.	H11A817B / FOD817B	Insulation voltage: 850V; Transient overvoltage: 6000V; CTI175; Int. Cr/ Ext. Cr: ≥7,0/ 7,0 mm; 30/110/21	IEC/EN 60747-5-2	VDE 40026857
Alt. use	Sharp Corporation Electronic Components and Devices Group	PC817	Insulation voltage: 890V; Transient overvoltage: 9000V Int. Cr/ Ext. Cr: 7.62/ 7.62 mm; 30/100/21	IEC/EN 60747-5-2	VDE 40008087
Alt. use	Bright Led Electronics Corp.	BPC-817 A/B/C/D/L BPC-817 M BPC-817 S	Dti=0.4mm EXT.dcr=7.0mm, thermal cycling test,100°C	IEC/EN 60747-5-2	VDE 40007240
Alt. use	Toshiba Corporation Semiconductor & Storage Products Company	TLP781F	Dti > 0.4mm, Ext cr > 8.0mm, Isolation 3000Vac min., 110°C min., Thermal cycling test	IEC/EN 60747-5-2	VDE 40021173
Varistor MOV/MOV1 (Optional) (MOV for GTM91120 series)	Thinking Electronic Industrial Co., Ltd.	TVR10471K, TVR14471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 005944
Alt. use	Centra Science Corp.	10D471K, 14D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 4008220
Alt. use	Success Electronics Co., Ltd.	SVR10D471K SVR14D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40030401
Alt. use	Walsin Technology Co., Ltd.	14D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40010090

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Alt. use	Lien Shun Electronics Co., Ltd.	14D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40005858
Alt. use	Ceramate Techn. Co., Ltd.	GNR10D471K GNR14D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40031745
Alt. use	Brightking (Shenzhen) Co., Ltd.	14D471K 10D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40027827
Alt. use	Joyin Co., Ltd.	JVR10N471K JVR14N471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 005937
Appliance inlet CON1 Class I units(C6 type)	Zhejiang LECI Electronics Co., Ltd.	DB-6	2.5A, 250Vac	IEC/EN 60320-1	VDE 40032465
Alt. use	Rich Bay Co., Ltd.	R-30790	2.5A, 250Vac	IEC/EN 60320-1	VDE 40030381
Alt. use	Sun Fair Electric Wire & Cable (HK) Co. Ltd.	S-02	2.5A, 250Vac	IEC/EN 60320-1	VDE 40034448
Alt. use	TECX-UNIONS Technology Corporation	TU-333	2.5A, 250Vac	IEC/EN 60320-1	ENEC 00633
Alt. use	Rong Feng Industrial Co., Ltd.	RF-190	2.5A, 250Vac	IEC/EN 60320-1	VDE 40030379
Alt. use	Inalways Corporation	0724	2.5A, 250Vac	IEC/EN 60320-1	ENEC 2010080
Alt. use	Zhe Jiang Bei Er jia	ST-A04-002	2.5A, 250Vac	IEC/EN 60320-1	VDE 40016045
Alt. use	Shenzhen Delikang Electronics Technology Co. Ltd.	CDJ-2	2.5A, 250Vac	IEC/EN 60320-1	VDE 40015580
Appliance inlet CON1 Class I units (C14 type)	Zhejiang LECI Electronics Co., Ltd.	DB-14	10A, 250Vac	IEC/EN 60320-1	VDE 40032137

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Alt. use	Rich Bay Co., Ltd.	R-301SN	10A, 250Vac	IEC/EN 60320-1	VDE 40030228
Alt. use	Sun Fair Electric Wire & Cable (HK)Co. Ltd.	S-03	10A, 250Vac	IEC/EN 60320-1	VDE 40034447
Alt. use	TECX-UNIONS Technology Corporation	TU-301-S, TU-301-SP	10A, 250Vac	IEC/EN 60320-1	ENEC 00647
Alt. use	Rong Feng Industrial Co., Ltd.	SS-120	10A, 250Vac	IEC/EN 60320-1	VDE 40028101
Alt. use	Inalways Corporation	0711	10A, 250Vac	IEC/EN 60320-1	ENEC 2010084
Alt. use	Zhe Jiang Bei Er jia	ST-A01-003J	10A, 250Vac	IEC/EN 60320-1	VDE 40013388
Appliance inlet CON1 Class II units (C8 type)	Zhejiang LECI Electronics Co., Ltd.	DB-8	2.5A, 250Vac	IEC/EN 60320-1	VDE 40032028
Alt. use	Rich Bay Co., Ltd.	R-201SN90	2.5A, 250Vac	IEC/EN 60320-1	VDE 40030384
Alt. use	Sun Fair Electric Wire & Cable (HK)Co. Ltd.	S-01	2.5A, 250Vac	IEC/EN 60320-1	VDE 40034449
Alt. use	TECX-UNIONS Technology Corporation	SO-222	2.5A, 250Vac	IEC/EN 60320-1	VDE 40043268
Alt. use	Rong Feng Industrial Co., Ltd.	RF-180	2.5A, 250Vac	IEC/EN 60320-1	VDE 40030168
Alt. use	Inalways Corporation	0721	2.5A, 250Vac	IEC/EN 60320-1	ENEC 2010087
Alt. use	Zhe Jiang Bei Er jia	ST-A03-005	2.5A, 250Vac	IEC/EN 60320-1	VDE 40014833
Alt. use	Shenzhen Delikang Electronics Technology Co. Ltd.	CDJ-8	2.5A, 250Vac	IEC/EN 60320-1	VDE 40025531
Appliance inlet CN1 Class II units (C18 type)	Rong Feng Industrial Co., Ltd.	SS-120	10A, 250Vac	IEC/EN 60320-1	VDE 40028101
Earthing wire for Class I model	KUNSHAN NEW ZHICHENG ELECTRONICS TECHNOLOGIES CO LTD	1015, 1007, 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368-1	Tested with appliance UL E237831

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Alt. use	ZHUANG SHAN CHUAN ELECTRICAL PRODUCTS (KUNSHAN) CO LTD	1015, 1007, 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368-1	Tested with appliance UL E333601
Alt. use	DONGGUAN CHUANTAI WIRE PRODUCTS CO LTD	1015, 1007, 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368-1	Tested with appliance UL E315628
Alt. use	YONG HAO ELECTRICAL INDUSTRY CO LTD	1015, 1007, 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368-1	Tested with appliance UL E240426
Alt. use	DONGGUAN GUNEETAL WIRE & CABLE CO LTD	1015, 1007, 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368-1	Tested with appliance UL E204204
Alt. use	SHENG YU ENTERPRISE CO LTD	1015, 1007, 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368-1	Tested with appliance UL E219726
Alt. use	KUNSHAN XINGHONGMENG ELECTRONIC CO LTD	1015, 1007, 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368-1	Tested with appliance UL E315421
Alt. use	SUZHOU YEMAO ELECTRONIC CO LTD	1015, 1007, 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368-1	Tested with appliance UL E353532
Output cord	Interchangeable	Interchangeable	Min. 24AWG, min. 300Vac, min. 80°C	IEC/EN 62368-1 UL 758	Tested with appliance UL approved
Heat-shrinkable tubing	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR, RSFR-H, RSFR-HPF	600V, 125 °C	IEC/EN 62368-1	Tested with appliance UL E203950
Alt. use	QIFURUI ELECTRONICS CO	QFR-h	600V, 125°C	IEC/EN 62368-1 UL 224	Tested within appliance UL E225897
Alt. use	DONGGUAN SALIPT CO LTD	SALIPT S-901-300 SALIPT S-901-600	Min. 300V, 125°C	IEC/EN 62368-1 UL 224	Tested within appliance UL E209436

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Alt. use	GUANGZHOU KAIHENG ENTERPRISE GROUP	K-2 (+) K-2 (CB)	Min. 300V, 125°C	IEC/EN 62368-1 UL 224	Tested within appliance UL E214175
Alt. use	CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-HFT	Min. 300V, 125°C	IEC/EN 62368-1 UL 224	Tested within appliance UL E180908
Transformer (T1)1)	GlobTek / BOAM / HAOPUWEI	See attachment for details	Class B, with critical component listed below	IEC 62368-1	Tested with appliance
- Magnet wire	PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD	UEWN/U (UL E201757)	MW28-C, 130°C	IEC 62368-1	Tested with appliance
Alt. use	PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD	UEWS/U (UL E201757)	MW75-C, 130°C	IEC 62368-1	Tested with appliance
Alt. use	JUNG SHING WIRE CO LTD	UEW-4 (UL E174837)	MW75C, 130°C	IEC 62368-1	Tested with appliance
Alt. use	JUNG SHING WIRE CO LTD	UEY-2 (UL E174837)	MW28-C, 130°C	IEC 62368-1	Tested with appliance
Alt. use	JIANGSU HONGLIU MAGNET WIRE TECHNOLOGY CO LTD	2UEW/130 (UL E335065)	MW75-C, 130°C	IEC 62368-1	Tested with appliance
Alt. use	CHANGZHOU DAYANG WIRE & CABLE CO LTD	2UEW/130 (UL E158909)	MW75-C, 130°C	IEC 62368-1	Tested with appliance
Alt. use	WUXI JUFENG COMPOUND LINE CO LTD	2UEWB (UL E206882)	MW75#, 130°C	IEC 62368-1	Tested with appliance
Alt. use	JIANGSU DARTONG M & E CO LTD	UEW (UL E237377)	MW 75-C, 130°C	IEC 62368-1	Tested with appliance
Alt. use	SHANDONG SAINT ELECTRIC CO LTD	UEW/130 (UL E194410)	MW75#, 130°C	IEC 62368-1	Tested with appliance

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Alt. use	ZHEJIANG LANGLI ELECTRIC EQUIPMENTS CO LTD	UEW (UL E222214)	MW 79#, 130°C	IEC 62368-1	Tested with appliance
-Triple-insulated wire (Secondary)	Great Leoflon Industrial Co., Ltd.	TRW (B) Serie(s)	Class B, reinforced insulation	IEC 60950-1 UL 2353 UL 60601-1	VDE 136581 UL E211989
- Alt. use	COSMOLINK CO. Ltd.	TIW-M Serie(s)	Class B, reinforced insulation	IEC 60950-1 UL 2353 UL 60601-1	VDE 138053 UL E213764
- Alt. use	Furukawa Electric Co., Ltd. Electronics & Automotive Systems Company Global Business Development Division	TEX-E	Class B, reinforced insulation	IEC 60950-1 UL 2353 UL 60601-1	VDE 006735 UL E206440
- Alt. use	TOTOKU ELECTRIC CO LTD	TIW-2	Reinforced insulation, rated 130° C (Class B)	UL 2353 UL60950-1 UL 60601-1	VDE 40005152 UL E249037
- Alt. use	E&B TECHNOLOGY CO LTD	E&B-XXXB E&B-XXXB-1	Reinforced insulation, Class B	IEC 60950-1 UL 2353 UL 60601-1	VDE 40023473 UL E315265
- Alt. use	CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-TIW	Reinforced insulation, Class B	IEC 60950-1 UL 2353 UL 60601-1	Tested with appliance UL E249037
- Alt. use	SHENZHEN JIUDING NEW MATERIAL CO LTD	DTIW-B	Reinforced insulation, Class B	IEC 60950-1 UL 2353 UL 60601-1	VDE 40037495 UL E357999
-Bobbin	CHANG CHUN PLASTICS CO LTD	T375J T375HF	V-0, 150°C, thickness 0,45 mm min.	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E59481
- Alt. use	CHANG CHUN PLASTICS CO LTD	4130	V-0, 140°C, thickness 0,74 mm min.	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E59481
- Alt. use	SUMITOMO BAKELITE CO LTD	PM-9820	V-0, 150°C, thickness 0,45 mm min.	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E41429

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
- Alt. use	HITACHI CHEMICAL CO LTD	CP-J-8800	V-0, 150°C, thickness 0,45 mm min.	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E42956
-Insulating tape	3M COMPANY ELECTRICAL MARKETS DIV (EMD)	1350F-1 1350T-1 44	Min.130°C	IEC 62368-1 UL 510	Tested with appliance UL E17385
- Alt. use	BONDTEC PACIFIC CO LTD	370S	Min.130°C	IEC 62368-1 UL 510	Tested with appliance UL E175868
- Alt. use	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	PZ CT WF	Min.130°C	IEC 62368-1 UL 510	Tested with appliance UL E165111
- Alt. use	JINGJIANG JINGYI ADHESIVE PRODUCT CO LTD	JY25-A	Min.130°C	IEC 62368-1 UL 510	Tested with appliance UL E246950
- Alt. use	CHANG SHU LIANG YI TAPE INDUSTRY CO LTD	LY-XX	Min.130°C	IEC 62368-1 UL 510	Tested with appliance UL E246820
-PTFE tubing	GREAT HOLDING INDUSTRIAL CO LTD	TFT / TFS	Min. 300V, 200°C	IEC 62368-1	Tested with appliance UL E156256
-Alt. use	SHENZHEN WOER HEAT- SHRINKABLE MATERIAL CO LTD	WF	600V, 200°C	IEC 62368-1	Tested with appliance UL E203950
-Alt. use	CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-TT-T / CB- TT-S	Min. 300V, 200°C	IEC 62368-1	Tested with appliance UL E180908
Enclosure (all parts)	SABIC INNOVATIVE PLASTICS B V	SE1X, SE1	PPE+PS, Min. V- 1, Min. thickness:2.0mm, 105°C	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E45329
Alt. use	SABIC INNOVATIVE PLASTICS B V	SE100	PPE+PS, Min. V- 1, Min. thickness:2.0mm, 95°C	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E45329

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Alt. use	SABIC INNOVATIVE PLASTICS B V	C2950	PC/ABS, Min. V-0, Min. thickness:2.0mm, 85°C	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E45329
Alt. use	SABIC INNOVATIVE PLASTICS B V	CX7211 EXCY0098	PC/ABS, Min. V-1, Min. thickness:2.0mm, 90°C	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E45329
Alt. use	SABIC INNOVATIVE PLASTICS B V	945	PC, Min. V-1, Min. thickness: 2.0mm, 120°C	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E45329
Alt. use	SABIC INNOVATIVE PLASTICS B V	HF500R	PC, V-0, Min. thickness:2.0mm, 125°C	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E45329
Alt. use	TEIJIN CHEMICALS LTD	LN-1250P LN-1250G	PC, Min. V-0, Min. thickness:2.0mm, 115°C	IEC 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E50075
Coupler for directly plug in model use	GlobTek, Inc.	Q-coupler	Max. 240V, Max. 2.0A	IEC 60320-1	Tested with appliance
Supplementary information: ¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039. For all transformers under all manufacturers.					

Attachment for transformer as below:

Product Model	Voltage Range	Transformer model	Product Model	Voltage Range	Transformer model
GTM96180	5V-8V	TF042	GTM96300	5-8.9V	TF038
	8.1V-14.9V	TF043		9-11.9V	TF057
	15V-18.9V	TF044		12-14.9V	TF039
	19V-30V	TF045		15-24V	TF040
	30.1V-48V	TF046		24.1-48V	TF041
GTM96180 POE	18V	TF064	GTM96300 POE	18V	TF068
	24V	TF065		24V	TF069
	36V	TF066		36V	TF070
	48V	TF067		48V	TF071
	54V, 56V	TF063		54V, 56V	TF051
GTM91120 GTM91128 series	5-7.5V	GT-3005001			
	7.6V-10.5V	GT-3009001			
	10.6V-14.5V	GT-3012001			
	14.6V-19.5V	GT-3015001			
	19.6V-24V	GT-3024001			
	24.1V-48V	GT-3048001			

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.2		Table: Classification of electrical energy sources					P
5.2.2.2 – Steady State Voltage and Current conditions							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				U (Vrms or Vpk)	I (A _{pk} or A _{rms})	Hz	
Model: GTM96300-3648-R2							
1	264Va.c. 60Hz	Primary circuits supplied by a.c. mains supply	Normal	--	--	--	ES3
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	
2	264Va.c. 60Hz	T1 secondary pin A to B	Normal	33,6Vpk / 89,9Vrms	--	60	ES3
3	264Va.c. 60Hz	T1 secondary pin B to D4	Normal	48.1Vdc	--	DC	ES1
			Single fault – D4 SC	0	--	--	
5.2.2.3 - Capacitance Limits							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters		ES Class	
				Capacitance, nF	Upk (V)		
1	264V	C4	Normal	2200uF	48.1	ES1	
2	264V	C4	Abnormal (Output OL)	2200uF	47.75	ES1	
3	264V	C4	Single fault (C4 SC)	2200uF	0.2	ES1	
5.2.2.4 - Single Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Duration (ms)	Upk (V)	Ip _k (mA)	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	
5.2.2.5 - Repetitive Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Off time (ms)	Upk (V)	Ip _k (mA)	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	

IEC 62368-1							
Clause	Requirement + Test			Result - Remark			Verdict
			Single fault – SC/OC	--	--	--	
Test Conditions: Normal – Abnormal - Supplementary information: SC=Short Circuit, OC=Short Circuit							

IEC 62368-1				
Clause	Requirement + Test		Result - Remark	Verdict
5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements			P
	Supply voltage (V)	90	264	—
	Ambient T _{min} (°C)	40	40	—
	Model	GTM96180-1807-2.0-T2		—
Maximum measured temperature T of part/at.....:		T (°C)		Allowed T _{max} (°C)
T1 winding		105	99	110
T1 core		102	94	Ref
C1		101	91	105
U3		93	84	100
MOV1		82	60	85
CY1		101	95	125
CX1		85	63	100
PCB		111	105	130
External enclosure		83	78	95
Internal enclosure		97	88	Ref
Inlet body		62	58	--
GTM96180-1817.9-5.9-T2				
T1 winding		95	92	110
T1 core		93	92	Ref
C1		99	79	105
U3		76	75	100
MOV1		77	59	85
CY1		86	83	125
CX1		77	60	100
PCB		94	80	130
External enclosure		67	68	95
Internal enclosure		76	77	Ref
Inlet body		58	55	--
Supplementary information:				

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Thermal requirements			P
	Supply voltage (V)	90	264	—
	Ambient T _{min} (°C)	40	40	—
	Model	GTM96180-1838-2.0-T3A		—
Maximum measured temperature T of part/at.....:		T (°C)		Allowed T _{max} (°C)
T1 winding		97	88	110
T1 core		95	88	Ref
C1		96	73	105
U3		76	70	100
MOV1		74	55	85
CY1		81	75	125
CX1		71	55	100
PCB		93	74	130
External enclosure		68	62	95
Internal enclosure		71	66	Ref
Inlet body		63	62	--
GTM96180-1848-T3				
T1 winding		92	86	110
T1 core		94	89	Ref
C1		98	78	105
U3		73	69	100
MOV1		77	57	85
CY1		90	84	125
CX1		77	58	100
PCB		95	75	130
External enclosure		66	62	95
Internal enclosure		75	71	Ref
Inlet body		57	55	--
Supplementary information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.5	TABLE: Thermal requirements			P
	Supply voltage (V):	90	264	—
	Ambient T _{min} (°C):	40	40	—
	Model:	GTM96300-2307.5-2.5-R2		—
Maximum measured temperature T of part/at.....:		T (°C)		Allowe d T _{max} (°C)
T1 winding		106	102	110
T1 core		98	93	Ref
C1		95	84	105
U3		96	90	100
MOV1		66	55	85
CY1		90	86	125
CX1		75	63	100
PCB		88	84	130
External enclosure		73	70	95
Internal enclosure		81	77	Ref
Inlet body		61	54	--
GTM96300-3617.9-5.9-R3A				
T1 winding		105	98	110
T1 core		105	98	Ref
C1		103	81	105
U3		97	92	100
MOV1		72	56	85
CY1		107	99	125
CX1		85	64	100
PCB		96	88	130
External enclosure		73	68	95
Internal enclosure		83	76	Ref
Inlet body		61	50	--
Supplementary information:				

IEC 62368-1				
Clause	Requirement + Test		Result - Remark	Verdict
5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Thermal requirements			P
	Supply voltage (V)	90	264	—
	Ambient T _{min} (°C)	40	40	—
	Model	GTM96300-3624-R2		—
Maximum measured temperature T of part/at.....:		T (°C)		Allowed T _{max} (°C)
T1 winding		105	88	110
T1 core		105	91	Ref
C1		103	76	105
U3		92	87	100
MOV1		72	54	85
CY1		98	87	125
CX1		89	62	100
PCB		95	81	130
External enclosure		76	66	95
Internal enclosure		84	74	Ref
Inlet body		72	55	--
GTM96300-3648-R3A				
T1 winding		103	90	110
T1 core		101	90	Ref
C1		100	76	105
U3		98	90	100
MOV1		67	52	85
CY1		95	86	125
CX1		79	58	100
PCB		104	86	130
External enclosure		76	70	95
Internal enclosure		88	81	Ref
Inlet body		58	50	--
Supplementary information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics		N/A
Penetration (mm)..... :			—
Object/ Part No./Material		Manufacturer/t rademark	T softening (°C)
supplementary information:			

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics			P
Allowed impression diameter (mm) :		≤ 2 mm		—
Object/Part No./Material	Manufacturer/trademark	Test temperature (°C)	Impression diameter (mm)	
Enclosure (SE1, SE1X)	SABIC INNOVATIVE PLASTICS B V	125	1.5	
Enclosure (SE100)	SABIC INNOVATIVE PLASTICS B V	125	1.6	
Enclosure (C2950)	SABIC INNOVATIVE PLASTICS B V	125	1.7	
Enclosure (CX7211, EXCY0098)	SABIC INNOVATIVE PLASTICS B V	125	1.8	
Enclosure (945)	SABIC INNOVATIVE PLASTICS B V	125	1.4	
Enclosure (HF500R)	SABIC INNOVATIVE PLASTICS B V	125	1.4	
Enclosure (LN-1250P, LN-1250G)	TEIJIN CHEMICALS LTD	125	1.5	
Supplementary information: The bobbin material of transformer (T1) are phenolic, no test is needed.				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.2.2, 5.4.2.4 and 5.4.3	TABLE: Minimum Clearances/Creepage distance							P
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Frequen- cy (kHz)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
GTM96180 series								
L to N before fuse(FI)	400	240	<30	2.22*	3.75	2.4	3.75	
Two poles of fuse(FI)	400	240	<30	2.22*	2.46	2.4	2.46	
Primary to protective earth (Class I)(RI)	400	240	<30	5.92*	6.1	5.92**	6.1	
Live parts to accessible parts(RI)	426	259	>30	6.22*	8.2	6.4	8.2	
Primary circuits to secondary circuits(RI)	426	259	>30	6.22*	6.53	6.4	6.53	
Primary winding to secondary winding(RI)	426	259	>30	6.22*	6.5	6.4	6.5	
Secondary winding to core(RI)	426	259	>30	6.22*	7.2	6.4	7.2	
Core to secondary parts(RI)	426	259	>30	6.22*	7.1	6.4	7.1	
GTM96300 series								
L to N before fuse(FI)	400	245	<30	2.22*	7.12	2.45	7.12	
Two poles of fuse(FI)	400	245	<30	2.22*	2.60	2.45	2.60	
Primary to protective earth (Class I)(RI)	400	245	<30	5.92*	6.1	5.92**	6.1	
Live parts to accessible parts(RI)	500	259	>30	6.52*	8.2	6.52**	8.2	
Primary circuits to secondary circuits(RI)	500	259	>30	6.52*	6.66	6.52**	6.66	
Primary winding to secondary winding(RI)	500	259	>30	6.52*	7.2	6.52**	7.2	
Secondary winding to core(RI)	500	259	>30	6.52*	6.85	6.52**	6.85	
Core to secondary parts(RI)	500	259	>30	6.52*	7.1	6.52**	7.1	
GTM91120series								
L to N before fuse(FI)	340	240	<30	2.22*	4.6	2.40	4.6	
Two poles of fuse(FI)	340	240	<30	2.22*	2.62	2.40	2.62	
Primary to protective earth (Class I)(RI)	340	240	<30	5.92*	6.1	5.92**	6.1	
Live parts to accessible parts(RI)	526	278	>30	6.52*	8.2	6.52**	8.2	

IEC 62368-1							
Clause	Requirement + Test			Result - Remark			Verdict
Primary circuits to secondary circuits(RI)	526	278	>30	6.52*	7.7	6.52**	7.7
Primary winding to secondary winding(RI)	526	278	>30	6.52*	8.4	6.52**	8.4
Secondary winding to core(RI)	526	278	>30	6.52*	6.85	6.52**	6.85
Core to secondary parts(RI)	526	278	>30	6.52*	7.1	6.52**	7.1
Supplementary information: *Required value was multiplied by the factor 1,48 due to the maximum specified altitude of 5000m **Required creepage not less than required clearance							

5.4.2.3	TABLE: Minimum Clearances distances using required withstand voltage			P
	Overvoltage Category (OV):			II
	Pollution Degree:			2
Clearance distanced between:		Required withstand voltage	Required cl (mm)	Measured cl (mm)
See table 5.4.2.2, 5.4.2.4 and 5.4.3 above.		--	--	--
Supplementary information: Limits in previous table for clearance selected based on Table 15 for Required Withstand Voltage 2.5kV (mains transient voltage 2.5kV).				

5.4.2.4	TABLE: Clearances based on electric strength test			N/A
Test voltage applied between:		Required cl (mm)	Test voltage (kV) peak/ r.m.s. / d.c.	Breakdown Yes / No
Supplementary information: Using procedure 2 to determine the clearance.				

5.4.4.2, 5.4.4.5 c) 5.4.4.9	TABLE: Distance through insulation measurements					P
Distance through insulation di at/of:	Peak voltage (V)	Frequency (Hz)	Material	Required DTI (mm)	DTI (mm)	
Enclosure	526	>30K	Plastic	0.4	See appended table 4.1.2	
Bobbin of T1	526	>30K	Phenolic	0.4	See appended table 4.1.2	
Insulation tape on T1 and secondary heat-sink	526	>30K	--	2 layers	See appended table 4.1.2	
Insulation sheet	526	>30K	Phenolic	0.4	See appended table 4.1.2	

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Supplementary information:

1. See also sub-clause 5.4.4.9.

5.4.9	TABLE: Electric strength tests			P
Test voltage applied between:		Voltage shape (AC, DC)	Test voltage (Vpeak)	Breakdown Yes / No
Basic/supplementary:				
Line to Neutral (with fuse disconnect)		AC	2500	No
Reinforced:				
Primary circuit to body (RI)		AC	4000	No
Primary circuit to protective earth(RI)		AC	4000	No
Primary circuit to secondary circuit (RI)		AC	4000	No
Primary winding to secondary winding of T1 (RI)		AC	4000	No
Primary winding to core (RI)		AC	4000	No
Insulation tape around transformer per layer (RI)		AC	4000	No
Insulation sheet (RI)		AC	4000	No
Supplementary information:				
1) Each source of insulation tape tested, see appended table 4.2.1 for detail.				

5.5.2.2	TABLE: Stored discharge on capacitors				P
Supply Voltage (V), Hz	Test Location	Operating Condition (N, S)	Switch position On or off	Measured Voltage (after 2 seconds)	ES Classification
264V, 60Hz	AC inlet	N	No switch	24V	ES1
264V, 60Hz	AC inlet	S(R1 open)	No switch	120V	ES2
Supplementary information:					
X-capacitors installed for testing are: CX1, Max. 0.47uF					
✓ bleeding resistor rating: R1=R2=1MΩ					
□ ICX:					
Notes:					
A. Test Location:					
Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth					
B. Operating condition abbreviations:					
N – Normal operating condition (e.g., normal operation, or open fuse); S –Single fault condition					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.6.6.2	TABLE: Resistance of protective conductors and terminations				P
Accessible part		Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)
AC inlet inside to outside		40A	2min	0.45V	10m Ω
Supplementary information: Tested with model GTM96300-3648-T3A					

5.7.2.2, 5.7.4	TABLE: Earthed accessible conductive part				P
Supply voltage.....:			264Vac		—
Location			Test conditions specified in 6.1 of IEC 60990 or Fault Condition No in IEC 60990 clause 6.2.2.1 through 6.2.2.8, except for 6.2.2.7		Touch current (mA)
L, N to output terminal(Class I)			1 (e closed, normal and reverse polarity p)		0.076
L, N to output terminal(Class I)			2* (netural open (switch n), earth intact and normal polarity, again in reverse polarity (switch p)		0.122
L, N to output terminal(Class I, CY1 short circuit)			1 (e closed, normal and reverse polarity p)		0.120
L, N to output terminal(Class I, CY1 short circuit)			2* (netural open (switch n), earth intact and normal polarity, again in reverse polarity (switch p)		0.143
L, N to output terminal(Class II)			1 (e closed, normal and reverse polarity p)		0.076
L, N to output terminal(Class II)			2* (netural open (switch n), earth intact and normal polarity, again in reverse polarity (switch p)		0.211
L, N to output terminal(Class II, CY1 short circuit)			1 (e closed, normal and reverse polarity p)		0.122
L, N to output terminal(Class II, CY1 short circuit)			2* (netural open (switch n), earth intact and normal polarity, again in reverse polarity (switch p)		0.176
--			3 (for IT system, each phase conductor faulted to earth, one at a time (switch g)		--
--			4 (for three-phase, each phase conductor open, one at a time switches I)		--
--			5 (IT power system or three phase delta system)		--
--			6 (three-phase for use on centre-earthed dalta supply system)		--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
--		8 (incidental electrically connected to other parts)	--
<p>Notes:</p> <p>[1] Supply voltage is the anticipated maximum Touch Voltage</p> <p>[2] Earthed neutral conductor [Voltage differences less than 1% or more]</p> <p>[3] Specify method used for measurement as described in IEC 60990 sub-clause 4.3</p> <p>[4] IEC60990, sub-clause 6.2.2.7, Fault 7 not applicable.</p> <p>[5] (*) IEC60990, sub-clause 6.2.2.2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided.</p> <p>a) Not considered IT power system.</p> <p>b) Not three phase equipment.</p> <p>c) Not IT power system or three phase delta system.</p> <p>d) Not three-phase for use on centre-earthed dalta supply system.</p> <p>e) Not such parts.</p>			

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

6.2.2	Table: Electrical power sources (PS) measurements for classification				P
Source	Description	Measurement	Max Power after 3 s	Max Power after 5 s*)	PS Classification
Model: GTM96300-2307.5-2.5-R2					
Output (See 6.2.2.2)	Normal operation	Power (W) :	33.9	33.9	PS2
		VA (V) :	4.8	4.8	
		IA (A) :	5.4	5.4	
R13 (See 6.2.2.3)	Short circuit	Power (W) :	33.9	33.9	PS2
		VA (V) :	4.8	4.8	
		IA (A) :	5.4	5.4	
Model: GTM96300-3648-R2					
Output (See 6.2.2.2)	Normal operation	Power (W) :	42.7	42.7	PS2
		VA (V) :	47.74	47.74	
		IA (A) :	0.77	0.77	
R13 (See 6.2.2.3)	Short circuit	Power (W) :	42.7	42.7	PS2
		VA (V) :	47.74	47.74	
		IA (A) :	0.77	0.77	
Model: GTM96180-1807-2.0-T2					
Output (See 6.2.2.2)	Normal operation	Power (W) :	24.6	24.6	PS2
		VA (V) :	4.77	4.77	
		IA (A) :	3.90	3.90	
R13 (See 6.2.2.3)	Short circuit	Power (W) :	24.6	24.6	PS2
		VA (V) :	4.77	4.77	
		IA (A) :	3.90	3.90	
Model: GTM96180-1848-T2					
Output (See 6.2.2.2)	Normal operation	Power (W) :	26.6	26.6	PS2
		VA (V) :	48.25	48.25	
		IA (A) :	0.46	0.46	
R13 (See 6.2.2.3)	Short circuit	Power (W) :	26.6	26.6	PS2
		VA (V) :	48.25	48.25	
		IA (A) :	0.46	0.46	
Model: GTM91120-2007.5-2.5-T2					
Output (See 6.2.2.2)	Normal operation	Power (W) :	21.6	21.6	PS2
		VA (V) :	4.8	4.8	
		IA (A) :	4.5	4.5	
R13 (See 6.2.2.3)	Short circuit	Power (W) :	21.6	21.6	PS2

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
6.2.2.3)		VA (V) :	4.8	4.8	
		IA (A) :	4.5	4.5	
Model: GTM91120-3048-T2					
Output (See 6.2.2.2)	Normal operation	Power (W) :	38.4	38.4	PS2
		VA (V) :	48	48	
		IA (A) :	0.85	0.85	
R13 (See 6.2.2.3)	Short circuit	Power (W) :	38.4	38.4	PS2
		VA (V) :	48	48	
		IA (A) :	0.85	0.85	
Model: GTM91128LI3CEL					
Output (See 6.2.2.2)	Normal operation	Power (W) :	31.2	31.2	PS2
		VA (V) :	12	12	
		IA (A) :	1.0	1.0	
R13 (See 6.2.2.3)	Short circuit	Power (W) :	31.2	31.2	PS2
		VA (V) :	12	12	
		IA (A) :	1.0	1.0	
Supplementary information:					

6.2.3.1	Table: Determination of Potential Ignition Sources (Arcing PIS)				P
Location	Open circuit voltage After 3 s (V _p)	Measured r.m.s current (I _{rms})	Calculated value (V _p x I _{rms})	Arcing PIS? Yes / No	
See below	--	--	--	--	
Supplementary information: The primary components and T1 having soldered pins in mains circuit (>50V peak) are considered as arcing PIS. An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V _p) and normal operating condition rms current (I _{rms}) is greater than 15.					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

6.2.3.2	Table: Determination of Potential Ignition Sources (Resistive PIS)				P
Circuit Location (x-y)	Operating Condition (Normal / Describe Single Fault)	Measured wattage or VA During first 30 s (W / VA)	Measured wattage or VA After 30 s (W / VA)	Protective Circuit, Regulator, or PTC Operated? Yes / No (Comment)	Resistive PIS? Yes/No
--	--	--	--	--	Yes
<p>Supplementary Information:</p> <p>All power dissipating components in primary and secondary circuit are considered as resistive PIS.</p> <p>A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter.</p> <p>If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification.</p> <p>A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, <u>or</u> (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.</p>					

8.5.5	TABLE: High Pressure Lamp		N/A
Description		Values	Energy Source Classification
Lamp type.....:			—
Manufacturer			—
Cat no.:			—
Pressure (cold) (MPa).....:			MS_
Pressure (operating) (MPa)			MS_
Operating time (minutes)			—
Explosion method			—
Max particle length escaping enclosure (mm) .:			MS_
Max particle length beyond 1 m (mm).....:			MS_
Overall result			
Supplementary information:			

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
B.2.5	TABLE: Input test					P
Model: GTM96180-1807-2.0-T2						
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90	0.4062	--	22.64	F1/F2	0.4062	Max Normal Load
100	0.3675	0.6	22.27	F1/F2	0.3675	Max Normal Load
240	0.1901	0.6	21.95	F1/F2	0.1901	Max Normal Load
264	0.1758	--	22.18	F1/F2	0.1758	Max Normal Load
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.						

B.2.5	TABLE: Input test					P
Model: GTM96180-1817.9-5.9-T2						
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90	0.3974	--	22.13	F1/F2	0.3974	Max Normal Load
100	0.3647	0.6	21.86	F1/F2	0.3647	Max Normal Load
240	0.1859	0.6	21.35	F1/F2	0.1859	Max Normal Load
264	0.1731	--	21.52	F1/F2	0.1731	Max Normal Load
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.						

B.2.5	TABLE: Input test					P
Model: GTM96180-1838-2.0-T2						
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90	0.3851	--	21.35	F1/F2	0.3851	Max Normal Load
100	0.3530	0.6	21.11	F1/F2	0.3530	Max Normal Load
240	0.1806	0.6	20.55	F1/F2	0.1806	Max Normal Load
264	0.1653	--	20.61	F1/F2	0.1653	Max Normal Load
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test						P
Model: GTM96180-1848-T2							
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status	
90	0.3794	--	20.94	F1/F2	0.3794	Max Normal Load	
100	0.3481	0.6	20.69	F1/F2	0.3481	Max Normal Load	
240	0.1774	0.6	20.26	F1/F2	0.1774	Max Normal Load	
264	0.1648	--	20.41	F1/F2	0.1648	Max Normal Load	
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.							

B.2.5	TABLE: Input test					P
Model: GTM96300-2307.5-2.5-R3A						
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90	0.5931	--	31.03	F1/F2	0.5931	Max Normal Load
100	0.5285	1.0	30.53	F1/F2	0.5285	Max Normal Load
240	0.2643	1.0	30.59	F1/F2	0.2643	Max Normal Load
264	0.2332	--	30.71	F1/F2	0.2332	Max Normal Load
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.						

B.2.5	TABLE: Input test					P
Model: GTM96300-3614.5-2.5-R3A						
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90	0.8171	--	43.36	F1/F2	0.8171	Max Normal Load
100	0.7227	1.0	42.68	F1/F2	0.7227	Max Normal Load
240	0.3547	1.0	42.07	F1/F2	0.3547	Max Normal Load
264	0.3133	--	41.93	F1/F2	0.3133	Max Normal Load
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test						P
Model: GTM96300-3624-R3A							
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status	
90	0.8007	--	42.30	F1/F2	0.8007	Max Normal Load	
100	0.7162	1.0	41.84	F1/F2	0.7162	Max Normal Load	
240	0.3407	1.0	40.80	F1/F2	0.3407	Max Normal Load	
264	0.3109	--	40.86	F1/F2	0.3109	Max Normal Load	
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.							

B.2.5	TABLE: Input test						P
Model: GTM96300-3648-R3A							
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status	
90	0.7682	--	41.46	F1/F2	0.7682	Max Normal Load	
100	0.6849	1.0	41.03	F1/F2	0.6849	Max Normal Load	
240	0.3343	1.0	39.91	F1/F2	0.3343	Max Normal Load	
264	0.3019	--	39.86	F1/F2	0.3019	Max Normal Load	
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.							

1.6.2	TABLE: Electrical data (in normal conditions)						P
Model: GTM96300-3656-T3-APOE							
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status	
90	0.7245	--	40.92	F1/F2	0.7245	Max Normal Load	
100	0.6158	1.0	40.23	F1/F2	0.6158	Max Normal Load	
240	0.3205	1.0	39.37	F1/F2	0.3205	Max Normal Load	
264	0.2987	--	38.89	F1/F2	0.2987	Max Normal Load	
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test					P
Model: GTM91120-2007.5-2.5-T2						
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90	0.52	--	27.0	F1/F2	0.52	Max Normal Load
100	0.47	1.0	26.2	F1/F2	0.47	Max Normal Load
240	0.24	1.0	26.1	F1/F2	0.24	Max Normal Load
264	0.22	--	26.1	F1/F2	0.22	Max Normal Load
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.						

B.2.5	TABLE: Input test					P
Model: GTM91120-3014.5-2.5-T2						
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90	0.70	--	36.1	F1/F2	0.70	Max Normal Load
100	0.64	1.0	35.7	F1/F2	0.64	Max Normal Load
240	0.32	1.0	35.0	F1/F2	0.32	Max Normal Load
264	0.29	--	35.1	F1/F2	0.29	Max Normal Load
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.						

B.2.5	TABLE: Input test					P
Model: GTM91120-3024-T3A						
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90	0.65	--	35.0	F1/F2	0.65	Max Normal Load
100	0.59	1.0	34.6	F1/F2	0.59	Max Normal Load
240	0.30	1.0	33.8	F1/F2	0.30	Max Normal Load
264	0.28	--	33.6	F1/F2	0.28	Max Normal Load
Supplementary information: The max. current under rated voltage didn't exceed 110% of the rated current.						

B.2.5	TABLE: Input test					P
Model: GTM91120-3048-T2						
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90	0.66	--	35.2	F1/F2	0.66	Max Normal Load
100	0.61	1.0	34.9	F1/F2	0.61	Max Normal Load
240	0.30	1.0	33.6	F1/F2	0.30	Max Normal Load
264	0.28	--	34.2	F1/F2	0.28	Max Normal Load
Supplementary information:The max. current under rated voltage didn't exceed 110% of the rated current.						

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

B.3 & B.4		TABLE: Abnormal operating and fault condition tests				P
	Ambient temperature (°C)				25, if no else specified	—
	Power source for EUT: Manufacturer, model/type, output rating				--	—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
Output (5V series)	OL	264	1h	F1/F2	0.858A	Load to 5.44A, EUT protected immediately, no hazards. Temperature recorded: T1 winding = 94°C Enclosure: 58°C
Output (48V series)	OL	264	1h	F1/F2	0.803A	Load to 0.768A, EUT protected immediately, no hazards. Temperature recorded: T1 winding = 109°C Enclosure: 66°C
Output	SC	90/264	10mins	F1/F2	0	EUT protected immediately, no hazards
C4	SC	90/264	10mins	F1/F2	0	EUT protected immediately, no hazards
Q1 pinD-S	SC	90/264	<1s	F1/F2	10*	EUT shut down immediately, fuse opened, repeat 10 times, no hazards
Q1 pinG-S	SC	90/264	10mins	F1/F2	0	EUT protected immediately, no hazards
D2	SC	90/264	10mins	F1/F2	0	EUT protected immediately, no hazards
T1 pin1-2	SC	90/264	<2mins	F1/F2	10*	EUT shut down, fuse opened, repeat 10 times, no hazards
T1 pinTA-TB	SC	90/264	10mins	F1/F2	0	EUT protected immediately, no hazards
C1	SC	90/264	<1s	F1/F2	10*	EUT shut down immediately, fuse opened, repeat 10 times, no hazards
BD1	SC	90/264	<1s	F1/F2	10*	EUT shut down immediately, fuse opened, repeat 10 times, no hazards

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Supplementary information:

“Sc” means short-circuited test, “OI” means overload test, “Oc” means open-circuited test; “Uoc” means output voltage without load.

Annex Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)					P
Note: Measured UOC (V) with all load circuits disconnected:						
Output Circuit	Components	Uoc (V)	Isc (A)		S (VA)	
			Meas.	Limit	Meas.	Limit
Model: GTM96300-2307.5-2.5-R2						
Output	Output Oc	5.14	0	8.0	0	100
Output	Output OI	0	5.44	8.0	33.9	100
Output	Single fault: Primary current limitation disabled. (R13 short)	0	0	8.0	0	100
Model: GTM96300-3648-R2						
Output	Output Oc	48.09	0	3.125	0	100
Output	Output OI	0	0.768	3.125	42.7	100
Output	Single fault: Primary current limitation disabled. (R13 short)	0	0	3.125	0	100
Model: GTM96180-1807-2.0-T2						
Output	Output Oc	5.112	0	8.0	0	100
Output	Output OI	0	3.90	8.0	24.6	100
Output	Single fault: Primary current limitation disabled. (R13 short)	0	0	8.0	0	100
Model: GTM96180-1848-T2						
Output	Output Oc	48.44	0	3.125	0	100
Output	Output OI	0	0.465	3.125	26.6	100
Output	Single fault: Primary current limitation disabled. (R13 short)	0	0	3.125	0	100
Model: GTM91120-2007.5-2.5-T2						
Output	Output Oc	5.13	0	8.0	0	100

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
Output	Output OI	0	4.5	8.0	21.6	100
Output	Single fault: Primary current limitation disabled. (R11 short)	0	0	8.0	0	100
Model: GTM91120-3048-T2						
Output	Output Oc	48.03	0	3.125	0	100
Output	Output OI	0	0.85	3.125	38.4	100
Output	Single fault: Primary current limitation disabled. (R11 short)	0	0	3.125	0	100
Supplementary Information: SC=Short circuit, Oc=Open circuit, OI=over loaded						

T.2, T.3, T.4, T.5	TABLE: Steady force test					P
Part/Location	Material	Thickness (mm)	Force (N)	Test Duration (sec)	Observation	
Enclosure top, closed to transformer (T.4)	Plastics	2.0	100	5	Enclosure remained intact, no crack/ opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Enclosure side (T.4)	Plastics	2.0	100	5	Enclosure remained intact, no crack/ opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Enclosure bottom, closed to transformer (T.4)	Plastics	2.0	100	5	Enclosure remained intact, no crack/ opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Internal components (T.2)	--	--	10	5	No insulation breakdown. No reduction the clearances and creepage distances	
Supplementary information:						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

T.6, T.9	TABLE: Impact tests			N/A
Part/Location	Material	Thickness (mm)	Vertical distance (mm)	Observation
Supplementary information:				

T.7	TABLE: Drop tests			P
Part/Location	Material	Thickness (mm)	Drop Height (mm)	Observation
Three side of enclosure	Hardwood	15mm	1000mm	After the drop test, no open was found for the enclosure
Supplementary information:				

T.8	TABLE: Stress relief test				
Part/Location	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation
Enclosure	Plastics	2.0mm	125	7	Enclosure remained intact, no cracking/opening developed in the enclosure joint. Internal ES3, TS3 were not accessible after test. No insulation breakdown.
Supplementary information:					

Appendix 1: Photos of the product


External view for GTM96300 series




External view for GTM96300 series




Internal view for GTM96300 series (Class I)

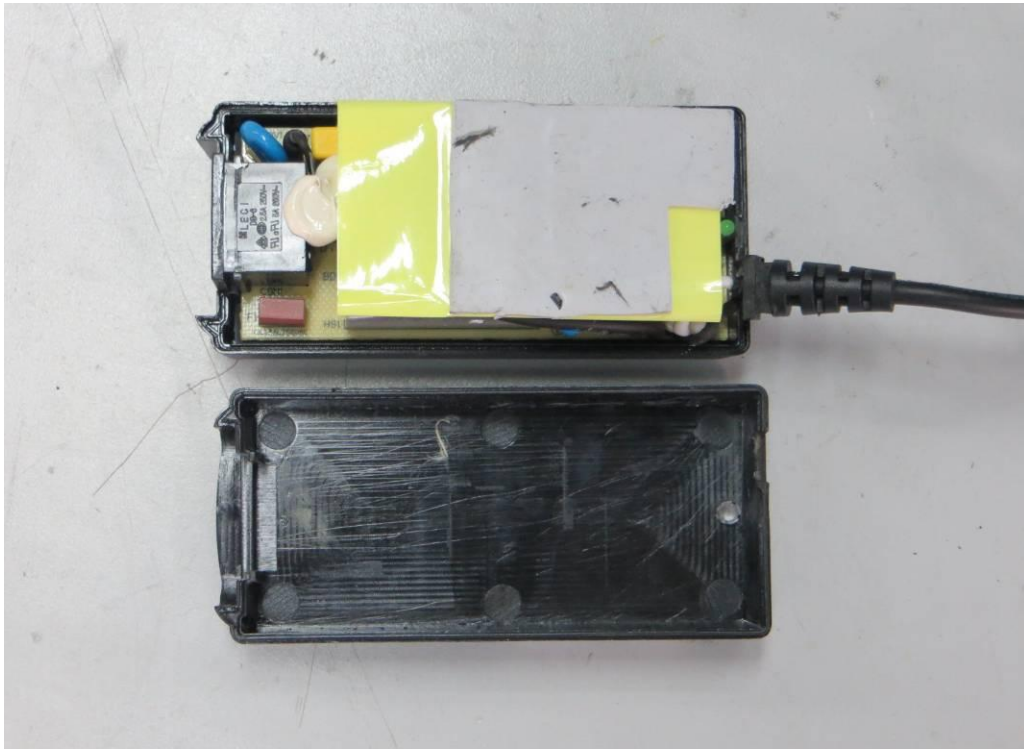


Internal view for GTM96300 series (Class I)

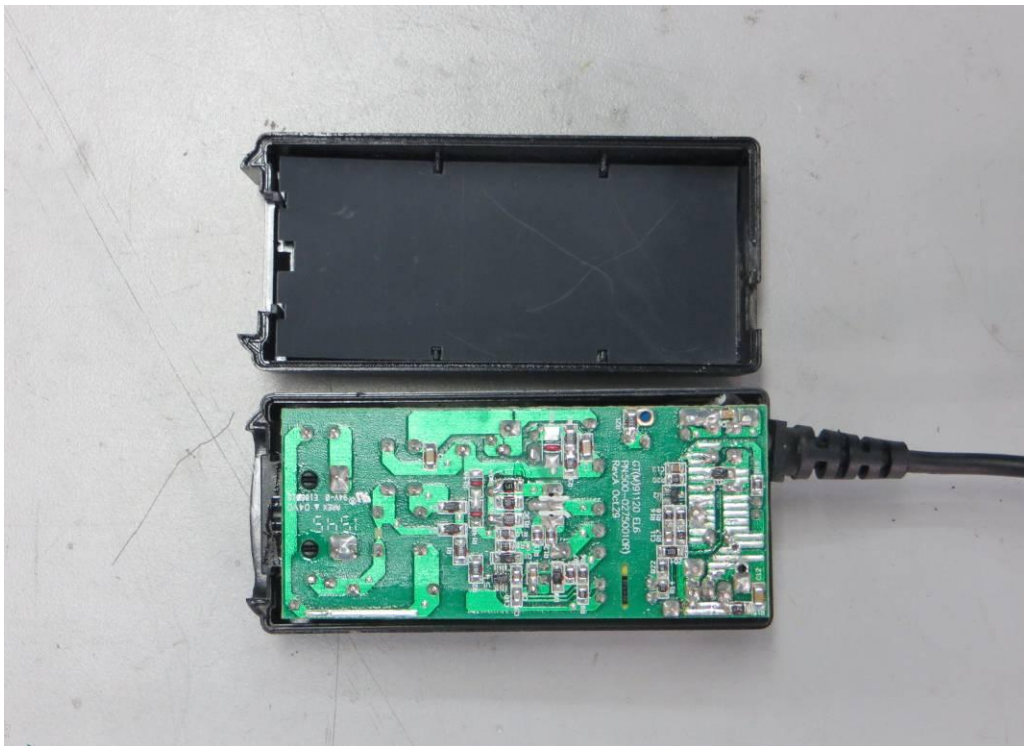


PCB for GTM96300 series (Class I)

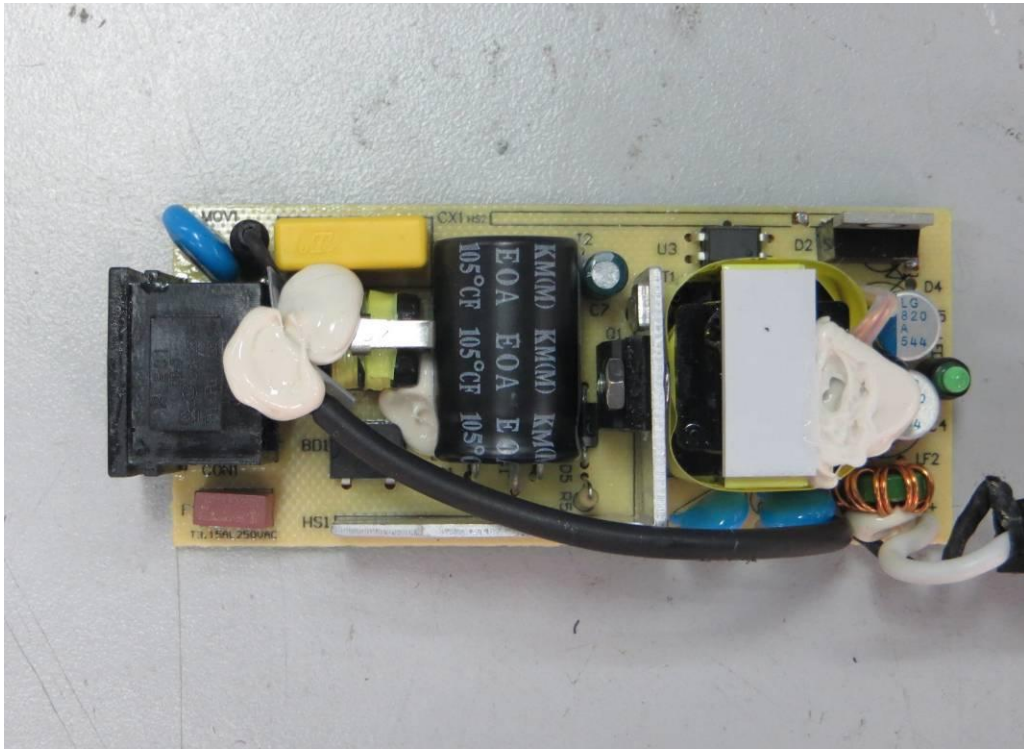


PCB for GTM96300 series (Class I)

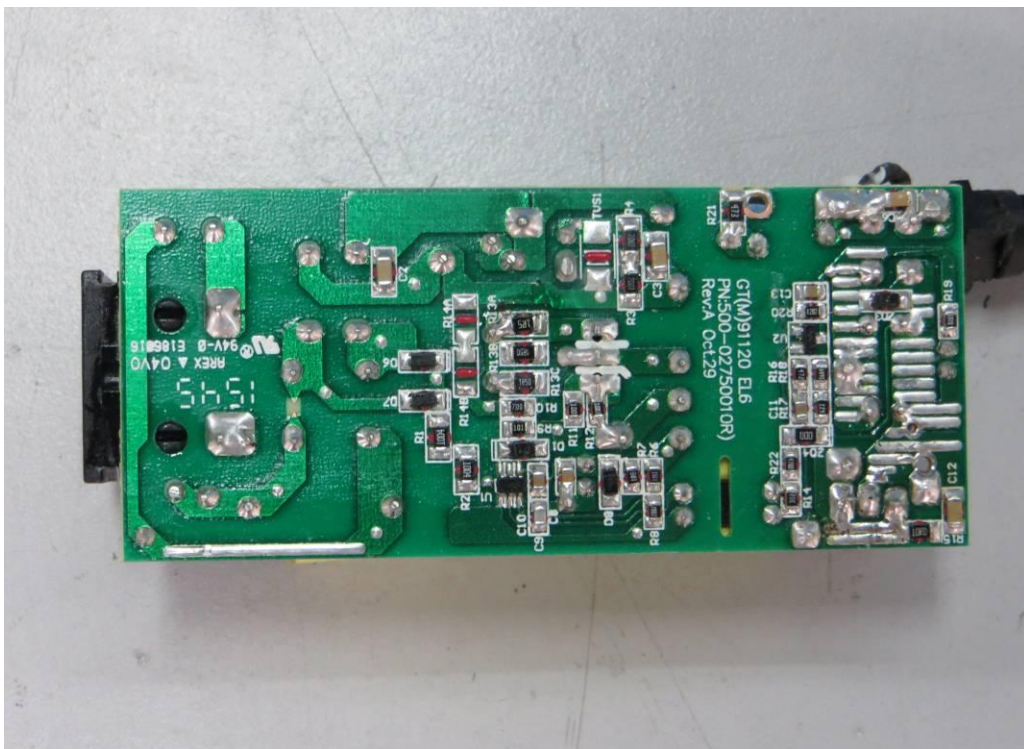


Internal view for GTM96300 series (Class II)

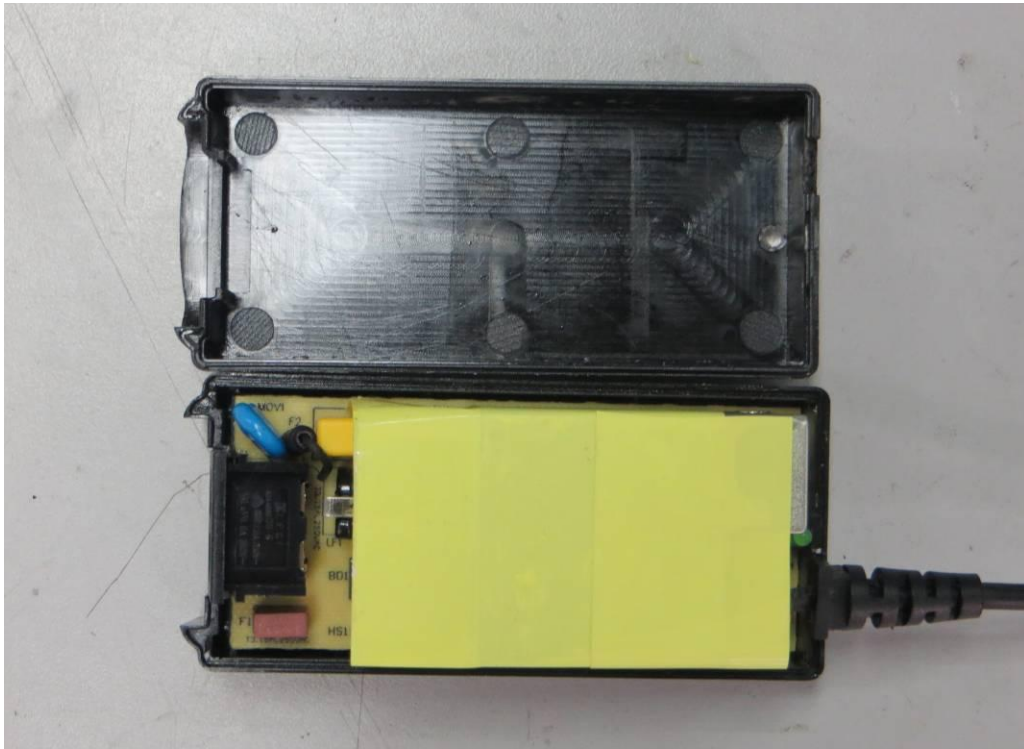


Internal view for GTM96300 series (Class II)

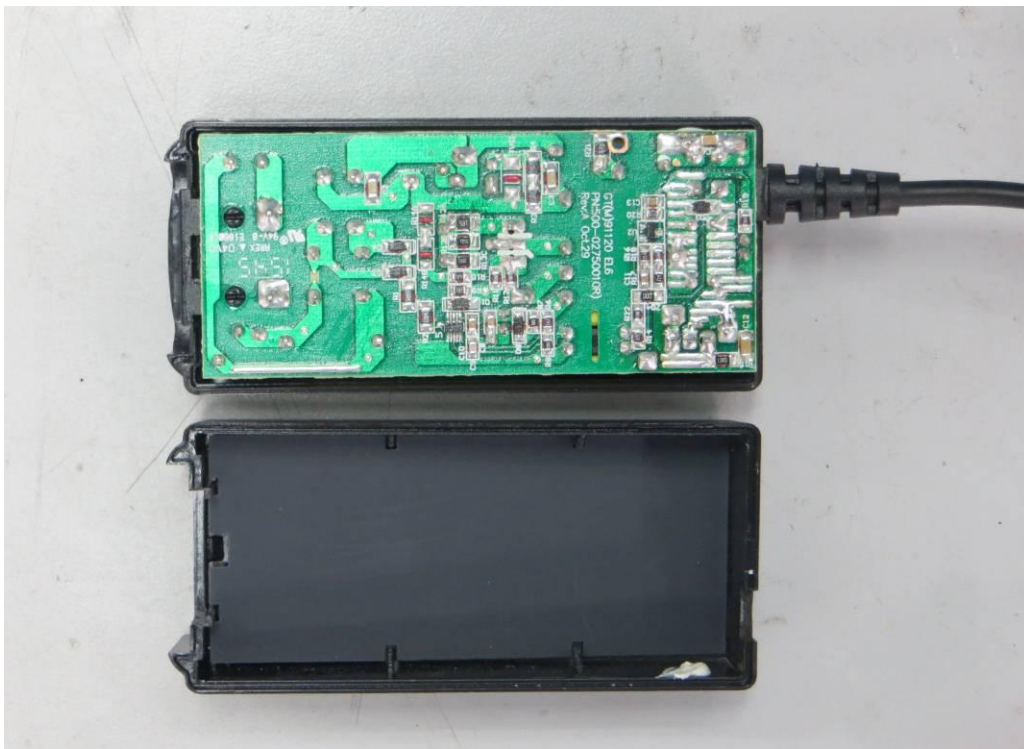


PCB for GTM96300 series (Class II)

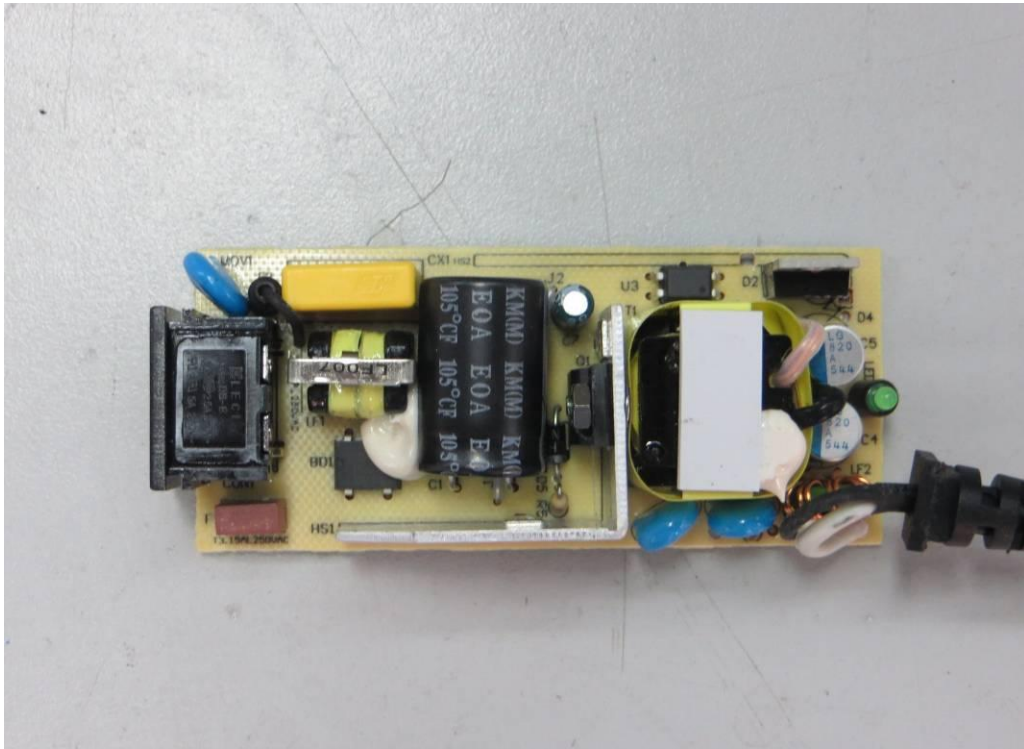

PCB for GTM96300 series (Class II)

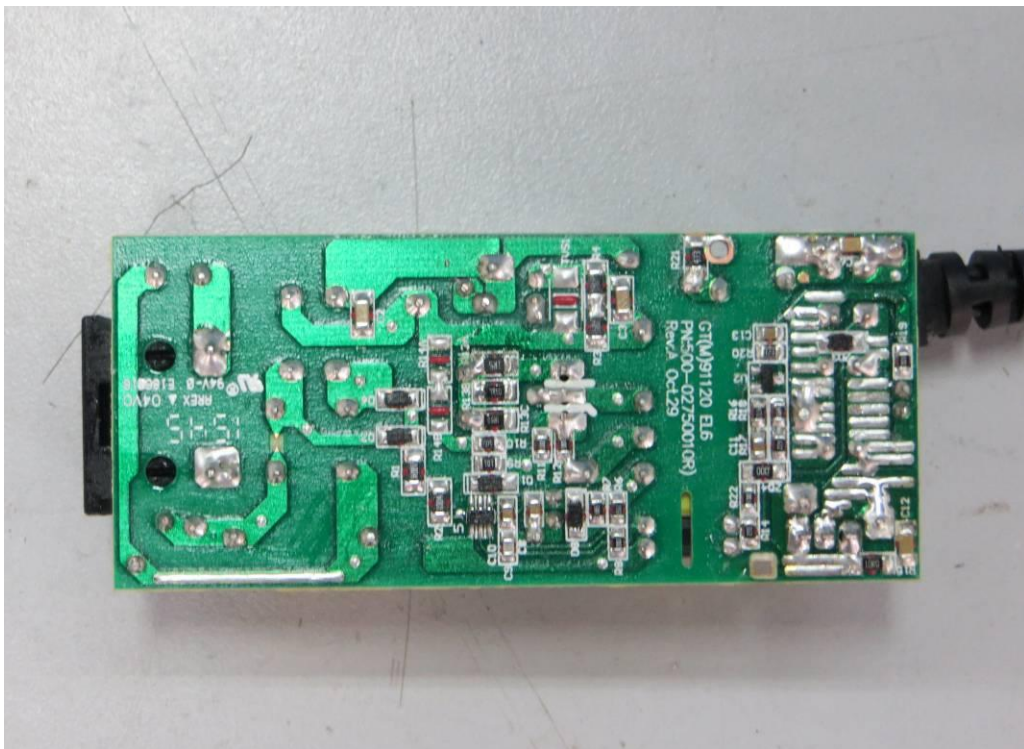

External view for GTM96180 series (desktop)

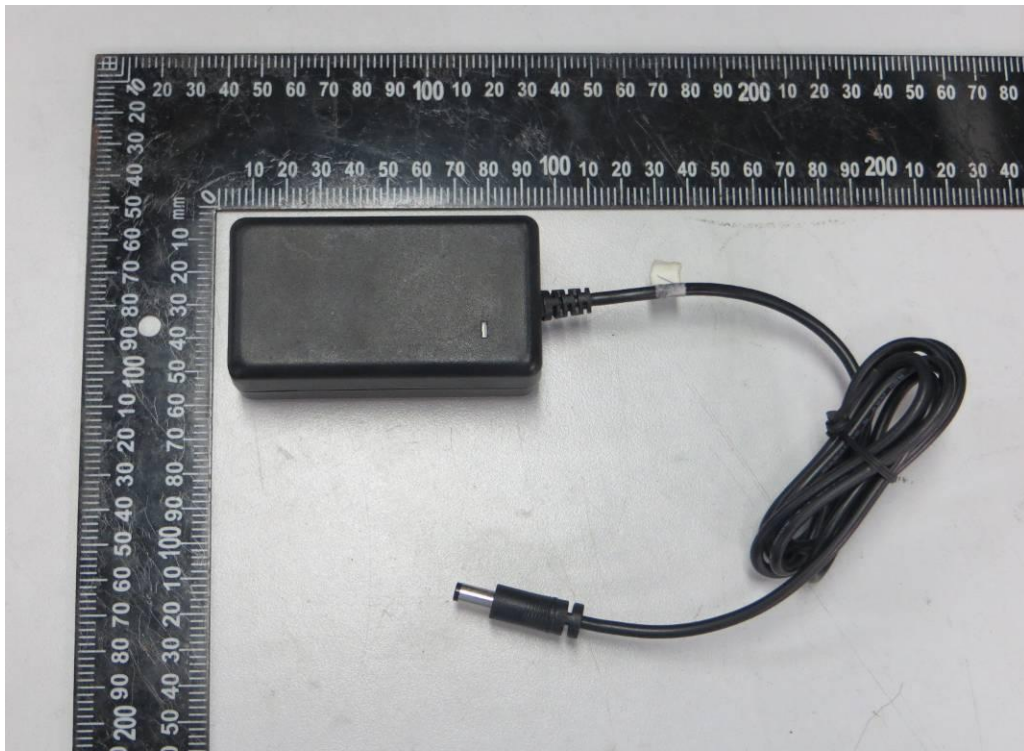

External view for GTM96180 series (desktop)




External view for GTM96180 series (Interchangeable plug)



External view for GTM96180 series (Interchangeable plug)




Internal view for GTM96180 series (Class I)

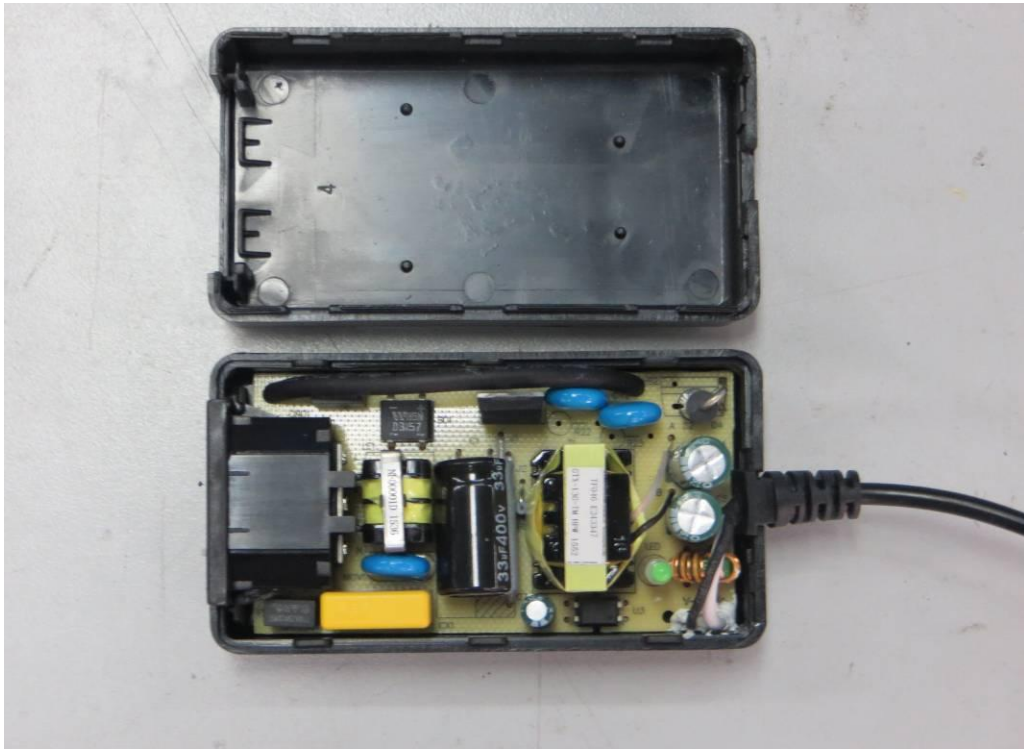


Internal view for GTM96180 series (Class I)



PCB for GTM96180 series (Class I)

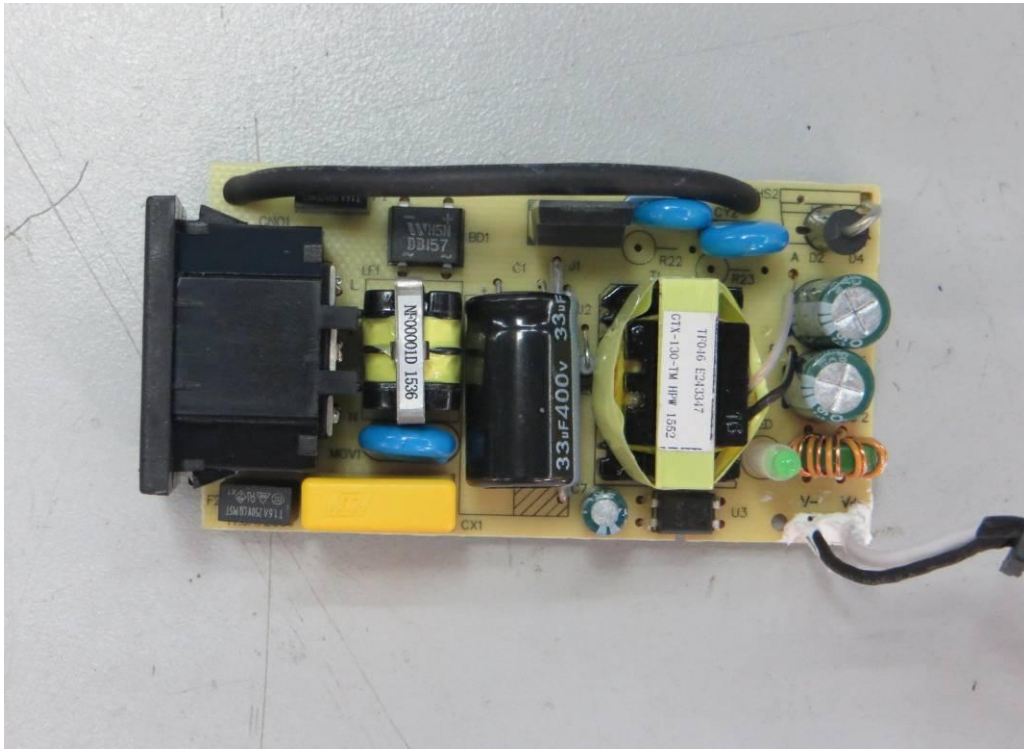

PCB for GTM96180 series (Class I)

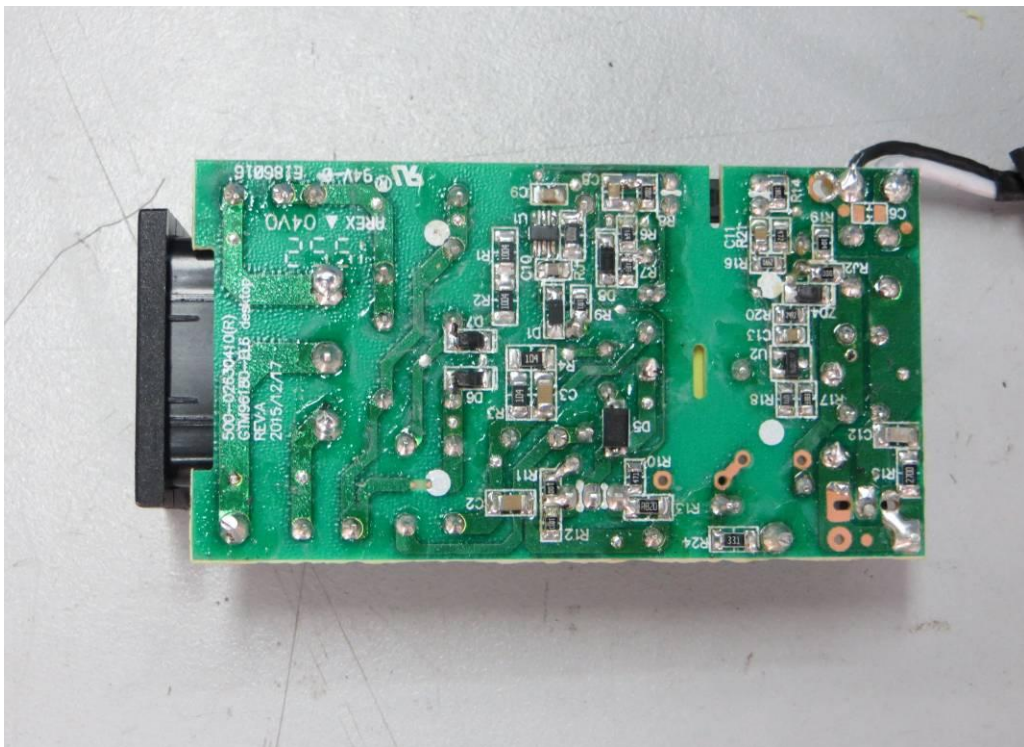


Internal view for GTM96180 series (Class II)




Internal view for GTM96180 series (Class II)




PCB for GTM96180 series (Class II)

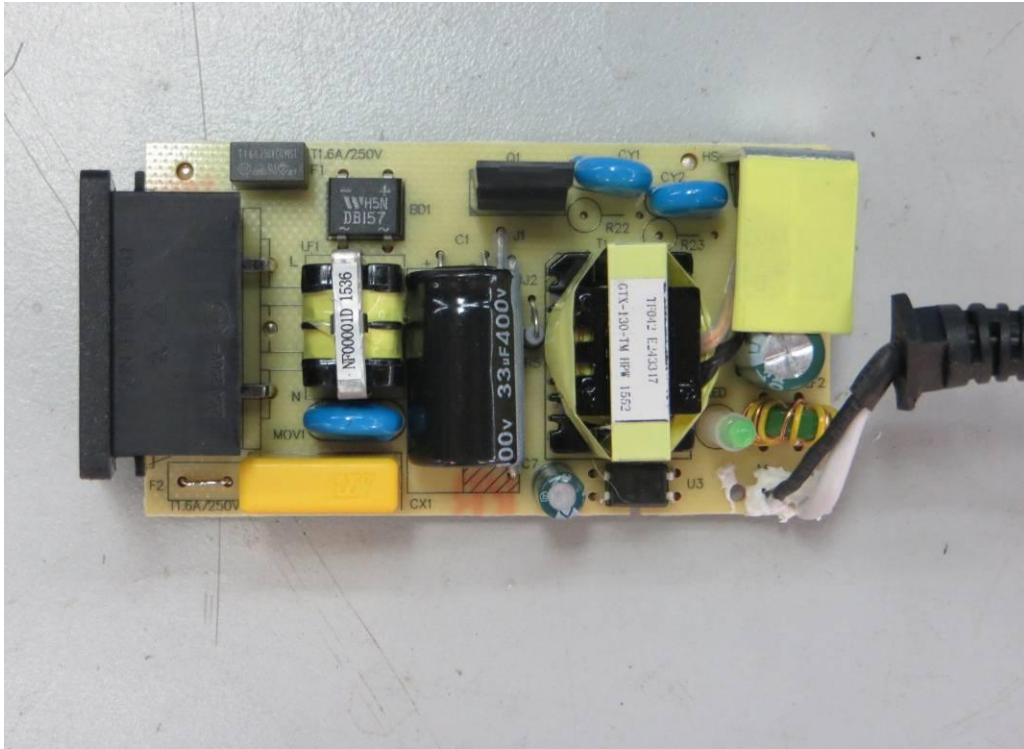

PCB for GTM96180 series (Class II)

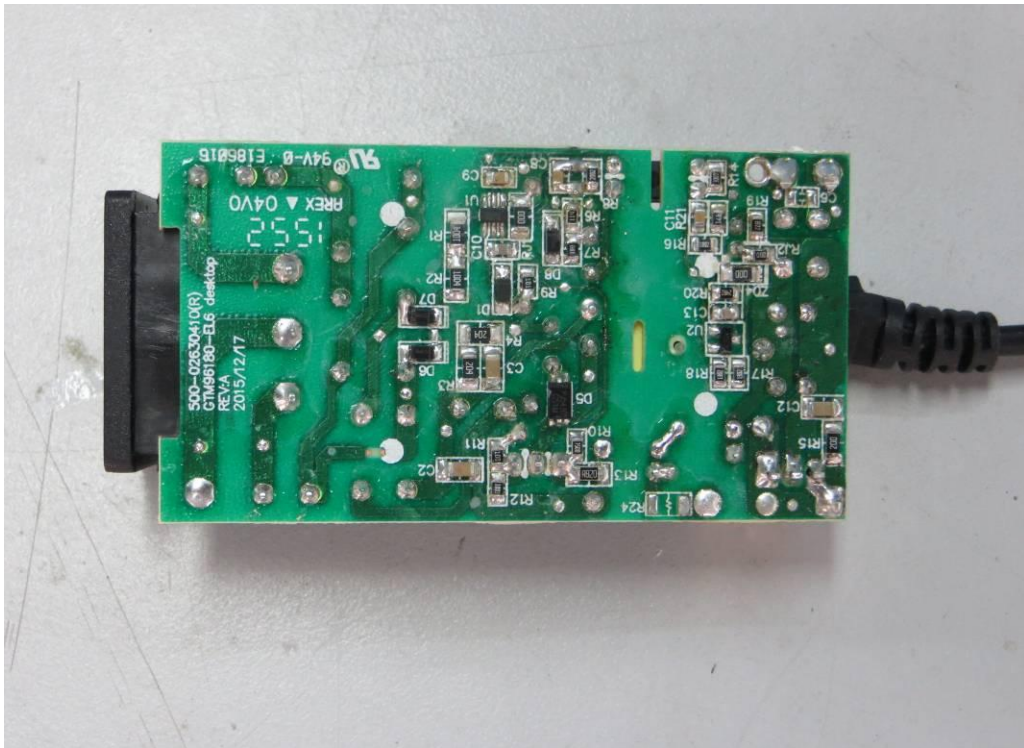


Internal view for GTM96180 series (Interchangeable plug)

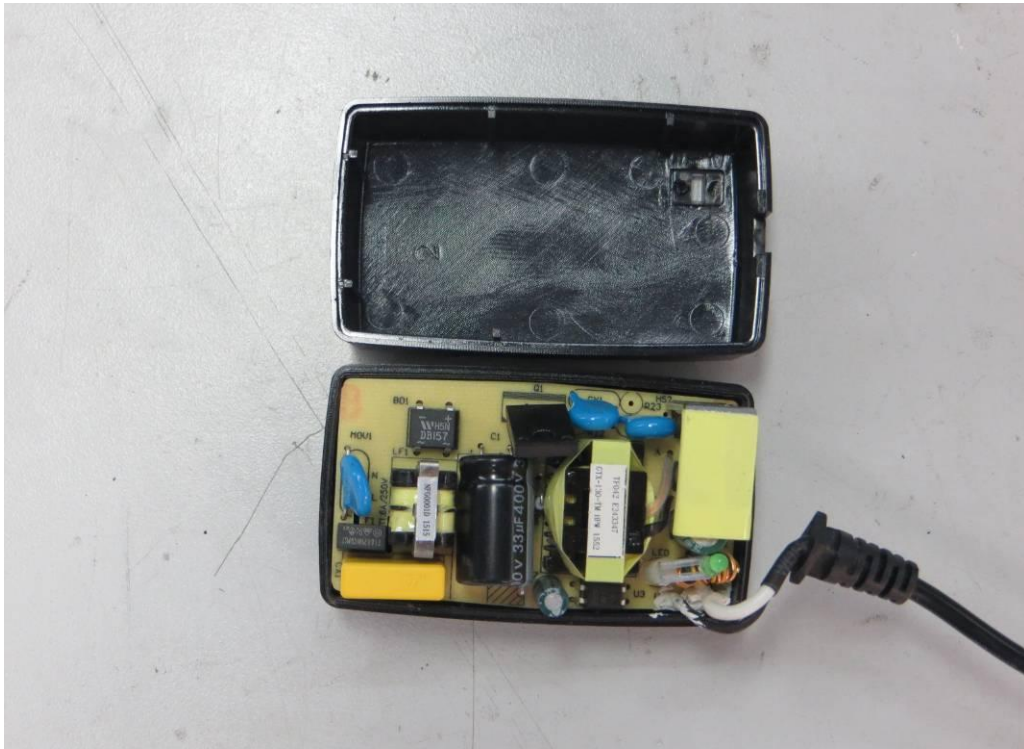


Internal view for GTM96180 series (Interchangeable plug)



PCB for GTM96180 series (Interchangeable plug)

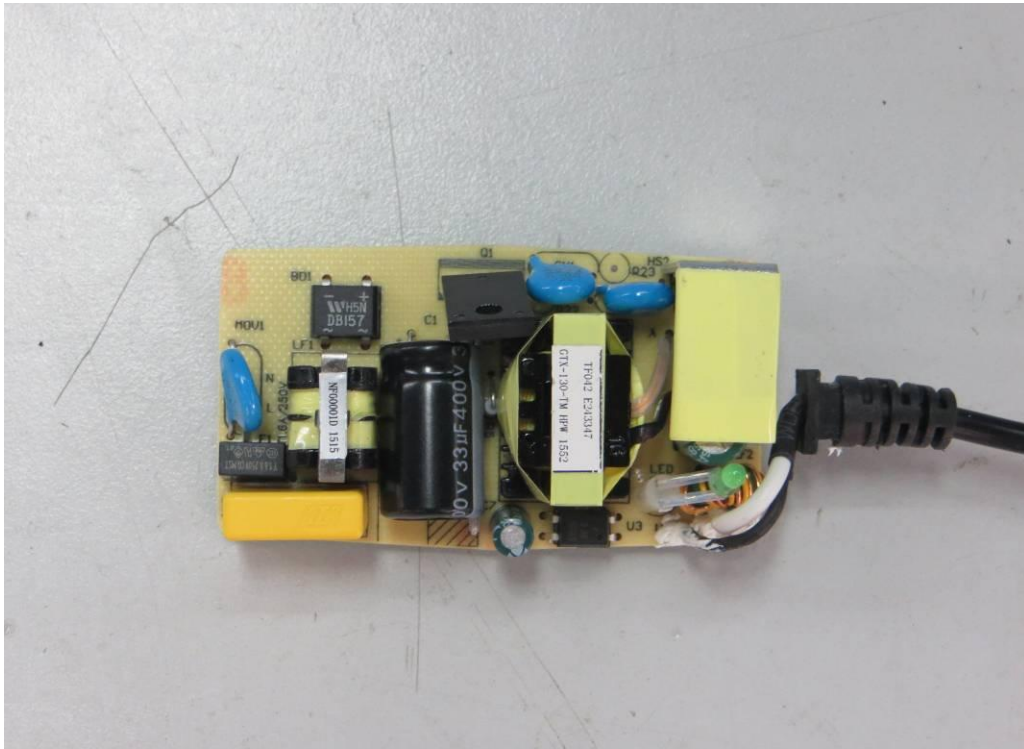

PCB for GTM96180 series (Interchangeable plug)

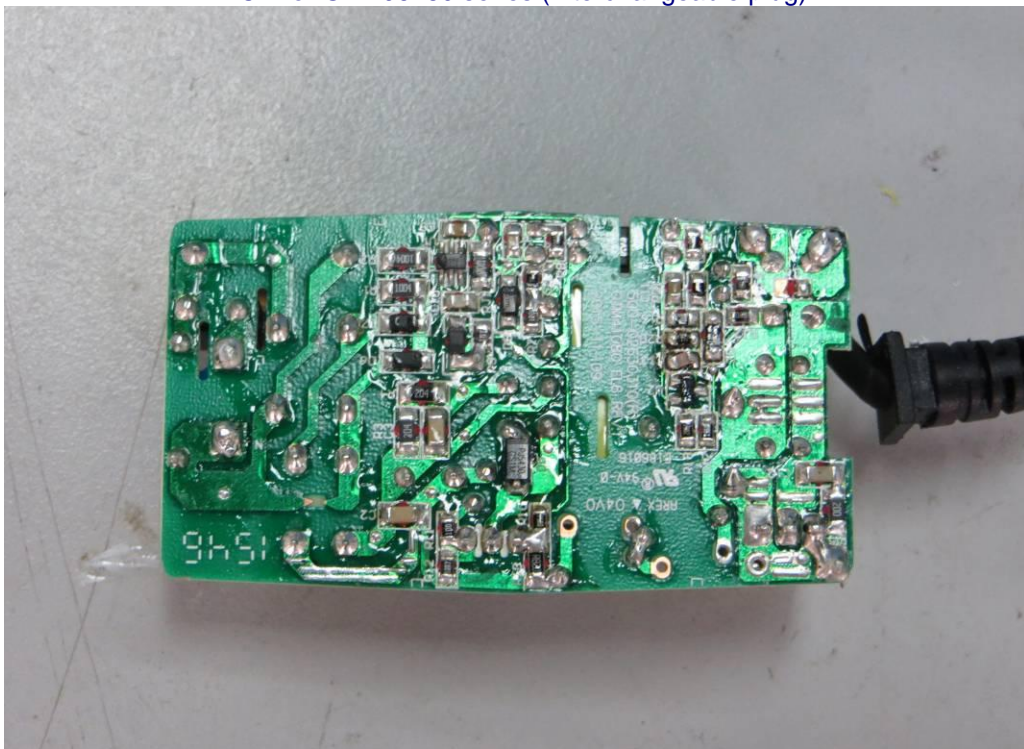

External view for GTM91120 series



External view for GTM91120 series



External view for GTM91120 series




External view for GTM91120 series




Internal view for GTM91120 series




Internal view for GTM91120 series

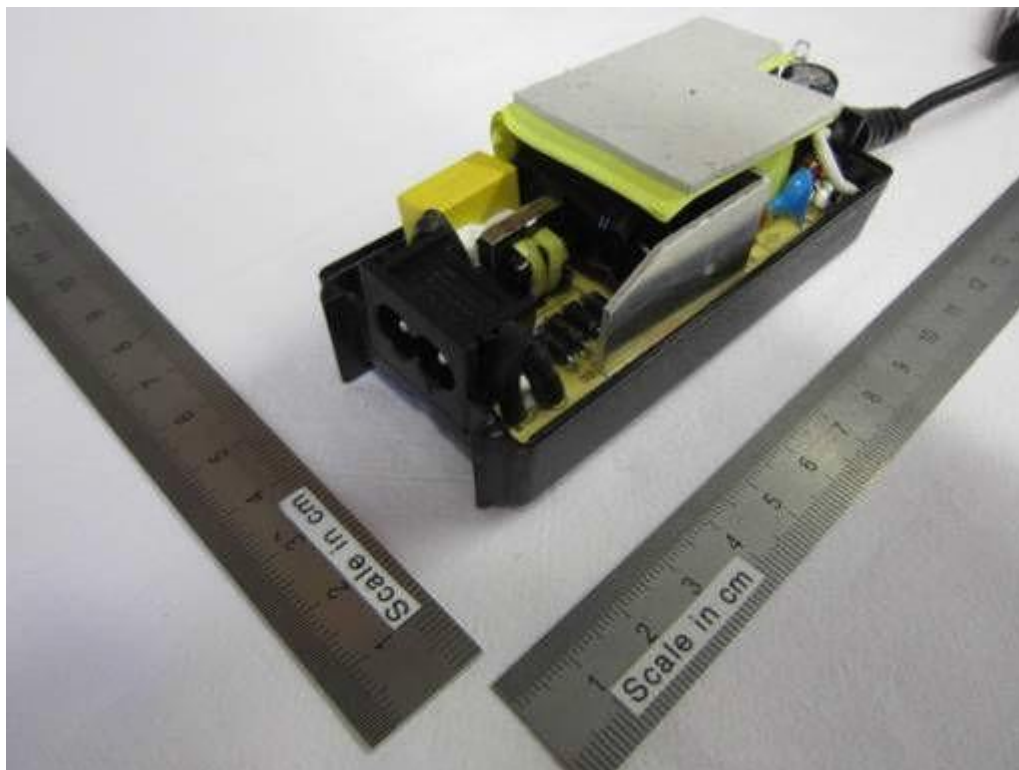


Internal view for GTM91120 series

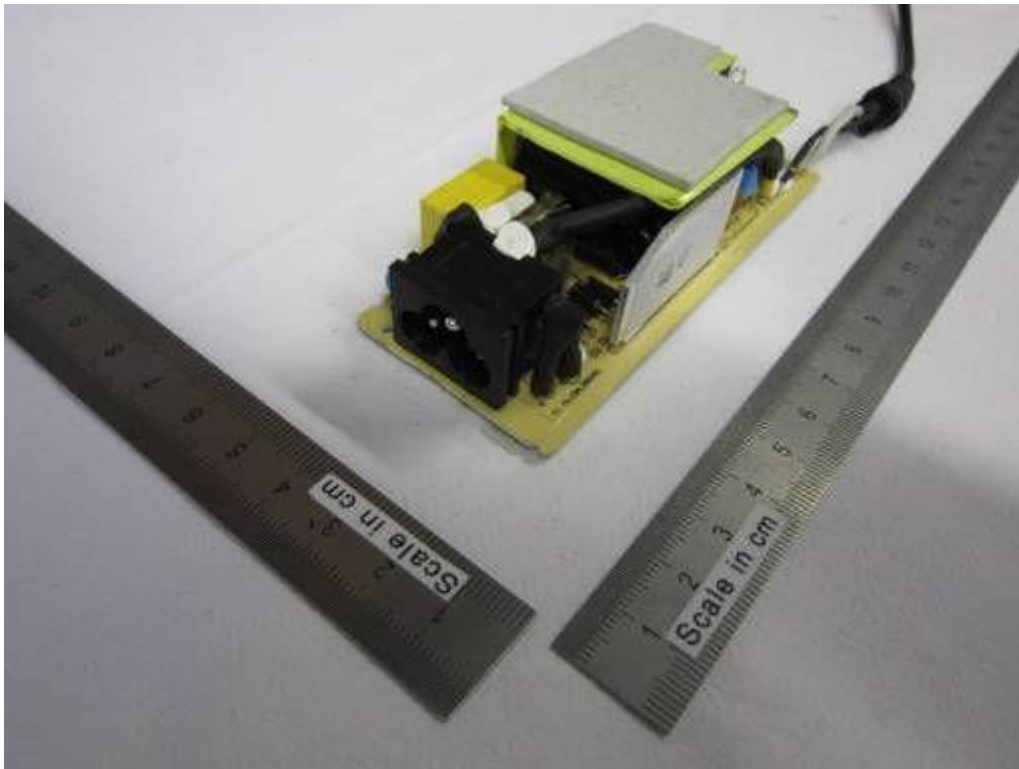

Internal view for GTM91120 series

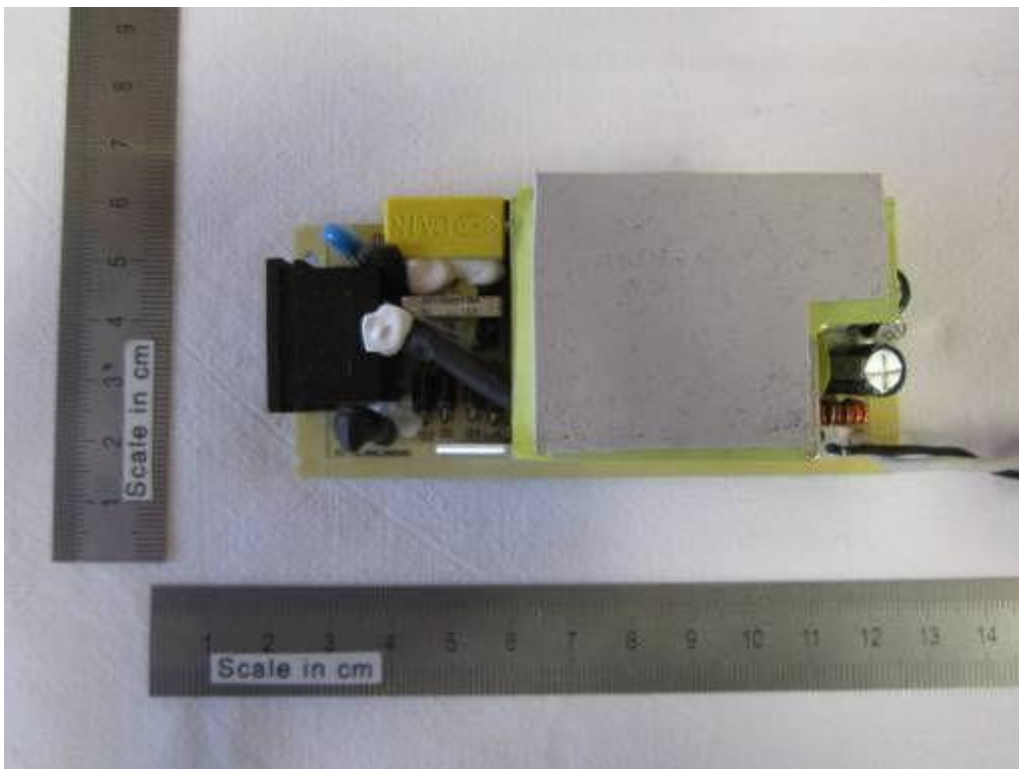

Internal view for GTM91120 series

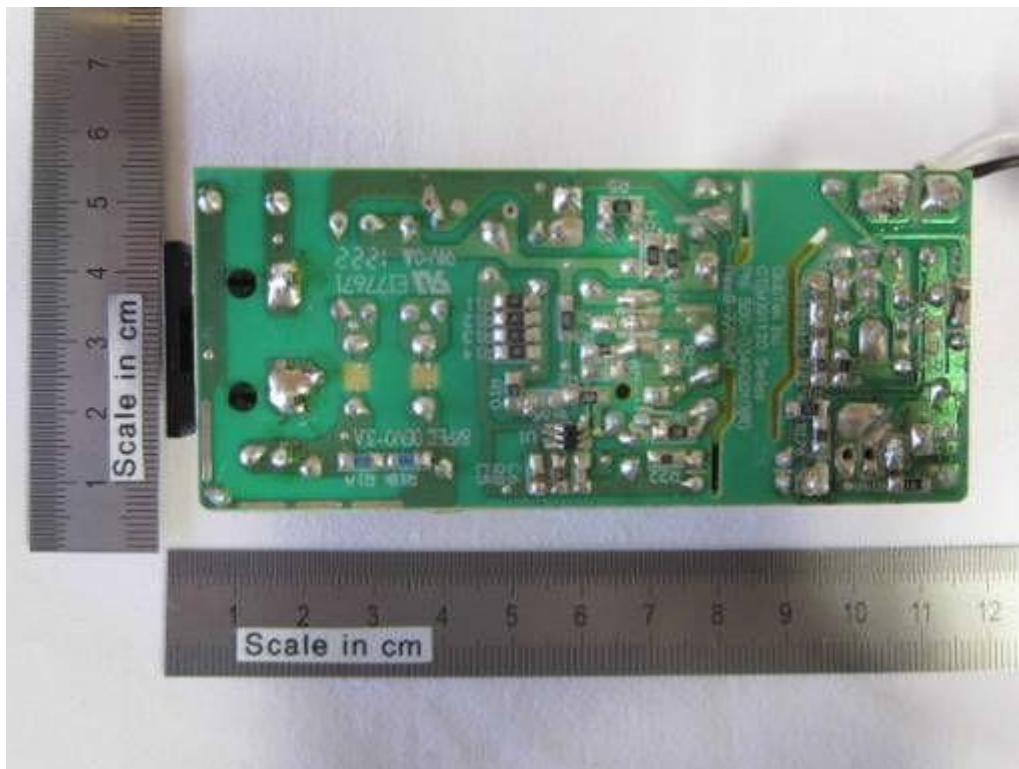

External view for GTM91128LI1CELL, GTM91128LI2CELL, GTM91128LI3CELL




External view for GTM91128LI1CELL, GTM91128LI2CELL, GTM91128LI3CELL




External view for GTM91128LI1CELL, GTM91128LI2CELL, GTM91128LI3CELL



PCB for GTM91128LI1CELL, GTM91128LI2CELL, GTM91128LI3CELL

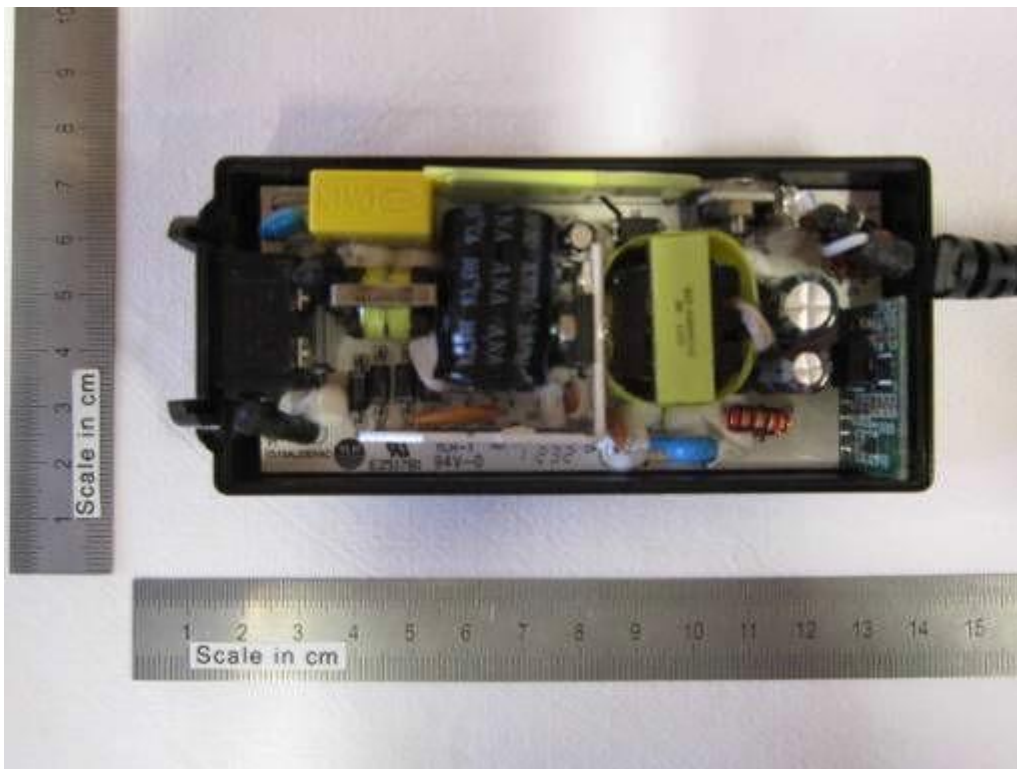


PCB for GTM91128LI1CELL, GTM91128LI2CELL, GTM91128LI3CELL

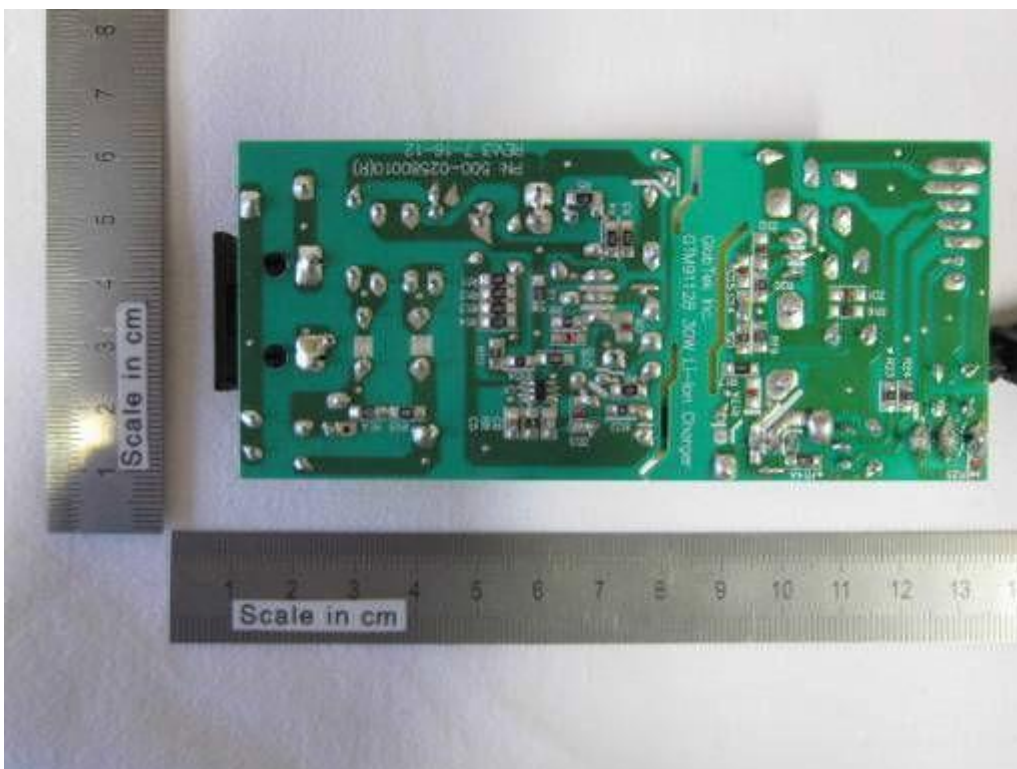


External view for POE series




External view for POE series

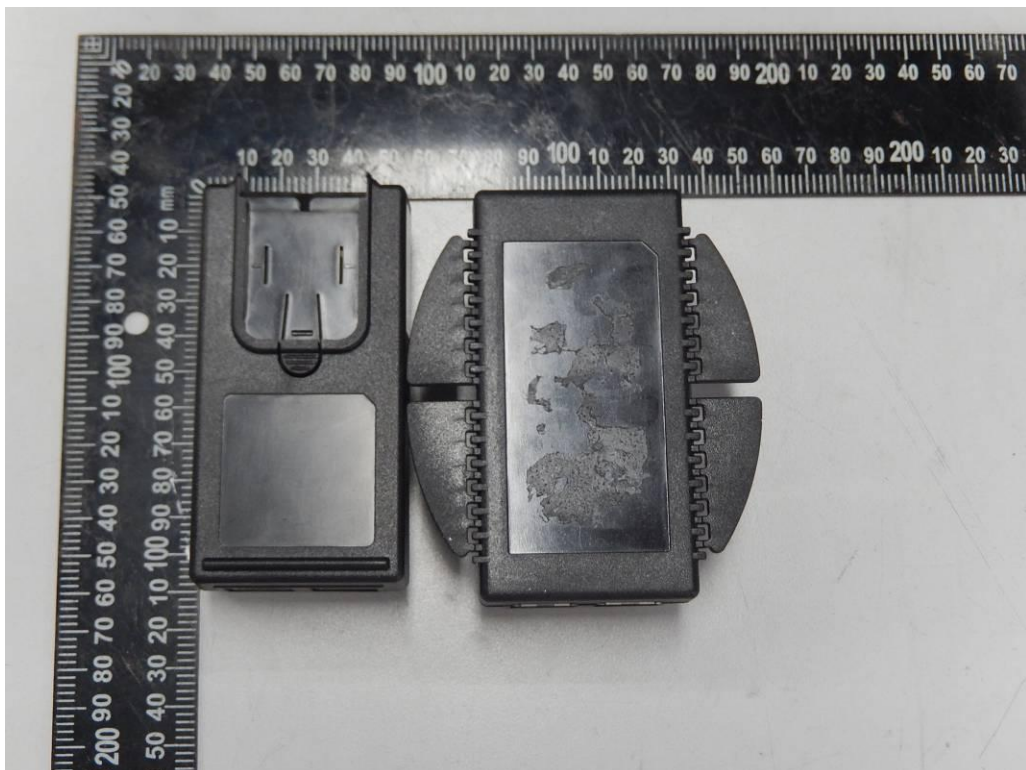


Internal view for POE series

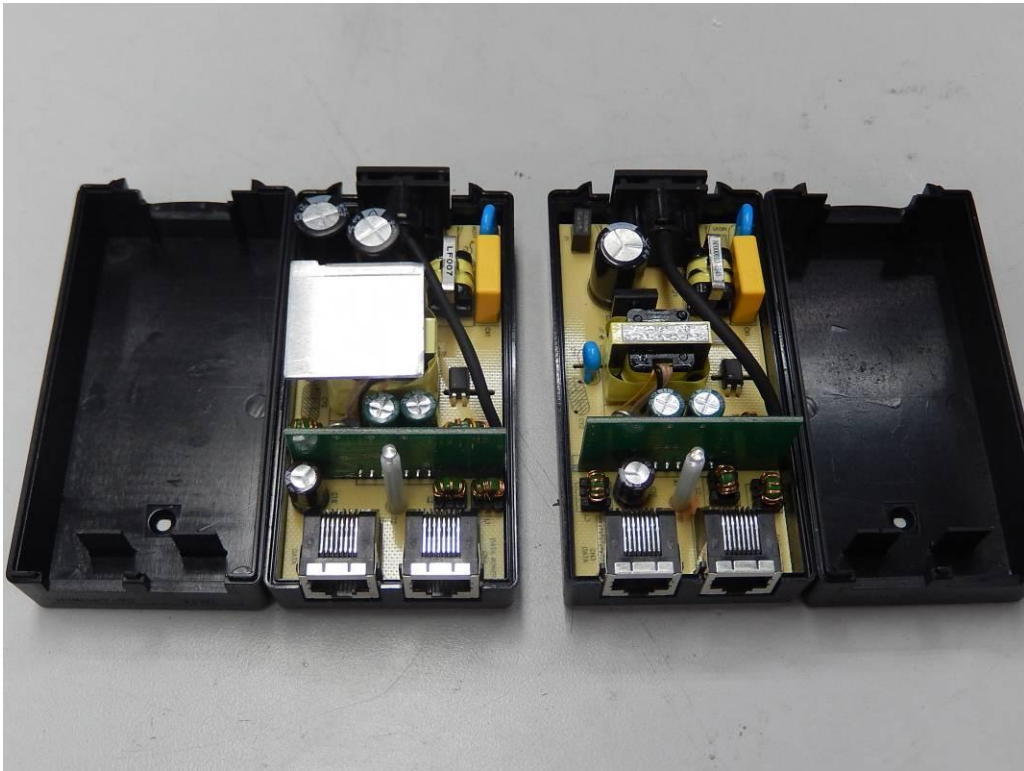


Internal view for POE series

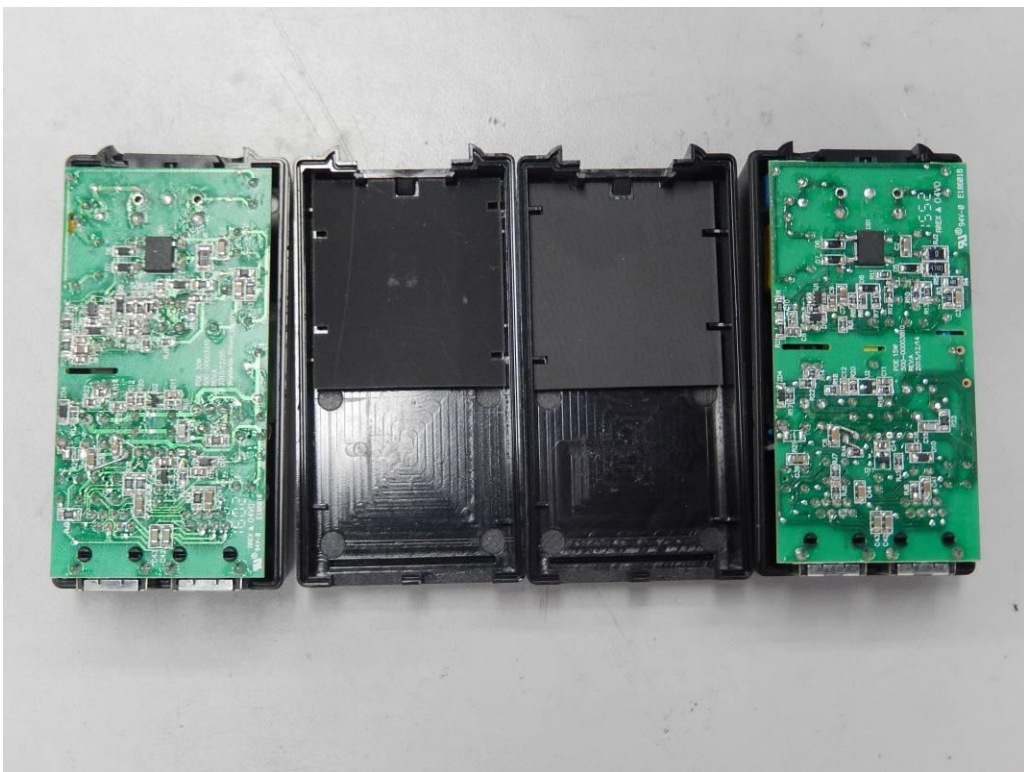

PCB for POE series

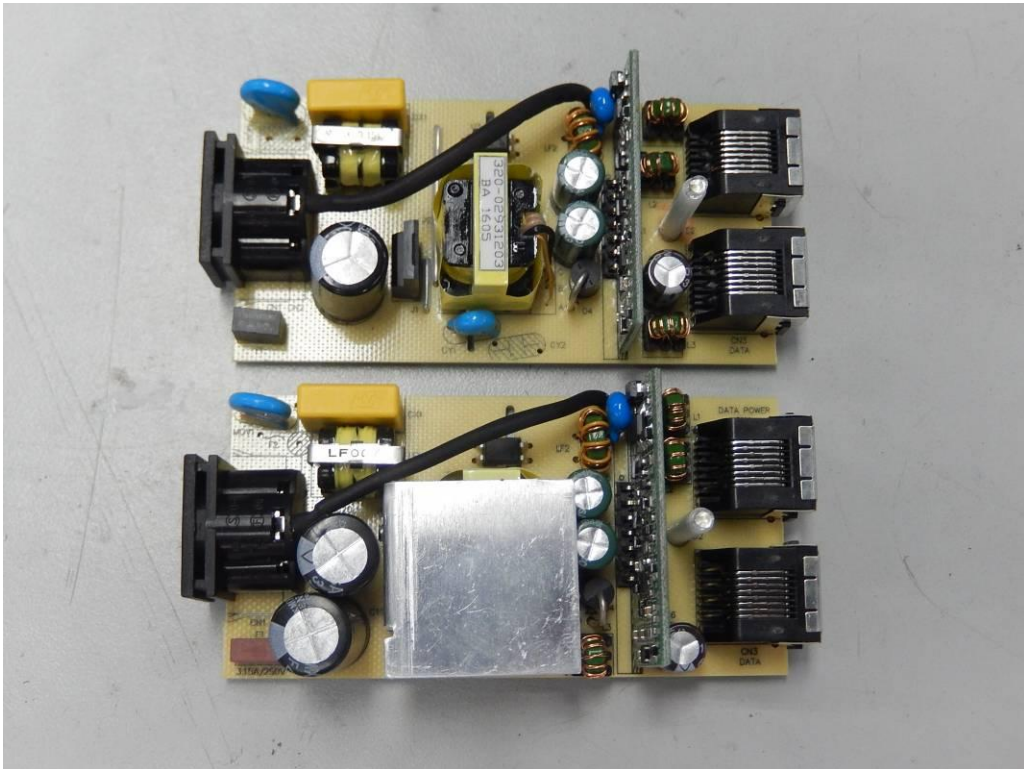


PCB for POE series

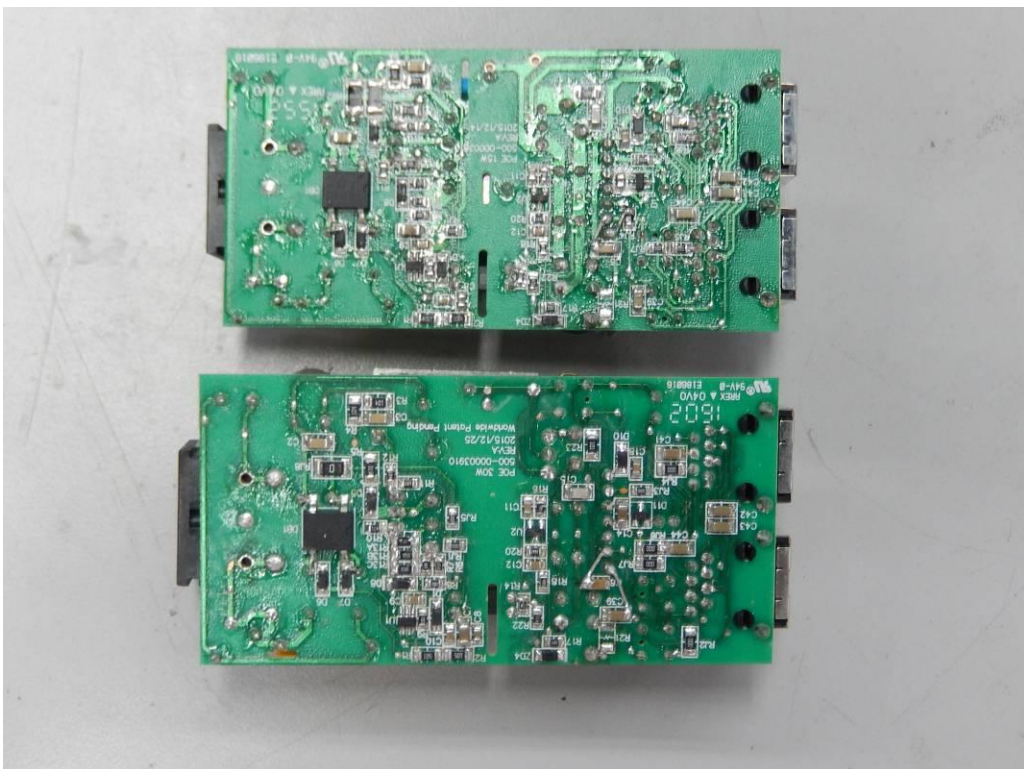

Transformer (EE22)




Transformer (EE22)

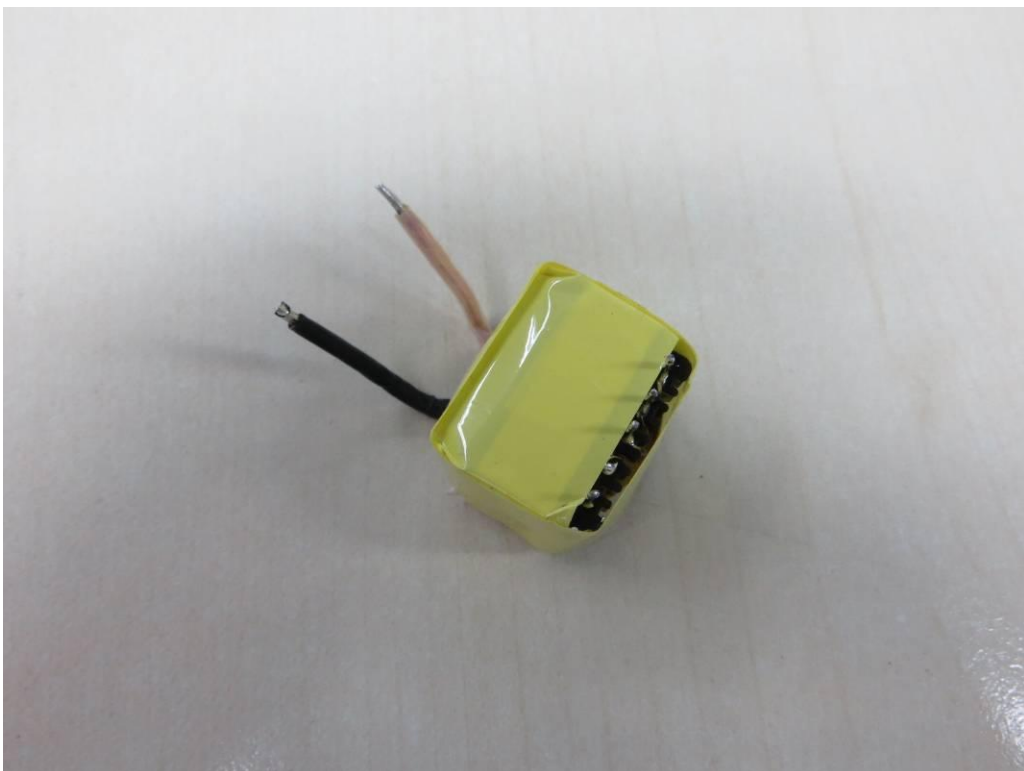


Transformer (EE22)

Transformer (EE22)

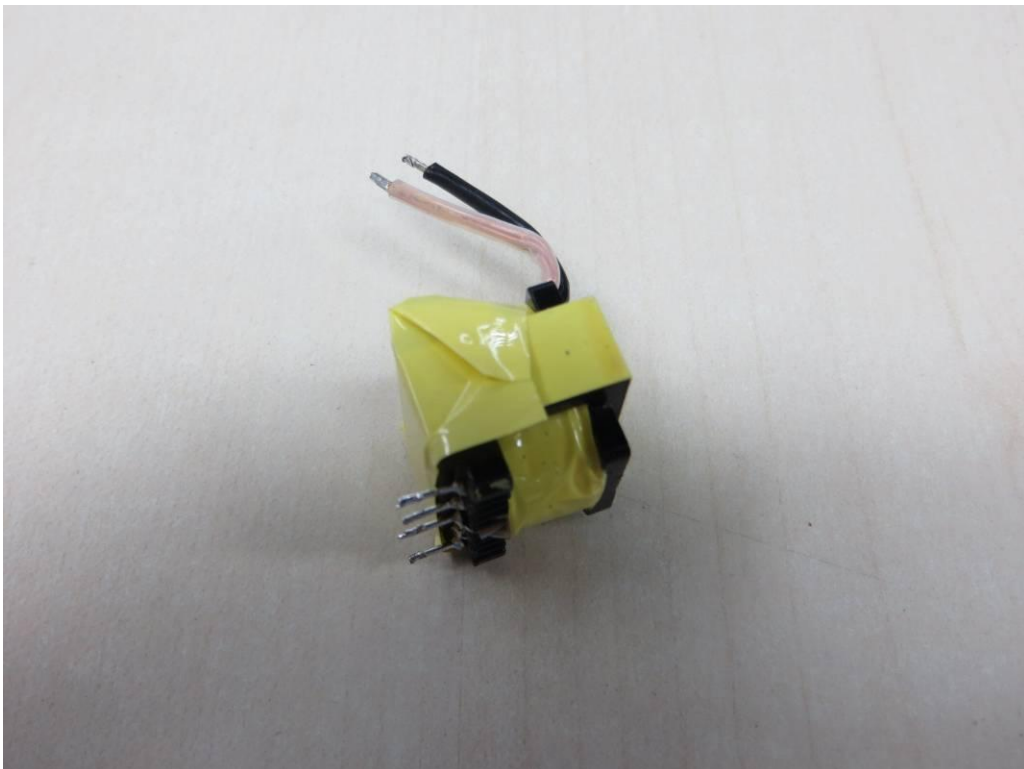


Transformer (EE22)

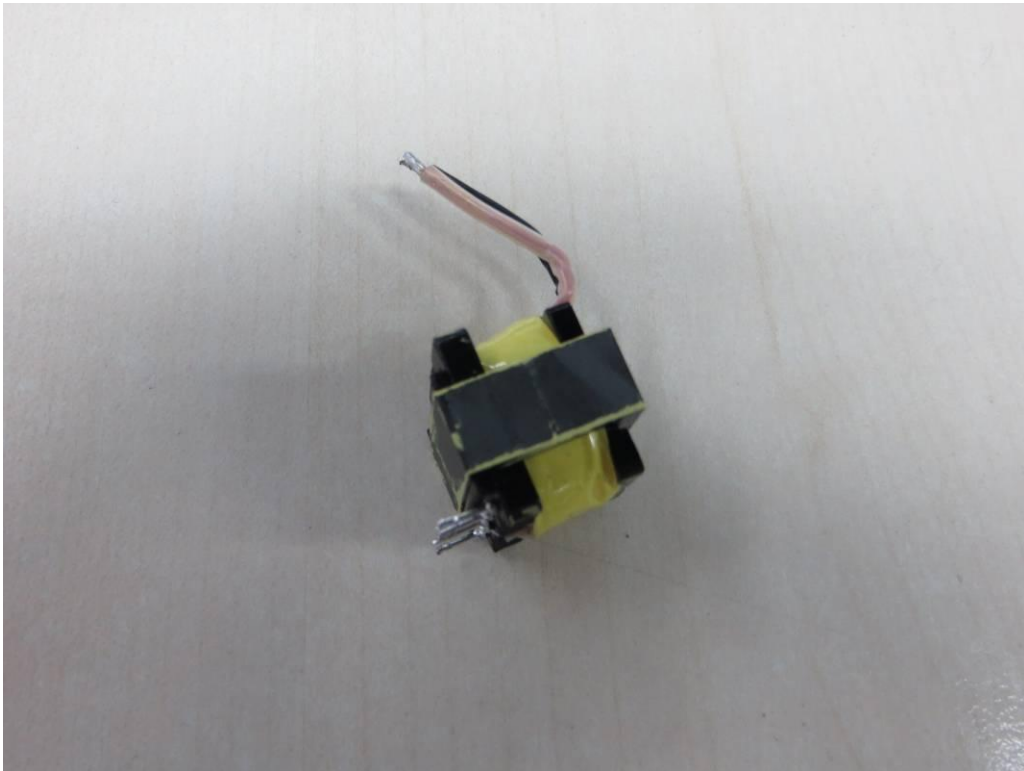


Transformer (EE22)




Transformer (EE22)

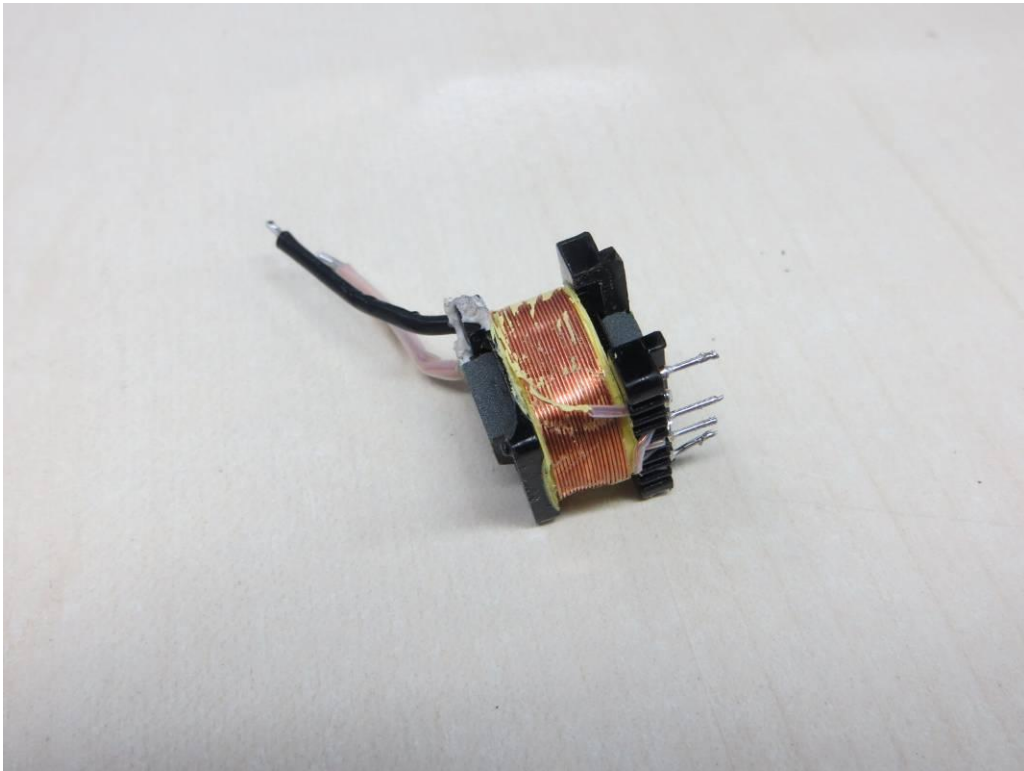


Transformer (EE22)

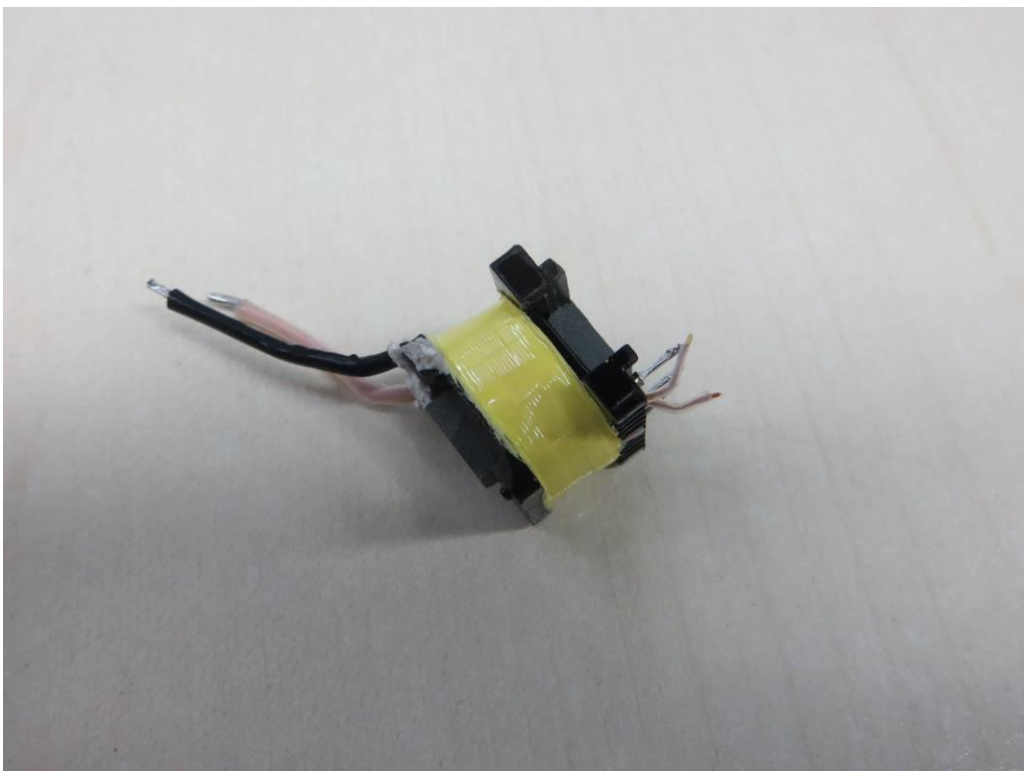


Transformer (EE22)

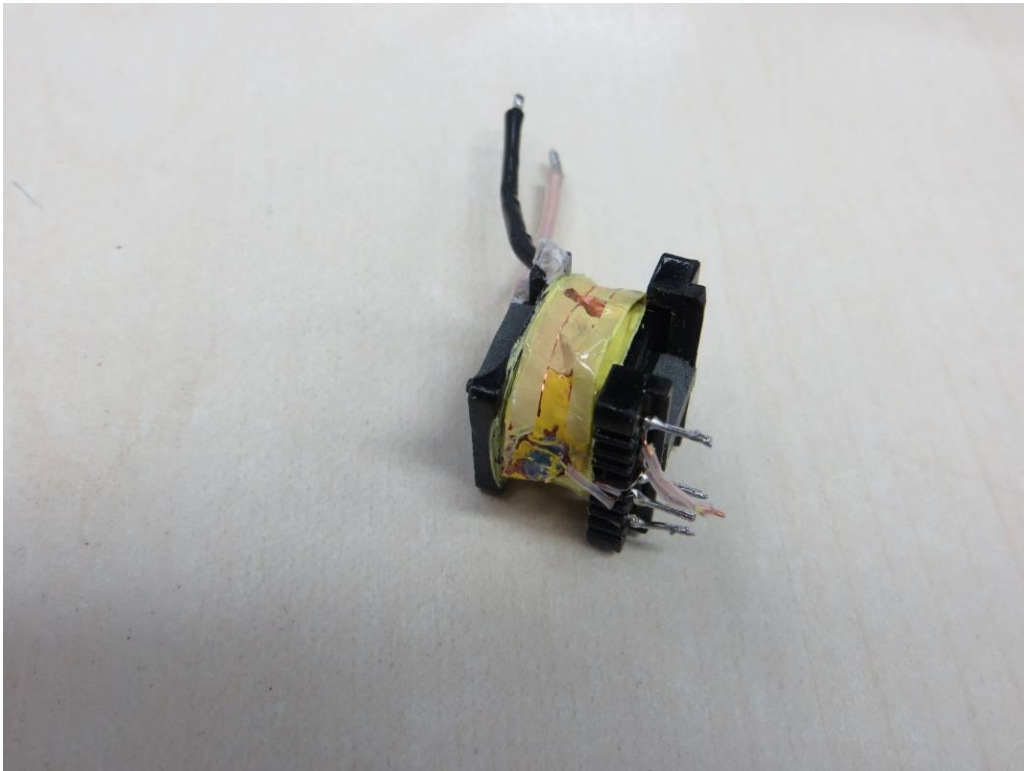


Transformer (EE22)

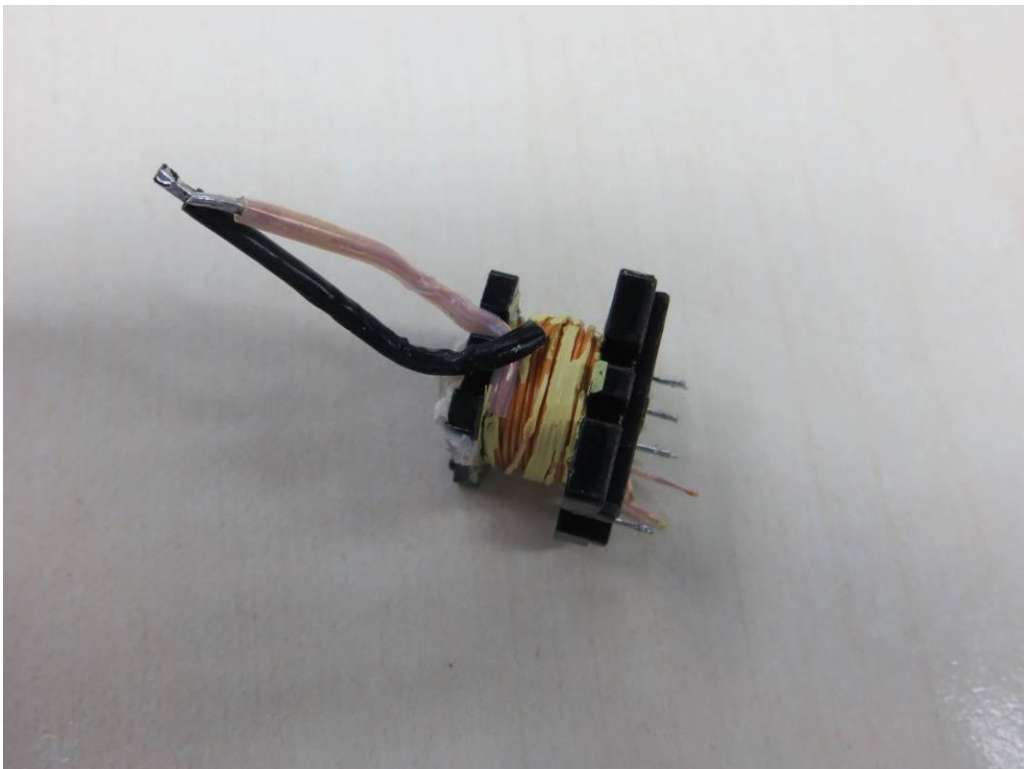


Transformer (EE22)

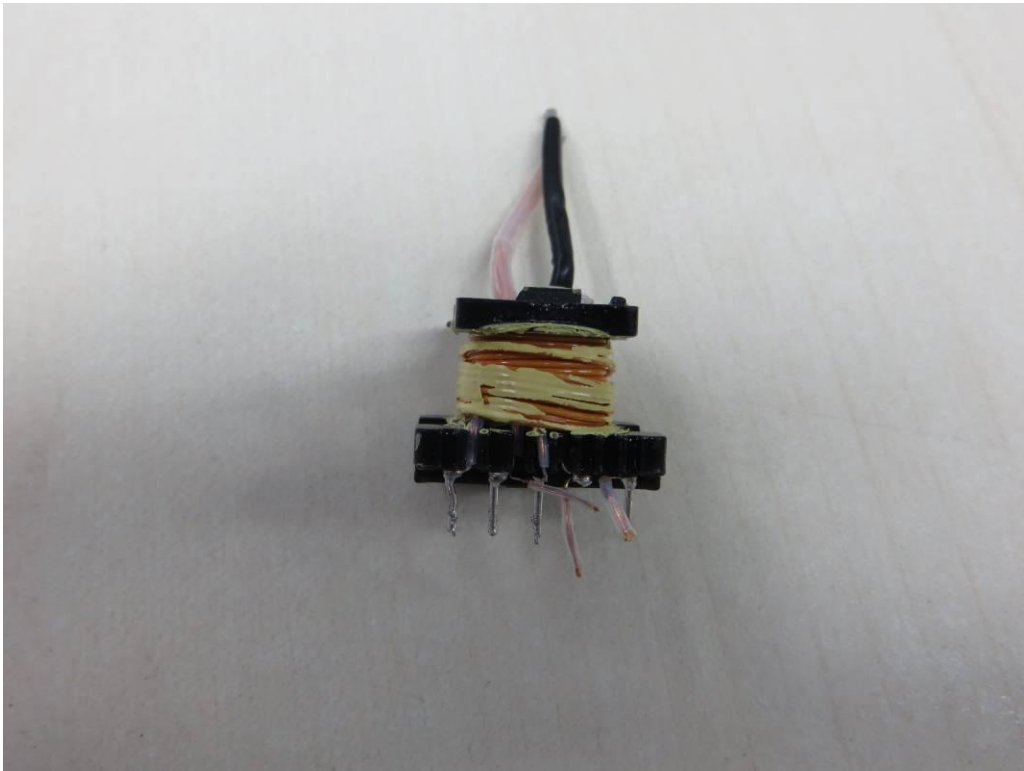


Transformer (EE22)

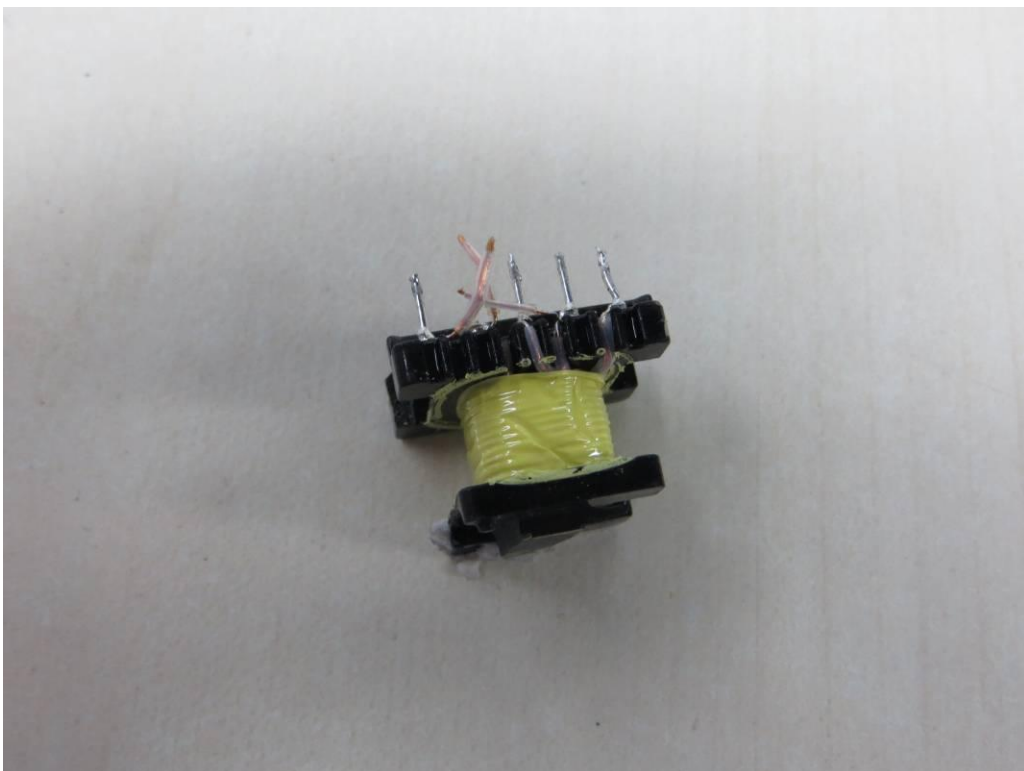


Transformer (EE22)

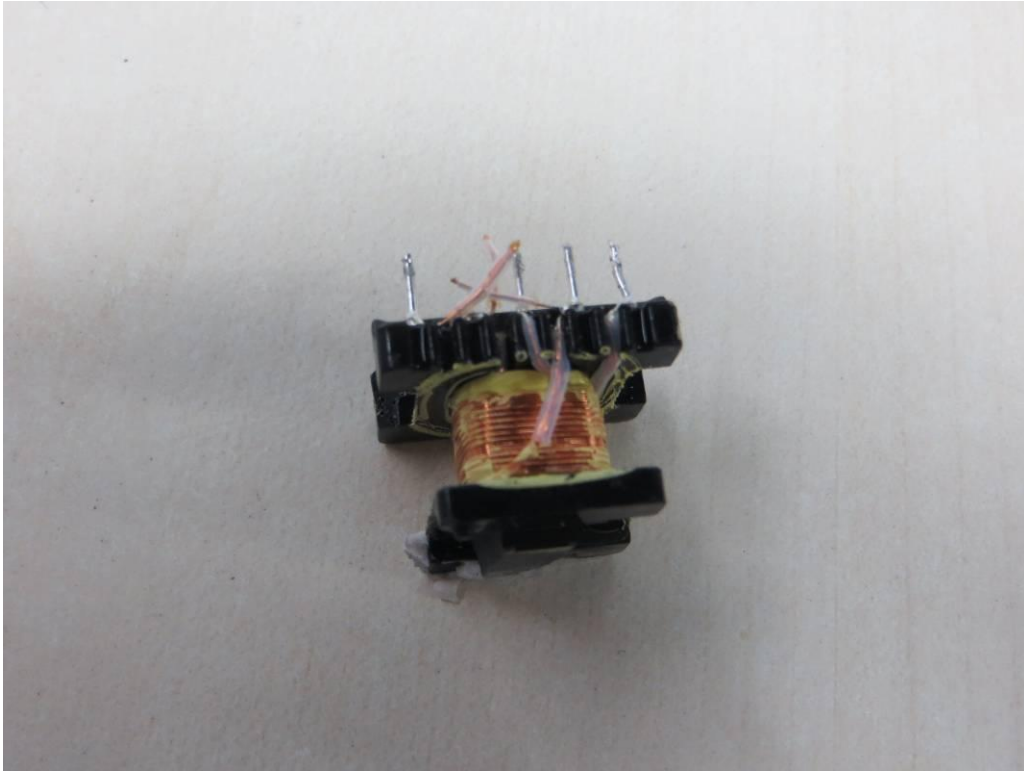


Transformer (EE22)

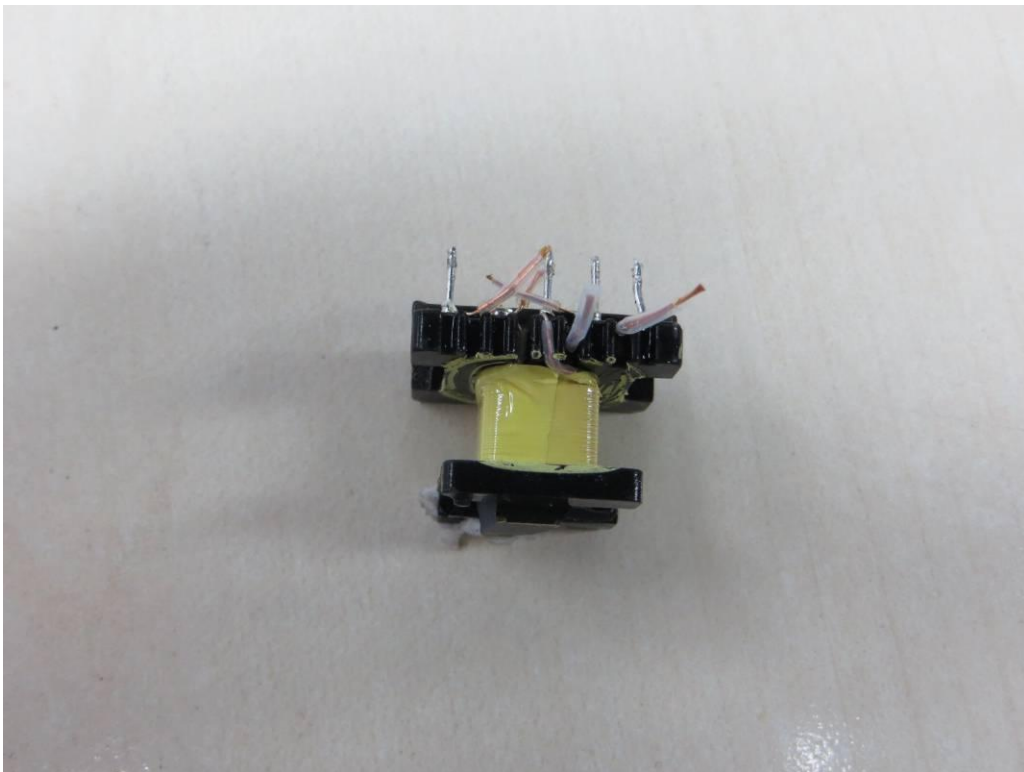

Transformer (EE22)

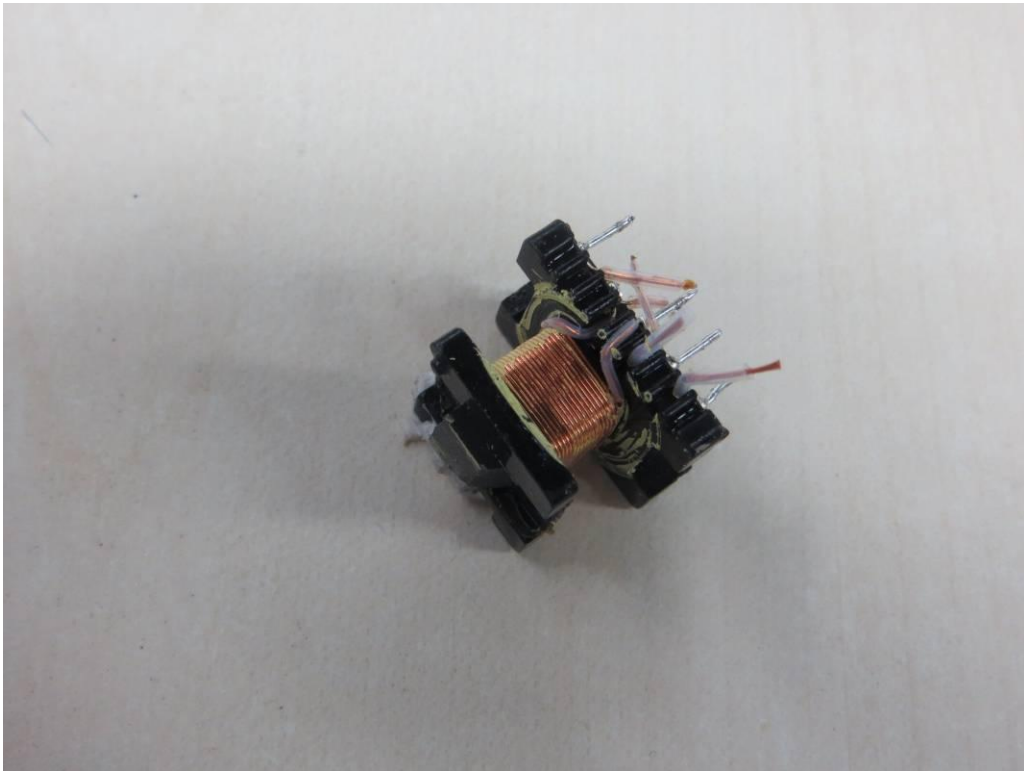

Transformer (EE22)

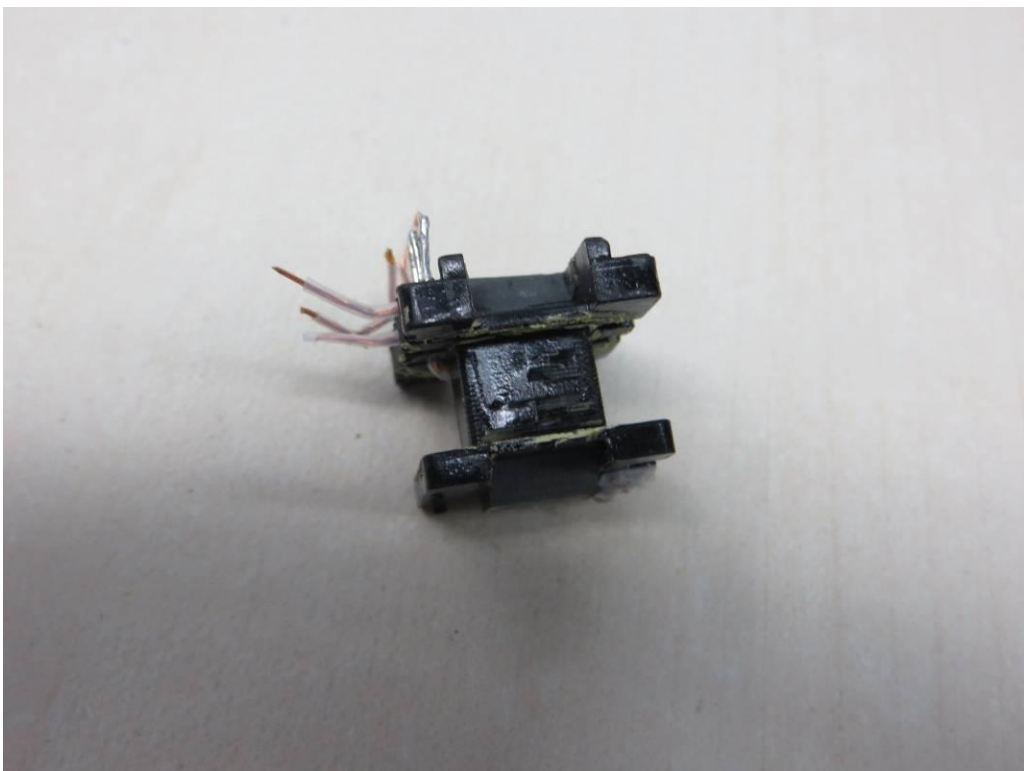


Transformer (EE16)




Transformer (EE16)




Transformer (EE16)

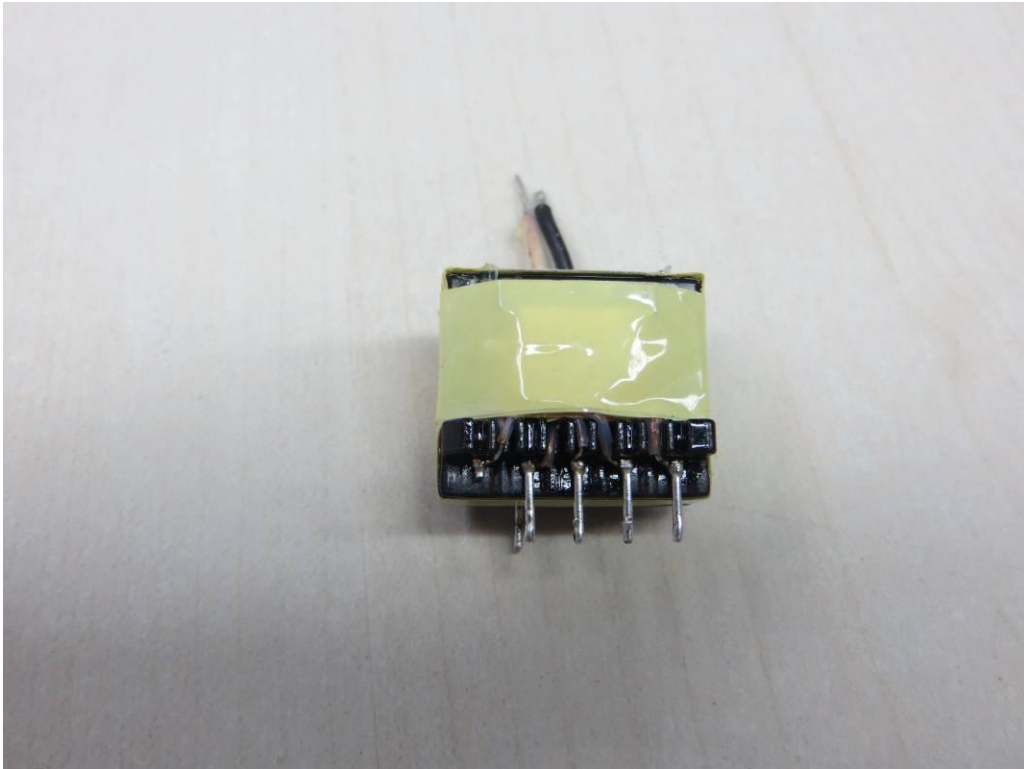


Transformer (EE16)

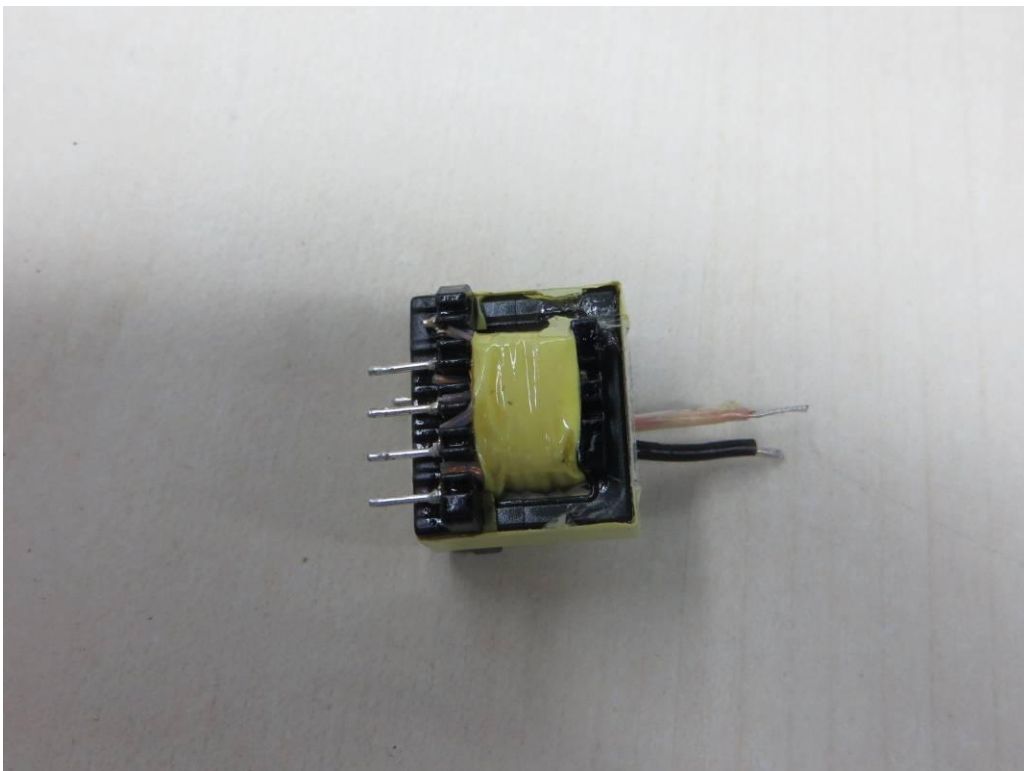


Transformer (EE16)

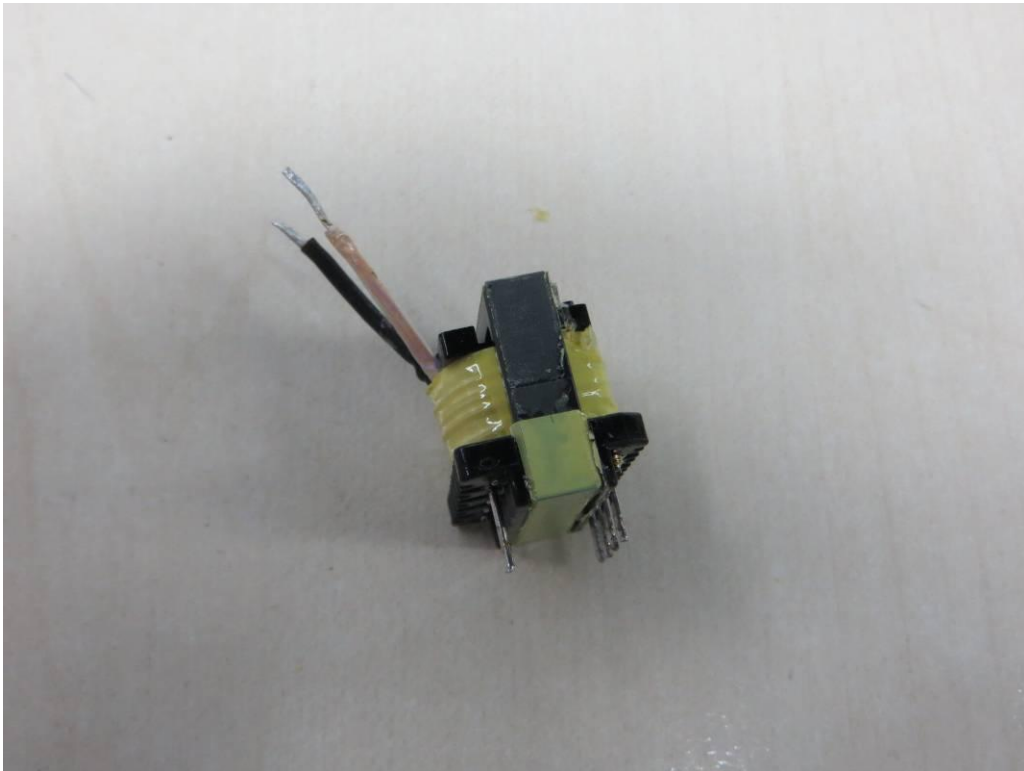


Transformer (EE16)

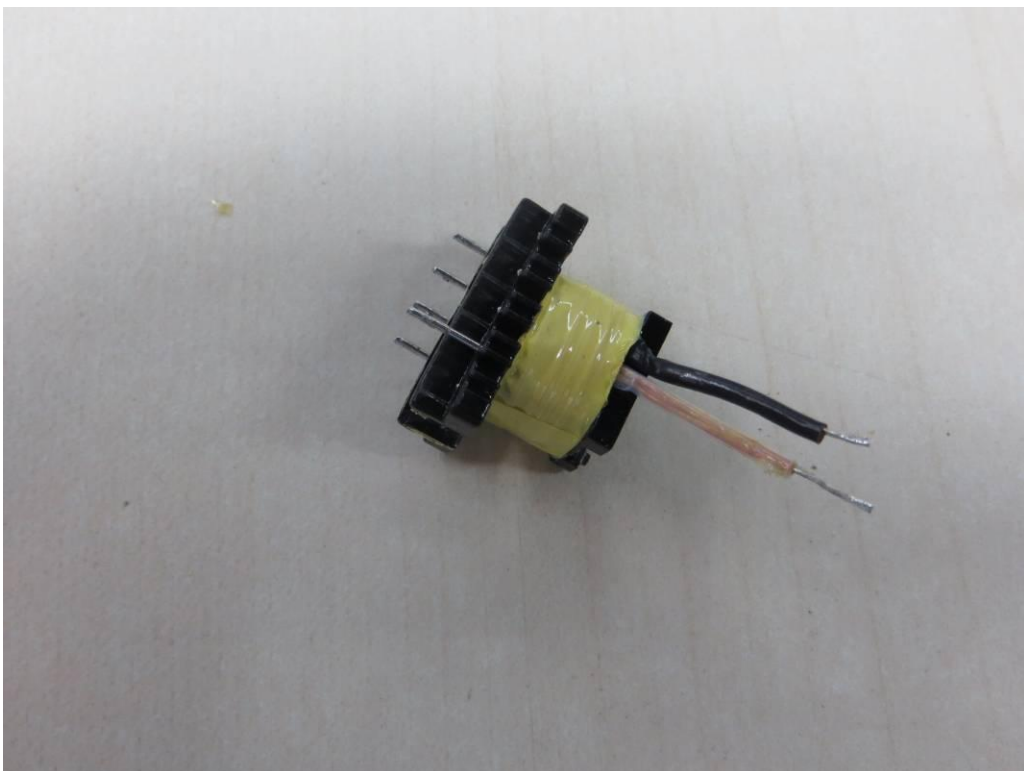


Transformer (EE16)

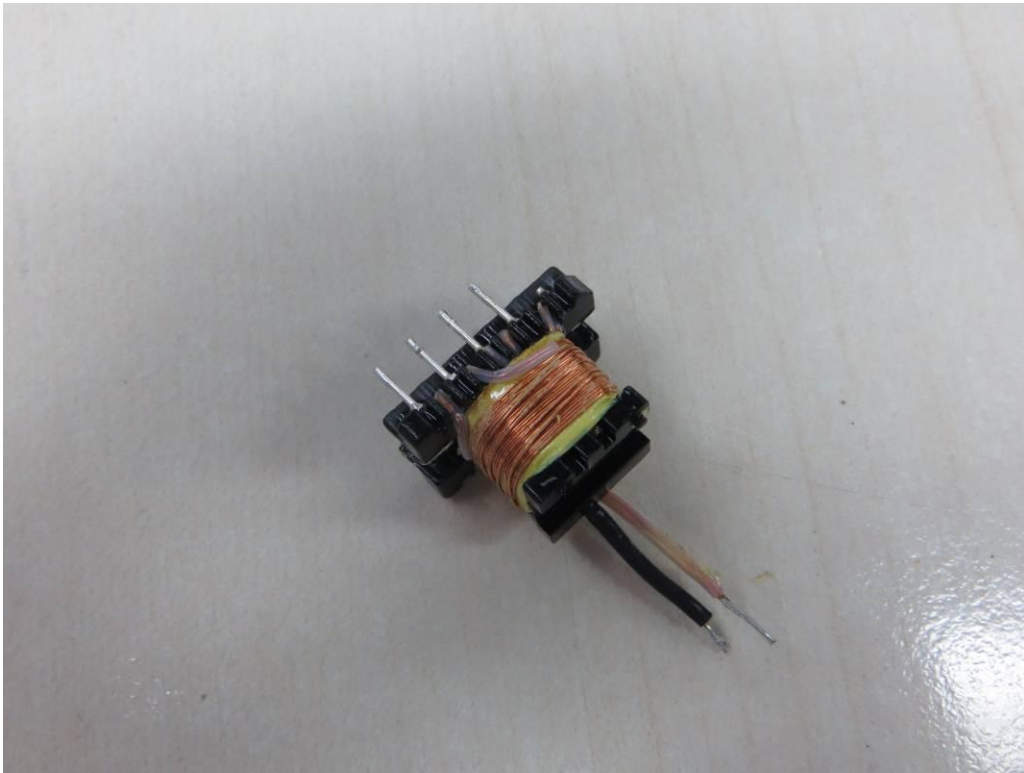


Transformer (EE16)

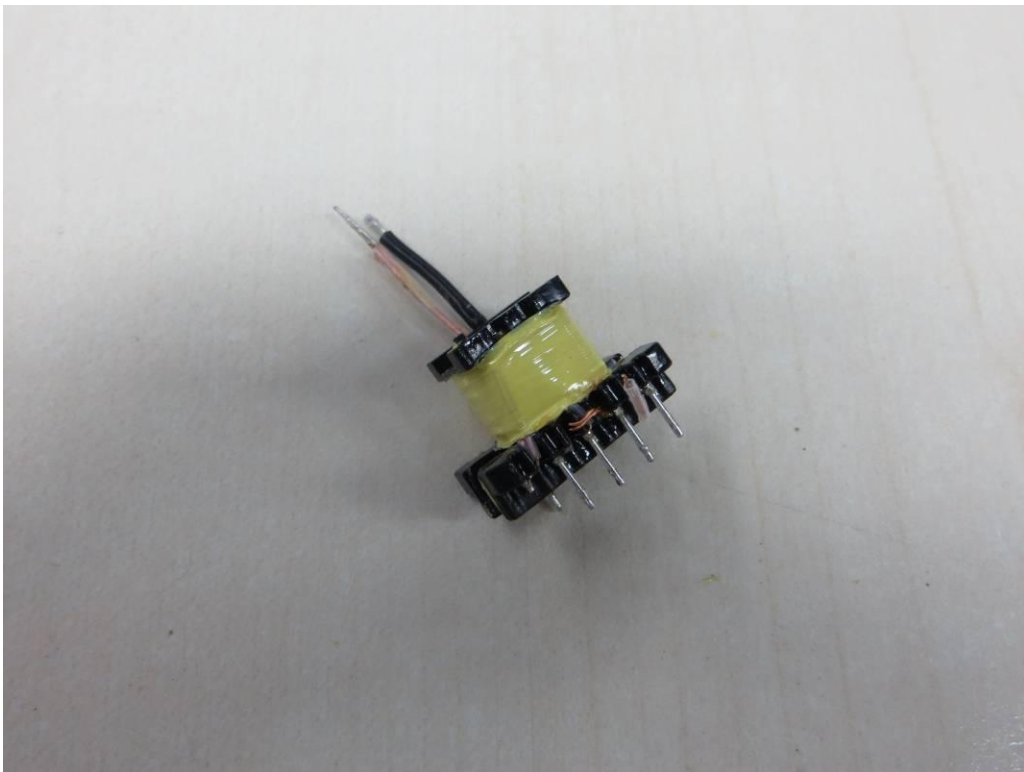


Transformer (EE16)

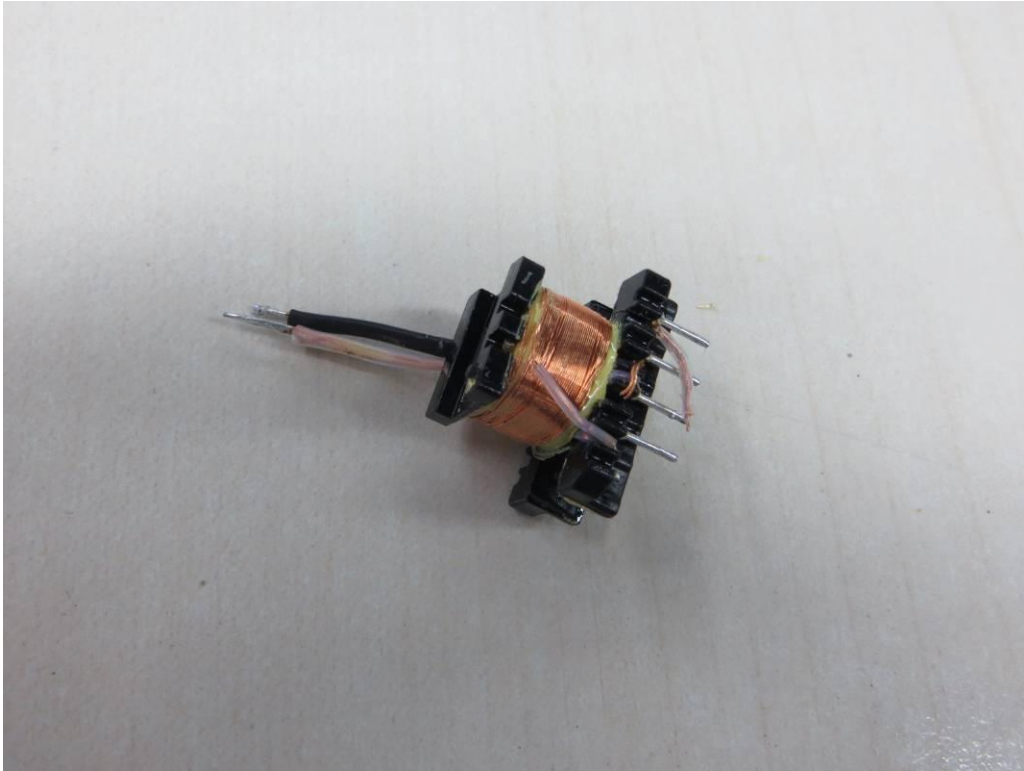


Transformer (EE16)

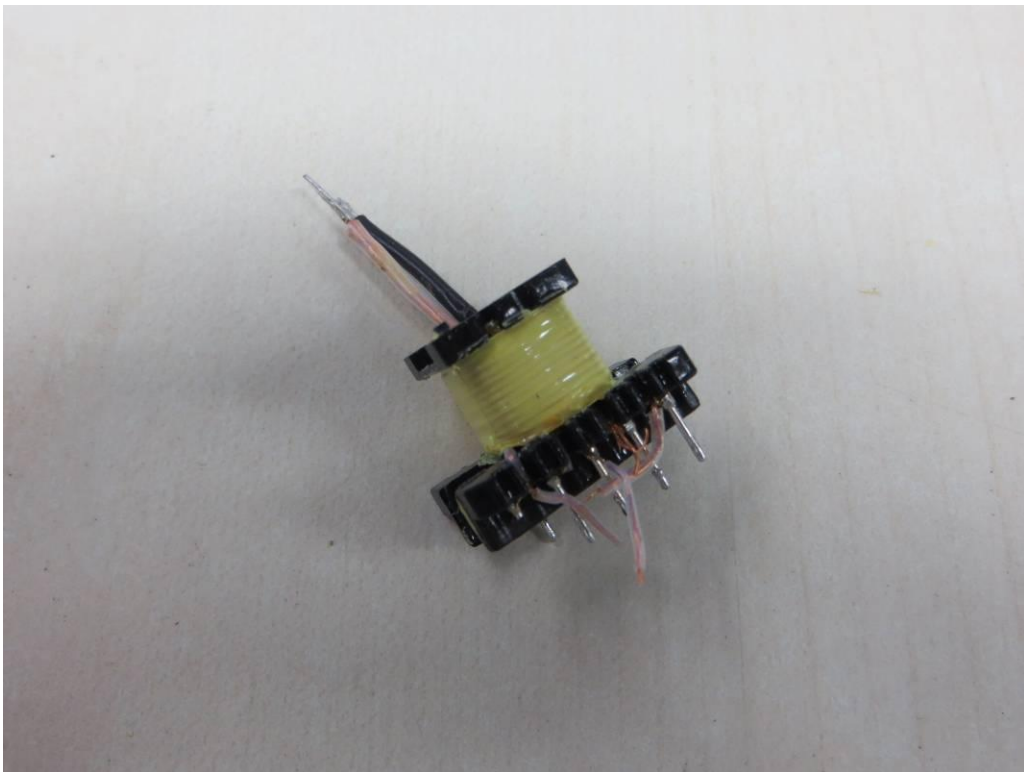


Transformer (EE16)

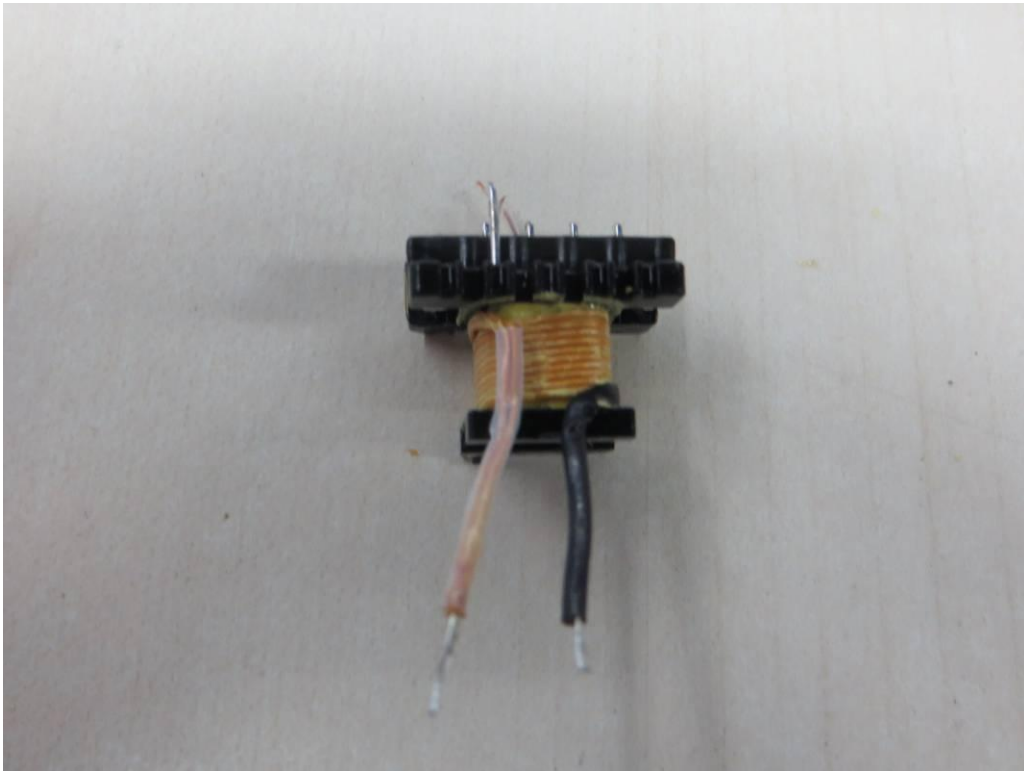


Transformer (EE16)

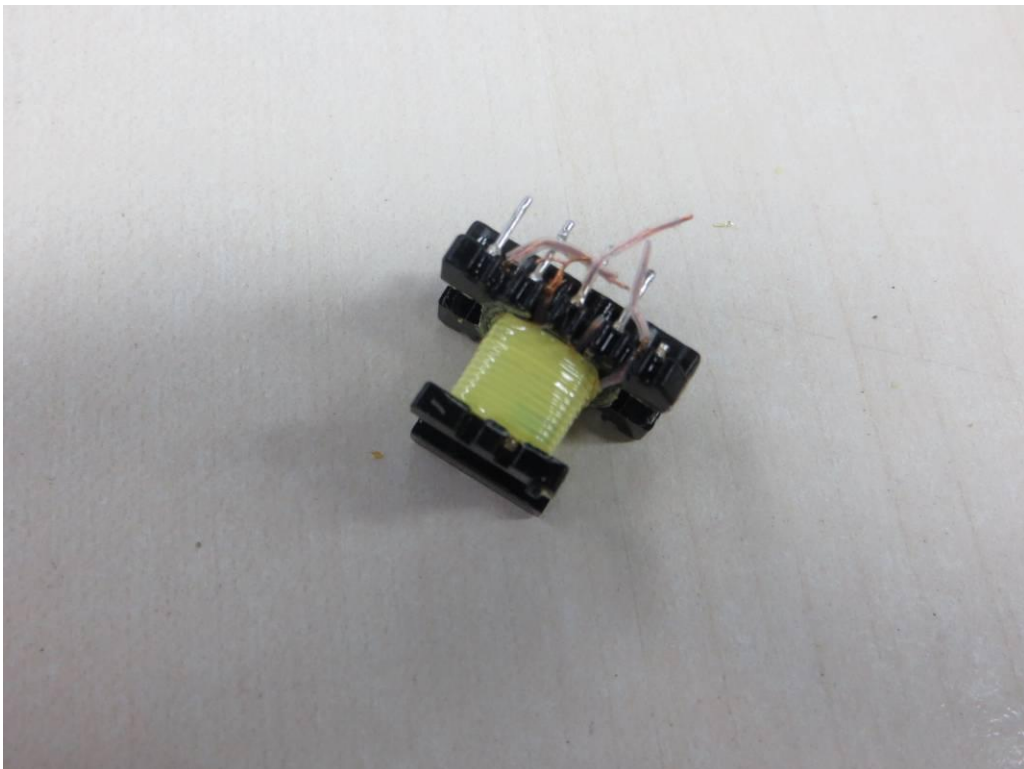

Transformer (EE16)

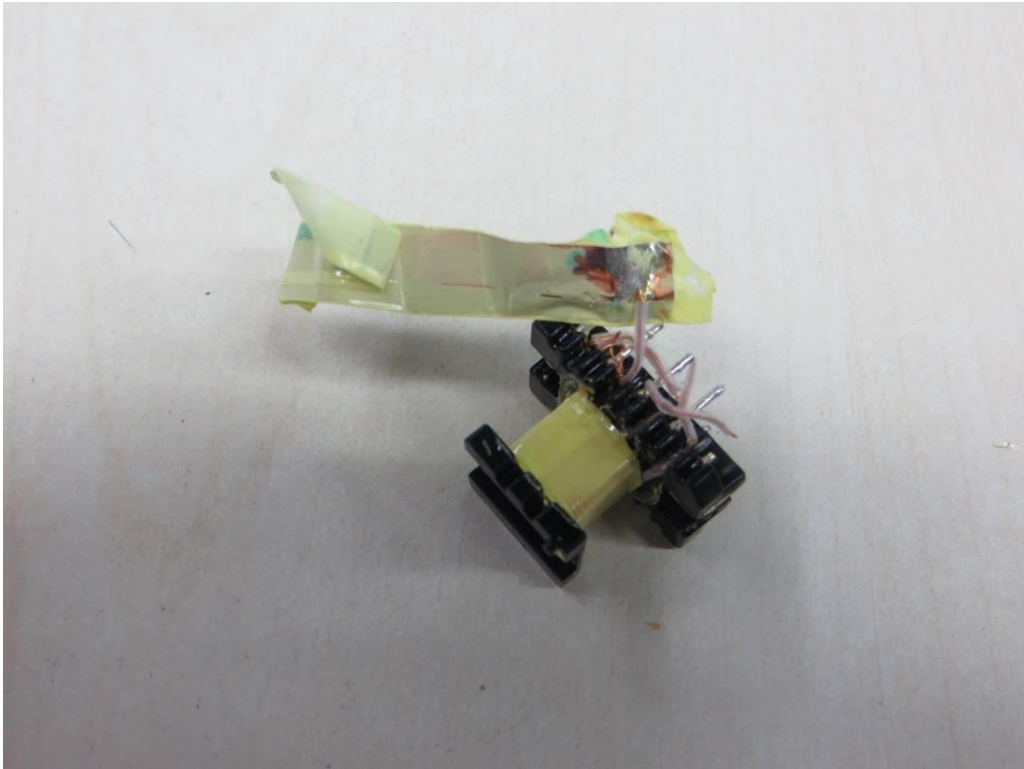

Transformer (EE16)

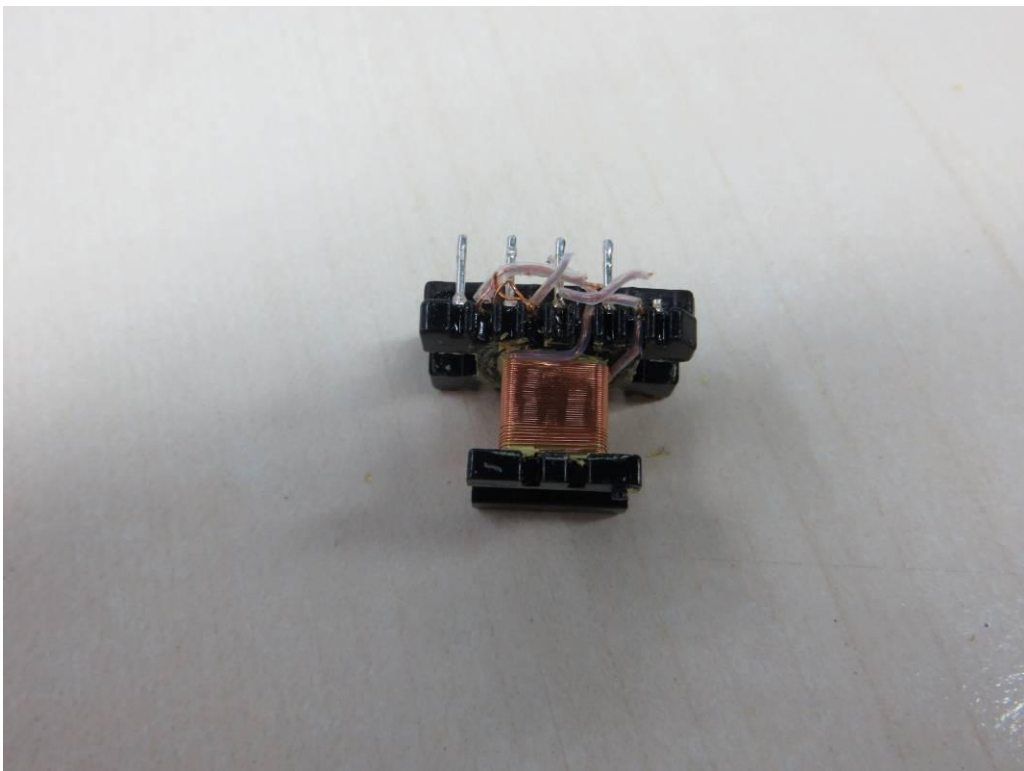

Transformer (EE16)



ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

<p align="center">ATTACHMENT TO TEST REPORT IEC 62368-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Information technology equipment – Safety –</p>			
Part 1: General requirements			
Differences according to.....: EN 62368-1:2014 including Annex ZB and Annex ZC (Extracted from the EN standard)			

EN 62368-1:2014 – CENELEC COMMON MODIFICATIONS

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
Contents	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZC (normative) A-Deviations Annex ZD (informative) IEC and CENELEC code designations for flexible cords		P
General	Delete all the “country” notes in the reference document according to the following list: 0.2.1 Note 1 Note 3 4.1.15 Note 4.7.3 Note 1 and 2 5.2.2.2 Note 5.4.2.3.2.2 & Table 13 Note c 5.4.2.3.2.4 Note 1 and 3 5.4.2.5 Note 2 5.4.5.1 Note 5.5.2.1 Note 5.5.6 Note 5.6.4.2.1 Note 2 and 3 5.7.5 Note 5.7.6.1 Note 1 and 2 10.2.1 & Table 39 Note 2, 3 and 4 10.5.3 Note 2 10.6.2.1 Note 3 F.3.3.6 Note 3		P

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.	NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.		P
4.Z1	<p>Add the following new subclause after 4.9:</p> <p>To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for pluggable equipment type B or permanently connected equipment, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for pluggable equipment type A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>	<p>Considered.</p> <p>Complied with item a) for internal fuse (F1, F2) used and for parts as described in b) reliance on the protection in the building installation.</p>	P
5.4.2.3.2.4	<p>Add the following to the end of this subclause:</p> <p>The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.</p>	No connection to external circuit.	N/A
10.2.1	<p>Add the following to c) and d) in Table 39:</p> <p>For additional requirements, see 10.5.1.</p>	No radiation.	N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
10.5.1	<p>Add the following after the first paragraph:</p> <p><i>For RS 1 compliance is checked by measurement under the following conditions:</i></p> <p><i>In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or presets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.</i></p> <p>NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.</p> <p><i>The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.</i></p> <p><i>Moreover, the measurement shall be made under fault conditions causing an increase of the high-voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.</i></p> <p><i>For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.</i></p> <p>NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.</p>		N/A
10.6.2.1	<p>Add the following paragraph to the end of the subclause:</p> <p>EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.</p>		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
10.Z1	<p>Add the following new subclause after 10.6.5.</p> <p>10.Z1 Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz</p> <p>The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz).</p> <p>For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body-mounted devices, attention is drawn to EN 50360 and EN 50566</p>		N/A
G.7.1	<p>Add the following note:</p> <p>NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p>		N/A
Bibliography	Add the notes for the standards EN references indicated		N/A

ZA	NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS	—
-----------	--	---

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
4.1.15	<p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord."</p> <p>In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p>		N/A
4.7.3	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363.</p> <p>Also see Annex G.4.2 of this annex</p>		N/A
5.2.2.2	<p>Denmark</p> <p>After the 2nd paragraph add the following:</p> <p>A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>	No high touch current measured.	N/A

ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

ZB ANNEX (normative)
SPECIAL NATIONAL CONDITIONS (EN)

Clause	Requirement + Test	Result - Remark	Verdict
5.4.11.1 and Annex G	<p>Finland and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>For separation of the telecommunication network from earth the following is applicable:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), and • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> • the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; • the additional testing shall be performed on all the test specimens as described in EN 60384-14; <p>the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14.</p> <p>in the sequence of tests as described in EN 60384-14.</p>		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.2.1	<p>Norway After the 3rd paragraph the following is added:</p> <p>Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).</p>	Considered.	P
5.5.6	<p>Finland, Norway and Sweden To the end of the subclause the following is added:</p> <p>Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.</p>	No such resistor used.	N/A
5.6.1	<p>Denmark Add to the end of the subclause:</p> <p>Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. Justification: In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p>		N/A
5.6.4.2.1	<p>Ireland and United Kingdom After the indent for pluggable equipment type A, the following is added:</p> <p>– the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.</p>		N/A
5.6.5.1	<p>Ireland and United Kingdom To the second paragraph the following is added:</p> <p>The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm² to 1,5 mm² in cross-sectional area.</p>		N/A
5.7.5	<p>Denmark To the end of the subclause the following is added:</p> <p>The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.1	<p>Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p>		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”</p> <p>Translation to Swedish:</p> <p>”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”.</p>		N/A
5.7.6.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .</p>		N/A
B.3.1 and B.4	<p>Ireland and United Kingdom</p> <p>The following is applicable:</p> <p>To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A.</p> <p>If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met</p>		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p>Justification: Heavy Current Regulations, Section 6c</p>		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C.</p> <p>Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.</p>		N/A
G.7.1	<p>United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations.</p> <p>NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>		N/A
G.7.1	<p>Ireland</p> <p>Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard</p>		N/A
G.7.2	<p>Ireland and United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>A power supply cord with a conductor of 1,25 mm² is allowed for equipment which is rated over 10 A and up to and including 13 A.</p>		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ZC	ANNEX (normative) A-DEVIATIONS (EN)		—
10.5.2	<p>Germany</p> <p>The following requirement applies:</p> <p>For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p><i>Justification:</i> German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.</p> <p>NOTE : Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de</p>	Not such equipment.	N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
F.1	<p>Italy</p> <p>The following requirements shall be fulfilled:</p> <ul style="list-style-type: none"> • The power consumption in Watts (W) shall be indicated on TV receivers and in their instruction for use (Measurement according to EN 60555-2). <p>Note/Nota <i>EN 60555-2 has since been replaced by IEC 60107-1:1997.</i></p> <ul style="list-style-type: none"> • TV receivers shall be provided with an instruction for use, schematic diagrams and adjustments procedure in Italian language. • Marking for controls and terminals shall be in Italian language. Abbreviation and international symbols are allowed provided that they are explained in the instruction for use. • The ECC manufacturers are bound to issue a conformity declaration according to the above requirements in the instruction manual. The correct statement for conformity to be written in the instruction manual, shall be: <i>Questo apparecchio è fabbricato nella CEE nel rispetto delle disposizioni del D.M. marzo 1992 ed è in particolare conforme alle prescrizioni dell'art. 1 dello stesso D.M.</i> • The first importers of TV receivers manufactured outside EEC are bound to submit the TV receivers for previous conformity certification to the Italian Post Ministry (PP.TT). The TV receivers shall have on the backcover the certification number in the following form: D.M. 26/03/1992 xxxxx/xxxxx/S or T or pT S for stereo T for Teletext pT for retrofitable teletext <p><i>Justification:</i> Ministerial Decree of 26 March 1992 : National rules for television receivers trade.</p>	Not such equipment.	N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62368-1 2 th Ed. U.S.A. NATIONAL DIFFERENCES Audio/video, information and communication technology equipment – Part 1: Safety requirements	
Differences according to	CSA/UL 62368-1:2014
Attachment Form No.	US&CA_ND_IEC623681B
Attachment Originator	UL(US)
Master Attachment	Date 2015-06
Copyright © 2015 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.	

IEC 62368-1 - US and Canadian National Differences Special National Conditions based on Regulations and Other National Differences			
1.1	All equipment is to be designed to allow installation according to the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CEC), Part I, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2. Also, for such equipment marked or otherwise identified, installation is allowed per the Standard for the Protection of Information Technology Equipment, ANSI/NFPA 75.		P
1.4	Additional requirements apply to some forms of power distribution equipment, including sub-assemblies.		P
4.1.17	For lengths exceeding 3.05 m, external interconnecting flexible cord and cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the NEC.	Should be evaluated during national approval.	N/A
	For lengths 3.05 m or less, external interconnecting flexible cord and cable assemblies that are not types specified in the NEC generally are required to have special construction features and identification markings.	Should be evaluated during national approval.	N/A
4.8	Lithium coin / button cell batteries have modified special construction and performance requirements.		N/A
5.6.3	Protective earthing conductors comply with the minimum conductor sizes in Table G.5, except as required by Table G.7ADV.1 for cord connected equipment, or Annex DVH for permanently connected equipment		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.7	Equipment intended to receive telecommunication ringing signals complies with a special touch current measurement tests.	Not such equipment	N/A
6.5.1	PS3 wiring outside a fire enclosure complies with single fault testing in B.4, or be current limited per one of the permitted methods.		N/A
Annex F (F.3.3.8)	Output terminals provided for supply of other equipment, except mains, supply are marked with a maximum rating or references to which equipment it is permitted to be connected.	Should be evaluated during national approval.	N/A
Annex G (G.7.1)	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.		N/A
Annex G (G.7.3)	Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.	Should be evaluated during national approval.	N/A
	Flexible power supply cords are required to be compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.	Should be evaluated during national approval.	N/A
Annex G (G.7.5)	Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement. Power supply cords are required to be no longer than 4.5 m in length if used in ITE Rooms.	Should be evaluated during national approval.	N/A
Annex H.2	Continuous ringing signals under normal operating conditions up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.		N/A
Annex H.4	For circuits with other than ringing signals and with voltages exceeding 42.4 V _{peak} or 60 V d.c., the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.		N/A
Annex M	Battery packs for stationary applications comply with special component requirements.	No battery.	N/A
Annex DVA (1)	Equipment intended for use in spaces used for environmental air are subjected to special flammability requirements for heat and visible smoke release.	Not such equipment or application as below.	N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	For ITE room applications, automated information storage systems with combustible media greater than 0.76 m ³ (27 cu ft) have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.		N/A
	Consumer products designed or intended primarily for children 12 years of age or younger are subject to additional requirements in accordance with U.S. & Canadian Regulations.		N/A
	Baby monitors additionally comply with ASTM F2951, Consumer Safety Specification for Baby Monitors.		N/A
Annex DVA (5.6.3)	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.		P
Annex DVA (6.3)	The maximum quantity of flammable liquid stored in equipment complies with NFPA 30.		N/A
Annex DVA (6.4.8)	For ITE room applications, enclosures with combustible material measuring greater than 0.9 m ² (10 sq ft) or a single dimension greater than 1.8 m (6 ft) have a flame spread rating of 50 or less. For equipment with the same dimensions for other applications, an external surface that is not a fire enclosure requires a min. flammability classification of V-1.		P
Annex DVA (10.3.1)	Equipment with lasers meets the U.S. Code of Federal Regulations 21 CFR 1040 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (10.5.1)	Equipment that produces ionizing radiation complies with the U.S. Code of Federal Regulations, 21 CFR 1020 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (F.3.3.3)	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings. Additional considerations apply for voltage ratings that exceed the attachment cap rating or are lower than the "Normal Operating Condition" in Table 2 of CAN/CSA C22.2 No. 235."		N/A
Annex DVA (F.3.3.5)	Equipment identified for ITE (computer) room installation is marked with the rated current		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVA (G.1)	Vertically-mounted disconnect switches and circuit breakers have the "on" position indicated by the handle in the up position		N/A
Annex DVA (G.3.4)	Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.		N/A
Annex DVA (G.4.2)	Equipment with isolated ground (earthing) receptacles complies with NEC 250.146(D) and CEC 10-112 and 10-906(8).		N/A
Annex DVA (G.4.3)	Where a fuse is used to provide Class 2 or Class 3 current limiting, it is not operator-accessible unless it is non- interchangeable.	No such fuse provided.	N/A
Annex DVA (G.5.3)	Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection.		N/A
Annex DVA (G.5.4)	Motor control devices are required for cord-connected equipment with a mains-connected motor if the equipment is rated more than 12 A, or if the equipment has a nominal voltage rating greater than 120 V, or if the motor is rated more than 1/3 hp (locked rotor current over 43 A).		N/A
Annex DVA (Annex M)	For ITE room applications, equipment with battery systems capable of supplying 750 VA for five minutes have a battery disconnect means that may be connected to the ITE room remote power-off circuit.		N/A
Annex DVA (Q)	Wiring terminals intended to supply Class 2 outputs according to the NEC or CEC Part 1 are marked with the voltage rating and "Class 2" or equivalent; marking is located adjacent to the terminals and visible during wiring.		N/A
Annex DVB (1)	Additional requirements apply for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities.		N/A
Annex DVC (1)	Additional requirements apply for equipment intended for mounting under kitchen cabinets.		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVE (4.1.1)	Some equipment, components, sub-assemblies and materials associated with the risk of fire, electric shock, or personal injury have component or material ratings in accordance with the applicable national (U.S. and Canadian) component or material requirements. Components required to comply include: appliance couplers, attachment plugs, battery back-up systems, battery packs, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), power supply cords, direct plug-in equipment, electrochemical capacitor modules (energy storage modules with ultra-capacitors), enclosures (outdoor), flexible cords and cables, fuses (branch circuit), ground-fault current interrupters, interconnecting cables, data storage equipment, printed wiring, protectors for communications circuits, receptacles, surge protective devices, vehicle battery adapters, wire connectors, and wire and cables.	See Table 4.1.2.	P
Annex DVH	Equipment for permanent connection to the mains supply is subjected to additional requirements.		N/A
Annex DVH (DVH.1)	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains are in accordance with the NEC/CEC.	Inlet for detachable power cord.	P
Annex DVH (DVH.3.2)	Terminals for permanent wiring, including protective earthing terminals, are suitable for U.S./Canadian wire gauge sizes, rated 125 percent of the equipment rating, and are specially marked when specified.		N/A
Annex DVH (DVH.3.2)	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm ²).		N/A
Annex DVH (DVH.4)	Permanently connected equipment is required to have a suitable wiring compartment and wire bending space.		N/A
Annex DVH (DVH 5.5)	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, complies with special earthing, wiring, marking and installation instruction requirements.		N/A

ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVI (6.7)	Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses.		N/A
Annex DVJ (10.6.1)	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.		N/A

Appendix no. 3 Equipment combined with two-pole plug (Class II)

Supplementary tests on plug portion according to EN 50075:1990

Clause	Requirement + Test	Result - Remark	Verdict
1.	Dimensions (Clause 7 of EN 50075)		
	Plugs shall comply with standard size. (Standard sheet 1)		P
2.	Protection Against Electric Shock (Clause 8 of EN 50075)		
2.1	Live parts of plugs with the exception of the bare metal parts of the pins, shall not be accessible. (Clause 8.1 of EN 50075)		P
2.2	It shall not be possible to make connection between a pin of a plug and a live socket contact of a socket-outlet while the other pin is an accessible. (Clause 8.2 of EN 50075)		P
2.3	External parts of plugs, with the exception of pins, shall be of insulating material. (Clause 8.3 of EN 50075)		P
3.	Construction (Clause 9 of EN 50075)		
3.1	The plug cannot be opened by hand or by using a general purpose tool. (Clause 9.1 of EN 50075)		P
3.2	Pins of plugs shall be solid and shall have adequate mechanical strength. (Clause 9.3 of EN 50075)		P
3.3	Pins of plugs shall be locked against rotation and adequately fixed into the body of the plug. (Clause 9.4 of EN 50075)		P
3.4	Plugs shall be provided with soldered, crimped or equally effective permanent connection. (Clause 9.5 of EN 50075)		P
3.5	Plug shall be shaped in such a way and made of such a material that they can easily be withdrawn by hand from a socket-outlet. (by gripping the product enclosure, Clause 9.6 of EN 50075)		P
4.	Resistance to Humidity (Clause 10 of EN 50075)		N/A
	The integrated pins were tested together with the product. (See test report for product)		

Clause	Requirement + Test	Result - Remark	Verdict
5.	Insulation Resistance and Electric Strength (Clause 11 of EN 50075) (See test report for product)		N/A
6.	Mechanical Strength (Clause 13 of EN 50075) Plug shall have adequate mechanical strength to withstand the stresses imposed during use.		P
6.1	The plugs are pressed between two flat surfaces with a force of 150N for 5min. 15min after removal of the force, the plug shall not show such deformation as would result in undue alteration of the dimensions which ensure safety. (Clause 13.1 of EN 50075)		P
6.2	The plug is tested in a tumbling barrel. (Clause 13.2 of EN 50075, fall number is shown in test report for product) After the test, the plug shall show no damage within the meaning of this standard, in particular: --- no part shall become detached or loosened. --- the pin shall not turn when a torque of 0.4Nm is applied. Note: A section of the pin is square constructed for preventing the rotation.		P
6.3	The pins is held in a suitable clamp in such a position that the straight part of a steel wire (D=1+-0.02mm, U-shaped) rests on the plug pin. The plug is caused to move backwards and forwards, so that the wire rubs along the pin. The number of the movements is 20 000, and the rate of the operation is 25 movements per min. (Clause 13.3 of EN 50075) After the test, the pin show no damage which may effect safety or impair the further use of the plug, in particular, the insulating sleeve shall not have punctured or rucked up.		P
6.4	A pull force of 40N is applied for 60s on each pin in turn in the direction of the longitudinal axis of the pin. The pull is applied 60min after the plug has been placed in a heating cabinet of 70°C. After the plug cooling down to ambient temperature, any pin shall not have displaced in the body of the plug more than 1mm. (Clause 13.4 of EN 50075)		P

Clause	Requirement + Test	Result - Remark	Verdict
7.	Resistance to Heat and to Ageing (Clause 14 of EN 50075)		P
8.	Current-carrying Parts and Connections (Clause 15 of EN 50075)		
8.1	Connection, electrical and mechanical, shall withstand the mechanical stresses occurring in normal use, and electrical connections shall be designed that contact pressure is not transmitted through insulating material. (Clause 15.1 & 15.2 of EN 50075)		P
8.2	Current-carrying parts shall be of copper or an alloy containing at least 58% of copper. (Clause 15.3 of EN 50075)		P
9.	Creepage Distance, Clearances, and Distances Through Insulation (Clause 16 of EN 50075)		P
10.	Resistance of Insulating Material to Abnormal Heat and to fire (Clause 17 of EN 50075)		P


Appendix no. 4 Dimension Checking for Two-pin plug according to EN50075

	<p style="text-align: center;">DIMENSIONS</p> <p style="text-align: center;">Checked by means of measurement according to EN50075 Standard sheet 1 (see appendix no.5)</p>	P
--	---	---

Position	Requirement (mm)	Measured (mm)	Verdict
1	25.6 – 26.6	25.84	P
2	13 – 14.4	13.98	P
3	45°	45°	P
4	R5 – 6	R5.4	P
5	34.6 – 36	35.09	P
6	18-19.2 in the plane of the engagement face	18.15	P
	17-18 at the ends of the pins	17.55	P
7	4min	-	N/A
8	φ3.8max	φ3.42	P
9	10-11	10.05	P
10	18.5 – 19.5	19.12	P
11	φ3.94 - φ4.06	φ3.98	P
	Dimensions of position 1, 2 and 3 shall not be exceeded within a distance of 18mm from the engagement face of the plug	19.15	P
	The edges of the metal parts shall be either chamfered or rounded off	Rounded off	P

Appendix no. 5

EN50075: 1990 Standard sheet 1

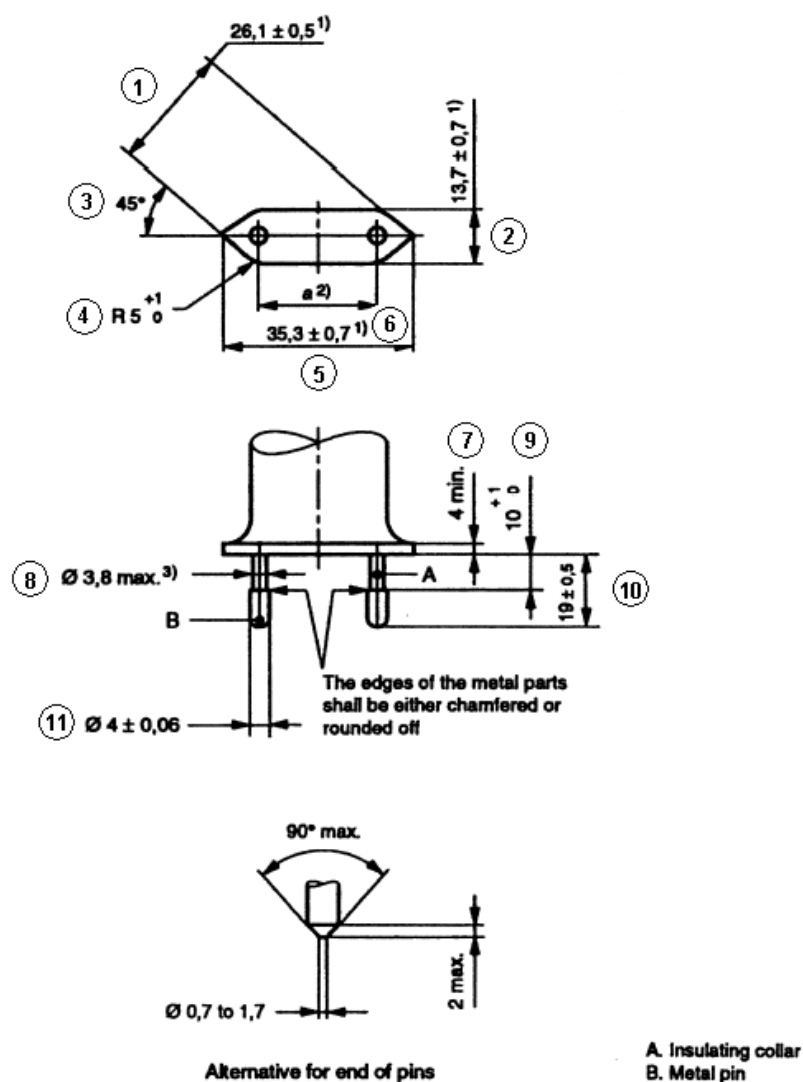

Dimensions in millimetres

¹⁾ These dimensions shall not be exceeded within a distance of 18 mm from the engagement face of the plug.

²⁾ Dimension a is:

18 mm to 19,2 mm in the plane of the engagement face;

17 mm to 18 mm at the ends of the pins.

³⁾ This dimension may be increased to 4 mm within a distance of 4 mm from the engagement face of the plug.

Pin ends shall be rounded, or conical as shown in detail sketch.

The sketches are not intended to govern design except as regards the dimensions shown.

Appendix 6: Photo for plug portion according to EN 50075:1990



APPENDIX NO.7: MECHANICAL DURABILITY TEST FOR NON-STANDARD INTERCHANGEABLE PLUG ADAPTERS ACCORDING IEC 61984: 2008

IEC 61984: 2008										
Clause	Requirement + Test	Result - Remark	Verdict							
6.14.1	MECHANICAL ENDURANCE (COC AND CBC)		P							
	A connector, either COC or CBC, shall meet the mechanical operations without load as specified in the DS or in the manufacturer's specification (preferred numbers of operating cycles are given in Table 4a).	100 cycles	P							
7.3.9	MECHANICAL OPERATION		P							
	The object of this test is to assess the mechanical operational endurance of a connector either CBC or COC in the normal operational mode without electrical load.		P							
	The test shall be carried out according to test 9a of IEC 60512, under the following conditions, unless otherwise specified.		P							
	Test conditions:		P							
	The specimens shall be engaged and disengaged by means of a device simulating normal operating conditions.		P							
	The preparation and mounting of the specimen shall be as in normal use.		P							
	The type and cross sectional area of the cable/wire bundle to be used shall be specified by the manufacturer or by the DS.		P							
	The number of operating cycles shall be specified by the manufacturer or by the DS.		P							
	Preferred values are indicated in Table 4a.	100 cycles	P							
	The speed of insertion and withdrawal shall be approximately 0,01 m/s with a rest in the unmated position of approximately 30 s.		P							
Table 4	Mechanical and electrical durability		P							
	Table 4a – Operating cycles – Preferred values		P							
	<table><tr><td>Operating cycles - Preferred values</td></tr><tr><td>10</td></tr><tr><td>50</td></tr><tr><td>100</td></tr><tr><td>500</td></tr><tr><td>1 000</td></tr><tr><td>5 000</td></tr></table>	Operating cycles - Preferred values	10	50	100	500	1 000	5 000	100 cycles	P
Operating cycles - Preferred values										
10										
50										
100										
500										
1 000										
5 000										