



# Power over Ethernet Consortium

## Clause 33 PD Conformance Test Suite v 1.6 Report

---

UNH-IOL — 121 Technology Drive, Suite 2 — Durham, NH 03824 — +1-603- 862-0090  
Consortium Manager: Gerard Nadeau — [grn@iol.unh.edu](mailto:grn@iol.unh.edu) — +1-603-862-0166

---

David Rakovsky  
Globtek, Inc  
186 Veterans Dr  
Northvale, NJ 07647

31-Jul-2006  
Report Rev. 1.0

Enclosed are the results from the Clause 33 PD Conformance testing performed on:

Device Under Test (DUT):	Globtek, Inc. GT-91080-XXXX PoE Splitter
Hardware Version:	Not Available
Software Version:	Not Applicable
Magnetics:	Not Available
Miscellaneous:	24V Output, 1000 ohm load attached

The test suite referenced in this report is available at the UNH-IOL website:

[ftp://ftp.iol.unh.edu/pub/ethernet/test\\_suites/CL33\\_PD/PD\\_Test\\_Suite\\_v1.6.pdf](ftp://ftp.iol.unh.edu/pub/ethernet/test_suites/CL33_PD/PD_Test_Suite_v1.6.pdf)

**There were no issues uncovered during PD Conformance Testing.**

Testing Completed  
07/25/2006

A handwritten signature in black ink that reads "Matthew F. Borowski".

Matthew Borowski  
[mfn6@iol.unh.edu](mailto:mfn6@iol.unh.edu)

Review Completed  
07/31/2006

A handwritten signature in black ink that reads "Zachary Clifton".

Zachary Clifton  
[zclifton@iol.unh.edu](mailto:zclifton@iol.unh.edu)

## Digital Signature Information

This document was created using an Adobe digital signature. A digital signature helps to ensure the authenticity of the document, but only in this digital format. For information on how to verify this document's integrity proceed to the following site:

<http://www.iol.unh.edu/certifyDoc>

If the document status still indicates "Validity of author NOT confirmed", then please contact the UNH-IOL to confirm the document's authenticity. To further validate the certificate integrity, Adobe 6.0 should report the following fingerprint information:

MD5 Fingerprint: A569 F807 031D B1EC E509 4110 95E3 5362  
SHA-1 Fingerprint: F007 7D91 2FAA A22C A3D9 F93F 05AC 09DB E219 84B2

## Result Key


The following table contains possible results and their meanings:

Result	Interpretation
<b>PASS</b>	The Device Under Test (DUT) was observed to exhibit conformant behavior.
<b>PASS with Comments</b>	The DUT was observed to exhibit conformant behavior however an additional explanation of the situation is included, such as due to time limitations only a portion of the testing was performed.
<b>FAIL</b>	The DUT was observed to exhibit non-conformant behavior.
<b>Warning</b>	The DUT was observed to exhibit behavior that is not recommended.
<b>Informative</b>	Results are for informative purposes only and are not judged on a pass or fail basis.
<b>Refer to Comments</b>	From the observations, a valid pass or fail could not be determined. An additional explanation of the situation is included.
<b>Not Applicable</b>	The DUT does not support the technology required to perform these tests.
<b>Not Available</b>	Due to testing station or time limitations, the tests could not be performed.
<b>Borderline</b>	The observed values of the specified parameters are valid at one extreme, and invalid at the other.
<b>Not Tested</b>	Not tested due to the time constraints of the test period.


## Test Setup

Testing Equipment	
Testing Software	UNH-IOL PDGUI v2.3
Real-time DSO	TEKTRONIX, TDS 3014
Current Probe and Amplifier	TEKTRONIX, TPS305 and TPSA300
Digital Multimeter	HEWLETT-PACKARD, 34401A
Digital Power Supply	AGILENT TECHNOLOGIES, E3641A

### Testing Configuration A

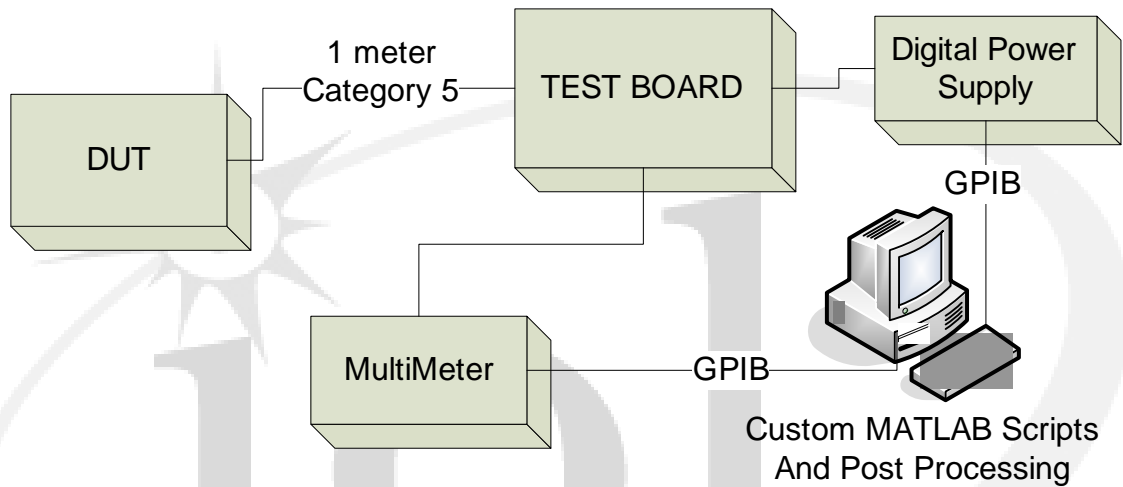

### Testing Configuration B

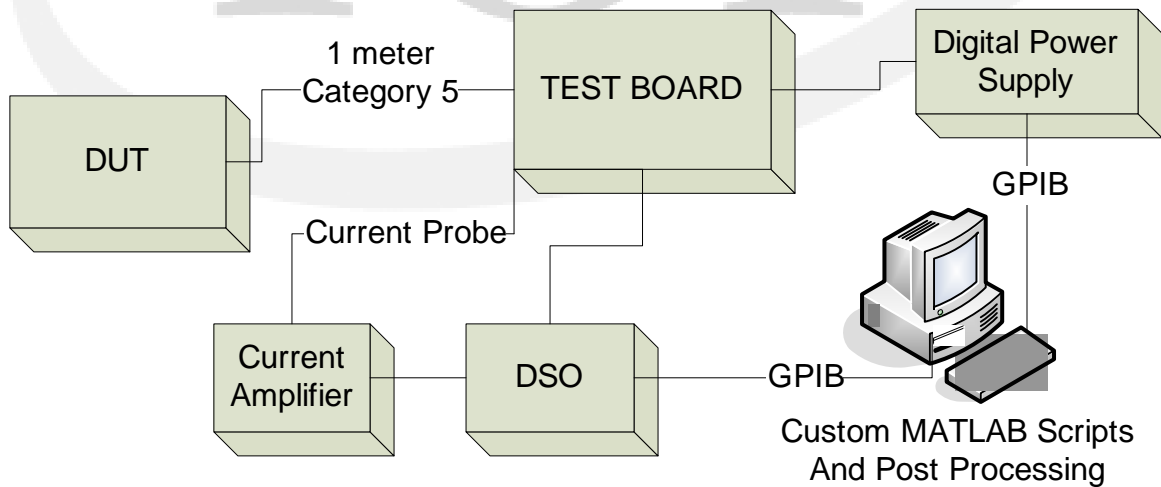

## GROUP 1: PARAMETRIC TESTING

Test # and Label	Part(s)	Result(s)
33.1.1 – PD Source Power	<b>a</b>	<b>PASS</b>
<b>Expected Results and Procedural Comments</b>		
Using Testing Configuration A, verify that the DUT does not source power on its PI for either mode A and B.  a. The DUT should not source power on its PI at any time.		
<b>Comments on Test Results</b>		
a. The DUT was observed to not source power on either of its two sets of PI conductors.		

Test # and Label	Part(s)	Result(s)
33.1.2 – PD Pinout	<b>a</b>	<b>PASS</b>
<b>Expected Results and Procedural Comments</b>		
Using Testing Configuration A, verify that the DUT is insensitive to the polarity of the power supply and is able to operate in either Mode A or Mode B.  a. In all cases the DUT should accept the applied power and become operational once the requested power has been supplied.		
<b>Comments on Test Results</b>		
a. The DUT became operational when power was applied to Mode A (MDI and MDI-X), or Mode B (MDI and MDI-X).		

Test # and Label	Part(s)	Result(s)	
33.1.3 Valid PD Detection Signature	a	PASS	
	b	PASS	
Expected Results and Procedural Comments			
<p>Purpose: To verify that the DUT presents a valid detection signature while it is requesting power on the PI.</p> <p>a. The observed signature resistance should between 23.75 and 26.25 kΩ (inclusive).</p> <p>b. The DUT should have either a voltage offset less than or equal to 1.9 V, or a current offset less than or equal to 10 μA.</p>			
Comments on Test Results			
Part a.	Mode A	Mode B	Units
V-I Slope Minimum	25.050	25.044	KΩ
V-I Slope Average	25.356	25.357	KΩ
V-I Slope Maximum	25.720	25.735	KΩ
Part b.			
Voltage Offset	0.975	0.968	V
Current Offset	Not Applicable	Not Applicable	μA
NOTE: Failures indicated in red, enclosed by parenthesis			

Test # and Label	Part(s)	Result(s)	
33.1.4 – Non Valid PD Detection Signature	a	PASS	
Expected Results and Procedural Comments			
<p>Purpose: To verify that the DUT presents a non-valid detection signature while it is not requesting power, or once powered, at the PI of the non-powered pairs.</p> <p>a. The PD should have a non-valid input resistance less than 12 kΩ or greater than 45 kΩ..</p>			
Comments on Test Results			
Part a.	Mode A	Mode B	Units
V-I Slope Minimum	7002	6105	KΩ
V-I Slope Maximum	29063	36356	KΩ
NOTE: Failures indicated in red, enclosed by parenthesis			

Test # and Label		Part(s)	Result(s)	
33.1.5 – PD Classification Signature		a	PASS	
Expected Results and Procedural Comments				
<p>Using Testing Configuration A, verify that the DUT provides proper classification signature current draw.</p> <p>a. The current drawn by the DUT should fall within the range (inclusive) specified for each supported class.</p>				
Comments on Test Results				
Part a.		Mode A	Mode B	Units
Class 0	Avg. Signature Current	0.582	0.582	mA
Class 1	Avg. Signature Current	Not Applicable	Not Applicable	mA
Class 2	Avg. Signature Current	Not Applicable	Not Applicable	mA
Class 3	Avg. Signature Current	Not Applicable	Not Applicable	mA
Class 4	Avg. Signature Current	Not Applicable	Not Applicable	mA
NOTE: Failures indicated in red, enclosed by parenthesis				

Test # and Label		Part(s)	Result(s)	
33.1.6 – Input Average Power		a	PASS	
Expected Results and Procedural Comments				
Using Testing Configuration B, verify that the DUT provides proper information about its maximum power requirements, and that those requirements fall within the acceptable range.				
a. The power drawn by the DUT should fall within the range (inclusive) specified for each supported class.				
Comments on Test Results				
Part a.		Mode A	Mode B	Units
Class 0	Power Draw at 44 V	1.449	1.437	W
	Power Draw at 57 V	1.453	1.431	W
Class 1	Power Draw at 44 V	Not Applicable	Not Applicable	W
	Power Draw at 57 V	Not Applicable	Not Applicable	W
Class 2	Power Draw at 44 V	Not Applicable	Not Applicable	W
	Power Draw at 57 V	Not Applicable	Not Applicable	W
Class 3	Power Draw at 44 V	Not Applicable	Not Applicable	W
	Power Draw at 57 V	Not Applicable	Not Applicable	W
Class 4	Power Draw at 44 V	Not Applicable	Not Applicable	W
	Power Draw at 57 V	Not Applicable	Not Applicable	W
NOTE: Failures indicated in red, enclosed by parenthesis				

Test # and Label	Part(s)	Result(s)
33.1.7 – Backfeed Voltage	<b>a</b>	<b>PASS</b>
<b>Expected Results and Procedural Comments</b>		
Using Testing Configuration A, verify that when the DUT is powered, the voltage on the opposite mode, across a 100kΩ resistor is less than $V_{bid}$ , or 2.8V.		
a. The voltage across the 100kΩ should be less than 2.8V		
<b>Comments on Test Results</b>		
a. The voltage across the 100kΩ resistor was observed to be 0V.		

Test # and Label	Part(s)	Result(s)
33.1.8 – PD Power Supply Turn On / Off	<b>a</b>	<b>PASS</b>
	<b>b</b>	<b>PASS</b>
	<b>c</b>	<b>PASS</b>
<b>Expected Results and Procedural Comments</b>		
Using Testing Configuration A, verify that the DUT will turn on its power supply once power has been applied to the PI, will remain on over the entire port voltage range, and turn off its power supply once power is removed.		
a. The DUT should turn on its power supply at a port voltage less than 42 V.		
b. Once turned on, the DUT's power supply should remain on for port voltages over the range of 44 V to 57V.		
c. The DUT should turn off its power supply at a port voltage greater than 30V and less than 36 V.		
<b>Comments on Test Results</b>		
a. Mode A - The DUT's power supply was observed to properly turn on at a port voltage of 39 V. Mode B - The DUT's power supply was observed to properly turn on at a port voltage of 39 V.		
b. The DUT remained operational throughout the entire range of port voltages.		
c. Mode A - The DUT's power supply was observed to turn off at a port voltage of 33 V. Mode B - The DUT's power supply was observed to turn off at a port voltage of 33 V.		

Test # and Label	Part(s)	Result(s)
33.1.9 – Ripple and Noise Operation	<b>a</b>	<b>PASS</b>
<b>Expected Results and Procedural Comments</b>		
Using Testing Configuration A, verify that the DUT will remain operational when ripple and noise is present on the PI.		
a. The DUT should remain operational when ripple and noise is injected on the PI.		
<b>Comments on Test Results</b>		
a. The DUT was observed to remain operational when ripple and noise is injected on the PI.		

Clause 33 PD Conformance Test Suite v1.6 Report  
DUT: Globtek, Inc GT-91080-XXXX 24V Output, With Load

Test # and Label	Part(s)	Result(s)	
33.1.10 – PD Maintain Power Signature	a	PASS	
	b	PASS	
Expected Results and Procedural Comments			
Using Testing Configuration A, verify that the DUT provides a valid Maintain Power Signature or MPS over the entire range of operation voltages.			
a. The DUTs input current must be equal to or above 10mA.			
b. The DUTs input resistance must be less than or equal to 26.25Ω.			
Comments on Test Results			
Part a.	Mode A	Mode B	Units
Minimum Input Current	24.749	24.775	mA
Part b.			
Maximum Input Resistance	2.306	2.303	KΩ
NOTE: Failures indicated in red, enclosed by parenthesis			

Test # and Label	Part(s)	Result(s)
33.1.11 – Classification Stability Time	<b>a</b>	<b>PASS</b>
	<b>b</b>	<b>PASS</b>
<b>Expected Results and Procedural Comments</b>		
<p>Using Testing Configuration B, verify that the classification current draw of the DUT is valid before T<sub>class</sub> and for all times after.</p> <p>a. The classification current draw should be in the valid range for specified class before 5ms. b. The classification current draw should be in the valid range for specified class for all times after 5ms.</p>		
<b>Comments on Test Results</b>		
<p>a. The DUTs classification current draw is valid before 5ms. b. The DUTs classification current is valid for all times after 5ms.</p>		



## **Annex A: Figures**

Attached are plots of the data taken for signature resistance and classification current draws. These data points were obtained using digital multimeter and a digital power supply. The data was downloaded and post processed using custom Matlab scripts.



Figure 1: Mode A Detection Signature Characteristics  
V-I Curve

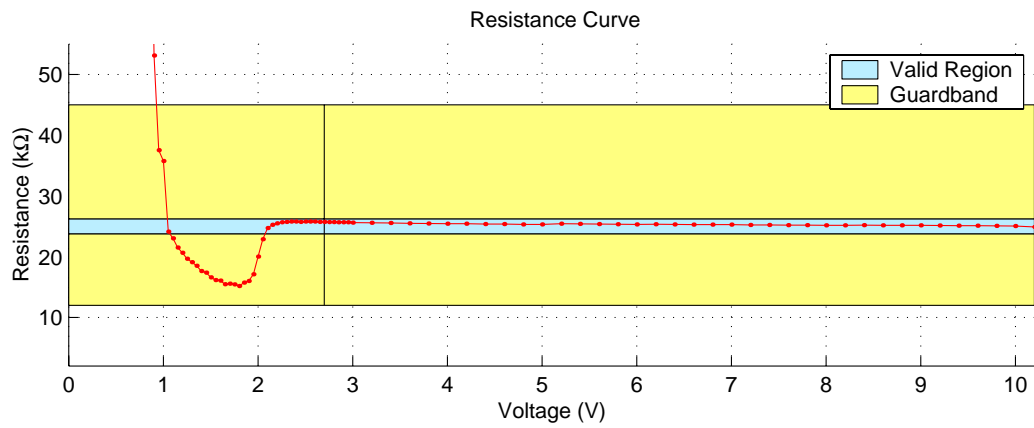
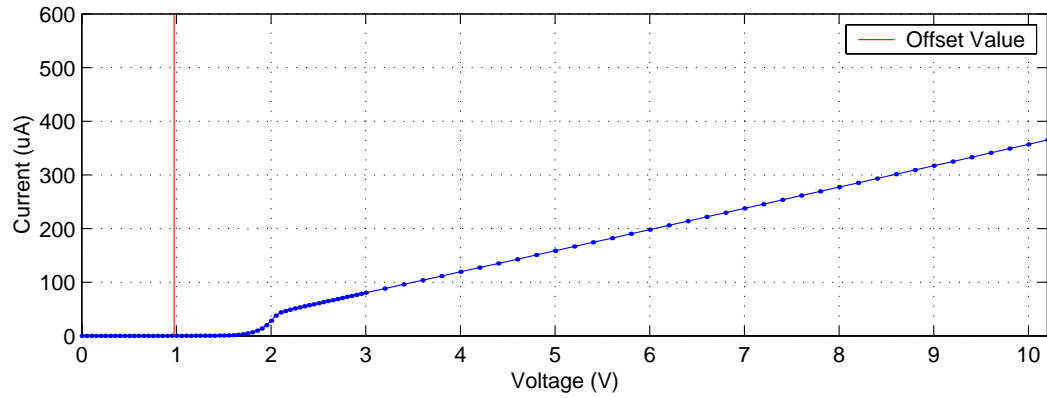


Figure 2: Mode B Detection Signature Characteristics  
V-I Curve

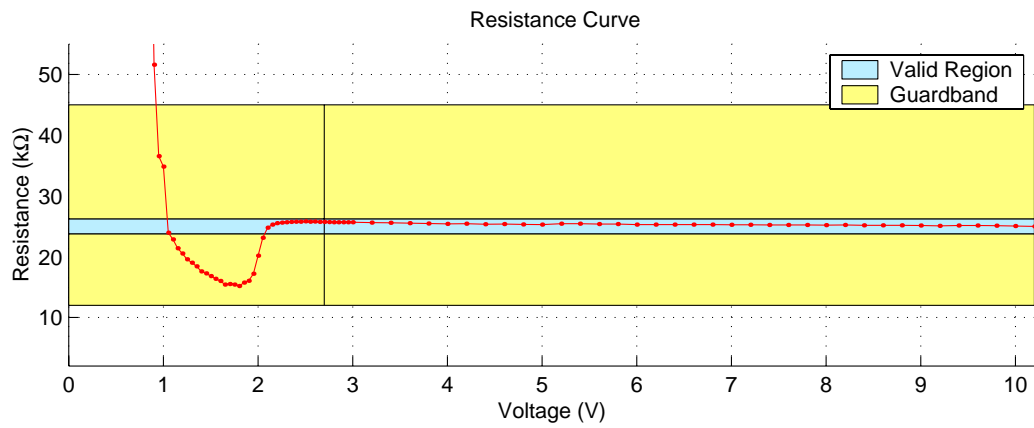
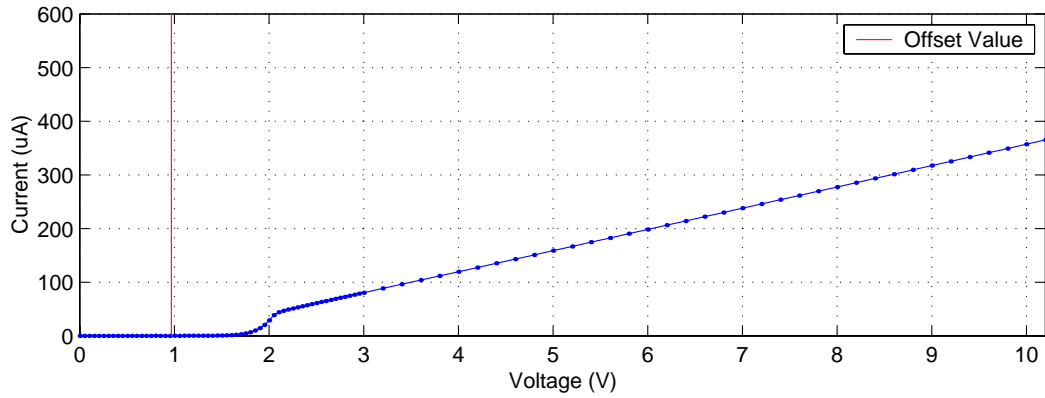


Figure 3: Mode A Classification Signature Characteristics – Class 0

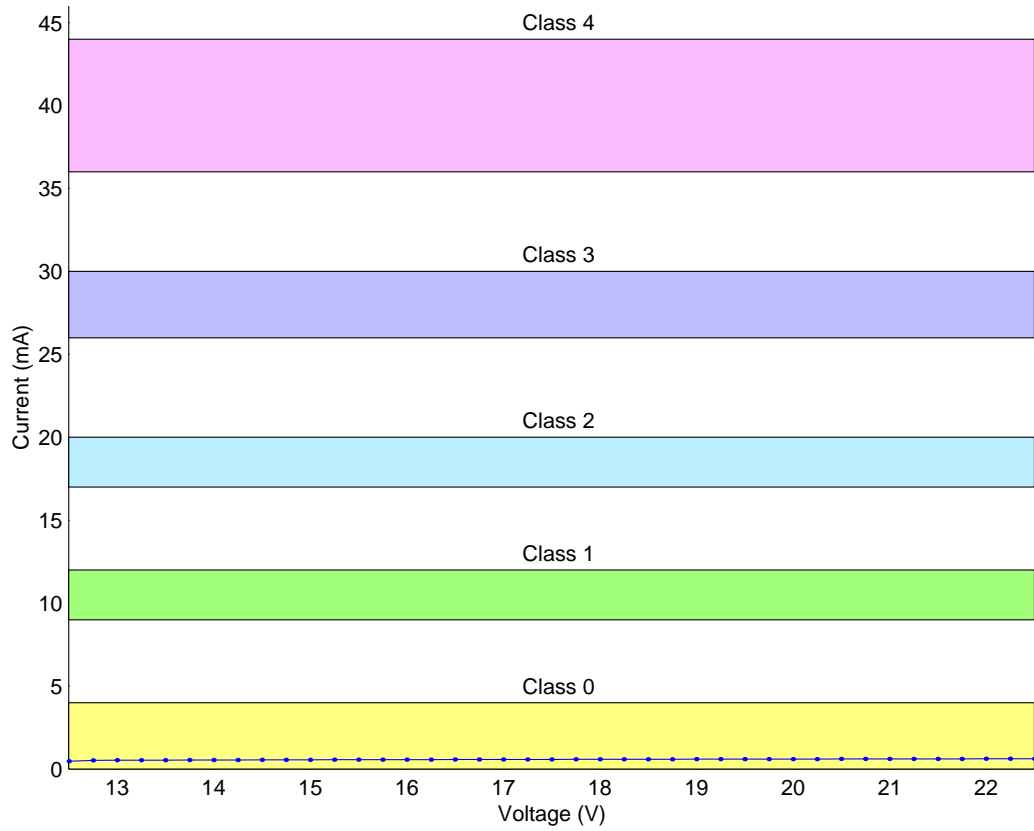


Figure 4: Mode B Classification Signature Characteristics – Class 0

