


Data#: 15 File#: 60503217CB.EMI

Date: 2006-05-03 Time: 22:42:02

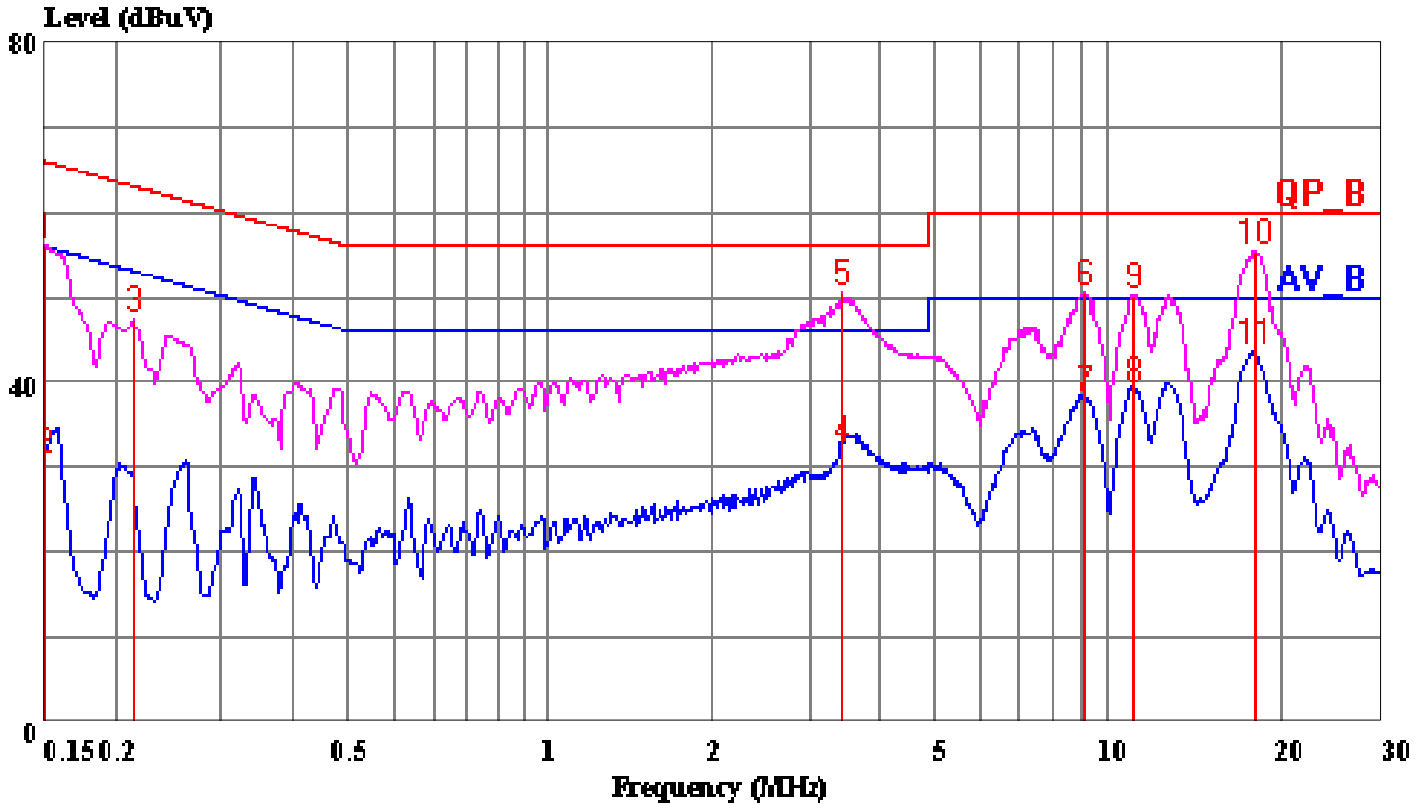

(CCS Conduction B)

Trace: 11 12

Ref Trace:


Condition: LINE
Report No. : 60503217
Test Engr. : ALEX PAN
Company : 聚力群興業有限公司
EUT : GT-21148-3012-T3
Test Config : EUT / ALL PERIPHERALS
Type of Test: CNS 13438 CLASS B
Mode of Op. : FULL RATED LOAD MODE / WORST

Page: 1

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	46.13	9.97	56.10	66.00	-9.90	Peak
2	0.150	20.74	9.97	30.71	56.00	-25.29	Average
3	0.213	37.40	9.94	47.34	63.10	-15.76	Peak
4	3.547	22.17	9.94	32.11	46.00	-13.89	Average
5	3.547	40.55	9.94	50.49	56.00	-5.51	Peak
6	9.253	40.31	10.13	50.44	60.00	-9.56	Peak
7	9.253	28.09	10.13	38.22	50.00	-11.78	Average
8	11.257	29.02	10.19	39.21	50.00	-10.79	Average
9	11.257	40.17	10.19	50.36	60.00	-9.64	Peak
10	18.135	45.17	10.32	55.49	60.00	-4.51	Peak
11	18.135	33.43	10.32	43.75	50.00	-6.25	Average

Data#: 38 File#: 60503217CB.EMI

Date: 2006-05-05 Time: 13:15:17

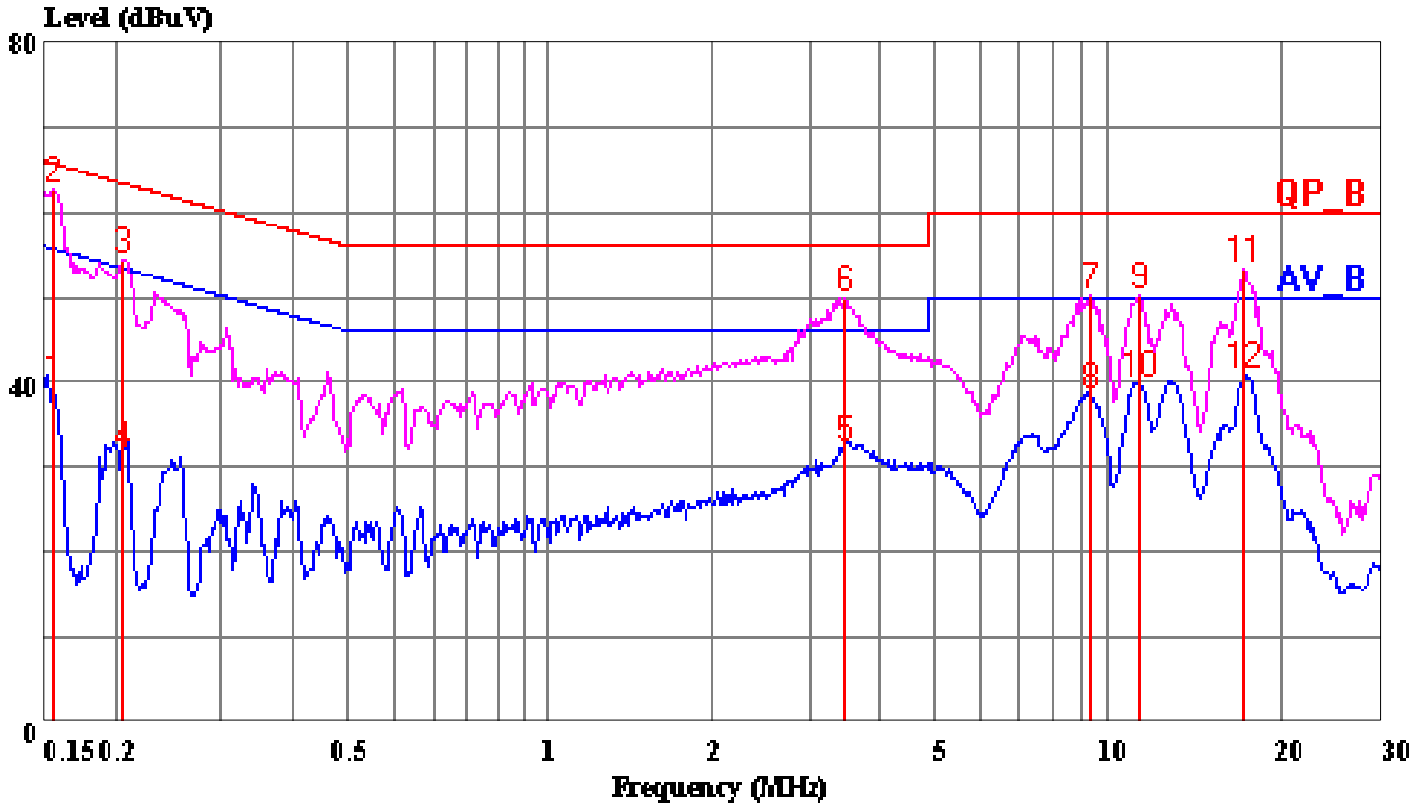

(CCS Conduction B)

Trace: 2 1

Ref Trace:

Condition: NEUTRAL
Report No. : 60503217
Test Engr. : ALEX PAN
Company : 聚力群興業有限公司
EUT : GT-21148-3012-T3
Test Config : EUT / ALL PERIPHERALS
Type of Test: CNS 13438 CLASS B
Mode of Op. : FULL RATED LOAD MODE / WORST

Page: 1

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.155	29.41	10.00	39.42	55.74	-16.32	Average
2	0.155	52.58	10.00	62.59	65.74	-3.15	Peak
3	0.204	44.58	9.95	54.53	63.45	-8.92	Peak
4	0.204	21.59	9.95	31.54	53.45	-21.91	Average
5	3.565	22.14	9.94	32.08	46.00	-13.92	Average
6	3.565	39.95	9.94	49.89	56.00	-6.11	Peak
7	9.451	40.00	10.14	50.14	60.00	-9.86	Peak
8	9.451	28.15	10.14	38.29	50.00	-11.71	Average
9	11.438	39.85	10.20	50.05	60.00	-9.95	Peak
10	11.438	29.70	10.20	39.90	50.00	-10.10	Average
11	17.383	42.88	10.36	53.24	60.00	-6.76	Peak
12	17.383	30.60	10.36	40.96	50.00	-9.04	Average

