



Test Report issued under the responsibility of:



TEST REPORT
IEC 62368-1
Audio/video, information and communication technology equipment
Part 1: Safety requirements

Report Number.....: T223-0212/21
Date of issue.....: 2021-03-29
Total number of pages.....: 246 pages

Applicant's name: **GlobTek, Inc.**
Address.....: 186 Veterans Drive, Northvale NJ 07647, New Jersey, USA

Test specification:
Standard: IEC 62368-1:2014 (Second Edition)
Test procedure.....: CB Scheme
Non-standard test method: N/A

Test Report Form No...... : IEC62368_1B
Test Report Form(s) Originator: UL(US)
Master TRF.....: 2014-03

Copyright © 2014 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.
This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:
The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.



Test Item description	ICT/ITE Power Supply	
Trade Mark		
Manufacturer	GlobTek, Inc. 186 Veterans Drive, Northvale NJ 07647, New Jersey, USA	
Model/Type reference	GT-41062-WWVV-X.X-TZ WW is the standard output wattage, with a maximum value of "18", VV is the standard rated output voltage designation, with a maximum value of "24";which can be 05, 06, 07, 09, 12, 15, 18, 20, 24. -X.X denote the output voltage differentiator, subtracting X.X volts from standard output voltage VV in 0.01V increments, the actual output voltage rang is 5-24Vdc, blank is to indicate the no voltage different. TZ=plug connection, where "2" is C8; "3" is C14, "3A" is C6 and model without "-TZ" is for direct plug in	
Ratings	Input: 100-240 V~; 50-60 Hz; 0,6 A Output: see table below (page 8)	
Testing procedure and testing location:		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	SIQ Ljubljana SIQ Ljubljana is accredited by Slovenian Accreditation with accreditation number LP-009 in the field of testing.
Testing location/ address		Mašera-Spasičeva ulica 10, SI-1000 Ljubljana Slovenia
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address.....		
Tested by (name + signature).....		Luka Košir
Approved by (name + signature)		Boštjan Glavič
<input type="checkbox"/>	Testing procedure: TMP/CTF Stage 1	
Testing location/ address.....		
Tested by (name + signature).....		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: WMT/CTF Stage 2	
Testing location/ address.....		
Tested by (name + signature).....		
Witnessed by (name + signature).....		
Approved by (name + signature)		

<input type="checkbox"/>	Testing procedure: SMT/CTF Stage 3 or 4	
Testing location/ address		
Tested by (name + signature)		
Approved by (name + signature).....		
Supervised by (name + signature)		

- List of Attachments (including a total number of pages in each attachment):**
1. National differences according to IEC 62368-1:2014 (Second Edition) – Enclosure No. 1 (54 pages)
 2. Pictures of the unit – Enclosure No. 2 (10 pages)
 3. Technical documentation – schematics, layouts, transformer data – Enclosure No. 3 (67 pages)
 4. Additional Test Data – Enclosure No. 4 (9 pages)

Summary of testing:

<p>Tests performed (name of test and test clause):</p> <ul style="list-style-type: none"> *5.2 Electrical energy source measurement 5.4.1.4 Measurement of maximum operating temperatures for materials, components and systems 5.4.1.8 Determination of working voltage 5.4.2 / 5.4.3 Clearance and creepage distances 5.4.4.2 Minimum distance through insulation 5.4.4.6.2 Separable thin sheet material 5.4.8 Humidity conditioning *5.4.9 Electric strength test* 5.5.2.2 Capacitor discharge test 5.6.6 Resistance of the protective bonding system (applicable for Class I model only) *5.7 Prospective touch voltage, touch current and protective conductor current* *6.2.2.2 Power measurement for worst-case fault *6.2.2.3 Power measurement for worst-case power source fault *9.2.5 Temperature test* B.2.5 Input test *B.3.1 – B.3.8 Simulated abnormal operating conditions: <ul style="list-style-type: none"> - Maximum load at output terminals *B.4.1 – B.4.9 Simulated single fault conditions: <ul style="list-style-type: none"> - Short circuit of clearances for functional insulation - Short circuit of creepage distances for functional insulation - Short circuit and interruption of electrodes in tubes and semiconductors 	<p>Testing location:</p> <p>SIQ Ljubljana Mašera-Spasičeva ulica 10, SI-1000 Ljubljana, Slovenia</p>
--	--

<ul style="list-style-type: none"> - Short circuit or disconnection of passive devices - Continuous operation of components <p>F.3.10 Permanence of markings</p> <p>G.5.3.3 Transformer overload test</p> <p>Annex Q.1 Limited Power Source</p> <p>T.2 Steady force test, 10 N</p> <p>T.5 Steady force test, 250 N</p> <p>T.6 Enclosure impact test</p> <p>T.7 Drop test</p> <p>T.8 Stress relief test</p> <p>Only limited tests were conducted under this investigation based on testing previously conducted under CBTR T223-0231/19 to IEC 60950-1:2005 (Second Edition), Am1:2009 + Am2:2013. All additional tests performed under this investigation marked with *. For all other tests results from T223-0231/19 report were considered acceptable based on comparison between methods and based on review of test data.</p>	
<p>Summary of compliance with National Differences:</p> <p>List of countries addressed</p> <p>Australia, Austria*, Canada, Denmark*, Finland*, Ireland*, Germany*, Italy*, Japan, Norway*, Slovenia*, Spain*, Sweden*, Switzerland*, United Kingdom*, USA, CENELEC common modifications as listed in online CB-Bulletin.</p> <p>* European Group Differences and National Differences</p> <p>See enclosure No. 1 for details.</p> <p><input checked="" type="checkbox"/> The product fulfils the requirements of EN 62368-1:2014 + A11:2017 and BS EN 62368-1:2014 + A11:2017 and EN 62368-1:2014/AC:15.</p>	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.

Class II units:

GlobTek, Inc.
www.globtek.com
ICT/ITE POWER SUPPLY 电源供应器

P/N(料号):
MODEL(型号):GT-41062-1805 -T2
INPUT(输入):100-240V~,50-60Hz,0.6A
OUTPUT(输出): 5V === 3.6A
FOR I.T.E.USE ONLY
仅适用于在海拔2000米以下地区使用

Pour matériel de informatique technologique
N4282
SAA111044EA

EFFICIENCY LEVEL (IV)

MADE IN CHINA 中国制造

Class I units

GlobTek, Inc.
www.globtek.com адаптер питания
ICT/ITE POWER SUPPLY 电源供应器

P/N/номер/料号:
MODEL/модель/型号:GT-41062-1805-T3
INPUT/вводить/输入:100-240V~,50-60Hz,0.6A
OUTPUT/экспорт/输出:5.0V === 3.6A,18.0W
FOR I.T.E.USE ONLY

PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE

EFFICIENCY LEVEL (IV)

MADE IN CHINA 中国制造 WWYY

Label for direct plug-in unit:

GlobTek, Inc.
www.globtek.com

LPS

ICT/ITE POWER SUPPLY/адаптер питания/电源供应器

직류전원장치 AC/DC ADAPTER
KTC HU10499-12008A
최저소비효율기준 만족 제품
모델명:GT-41062-1824
Mfr. Name: GLOBTEK (SUZHOU) CO.,LTD
A/S Center: 10-6221-6100

P/N/номер/料号:
MODEL/модель/型号:GT-41062-1824
INPUT/вход/输入:100-240V~,50-60Hz,0.6A
OUTPUT/выход/输出: 24.0V === 0.75A,18.0W

EFFICIENCY LEVEL (V) 10276

MADE IN CHINA/Китай Производство/中国制造

TEST ITEM PARTICULARS:	
Classification of use by	<input checked="" type="checkbox"/> Ordinary person <input type="checkbox"/> Instructed person <input type="checkbox"/> Skilled person <input checked="" type="checkbox"/> Children likely to be present
Supply Connection.....	<input checked="" type="checkbox"/> AC Mains <input type="checkbox"/> DC Mains <input type="checkbox"/> External Circuit - not Mains connected - <input type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply % Tolerance	<input checked="" type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> +____%/ -____% <input type="checkbox"/> None
Supply Connection – Type	<input checked="" type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input checked="" type="checkbox"/> direct plug-in <input type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input type="checkbox"/> other: _____
Considered current rating of protective device as part of building or equipment installation	16 A (13 A for UK, 20 A for US/CAN) Installation location: <input checked="" type="checkbox"/> building; <input type="checkbox"/> equipment
Equipment mobility	<input checked="" type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input checked="" type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input type="checkbox"/> wall-mounted
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other: _____
Class of equipment	<input checked="" type="checkbox"/> Class I <input checked="" type="checkbox"/> Class II <input type="checkbox"/> Class III
Access location	<input type="checkbox"/> restricted access location <input checked="" type="checkbox"/> N/A
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified maximum operating ambient:	40°C
IP protection class	<input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP____
Power Systems	<input checked="" type="checkbox"/> TN <input type="checkbox"/> TT <input type="checkbox"/> IT - ____ V _{L-L}
Altitude during operation (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> 4000 m
Altitude of test laboratory (m)	<input type="checkbox"/> 2000 m or less <input checked="" type="checkbox"/> 300 m
Mass of equipment (kg)	<input checked="" type="checkbox"/> approx. 0,2 kg
POSSIBLE TEST CASE VERDICTS:	
- test case does not apply to the test object	N/A
- test object does meet the requirement	P (Pass)
- test object does not meet the requirement	F (Fail)

TESTING:	
Date of receipt of test item	2020-12-22
Date (s) of performance of tests	From 2021-01-12 to 2021-01-18
GENERAL REMARKS:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60950-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided..... :	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	1) GlobTek, Inc. 186 Veterans Drive Northvale, NJ 07647, New Jersey, USA 2) GlobTek (Shuzhou) Co., Ltd. Building 4, No. 76, Jinling East Road, Suzhou Industrial Park, Jiangsu 215021, China
GENERAL PRODUCT INFORMATION:	
ICT/ITE Power Supply. Information about the Product: The equipment is an external power adaptor for the general use with information technology equipment. It can be as a direct plug-in (GT-41062-WWVV-X.X.) or table top/movable (GT-41062-WWVV-X.X.-T2; -T3; -T3A) version.	

Model Differences:

Models are the same. Difference exist in output voltage increment.

Table of different series codes of Model 41062:

Model	Output voltage (Vdc)	Max. output current (A)	Max. output wattage (W)	Transformer	Class
GT-41062-WW05	5	3,6	18	XF00209	II
GT-41062-WW06-X.X	5.01-6	3,0	18	XF00209	II
GT-41062-WW07-X.X	6.01-7	2,57	18	XF00209	II
GT-41062-WW09-X.X	7.01-9	2,0	18	XF00168	II
GT-41062-WW12-X.X	9.01-12	1,5	18	XF00168	II
GT-41062-WW15-X.X	12.01-15	1,2	18	XF00168	II
GT-41062-WW18-X.X	15.01-18	1,0	18	XF00169	II
GT-41062-WW20-X.X	18.01-20	0,9	18	XF00169	II
GT-41062-WW24-X.X	20.01-24	0,75	18	XF00169	II
GT-41062-WW05-T2	5	3,6	18	XF00210	II
GT-41062-WW06-X.X-T2	5.01-6	3,0	18	XF00210	II
GT-41062-WW07-X.X-T2	6.01-7	2,57	18	XF00210	II
GT-41062-WW09-X.X-T2	7.01-9	2,0	18	XF00211	II
GT-41062-WW12-X.X-T2	9.01-12	1,5	18	XF00211	II
GT-41062-WW15-X.X-T2	12.01-15	1,2	18	XF00211	II
GT-41062-WW18-X.X-T2	15.01-18	1,0	18	XF00212	II
GT-41062-WW20-X.X-T2	18.01-20	0,9	18	XF00212	II
GT-41062-WW24-X.X-T2	20.01-24	0,75	18	XF00212	II
GT-41062-WW05-T3(A)	5	3,6	18	XF00210	I
GT-41062-WW06-X.X-T3(A)	5.01-6	3,0	18	XF00210	I
GT-41062-WW07-X.X-T3(A)	6.01-7	2,57	18	XF00210	I
GT-41062-WW09-X.X-T3(A)	7.01-9	2,0	18	XF00211	I
GT-41062-WW12-X.X-T3(A)	9.01-12	1,5	18	XF00211	I
GT-41062-WW15-X.X-T3(A)	12.01-15	1,2	18	XF00211	I
GT-41062-WW18-X.X-T3(A)	15.01-18	1,0	18	XF00212	I
GT-41062-WW20-X.X-T3(A)	18.01-20	0,9	18	XF00212	I
GT-41062-WW24-X.X-T3(A)	20.01-24	0,75	18	XF00212	I

Additional application considerations – (Considerations used to test a component or sub-assembly) –

The product was tested according to the standard IEC 62368-1:2014 (2nd Edition) and/or EN 62368-1:2014 + A11:2017. The product fulfils the requirements of EN 62368-1:2014 + A11:2017, BS EN 62368-1:2014 + A11:2017 and EN 62368-1:2014/AC:15.

Additionally, the product was also evaluated according to the standards CSA C22.2 No. 62368-1:2014 and UL 62368-1:2014 (2nd Edition) and fulfils the requirements of these standards.

1. All secondary output circuits are separated from mains by reinforced insulation and rated ES1 non-hazardous energy levels.
2. The power supply is rated Class I or Class II, depending on input connection (see page 2).
3. The transformers provide reinforced insulation. These transformers are built up to fulfill the requirement of insulation class B and provide in addition an UR (OBJY2) insulation system (see also list of safety critical components).
4. The maximum working voltages are 233 V rms; 475 Vpk (24 V version).
5. The product was evaluated for a maximum ambient of 40°C.
6. Direct plug-in units:
 Dimensions of the injection part of the European plug are in accordance the with the requirement of EN 50075 standard. Dimensions of the injection part of the US plug are in accordance with the requirement of UL 1310 standard. Dimensions of the injection part of the UK plug are in accordance with the requirement of the BS 1363 standard. Dimensions of the injection part of the Australian plug are in accordance with the AS/NZS 3112:2017.
 Only dimensions of the pins were measured and torque test was performed. Compliance with the BS 1363 and AS/NZS 3112:2017 shall be evaluated during national approval.

History Sheet:

Date	Report No.	Change/Modification	Rev. No.
2021-03-29	T223-0212/21	This test report is based on CB Test Report T223-0231/19 acc. to IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013. Additional tests were performed to comply also according to IEC 62368-1:2014 (Second Edition) & EN 62368-1:2014 + A11:2017: 5.2 Electrical energy source measurement 5.4.9 Electric strength test 5.7 Prospective touch voltage, touch current and protective conductor current 6.2.2.2, 6.2.2.3 Power Measurements 9.2.5 Temperature test (accessible parts)	-

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:

(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.)
 (Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.)

Electrically-caused injury (Clause 5):

(Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification)

Example: +5 V dc input ES1

Source of electrical energy	Corresponding classification (ES)
All circuit except output circuit	ES3 (steady-state voltage and current)
Secondary output connector	ES1 (steady-state voltage and current)

Electrically-caused fire (Clause 6):

(Note: List sub-assembly or circuit designation and corresponding energy source classification)

Example: Battery pack (maximum 85 watts): PS2

Source of power or PIS	Corresponding classification (PS)
Internal circuit of the unit	PS3, Arching PIS, Resistive PIS
Secondary output connector	PS2 LPS

Injury caused by hazardous substances (Clause 7)

(Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.)

Example: Liquid in filled component Glycol

Source of hazardous substances	Corresponding chemical
N/A	N/A

Mechanically-caused injury (Clause 8)

(Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.)

Example: Wall mount unit MS2

Source of kinetic/mechanical energy	Corresponding classification (MS)
Sharp edges and corners	MS1
Equipment mass	MS1

Thermal burn injury (Clause 9)

(Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.)

Example: Hand-held scanner – thermoplastic enclosure TS1

Source of thermal energy	Corresponding classification (TS)
Internal parts/circuits	TS3
Accessible surfaces	TS1

Radiation (Clause 10)

(Note: List the types of radiation present in the product and the corresponding energy source classification.)


Example: DVD – Class 1 Laser Product RS1

Type of radiation	Corresponding classification (RS)
N/A	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

ENERGY SOURCE DIAGRAM

Indicate which energy sources are included in the energy source diagram. Insert diagram below

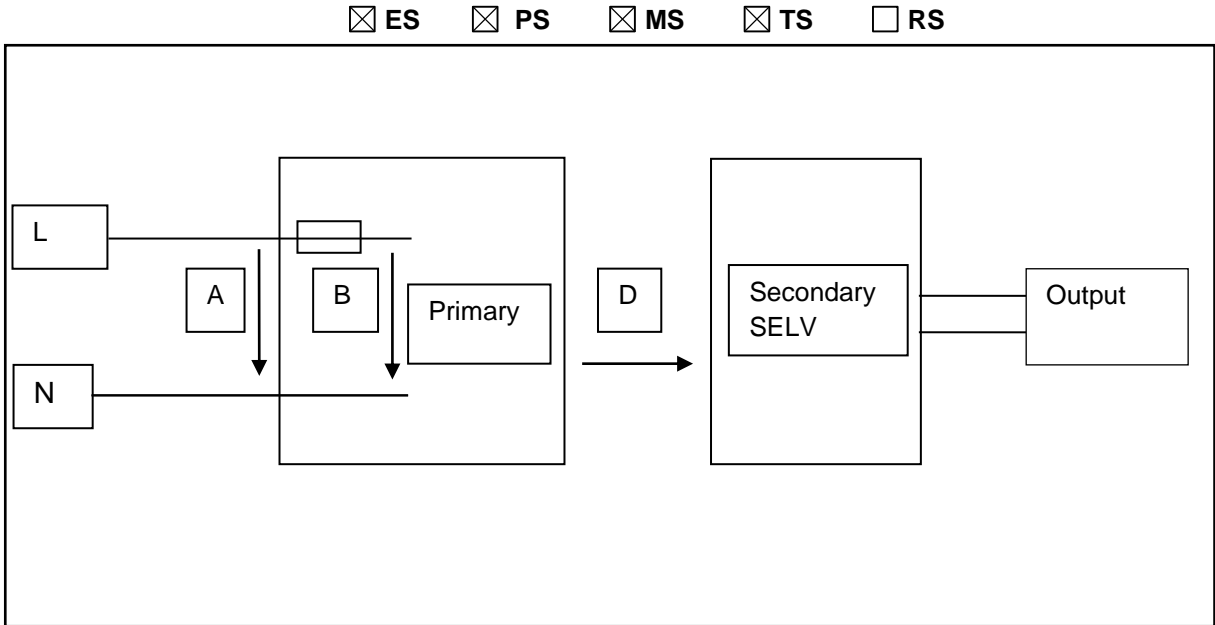

Description of the circuits and accessible parts:

- AC input: ES3 (steady state), PS3
- Primary circuit: ES3, PS3
- Output of the unit: ES1, PS2 LPS
- Complete enclosure: TS1
- Mass, edges/corners: MS1

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

OVERVIEW OF EMPLOYED SAFEGUARDS				
Clause	Possible Hazard			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary/Child	ES3: All circuit except output circuits	N/A	N/A	Equipment Enclosure
Ordinary/Child	ES1: pins of appliance inlet	N/A	N/A	Bleeder resistors (See 5.5.2)
Ordinary/Child	ES1: USB output	N/A	N/A	N/A
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
All combustible materials within equipment fire enclosure	PS3: All primary and secondary circuits inside the equipment enclosure	No excessive temperature under normal and abnormal operation	No fire after single fault condition + fire enclosure	N/A
Reduction of the likelihood of the entry of foreign objects	PS3	N/A	Equipment safeguard (no openings)	N/A
Connections of secondary equipment	PS2 LPS	N/A	N/A	N/A
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary/Child	MS1: sharp edges and corners	N/A	N/A	N/A
Ordinary/Child	MS1: equipment mass	N/A	N/A	N/A
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced

IEC 62368-1				
Clause	Requirement + Test	Result - Remark		Verdict
Ordinary/Child	TS1: accessible parts	N/A	N/A	N/A
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
Supplementary Information: (1) See attached energy source diagram for additional details. (2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault				

4	GENERAL REQUIREMENTS		P
4.1.1	Acceptance of materials, components and subassemblies		P
4.1.2	Use of components	Certified components are used in accordance with their ratings, certifications and they comply with applicable parts of this standard. Components not certified are used in accordance with their ratings and they comply with applicable parts of IEC 62368-1 and the relevant component standard. Components, for which no relevant IEC-standard exists, or used in circuits not in accordance with their specified ratings, have been tested under the conditions occurring in the equipment, using applicable parts of IEC 62368-1. (See appended table 4.1.2)	P
4.1.3	Equipment design and construction	Equipment is designed in such a manner that under normal operating condition, abnormal operating condition and single fault condition does not cause any injury or in case of fire, property damage.	P
4.1.15	Markings and instructions	(See Annex F)	P
4.4.4	Safeguard robustness		P
4.4.4.2	Steady force tests.....	(See Annex T.4, T.5)	P
4.4.4.3	Drop tests	(See Annex T.7)	P
4.4.4.4	Impact tests	(See Annex T.6)	P
4.4.4.5	Internal accessible safeguard enclosure and barrier tests	(See Annex T.9, Annex U)	N/A
4.4.4.6	Glass Impact tests.....	No safeguard made of glass.	N/A
4.4.4.7	Thermoplastic material tests	(See Annex T.8)	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.4.4.8	Air comprising a safeguard	(See Annex T)	P
4.4.4.9	Accessibility and safeguard effectiveness	No risk of explosion.	N/A
4.5	Explosion	No risk of explosion.	N/A
4.6	Fixing of conductors		P
4.6.1	Fix conductors not to defeat a safeguard		P
4.6.2	10 N force test applied to	10 N test was applied to internal components including conductors.	P
4.7	Equipment for direct insertion into mains socket – outlets	The EUT is not direct plug-in equipment.	N/A
4.7.2	Mains plug part complies with the relevant standard		N/A
4.7.3	Torque (Nm).....		N/A
4.8	Products containing coin/button cell batteries	No such component inside the unit.	N/A
4.8.2	Instructional safeguard		N/A
4.8.3	Battery Compartment Construction		N/A
	Means to reduce the possibility of children removing the battery		—
4.8.4	Battery Compartment Mechanical Tests	(See Table 4.8.4)	N/A
4.8.5	Battery Accessibility		N/A
4.9	Likelihood of fire or shock due to entry of conductive object	(See Annex P) No openings	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5	ELECTRICALLY-CAUSED INJURY		P
5.2.1	Electrical energy source classifications	(See appended table 5.2)	P
5.2.2	ES1, ES2 and ES3 limits	Output: ES1	P
5.2.2.2	Steady-state voltage and current	(See appended table 5.2)	P
5.2.2.3	Capacitance limits	(See appended table 5.2)	P
5.2.2.4	Single pulse limits	(See appended table 5.2)	N/A
5.2.2.5	Limits for repetitive pulses	(See appended table 5.2) and B.4 (faults – hiccup mode)	P
5.2.2.6	Ringling signals	(See Annex H)	N/A
5.2.2.7	Audio signals	(See Clause E.1)	N/A
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons	Bare conductors at ES3 are located inside plastic enclosure. Ordinary person can't access live parts. No accessible conductors at ES2 & ES3.	P
5.3.2.1	Accessibility to electrical energy sources and safeguards	Unit is accessible by ordinary person (output is ES1 circuit).	P
5.3.2.2	Contact requirements		P
	a) Test with test probe from Annex V	No openings. ES3 or ES2 circuit not accessible. No ES3 basic safeguard accessible.	P
	b) Electric strength test potential (V)	Test finger cannot penetrate into the unit.	N/A
	c) Air gap (mm)	See above.	N/A
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material	No hygroscopic insulation materials used.	P
5.4.1.3	Humidity conditioning	(See sub-clause 5.4.8)	P
5.4.1.4	Maximum operating temperature for insulating materials	(See appended table 5.4.1.4)	P
5.4.1.5	Pollution degree	PD2	—
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling		N/A
5.4.1.6	Insulation in transformers with varying dimensions	No such transformer used.	N/A
5.4.1.7	Insulation in circuits generating starting pulses	No such circuits.	N/A
5.4.1.8	Determination of working voltage		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.1.9	Insulating surfaces	An accessible surface was considered conductive for determination of clearances, creepage distances and distance through insulation.	P
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		P
5.4.1.10.2	Vicat softening temperature	(See appended table 5.4.1.10.2)	N/A
5.4.1.10.3	Ball pressure	Phenolic material used. No test needed.	N/A
5.4.2	Clearances		P
5.4.2.2	Determining clearance using peak working voltage	(See appended table 5.4.2.2)	P
5.4.2.3	Determining clearance using required withstand voltage	(See appended table 5.4.2.3)	P
	a) a.c. mains transient voltage	2500 V	—
	b) d.c. mains transient voltage	No d.c. mains	—
	c) external circuit transient voltage.....	No external circuit in the sense of this clause.	—
	d) transient voltage determined by measurement ... :	Measurement not relevant	—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	(See appended table 5.4.2.4)	P
5.4.2.5	Multiplication factors for clearances and test voltages	Maximum specified altitude ≤ 2000 m.	N/A
5.4.3	Creepage distances.....	(See appended table 5.4.3)	P
5.4.3.1	General		P
5.4.3.3	Material Group	Material group IIIb considered.	—
5.4.4	Solid insulation		P
5.4.4.2	Minimum distance through insulation	(See appended table 5.4.4.2)	P
5.4.4.3	Insulation compound forming solid insulation		P
5.4.4.4	Solid insulation in semiconductor devices	Approved optocoupler used.	P
5.4.4.5	Cemented joints		N/A
5.4.4.6	Thin sheet material	Transformer provided with triple insulated wire for secondary winding. Tape used for mechanical protection only.	P
5.4.4.6.1	General requirements		P
5.4.4.6.2	Separable thin sheet material		P
	Number of layers (pcs)	Min. 2 layers between primary and secondary winding.	P
5.4.4.6.3	Non-separable thin sheet material	No such material.	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.4.6.4	Standard test procedure for non-separable thin sheet material..... :	(See appended Table 5.4.9)	N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components	Transformer provided with triple insulated wire for secondary winding.	P
5.4.4.9	Solid insulation at frequencies >30 kHz :	(See appended Table 5.4.4.9)	P
5.4.5	Antenna terminal insulation	No such terminal.	N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
	Insulation resistance (MΩ) :		—
5.4.6	Insulation of internal wire as part of supplementary safeguard..... :	(See appended table 5.4.4.2)	N/A
5.4.7	Tests for semiconductor components and for cemented joints	No such component.	N/A
5.4.8	Humidity conditioning		P
	Relative humidity (%) :	94%	—
	Temperature (°C) :	25°C	—
	Duration (h) :	48 h	—
5.4.9	Electric strength test..... :	(See appended table 5.4.9)	P
5.4.9.1	Test procedure for a solid insulation type test	Method 1 (transient voltages) is the worst case.	P
5.4.9.2	Test procedure for routine tests	Routine test on transformer checked.	P
5.4.10	Protection against transient voltages between external circuit	No such external circuits.	N/A
5.4.10.1	Parts and circuits separated from external circuits	(See appended table 5.4.9)	N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test :	(See appended table 5.4.9)	N/A
5.4.10.2.3	Steady-state test :	(See appended table 5.4.9)	N/A
5.4.11	Insulation between external circuits and earthed circuitry :	(See appended table 5.4.9)	N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	Rated operating voltage U_{op} (V) :		—
	Nominal voltage U_{peak} (V) :		—
	Max increase due to variation U_{sp} :		—
	Max increase due to ageing ΔU_{sa} :		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	$U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$:		—
5.5	Components as safeguards		
5.5.1	General		P
5.5.2	Capacitors and RC units		P
5.5.2.1	General requirement	Capacitors and RC units that serve as a safeguard comply with IEC 60384-14 and clause G.11 of this standard.	P
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector	(See appended table 5.5.2.2)	P
5.5.3	Transformers	(See Annex G.5.3)	P
5.5.4	Optocouplers	(See sub-clause 5.4 or Annex G.12). Approved optocoupler used.	P
5.5.5	Relays	(See Annex G.2)	N/A
5.5.6	Resistors	No resistors used as a safeguard. (See Annex G.10)	N/A
5.5.7	SPD's	No SPD's. (See Annex G.8)	N/A
5.5.7.1	Use of an SPD connected to reliable earthing	No varistor between the mains and earth.	N/A
5.5.7.2	Use of an SPD between mains and protective earth		N/A
5.5.8	Insulation between the mains and external circuit consisting of a coaxial cable	No such external circuit.	N/A
5.6	Protective conductor		
5.6.2	Requirement for protective conductors		P
5.6.2.1	General requirements		P
5.6.2.2	Colour of insulation	The insulation of protective bonding conductor is green-and-yellow.	P
5.6.3	Requirement for protective earthing conductors	Approved appliance inlet is used.	N/A
	Protective earthing conductor size (mm ²)		—
5.6.4	Requirement for protective bonding conductors	Applicable only for product which are Class I.	P
5.6.4.1	Protective bonding conductors	Protective bonding conductor complies with conductor size in table G.5.	P
	Protective bonding conductor size (mm ²).	AWG18	—
	Protective current rating (A)	16 A (13 A for UK and 20 A for US/CAN)	—
5.6.4.3	Current limiting and overcurrent protective devices	No component in parallel to protective device.	N/A
5.6.5	Terminals for protective conductors	No terminals used.	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.5.1	Requirement		N/A
	Conductor size (mm ²), nominal thread diameter (mm).....:		N/A
5.6.5.2	Corrosion	No risk of corrosion.	N/A
5.6.6	Resistance of the protective system	Applicable for Class I model only.	P
5.6.6.1	Requirements	Protective bonding conductors and their terminations do not have excessive resistance. Checked with 5.6.6.2.	P
5.6.6.2	Test Method Resistance (Ω).....:	(See appended table 5.6.6.2)	P
5.6.7	Reliable earthing		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		P
5.7.2	Measuring devices and networks		P
5.7.2.1	Measurement of touch current.....:	(See appended table 5.7.4)	P
5.7.2.2	Measurement of prospective touch voltage		P
5.7.3	Equipment set-up, supply connections and earth connections		P
	System of interconnected equipment (separate connections/single connection).....:	Not a system of interconnected equipment.	—
	Multiple connections to mains (one connection at a time/simultaneous connections).....:	No multiple connections to the mains.	—
5.7.4	Earthed conductive accessible parts.....:	(See appended Table 5.7.4)	P
5.7.5	Protective conductor current	Measured touch current does not exceed ES2 limits in 5.2.2.2 therefore measurement of protective conductor current is not relevant.	N/A
	Supply Voltage (V).....:		—
	Measured current (mA).....:		—
	Instructional Safeguard.....:	(See F.4 and F.5)	N/A
5.7.6	Prospective touch voltage and touch current due to external circuits	No external circuits.	N/A
5.7.6.1	Touch current from coaxial cables		N/A
5.7.6.2	Prospective touch voltage and touch current from external circuits		N/A
5.7.7	Summation of touch currents from external circuits	No external circuits.	N/A
	a) Equipment with earthed external circuits Measured current (mA).....:		N/A
	b) Equipment whose external circuits are not referenced to earth. Measured current (mA).....:		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6	ELECTRICALLY- CAUSED FIRE		P
6.2	Classification of power sources (PS) and potential ignition sources (PIS)		P
6.2.2	Power source circuit classifications	All circuits inside the equipment are presumed PS3, arcing and/or resistive PIS. Secondary output is classified PS2.	P
6.2.2.1	General		P
6.2.2.2	Power measurement for worst-case load fault ... :	(See appended table 6.2.2)	P
6.2.2.3	Power measurement for worst-case power source fault..... :	(See appended table 6.2.2)	P
6.2.2.4	PS1	(See appended table 6.2.2)	N/A
6.2.2.5	PS2	(See appended table 6.2.2)	P
6.2.2.6	PS3	(See appended table 6.2.2)	P
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS	(See appended table 6.2.3.1) Complete primary side considered arcing PIS.	P
6.2.3.2	Resistive PIS	(See appended table 6.2.3.2) Primary and secondary circuit considered resistive PIS.	P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P
6.3.1 (a)	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials..... :	(See appended table 5.4.1.5, 6.3.2, 9.0, B.2.6)	P
6.3.1 (b)	Combustible materials outside fire enclosure	No parts outside the enclosure except output cord. Plastic housing rated V-0. Output is considered as PS2.	N/A
6.4	Safeguards against fire under single fault conditions		P
6.4.1	Safeguard Method	Control fire spread. Selection and application of supplementary safeguards for components, wiring, materials and constructional measures that reduce the spread of fire. In addition, fire enclosure is provided.	P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits	No PS1 circuit.	N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits	This method not applied.	N/A
6.4.3.1	General		N/A
6.4.3.2	Supplementary Safeguards		N/A
	Special conditions if conductors on printed boards are opened or peeled		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.3.3	Single Fault Conditions	(See appended table 6.4.3)	N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits	No PS1 circuit.	N/A
6.4.5	Control of fire spread in PS2 circuits	No such circuits in the unit. All circuits are considered PS3.	N/A
6.4.5.2	Supplementary safeguards	(See appended tables 4.1.2 and Annex G)	N/A
6.4.6	Control of fire spread in PS3 circuit	In addition to the compliance with 6.4.5, a fire enclosure that complies with 6.4.8 is provided with the equipment.	P
6.4.7	Separation of combustible materials from a PIS	Separation from PIS to fire enclosure comply with 6.4.8.4.	P
6.4.7.1	General.....	(See tables 6.2.3.1 and 6.2.3.2)	P
6.4.7.2	Separation by distance	All components and combustible materials other than small parts are either rated at least V-1 or mounted on material with rating minimum V-0.	P
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers	Equipment enclosure is evaluated for fire enclosure.	P
6.4.8.1	Fire enclosure and fire barrier material properties		P
6.4.8.2.1	Requirements for a fire barrier		P
6.4.8.2.2	Requirements for a fire enclosure	Equipment fire enclosure is made of materials rated V-0 minimum.	P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		P
6.4.8.3.1	Fire enclosure and fire barrier openings	No openings in a fire enclosure.	P
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top Openings in Fire Enclosure: dimensions (mm)	No openings in a fire enclosure.	N/A
	Needle Flame test		N/A
6.4.8.3.4	Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm)	No openings in a fire enclosure.	N/A
	Flammability tests for the bottom of a fire enclosure		N/A
6.4.8.3.5	Integrity of the fire enclosure, condition met: a), b) or c).....	No door or cover in fire enclosure that can be open by ordinary person.	N/A
6.4.8.4	Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating.....	Fire enclosure is made of min. V-0 materials.	P
6.5	Internal and external wiring		P
6.5.1	Requirements		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.5.2	Cross-sectional area (mm ²)	Min. AWG18 (VW-1). Refer to the List of critical components.	—
6.5.3	Requirements for interconnection to building wiring	No interconnection to building wiring.	N/A
6.6	Safeguards against fire due to connection to additional equipment	See below.	P
	External port limited to PS2 or complies with Clause Q.1	Output limited to PS2/LPS.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

7	INJURY CAUSED BY HAZARDOUS SUBSTANCES		N/A
7.2	Reduction of exposure to hazardous substances	No hazardous substances.	N/A
7.3	Ozone exposure	Unit does not produce ozone.	N/A
7.4	Use of personal safeguards (PPE)	No PPE specified.	N/A
	Personal safeguards and instructions		—
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010)		—
7.6	Batteries	(See Annex M)	N/A

8	MECHANICALLY-CAUSED INJURY		P
8.1	General		P
8.2	Mechanical energy source classifications	Sharp edges and corners, and equipment mass are both classified as MS1. There are no moving parts inside the unit neither equipment is intended for wall/ceiling mounting.	P
8.3	Safeguards against mechanical energy sources	No safeguard is required to be interposed between MS1 and an ordinary person.	N/A
8.4	Safeguards against parts with sharp edges and corners	No parts with sharp edges or corners.	N/A
8.4.1	Safeguards		N/A
8.5	Safeguards against moving parts	No moving parts.	N/A
8.5.1	MS2 or MS3 part required to be accessible for the function of the equipment	No such part.	N/A
8.5.2	Instructional Safeguard		—
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	Large data storage equipment	Not such product.	N/A
8.5.4.2	Equipment having electromechanical device for destruction of media	The EUT is not a media destruction device.	N/A
8.5.4.2.1	Safeguards and Safety Interlocks.....	(See Annex F.4 and Annex K)	N/A
8.5.4.2.2	Instructional safeguards against moving parts		N/A
	Instructional Safeguard		—
8.5.4.2.3	Disconnection from the supply		N/A
8.5.4.2.4	Probe type and force (N).....		N/A
8.5.5	High Pressure Lamps	No high-pressure lamps in the unit.	N/A
8.5.5.1	Energy Source Classification		N/A
8.5.5.2	High Pressure Lamp Explosion Test.....	(See appended table 8.5.5.2)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.6	Stability		N/A
8.6.1	Product classification	Equipment mass is < 7 kg and classified MS1. No stability requirements are applicable.	N/A
	Instructional Safeguard..... :	The EUT is not a TV set.	—
8.6.2	Static stability		N/A
8.6.2.2	Static stability test		N/A
	Applied Force..... :		—
8.6.2.3	Downward Force Test		N/A
8.6.3	Relocation stability test		N/A
	Unit configuration during 10° tilt :		—
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test (Applied Force) :		N/A
	Position of feet or movable parts..... :		—
8.7	Equipment mounted to wall or ceiling		N/A
8.7.1	Mounting Means (Length of screws (mm) and mounting surface) :		N/A
8.7.2	Direction and applied force..... :		N/A
8.8	Handles strength	No handles.	N/A
8.8.1	Classification		N/A
8.8.2	Applied Force :		N/A
8.9	Wheels or casters attachment requirements	No wheels or casters.	N/A
8.9.1	Classification		N/A
8.9.2	Applied force :		—
8.10	Carts, stands and similar carriers	No cart, stand or similar carriers.	N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A
	Instructional Safeguard..... :		—
8.10.3	Cart, stand or carrier loading test and compliance		N/A
	Applied force :		—
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Applied horizontal force (N)..... :		—
8.10.6	Thermoplastic temperature stability (°C) :		N/A
8.11	Mounting means for rack mounted equipment	The EUT is not intended for rack mounting.	N/A
8.11.1	General		N/A
8.11.2	Product Classification		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.11.3	Mechanical strength test, variable <i>N</i>		N/A
8.11.4	Mechanical strength test 250N, including end stops		N/A
8.12	Telescoping or rod antennas	No telescoping or rod antennas.	N/A
	Button/Ball diameter (mm)		—

9	THERMAL BURN INJURY		P
9.2	Thermal energy source classifications	All accessible surfaces are classified as TS1.	P
9.3	Safeguard against thermal energy sources	No safeguard needs to be interposed between TS1 and ordinary person. Enclosure is used for safeguard for TS3 (internal parts).	N/A
9.4	Requirements for safeguards		N/A
9.4.1	Equipment safeguard	All temperatures are limited to TS1. See enclosed table.	N/A
9.4.2	Instructional safeguard	No accessible part at TS2 or TS3.	N/A

10	RADIATION		N/A
10.2	Radiation energy source classification	No radiation energy sources.	N/A
10.2.1	General classification		N/A
10.3	Protection against laser radiation	No laser source inside the unit.	N/A
	Laser radiation that exists equipment:		—
	Normal, abnormal, single-fault	(See attached laser test report)	N/A
	Instructional safeguard		—
	Tool		—
10.4	Protection against visible, infrared, and UV radiation		N/A
10.4.1	General		N/A
10.4.1.a)	RS3 for Ordinary and instructed persons		N/A
10.4.1.b)	RS3 accessible to a skilled person		N/A
	Personal safeguard (PPE) instructional safeguard		—
10.4.1.c)	Equipment visible, IR, UV does not exceed RS1 ...		N/A
10.4.1.d)	Normal, abnormal, single-fault conditions	(See appended table B.3 & B.4)	N/A
10.4.1.e)	Enclosure material employed as safeguard is opaque		N/A
10.4.1.f)	UV attenuation.....		N/A
10.4.1.g)	Materials resistant to degradation UV		N/A
10.4.1.h)	Enclosure containment of optical radiation		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.4.1.i)	Exempt Group under normal operating conditions.....:		N/A
10.4.2	Instructional safeguard.....:		N/A
10.5	Protection against x-radiation	No X-Radiation.	N/A
10.5.1	X- radiation energy source that exists equipment:	(See appended table B.3 & B.4)	N/A
	Normal, abnormal, single fault conditions		N/A
	Equipment safeguards.....:		N/A
	Instructional safeguard for skilled person.....:		N/A
10.5.3	Most unfavourable supply voltage to give maximum radiation.....:		—
	Abnormal and single-fault condition.....:	(See appended table B.3 & B.4)	N/A
	Maximum radiation (pA/kg).....:		N/A
10.6	Protection against acoustic energy sources	The EUT is not a personal music player.	N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output, dB(A).....:		N/A
	Output voltage, unweighted r.m.s.....:		N/A
10.6.4	Protection of persons		N/A
	Instructional safeguards.....:		N/A
	Equipment safeguard prevent ordinary person to RS2.....:		—
	Means to actively inform user of increase sound pressure.....:		—
	Equipment safeguard prevent ordinary person to RS2.....:		—
10.6.5	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.5.1	Corded passive listening devices with analog input		N/A
	Input voltage with 94 dB(A) L_{Aeq} acoustic pressure output.....:		—
10.6.5.2	Corded listening devices with digital input		N/A
	Maximum dB(A).....:		—
10.6.5.3	Cordless listening device		N/A
	Maximum dB(A).....:		—

B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		P
B.2	Normal Operating Conditions		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.2.1	General requirements	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers	No audio amplifier within the unit.	N/A
B.2.3	Supply voltage and tolerances	100-240Vac with tolerances +10% / -10% (90-264Vac).	P
B.2.5	Input test	(See appended table B.2.5) The measured input current under normal operating conditions did not exceed the rated current by more than 10%.	P
B.3	Simulated abnormal operating conditions		P
B.3.1	General requirements	(See appended table B.3)	P
B.3.2	Covering of ventilation openings	No ventilation openings.	N/A
B.3.3	D.C. mains polarity test	Unit not intended for connection to d.c. mains.	N/A
B.3.4	Setting of voltage selector	No voltage selector.	N/A
B.3.5	Maximum load at output terminals	Output overload test performed. See table B.3.	P
B.3.6	Reverse battery polarity	No replaceable battery.	N/A
B.3.7	Abnormal operating conditions as specified in Clause E.2.	No audio amplifier in the unit.	N/A
B.3.8	Safeguards functional during and after abnormal operating conditions	During an abnormal operating condition that does not lead to a single fault condition, all safeguards are remained effective. After restoration of normal operating conditions, all safeguards are compliant with applicable requirements. For those abnormal operating conditions that lead to single fault conditions, see Clause B.4.8.	P
B.4	Simulated single fault conditions		P
B.4.2	Temperature controlling device open or short-circuited	No temperature controlling device.	N/A
B.4.3	Motor tests		N/A
B.4.3.1	Motor blocked or rotor locked increasing the internal ambient temperature	No motor.	N/A
B.4.4	Short circuit of functional insulation		P
B.4.4.1	Short circuit of clearances for functional insulation	Clearances for functional insulation that are not evaluated for basic insulation or relevant electric strength test are short-circuited in turn. See appended table B.4.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.4.4.2	Short circuit of creepage distances for functional insulation	Creepage distances for functional insulation that are not evaluated for basic insulation or relevant electric strength test are short-circuited in turn. See appended table B.4.	P
B.4.4.3	Short circuit of functional insulation on coated printed boards	No coated printed boards.	N/A
B.4.5	Short circuit and interruption of electrodes in tubes and semiconductors	See appended table B.4.	P
B.4.6	Short circuit or disconnect of passive components	See appended table B.4.	P
B.4.7	Continuous operation of components	No such components.	N/A
B.4.8	Class 1 and Class 2 energy sources within limits during and after single fault conditions		P
B.4.9	Battery charging under single fault conditions.... :	(See Annex M). No batteries provided.	N/A
C	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV radiation	No UV radiation within the unit.	N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure apparatus		N/A
C.2.4	Xenon-arc light exposure apparatus		N/A
D	TEST GENERATORS		N/A
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A
E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS		N/A
E.1	Audio amplifier normal operating conditions		N/A
	Audio signal voltage (V).....:		—
	Rated load impedance (Ω)		—
E.2	Audio amplifier abnormal operating conditions		N/A
F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS		P
F.1	General requirements		P
	Instructions – Language	English.	—
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.2.2	Graphic symbols IEC, ISO or manufacturer specific		P
F.3	Equipment markings		P
F.3.1	Equipment marking locations	On the housing.	P
F.3.2	Equipment identification markings	Refer to labels.	P
F.3.2.1	Manufacturer identification	Refer to labels.	—
F.3.2.2	Model identification	Refer to labels.	—
F.3.3	Equipment rating markings		P
F.3.3.1	Equipment with direct connection to mains		P
F.3.3.2	Equipment without direct connection to mains		N/A
F.3.3.3	Nature of supply voltage	~ symbol used to identify AC input	—
F.3.3.4	Rated voltage	Refer to labels.	—
F.3.3.4	Rated frequency	Refer to labels.	—
F.3.3.6	Rated current or rated power	Refer to labels.	—
F.3.3.7	Equipment with multiple supply connections	No multiple supply connections.	N/A
F.3.4	Voltage setting device		N/A
F.3.5	Terminals and operating devices		N/A
F.3.5.1	Mains appliance outlet and socket-outlet markings.....	No such device on the equipment.	N/A
F.3.5.2	Switch position identification marking	No switch.	N/A
F.3.5.3	Replacement fuse identification and rating markings.....	Fuse is not user replaceable.	N/A
F.3.5.4	Replacement battery identification marking.....	No battery.	N/A
F.3.5.5	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		P
F.3.6.1	Class I Equipment	Appliance inlet used (for Class I model).	P
F.3.6.1.1	Protective earthing conductor terminal	Part of appliance inlet connector (for Class I model).	P
F.3.6.1.2	Neutral conductor terminal		N/A
F.3.6.1.3	Protective bonding conductor terminals		N/A
F.3.6.2	Class II equipment (IEC60417-5172)	Correct symbol used (for Class II model).	P
F.3.6.2.1	Class II equipment with or without functional earth	No functional earthing. Symbol IEC60417-5172 provided on the unit (for Class II model).	N/A
F.3.6.2.2	Class II equipment with functional earth terminal marking		N/A
F.3.7	Equipment IP rating marking	IPX0	—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.8	External power supply output marking		P
F.3.9	Durability, legibility and permanence of marking		P
F.3.10	Test for permanence of markings	Marking remain legible after rubbing test with a piece of cloth soaked with water and n-hexane. Marking is printed to enclosure.	P
F.4	Instructions		P
	a) Equipment for use in locations where children not likely to be present - marking		N/A
	b) Instructions given for installation or initial use		N/A
	c) Equipment intended to be fastened in place		N/A
	d) Equipment intended for use only in restricted access area		N/A
	e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1	No audio terminals.	N/A
	f) Protective earthing employed as safeguard		N/A
	g) Protective earthing conductor current exceeding ES 2 limits		N/A
	h) Symbols used on equipment	Explanations provided in manuals.	P
	i) Permanently connected equipment not provided with all-pole mains switch		N/A
	j) Replaceable components or modules providing safeguard function	No such component.	N/A
F.5	Instructional safeguards		N/A
	Where "instructional safeguard" is referenced in the test report it specifies the required elements, location of marking and/or instruction		N/A
G	COMPONENTS		P
G.1	Switches		N/A
G.1.1	General requirements	No switch provided.	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.2	Relays		N/A
G.2.1	General requirements	No relay.	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supply power		N/A
G.2.4	Mains relay, modified as stated in G.2		N/A
G.3	Protection Devices		P
G.3.1	Thermal cut-offs		N/A
G.3.1.1a) &b)	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.3.1.1c)	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Thermal cut-off connections maintained and secure		N/A
G.3.2	Thermal links		N/A
G.3.2.1a)	Thermal links separately tested with IEC 60691		N/A
G.3.2.1b)	Thermal links tested as part of the equipment		N/A
	Aging hours (H)		—
	Single Fault Condition		—
	Test Voltage (V) and Insulation Resistance (Ω) ..		—
G.3.3	PTC Thermistors		N/A
G.3.4	Overcurrent protection devices	Internal fuse F1 used. Refer to List of critical components.	P
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.5		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions	(See appended Table B.4)	N/A
G.4	Connectors		P
G.4.1	Spacings	Approved appliance inlet used for input. Special connector used for output.	P
G.4.2	Mains connector configuration	See above.	P
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely	Secondary connector with special plug. Insertion into mains is unlikely.	N/A
G.5	Wound Components		P
G.5.1	Wire insulation in wound components	Approved triple insulated wire used for secondary winding of T1. (See Annex J)	P
G.5.1.2 a)	Two wires in contact inside wound component, angle between 45° and 90°	Mechanical separation provided between the windings.	P
G.5.1.2 b)	Construction subject to routine testing	Mechanical separation does not provide basic, supplementary or reinforced insulation.	P
G.5.2	Endurance test on wound components	Not required, since mechanical separation/protection in provided.	N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Time (s)		—
	Temperature (°C)		—
G.5.2.3	Wound Components supplied by mains		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.3	Transformers		P
G.5.3.1	Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1).....:	Transformer T1 complies with G.5.3.2 and G.5.3.3	P
	Position	T1 (primary to secondary)	—
	Method of protection	Primary current limitation.	—
G.5.3.2	Insulation		P
	Protection from displacement of windings..... :	Tape, triple insulated wire and bobbin.	—
G.5.3.3	Overload test	(See appended table B.3)	P
G.5.3.3.1	Test conditions		P
G.5.3.3.2	Winding Temperatures testing in the unit		P
G.5.3.3.3	Winding Temperatures - Alternative test method		N/A
G.5.4	Motors		N/A
G.5.4.1	General requirements	No motor.	N/A
	Position		—
G.5.4.2	Test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days)		—
G.5.4.5	Running overload test for d.c. motors in secondary circuits		N/A
G.5.4.5.2	Tested in the unit		N/A
	Electric strength test (V)		—
G.5.4.5.3	Tested on the Bench - Alternative test method; test time (h)		N/A
	Electric strength test (V)		—
G.5.4.6	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature		N/A
	Electric strength test (V)		N/A
G.5.4.6.3	Tested on the bench - Alternative test method; test time (h).....:		N/A
	Electric strength test (V)		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage		—
G.6	Wire Insulation		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.6.1	General	Approved triple insulated wire is used inside transformers (complies with Annex J). Refer to List of critical components.	P
G.6.2	Solvent-based enamel wiring insulation		N/A
G.7	Mains supply cords		N/A
G.7.1	General requirements	Power supply cord is not part of investigation	N/A
	Type		—
	Rated current (A).....		—
	Cross-sectional area (mm ²), (AWG)		—
G.7.2	Compliance and test method		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N)		—
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm) ... :		—
G.7.3.2.4	Strain relief comprised of polymeric material		N/A
G.7.4	Cord Entry	(See appended table 5.4.11.1)	N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Mass (g)		—
	Diameter (m)		—
	Temperature (°C)		—
G.7.6	Supply wiring space		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Test with 8 mm strand		N/A
G.8	Varistors		P
G.8.1	General requirements	Approved varistors are used. Refer to list of critical components.	P
G.8.2	Safeguard against shock		N/A
G.8.3	Safeguard against fire		N/A
G.8.3.2	Varistor overload test	(See appended table B.3)	N/A
G.8.3.3	Temporary overvoltage	(See appended table B.3)	N/A
G.9	Integrated Circuit (IC) Current Limiters		N/A
G.9.1 a)	Manufacturer defines limit at max. 5A.	No such component.	N/A
G.9.1 b)	Limiters do not have manual operator or reset		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.9.1 c)	Supply source does not exceed 250 VA		—
G.9.1 d)	IC limiter output current (max. 5A).....		—
G.9.1 e)	Manufacturers' defined drift		—
G.9.2	Test Program 1		N/A
G.9.3	Test Program 2		N/A
G.9.4	Test Program 3		N/A
G.10	Resistors		P
G.10.1	General requirements	Certified bleeder resistors used. Refer to list of critical components.	P
G.10.2	Resistor test		N/A
G.10.3	Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable		N/A
G.10.3.1	General requirements		N/A
G.10.3.2	Voltage surge test		N/A
G.10.3.3	Impulse test		N/A
G.11	Capacitor and RC units		P
G.11.1	General requirements		P
G.11.2	Conditioning of capacitors and RC units		P
G.11.3	Rules for selecting capacitors	Certified capacitors used. Refer to List of critical components.	P
G.12	Optocouplers		P
	Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results)	Approved optocouplers used. Refer to List of critical components.	P
	Type test voltage V_{ini}	Considered.	—
	Routine test voltage, $V_{ini,b}$	Considered.	—
G.13	Printed boards		P
G.13.1	General requirements	Approved printed board used. Refer to List of critical components.	P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface	No inner layers.	N/A
	Compliance with cemented joint requirements (Specify construction)		—
G.13.5	Insulation between conductors on different surfaces	PCB tracks provided only on one side (bottom).	N/A
	Distance through insulation	(See appended table 5.4.4.5)	N/A
	Number of insulation layers (pcs)		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2a)	Thermal conditioning		N/A
G.13.6.2b)	Electric strength test		N/A
G.13.6.2c)	Abrasion resistance test		N/A
G.14	Coating on components terminals		N/A
G.14.1	Requirements	No special coating.	N/A
G.15	Liquid filled components		N/A
G.15.1	General requirements	No LFC.	N/A
G.15.2	Requirements		N/A
G.15.3	Compliance and test methods		N/A
G.15.3.1	Hydrostatic pressure test		N/A
G.15.3.2	Creep resistance test		N/A
G.15.3.3	Tubing and fittings compatibility test		N/A
G.15.3.4	Vibration test		N/A
G.15.3.5	Thermal cycling test		N/A
G.15.3.6	Force test		N/A
G.15.4	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
a)	Humidity treatment in accordance with sc5.4.8 – 120 hours	No such component.	N/A
b)	Impulse test using circuit 2 with $U_c =$ to transient voltage		N/A
C1)	Application of ac voltage at 110% of rated voltage for 2.5 minutes		N/A
C2)	Test voltage		—
D1)	10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer		N/A
D2)	Capacitance		—
D3)	Resistance		—
H	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General	No ringing generator.	N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringling signal		N/A
H.3.1.1	Frequency (Hz)		—
H.3.1.2	Voltage (V)		—
H.3.1.3	Cadence; time (s) and voltage (V)		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
H.3.1.4	Single fault current (mA):..... :		—
H.3.2	Tripping device and monitoring voltage..... :		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage complied with		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V) :		—
J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION		P
	General requirements	Approved TIW used. See list of critical components. No additional testing considered required.	P
K	SAFETY INTERLOCKS		N/A
K.1	General requirements	No safety interlocks.	N/A
K.2	Components of safety interlock safeguard mechanism	(See Annex G)	N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
	Compliance..... :	(See appended table B.4)	N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Compliance and Test method		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements (type and circuit location)		N/A
K.7.2	Overload test, Current (A)		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test	(See appended table 5.4.11)	N/A
L	DISCONNECT DEVICES		P
L.1	General requirements	Appliance coupler considered as a disconnect device.	P
L.2	Permanently connected equipment	Not permanently connected equipment.	N/A
L.3	Parts that remain energized	No parts remain energized after disconnection.	N/A
L.4	Single phase equipment	The disconnect device disconnects both poles simultaneously.	P
L.5	Three-phase equipment	Single phase unit.	N/A
L.6	Switches as disconnect devices	No switches.	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
L.7	Plugs as disconnect devices	The appliance coupler is regarded as disconnect device, no warning is required.	N/A
L.8	Multiple power sources	One power source only.	N/A
M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		N/A
M.1	General requirements	No battery.	N/A
M.2	Safety of batteries and their cells		N/A
M.2.1	Requirements		N/A
M.2.2	Compliance and test method (identify method) .. :		N/A
M.3	Protection circuits		N/A
M.3.1	Requirements		N/A
M.3.2	Tests		N/A
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		N/A
M.3.3	Compliance	(See appended Tables and Annex M and M.4)	N/A
M.4	Additional safeguards for equipment containing secondary lithium battery		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Charging operating limits		N/A
M.4.2.2a)	Charging voltage, current and temperature	(See Table M.4)	—
M.4.2.2 b)	Single faults in charging circuitry	(See Annex B.4)	—
M.4.3	Fire Enclosure		N/A
M.4.4	Endurance of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation		N/A
M.4.4.3	Drop and charge/discharge function tests		N/A
	Drop		N/A
	Charge		N/A
	Discharge		N/A
M.4.4.4	Charge-discharge cycle test		N/A
M.4.4.5	Result of charge-discharge cycle test		N/A
M.5	Risk of burn due to short circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Compliance and Test Method (Test of P.2.3)		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.6	Prevention of short circuits and protection from other effects of electric current		N/A
M.6.1	Short circuits		N/A
M.6.1.1	General requirements		N/A
M.6.1.2	Test method to simulate an internal fault		N/A
M.6.1.3	Compliance (Specify M.6.1.2 or alternative method)		N/A
M.6.2	Leakage current (mA)		N/A
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
M.7.2	Compliance and test method		N/A
M.8	Protection against internal ignition from external spark sources of lead acid batteries		N/A
M.8.1	General requirements		N/A
M.8.2	Test method		N/A
M.8.2.1	General requirements		N/A
M.8.2.2	Estimation of hypothetical volume V_z (m ³ /s)		—
M.8.2.3	Correction factors		—
M.8.2.4	Calculation of distance d (mm)		—
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing)		N/A
N	ELECTROCHEMICAL POTENTIALS		N/A
	Metal(s) used.....	Pollution degree considered.	—
O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES		P
	Figures O.1 to O.20 of this Annex applied	Considered.	—
P	SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS		P
P.1	General requirements	No openings.	P
P.2.2	Safeguards against entry of foreign object		N/A
	Location and Dimensions (mm)		—
P.2.3	Safeguard against the consequences of entry of foreign object		N/A
P.2.3.1	Safeguards against the entry of a foreign object		N/A
	Openings in transportable equipment		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Transportable equipment with metalized plastic parts		N/A
P.2.3.2	Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard)		N/A
P.3	Safeguards against spillage of internal liquids		N/A
P.3.1	General requirements		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Safeguards effectiveness		N/A
P.4	Metallized coatings and adhesive securing parts		N/A
P.4.2 a)	Conditioning testing		N/A
	Tc (°C).....		—
	Tr (°C)		—
	Ta (°C)		—
P.4.2 b)	Abrasion testing	(See G.13.6.2)	N/A
P.4.2 c)	Mechanical strength testing	(See Annex T)	N/A
Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		P
Q.1	Limited power sources	Unit not intended for interconnection with building wiring, however output was evaluated and complies with LPS and also PS2.	P
Q.1.1 a)	Inherently limited output		N/A
Q.1.1 b)	Impedance limited output		P
	- Regulating network limited output under normal operating and simulated single fault condition		P
Q.1.1 c)	Overcurrent protective device limited output		N/A
Q.1.1 d)	IC current limiter complying with G.9		N/A
Q.1.2	Compliance and test method	Refer to table Annex Q.1	P
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A)		—
	Current limiting method.....		—
R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General requirements		N/A
R.2	Determination of the overcurrent protective device and circuit		N/A
R.3	Test method Supply voltage (V) and short-circuit current (A).		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W	Certified materials used.	N/A
	Samples, material.....:		—
	Wall thickness (mm)		—
	Conditioning (°C)		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material.....:		—
	Wall thickness (mm)		—
	Conditioning (°C)		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	Test specimen does not show any additional hole		N/A
S.3	Flammability test for the bottom of a fire enclosure		N/A
	Samples, material.....:		—
	Wall thickness (mm)		—
	Cheesecloth did not ignite		N/A
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W	Steady state power <4000W.	N/A
	Samples, material.....:		—
	Wall thickness (mm)		—
	Conditioning (test condition), (°C)		—
	Test flame according to IEC 60695-11-20 with conditions as set out		N/A
	After every test specimen was not consumed completely		N/A
	After fifth flame application, flame extinguished within 1 min		N/A
T	MECHANICAL STRENGTH TESTS		P
T.1	General requirements		P
T.2	Steady force test, 10 N	(See appended table T.2)	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
T.3	Steady force test, 30 N	(See appended table T3)	N/A
T.4	Steady force test, 100 N	(See appended table T4)	N/A
T.5	Steady force test, 250 N	(See appended table T5)	P
T.6	Enclosure impact test	(See appended table T6).	P
	Fall test		P
	Swing test		N/A
T.7	Drop test	(See appended table T7)	P
T.8	Stress relief test	(See appended table T8)	P
T.9	Impact Test (glass)		N/A
T.9.1	General requirements		N/A
T.9.2	Impact test and compliance		N/A
	Impact energy (J)		—
	Height (m).....		—
T.10	Glass fragmentation test.....	(See sub-clause 4.4.4.9)	N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm)		—
U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
U.1	General requirements	No CRT used.	N/A
U.2	Compliance and test method for non-intrinsically protected CRTs		N/A
U.3	Protective Screen.....	(See Annex T)	N/A
V	DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)		P
V.1	Accessible parts of equipment		P
V.2	Accessible part criterion		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.1.2	TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾	
GT-41062-WWVV-X.X-T2 series						
Enclosure	Sabic Innovative	Type CX7211 or C2950	Plastic material, overall approx. 80 mm by 45 by 25 mm, min thickness 1,5 mm Rated min. V-0 at RTI= min. 85°C by min. thickness 1,5 mm;	IEC/EN 62368-1 (QMFZ2)	Accepted UR E45329	
Enclosure	Sabic Innovative	Type 945	Plastic material, overall approx. 80 mm by 45 by 25 mm, min thickness 1,5 mm Rated min. V- 0 at RTI= min. 125°C by min. thickness 1,5 mm;	IEC/EN 62368-1 (QMFZ2)	Accepted UR E207780 UR E45329	
Enclosure	Teijin	Type LN-1250P or LN-1250G	Plastic material, overall approx. 80 mm by 45 by 25 mm, min thickness 1,5 mm Rated V-0 at RTI =125°C by min. 1,5 mm thickness;	IEC/EN 62368-1 (QMFZ2)	Accepted UR E50075	
Input Connector Type C8 (Inlet)	Sun Fair	S-01	Min. 2,5A, Min. 250 Vac 70°C	IEC/EN 60320 (AXUT2)	VDE 40034449 UR E226643	
(alternative)	Tecx	SO-222 series	Min. 2,5A, Min. 250 Vac 70°C	IEC/EN 60320 (AXUT2)	VDE 40020337 UR E220004	
(alternative)	Leci	DB-8	Min. 2,5A, Min. 250 Vac 70°C	IEC/EN 60320 (AXUT2)	VDE 40032028 UR E302229	
(alternative)	Rich Bay	R-201SN	Min. 2,5A, Min. 250 Vac 70°C	IEC/EN 60320 (AXUT2)	VDE 40030384 UR E184638	
(alternative)	Rong Feng Industrial Co., Ltd.	RF-180	2.5A, 250Vac	IEC/EN 60320-1	VDE 40030168	
(alternative)	Inalways Corporation	0721	2.5A, 250Vac	IEC/EN 60320-1	ENEC 2016021	
(alternative)	Zhe Jiang Bei Er jia	ST-A03-005	2.5A, 250Vac	IEC/EN 60320-1	VDE 40014833	
(alternative)	Kunshan DLK Electronics	CDJ-8	2.5A, 250Vac	IEC/EN 60320-1	VDE 40025531	

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
PCB	Various	Paper phenolic, paper epoxy or glass epoxy, rated 94V-1 at RTI=130°C by min. thickness 0,2 mm. Measured thickness 1,6 mm Overall approx 70 mm by 44 mm		IEC/EN 62368-1 UL 94, UL 796	Accepted. UL
Fuse (F1)	+ Wickmann Werke	392	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 126983 UR E67006
(alternative)	Bussmann	SS-5	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 40015513 UR E19180
(alternative)	Walter	ICP	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX)	VDE 40012824 UR E56092
(alternative)	Conquer	MST	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX8)	VDE 40017118 UR E82636
Alt. use	Ever Island Electric Co., Ltd. And Walter Electric	2010	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40018781 UR E220181
Alt. use	Bel Fuse Ltd.	RST	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40011144 UR E20624
Alt. use	Shenzhen Lanson Electronics Co. Ltd.	SMT	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40012592 UR E221465
Alt. use	Dongguan Better Electronics Technology Co., Ltd.	932	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX8)	VDE 40033369 UR E300003
Alt. use	Hollyland Company Limited	5ET	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40015669 UR E156471
Alt. use	Sunny East Enterprise Co. Ltd.	CFD	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX)	VDE 40030246 UR E133774
Alt. use	Conquer Electronics Co., Ltd.	MET	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40017157 UR E82636
Alt. use	Zhongshan Lanbao Electrical Appliances Co., Ltd.	RTI-10	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX)	VDE 40017009 UR E213695

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
Varistor (ZNR1)	Thinking	TVR10471 TVR14471	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE cURus E314979
(alternative)	Joyin	JVR10N471 K JVR14N471 K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE 005937 cURus E325508
(alternative)	Success	SVR10D471 K SVR14D471 K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE40030401 cURus E330256
(alternative)	Centra science corp.	CNR 10D471K CNR 14D471K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 61051-2 IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE 40008220 cURus E165143
(alternative)	Ceramate	GNR10D471 K, GNR14D471 K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 61051-2 IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE 40031745 cURus E315429
X-Capacitor (CX1)	+ Cheng Tung	CTX	Max. 0,22 μ F, min.300V Min.X2	IEC/EN 60384-14 (FOWX2)	VDE 40022642 UR E193049
(alternative)	Tenta	MEX	Max. 0,22 μ F, min.275V Min.X2	IEC/EN60384-14 (FOWX2)	VDE 119119 UR E222911
(alternative)	Dain Electronics Co., Ltd.	MPX	Max. 0,22 μ F, min.275V Min.X2	IEC/EN 60384-14 (FOWX2)	VDE 40018798 UR E147776
(alternative)	UTX (Ultra Tech Xiphi)	HQX	Max. 0,22 μ F, min.275V Min.X2	IEC/EN60384-14 (FOWX2)	VDE 40015608 UR E183780
Bleeder Resistor (RA, RB)	VIKING TECH CORPORATIO N KAOSHIUNG BRANCH	HVR05 series (c), HVR06 series (d),	2M Ω 1/8W, 2M Ω 1/4W	IEC/EN62368-1 AZOT2	Accepted UR E490339
	FUTABA ELECTRIC CO LTD	RM series	2M Ω 1/4W	IEC/EN 60065-1 FPAV2	CB SE-77444 UR E220321
	VISHAY COMPONENTS INDIA PVT. LTD	SVR37#\$	2M Ω 1/2W	IEC/EN 62368-1 FPAV8	VDE 40002857 UR E171160
	Yageo Components (Suzhou)	HHV Series	2M Ω 1/4W	IEC/EN 62368-1 FPAV2	VDE: 40031974 UR E333286

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
	TZAI YUAN ENTERPRISE CO LTD	HSMD OR SMD	2MΩ 1/8W	IEC/EN62368-1 AZOP2, AZOP8	Accepted UR E354677
	PROSPERITY DIELECTRICS CO LTD	FVS03, TF06V, FVS05, TF08V, FVS06, TF12V, FVS20, TF20V, FVS25, TF25V	2MΩ 1/4W	IEC/EN 62368-1 UL 62368-1	Accepted UR E358325
Electrolytic Capacitor (C1)	Various	Various	Min. 33 μF, Min. 400Vac; 105°C	IEC/EN 62368-1	Accepted.
Transformer (T1) Pri/sec	+ Yao Sheng Alternative: ENG or BOAM or GlobTek or Haopuwei or Hejia XF00210 or XF00211 or XF00212, open type construction with overall dimension approx. 23 mm by 20 mm by 18 mm. <u>Rating:</u> 240V/ 0,6A, 50/60 Hz <u>Core:</u> Ferrite ETD <u>Coil:</u> enamelled copper wire. <u>Bobbin:</u> UR E59481, type +T373J, T375J from Chang Chun and PM-9820 from Sumitomo UR (QMFZ2), rated 94V-0 at min thickness 1,6 mm Measured thickness: 3,4 mm Insulation: Triple insulated wire, Furukawa, TEX-E, Class B (VDE 006735, UR E206440) or Totoku TIW-E class B (VDE 40052023, UR E166483) or GREAT LEOFLON INDUSTRIAL CO LTD TRW(B) class B (VDE 136581, UR E211989), Cosmolink /TIW-M (VDE 138053 UR E213764) Insulation class B			IEC/EN 62368-1	Accepted.
Y-Capacitor (CY1)	+ TDK	CD	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 138526 UR E37861
(alternative)	+Success	SE	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40037211 VDE 40020002 UR E114280

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
	+Success	SB	Max. 2200pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40037221 VDE 40020001 UR E114280
(alternative)	JYA-NAY Co., Ltd.	JN	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	TUV 69242987 UR E201384
(alternative)	Haohua Electronic Co.	CT7	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40003902 UR E233106
(alternative)	Walsin Technology Corp.	AH	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40001804 UR E146544
Transistor (Q1) (Screwed to the heatsink 1)	Various	Various	Min. 600 V, Min. 6A Insulated from the heatsink 1 with the glue	IEC/EN 62368-1	Accepted.
Heatsink 1	Aluminium, overall approx. 25.2mm by 15.5mm by 20mm			IEC/EN 62368-1	Accepted.
Heatsink 2 (floating)	Aluminium, overall approx. 35 mm by 20 mm by 1,5 mm			IEC/EN 62368-1	Accepted.
Optical Isolator (PC1)	+ Lite-on	LTV-817	Dti. = Min. 0,6mm Int. cr. = Min. 5,2mm Ext. cr. = Min. 7,8mm Minimum 3000 V ac isolation. Reinforced insulation. (Operation temperature 110°C) Vinia, Vinib=6000V	IEC/EN 60950-1, VDE 0884 (FPQU2)	VDE 40015248 UR E113898
(alternative)	Fairchild Semiconductor	H11A817	Dti > 0,4mm, Ext.cr. > 7,8 mm, Int cr ≥ 5,2mm Isolation 3000Vac min. 110°C min. Thermal cycling test	IEC/EN 60950-1, VDE 0884 (FPQU2)	FIMKO VDE 104801 UR E90700

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
(alternative)	Everlight	EL817	Dti. $\geq 0,4\text{mm}$ Ext. cr. $\geq \text{Min. } 8,0\text{ mm}$; Thermal cycling test Isolation voltage min. 3000Vac, reinforced insulation (Operation temperature 110°C).	IEC/EN 60950-1 VDE 0884 (FPQU2)	FIMKO, VDE 132249 UR E214129
(alternative)	Cosmo Electronics Corp	K1010, KP1010	Dti $> 0,4\text{mm}$, Int cr $> 5,3\text{mm}$, Ext cr $> 8,0\text{mm}$, Isolation 3000Vac min., 110°C min., Thermal cycling test	IEC/EN 60950-1 VDE 0884 (FPQU2)	VDE 101347 UR E169586
Internal & output wiring	Various	Various	FT-1 or WV-1	IEC/EN 62368-1	Accepted
GT-41062-WVVV-X.X series					
Enclosure	Sabic Innovative	Type CX7211 or C2950	Plastic material, overall approx. 80 mm by 45 by 25 mm, min thickness 1,5 mm Rated min. V-0 at RTI= min. 85°C by min. thickness 1,5 mm;	IEC/EN 62368-1 (QMFZ2)	Accepted UR E45329
Enclosure	Sabic Innovative	Type 945	Plastic material, overall approx. 80 mm by 45 by 25 mm, min thickness 1,5 mm Rated min. V- 0 at RTI= min. 125°C by min. thickness 1,5 mm;	IEC/EN 62368-1 (QMFZ2)	Accepted UR E207780 UR E45329
Enclosure & plug	Teijin	Type LN- 1250P or LN-1250G	Plastic material, overall approx. 80 mm by 45 by 25 mm, min thickness 1,5 mm Rated V-0 at RTI =125°C by min. 1,5 mm thickness;	IEC/EN 62368-1 (QMFZ2)	Accepted UR E50075

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
PCB	Various	Paper phenolic, paper epoxy or glass epoxy, rated 94V-1 at RTI=130°C by min. thickness 0,2 mm . Measured thickness 1,6 mm Overall approx 70 mm by 36 mm		(ZPMV2)	UR
Fuse (F1)	+ Wickmann Werke	392	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 126983 UR E67006
(alternative)	Conquer Electronics	MST-series	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 40017118 UR E82636
(alternative)	Bussmann	SS-5	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 40015513 UR E19180
(alternative)	Walter	ICP	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX)	VDE 40012824 UL E56092
(alternative)	Ever island electric co ltd & walter electric	2010	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 40018781 UR E56092
Alt. use	Bel Fuse Ltd.	RST	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40011144 UL E20624
Alt. use	Shenzhen Lanson Electronics Co. Ltd.	SMT	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40012592 UR E221465
Alt. use	Dongguan Better Electronics Technology Co., Ltd.	932	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX8)	VDE 40033369 UR E300003
Alt. use	Hollyland Company Limited	5ET	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40015669 UR E156471
Alt. use	Sunny East Enterprise Co. Ltd.	CFD	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX)	VDE 40030246 UR E133774
Alt. use	Conquer Electronics Co., Ltd.	MET	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40017157 UR E82636
Alt. use	Zhongshan Lanbao Electrical Appliances Co., Ltd.	RTI-10	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX)	VDE 40017009 UR E213695

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
Alt. use	Ever Island Electric Co., Ltd. And Walter Electric	2010	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40018781 UR E220181
Alt. use	Bel Fuse Ltd.	RST	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40011144 UR E20624
Varistor (ZNR1)	Thinking	TVR10471 TVR14471	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 61051-2 IEC/EN 62368-1 Annex Q (VZCA2) (VZCA8)	VDE 40021243 cURus E314979
(alternative)	Joyin	JVR10N471 K JVR14N471 K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 61051-2 IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE 005937 cURus E154922
(alternative)	Success	SVR10D471 K SVR14D471 K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 61051-2 IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE40030401 cURus E330256
(alternative)	Centra science corp.	CNR 10D471K CNR 14D471K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 61051-2 IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE 40008220 cURus E165143
(alternative)	Ceramate	GNR10D471 K, GNR14D471 K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 61051-2 IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE 40031745 cURus E315429
X-Capacitor (CX1)	+ Cheng Tung	CTX	Max. 0,22 μ F, min.300V Min.X2	IEC/EN 60384-14 (FOWX2)	VDE 40022642 UR E193049
(alternative)	Tenta	MEX	Max. 0,22 μ F, min.275V Min.X2	IEC/EN60384-14 (FOWX2)	VDE 119119 UR E222911
(alternative)	Dain Electronics Co., Ltd.	MPX	Max. 0,22 μ F, min.275V Min.X2	IEC/EN 60384-14 (FOWX2)	VDE 40018798 UR E147776
(alternative)	UTX (Ultra Tech Xiphi)	HQX	Max. 0,22 μ F, min.275V Min.X2	IEC/EN60384-14 (FOWX2)	VDE 40015608 UR E183780
Bleeder Resistor (RA, RB)	VIKING TECH CORPORATIO N KAOSHIUNG BRANCH	HVR05 series (c), HVR06 series (d),	2M Ω 1/8W, 2M Ω 1/4W	IEC/EN62368-1 AZOT2	Accepted UR E490339
	FUTABA ELECTRIC CO LTD	RM series	2M Ω 1/4W	IEC/EN 60065-1 FPAV2	CB SE-77444 UR E220321

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
	VISHAY COMPONENTS INDIA PVT. LTD	SVR37#\$	2MΩ 1/2W	IEC 62368-1 FPAV8	VDE 40002857 UR E171160
	Yageo Components (Suzhou)	HHV Series	2MΩ 1/4W	IEC/EN 62368-1 FPAV2	VDE: 40031974 UR E333286
	TZAI YUAN ENTERPRISE CO LTD	HSMD OR SMD	2MΩ 1/8W	IEC/EN62368-1 AZOP2, AZOP8	Accepted UR E354677
	PROSPERITY DIELECTRICS CO LTD	FVS03, TF06V, FVS05, TF08V, FVS06, TF12V, FVS20, TF20V, FVS25, TF25V	2MΩ 1/4W	IEC/EN 62368-1 UL 62368-1	Accepted UR E358325
Electrolytic Capacitor (C1)	Various	Various	Max. 33μF, 400Vac; 105°C	IEC/EN 62368-1	Accepted.
Transformer (T1) Pri/sec	+Yao Sheng, Alternative: ENG or BOAM or GlobTek or Haopuwei or Hejia XF00168,XF00169,XF00209, open type construction with overall dimension approx. 23 mm by 20 mm by 18 mm. Rating: 240V/ 0,6A, 50/60 Hz Core: Ferrite ETD Coil: enamelled copper wire. Bobbin: UR E59481, type +T373J, T375J from Chang Chun and PM-9820 from Sumitomo , UR (QMFZ2), rated 94V-0 at min thickness 1,6mm Measured thickness: 3,4 mm Insulation: Triple insulated wire, Furukawa, TEX-E, Class B (VDE 006735, UR E206440) or Totoku TIW-E class B (VDE 40052023, UR E166483) or GREAT LEOFLON INDUSTRIAL CO LTD TRW(B) class B (VDE 136581, UR E211989), Cosmolink /TIW-M (VDE 138053 UR E213764) Insulation class B			IEC/EN 62368-1	Accepted.

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
Y-Capacitor (CY1)	+ TDK	CD	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 138526 UR E37861
(alternative)	+Success	SE, SB	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40037213 VDE 40037221 UR E114280
(alternative)	+Success	SB	Max. 2200pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40037213 VDE 40037221 UR E114280
(alternative)	JYA-NAY Co., Ltd.	JN	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	TUV 69242987 UR E201384
(alternative)	Haohua Electronic Co.	CT7	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40003902 UR E233106
(alternative)	Walsin Technology Corp.	AH	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40001804 UR E146544
Optical Isolator (U2)	+ Lite-on	LTV-817	Dti. = Min. 0,6mm Int. cr. = Min. 5,2mm Ext. cr. = Min. 7,8mm Minimum 3000 V ac isolation. Reinforced insulation. (Operation temperature 110°C). Vinia, Vinib=6000V	IEC/EN 60950-1, VDE 0884 (FPQU2)	VDE 40015248 UR E113898
(alternative)	Fairchild Semiconductor	H11A817	Dti > 0,4mm, Ext.cr. > 7,8 mm, Int cr ≥ 5,2mm Isolation 3000Vac min. 110°C min. Thermal cycling test	IEC/EN 60950-1 VDE 0884 (FPQU2)	FIMKO VDE 104801 UR E90700
(alternative)	Everlight	EL817	Dti. ≥ 0,4mm Ext. cr. ≥ Min. 8,0 mm; Thermal cycling test Isolation voltage min. 3000Vac, reinforced insulation (Operation temperature 110°C).	IEC/EN 60950-1 VDE 0884 (FPQU2)	FIMKO, VDE 132249 UR E214129

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
(alternative)	Cosmo Electronics Corp	K1010, KP1010	Dti > 0,4mm, Int cr > 5,3mm, Ext cr > 8,0mm, Isolation 3000Vac min., 110°C min., Thermal cycling test	IEC/EN 60950-1 VDE 0884 (FPQU2)	VDE 101347 UR E169586
Transistor (Q1)	Various	Various	Min. 600 V, Min. 6A Insulated from the heatsink 1 with the glue	IEC/EN 62368-1	Accepted.
Internal & output wiring	Various	Various	FT-1 or WV-1	IEC/EN 62368-1	Accepted
GT-41062-WWVV-X.X-T3 and GT-41062-WWVV-X.X-T3A					
Enclosure	Sabic Innovative	Type 945	Plastic material, overall approx. 80 mm by 45 by 25 mm, min thickness 1,5 mm Rated min. V- 0 at RTI= min. 125°C by min. thickness 1,5 mm;	IEC/EN 62368-1 (QMFZ2)	Accepted UR E207780 UR E45329
Enclosure	Sabic Innovative	CX7211 or C2950	Plastic material, overall approx. 80 mm by 45 by 25 mm, min thickness 1,5 mm Rated min. V- 0 at RTI= min. 85°C by min. thickness 1,5 mm	IEC/EN 62368-1 (QMFZ2)	Accepted UR E207780 UR E45329
Enclosure	Teijin	Type LN- 1250P or LN-1250G	Plastic material, overall approx. 80 mm by 45 by 25 mm, min thickness 1,5 mm Rated V-0 at RTI =125°C by min. 1,5 mm thickness;	IEC/EN 62368-1 (QMFZ2)	Accepted UR E50075
Input Connector (C14 inlet for T3 model)	Richbay	R-301SN	Min. 250Vac; Min. 10A	IEC/EN 60320 (AXUT2)	VDE 40030228 UR E184638
(alternative)	Sun Fair	S-03 series	Min. 250Vac; Min. 10A	IEC/EN 60320 (AXUT2)	VDE 40034447 UR E226643
(alternative)	TECX	TU-301 TU-301-S, TU-301-SP	Min. 250Vac; Min. 10A	IEC/EN 60320 (AXUT2)	ENEC 01898 UR E220004

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
(alternative)	Leci	DB-14	Min. 250Vac; Min. 10A	IEC/EN 60320 (AXUT2)	VDE 40032137 UR E302229
Alt. use	Rong Feng Industrial Co., Ltd.	SS-120	10A, 250Vac	IEC/EN 60320-1	VDE 40028101
Alt. use	Inalways Corporation	0711	10A, 250Vac	IEC/EN 60320-1	ENEC 2016019
Alt. use	Zhe Jiang Bei Er jia	ST-A01- 003J	10A, 250Vac	IEC/EN 60320-1	VDE 40013388
Input Connector (C6 inlet for T3A model)	+ Sun Fair	S-02	Min. 250Vac Min. 2,5A	IEC/EN 60320 (AXUT2)	VDE 40034448 UR E226643
(alternative)	Richbay	R-30790	Min. 250Vac Min. 2,5A	IEC/EN 60320 (AXUT2)	VDE 40030381 UR E184638
(alternative)	Leci	DB-6	Min. 250Vac Min. 2,5A	IEC/EN 60320 (AXUT2)	VDE 40032465 UR E302229
(alternative)	TECX	TU-333	Min. 250Vac Min. 2,5A	IEC/EN 60320 (AXUT2)	VDE 40005430 UR E220004
(alternative)	Supercom electronics co ltd	SC-14	Min. 250Vac Min. 2,5A	IEC/EN 60320 (AXUT2)	VDE UR E152973
Alt. use	Rong Feng Industrial Co., Ltd.	RF-190	2.5A, 250Vac	IEC/EN 60320-1	VDE 40030379
Alt. use	Inalways Corporation	0724	2.5A, 250Vac	IEC/EN 60320-1	ENEC 2016023
Alt. use	Zhe Jiang Bei Er jia	ST-A04-002	2.5A, 250Vac	IEC/EN 60320-1 IEC/EN 60320-3	VDE 40016045
Fuse (F1)	+ Wickmann Werke	392	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 126983 UR E67006
(alternative)	Conquer Electronics	MST-series	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 40017118 UR E82636
(alternative)	Bussmann	SS-5	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 40015513 UR E19180
(alternative)	Walter	ICP	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX)	VDE 40012824 UL E56092
(alternative)	Ever island electric co ltd & walter electric	2010	T 2A; 250Va.c.	IEC/EN 60127-2 (JDYX2)	VDE 40018781 UR E56092
Alt. use	Bel Fuse Ltd.	RST	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40011144 UR E20624

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
Alt. use	Shenzhen Lanson Electronics Co. Ltd.	SMT	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40012592 UR E221465
Alt. use	Dongguan Better Electronics Technology Co., Ltd.	932	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX8)	VDE 40033369 UR E300003
Alt. use	Hollyland Company Limited	5ET	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40015669 UR E156471
Alt. use	Sunny East Enterprise Co. Ltd.	CFD	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX)	VDE 40030246 UR E133774
Alt. use	Conquer Electronics Co., Ltd.	MET	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX2)	VDE 40017157 UR E82636
Alt. use	Zhongshan Lanbao Electrical Appliances Co., Ltd.	RTI-10	T 2A; 250Va.c.	IEC/EN 60127-1 IEC/EN 60127-3 (JDYX)	VDE 40017009 UR E213695
PCB	Various	Paper phenolic, paper epoxy or glass epoxy, rated 94V-1 at RTI=130°C by min. thickness 0,2 mm. Measured thickness 1,6 mm Overall approx.. 70 mm by 44 mm		(ZPMV2)	UR
Varistor (ZNR1)	Thinking	TVR10471 TVR14471	300 Vac, 385 Vdc; coating min. UL94V-1	IEC61051-2 IEC 60950-1 Annex Q (VZCA2) (VZCA8)	VDE 400212431 cURus E314979
(alternative)	Joyin	JVR10N471 K JVR14N471 K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC61051-2 IEC 60950-1 Annex Q (FOWX2) (FOWX8)	VDE 005937 cURus E154922
(alternative)	Success	SVR10D471 K SVR14D471 K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC61051-2 IEC 60950-1 Annex Q (VZCA2) (VZCA8)	VDE40030401 cURus E330256
(alternative)	Centra science corp.	CNR 10D471K CNR 14D471K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC61051-2 IEC 60950-1 Annex Q (VZCA2) (VZCA8)	VDE 40008220 cURus E165143

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
(alternative)	Ceramate	GNR10D471 K, GNR14D471 K	300 Vac, 385 Vdc; coating min. UL94V-1	IEC/EN 61051-2 IEC/EN 60950-1 Annex Q (VZCA2) (VZCA8)	VDE 40031745 cURus E315429
X-Capacitor (CX1)	+ Cheng Tung	CTX	Max. 0,22 µF, 300V X2	IEC/EN 60384-14 (FOWX2)	VDE 40022642 UR E193049
(alternative)	Tenta	MEX	Max. 0,22 µF, 275V X2	IEC/EN60384-14 (FOWX2)	VDE 119119 UR E222911
(alternative)	Dain Electronics Co., Ltd.	MPX	Max. 0,22 µF, min. 250 V X1 or X2	IEC/EN 60384-14 (FOWX2)	VDE 40018798 UR E147776
(alternative)	UTX (Ultra Tech Xiphi)	HQX	Max. 0,22 µF, min.275V X2	IEC/EN60384-14 (FOWX2)	VDE 40015608 UR E183780
Bleeder Resistor (RA, RB)	VIKING TECH CORPORATIO N KAOSHIUNG BRANCH	HVR05 series (c), HVR06 series (d),	2MΩ 1/8W, 2MΩ 1/4W	IEC/EN62368-1 AZOT2	Accepted UR E490339
	FUTABA ELECTRIC CO LTD	RM series	2MΩ 1/4W	IEC/EN 60065-1 FPAV2	CB SE-77444 UR E220321
	VISHAY COMPONENTS INDIA PVT. LTD	SVR37#	2MΩ 1/2W	IEC/EN 62368-1 FPAV8	VDE 40002857 UR E171160
	Yageo Components (Suzhou)	HHV Series	2MΩ 1/4W	IEC/EN 62368-1 FPAV2	VDE: 40031974 UR E333286
	TZAI YUAN ENTERPRISE CO LTD	HSMD OR SMD	2MΩ 1/8W	IEC/EN62368-1 AZOP2, AZOP8	Accepted UR E354677
	PROSPERITY DIELECTRICS CO LTD	FVS03, TF06V, FVS05, TF08V, FVS06, TF12V, FVS20, TF20V, FVS25, TF25V	2MΩ 1/4W	IEC/EN 62368-1 UL 62368-1	Accepted UR E358325
Y-Capacitor (CY1)	+ TDK	CD	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 138526 UR E37861

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
(alternative)	+Success	SE	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40037213 VDE 40037221 UR E114280
(alternative)	+Success	SB	Max. 2200pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40037213 VDE 40037221 UR E114280
(alternative)	JYA-NAY Co., Ltd.	JN	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	TUV 69242987 UR E201384
(alternative)	Haohua Electronic Co.	CT7	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40003902 UR E233106
(alternative)	Walsin Technology Corp.	AH	Max. 4700pF, Min. 250V	IEC/EN 60384-14 UL1414 (FOWX2)	VDE 40001804 UR E146544
Transistor (Q1) (Screwed to the heatsink 1)	Various	Various	Min. 600 V, Min. 6A Insulated from the heatsink 1 with the glue	IEC/EN 62368-1	Accepted.
Electrolytic Capacitor (C1)	Various	Various	Min. 33 μ F, Min. 400Vac; 105°C	IEC/EN 62368-1	Accepted.

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
Transformer (T1) Pri/sec	+ Yao Sheng, Alternative: ENG or BOAM or GlobTek or Haopuwei or Hejia		XF00210 or XF00211 or XF00212, open type construction with overall dimension approx. 23 mm by 20 mm by 18 mm. <u>Rating:</u> 240V/ 0,6A, 50/60 Hz <u>Core:</u> Ferrite ETD <u>Coil:</u> enamelled copper wire. <u>Bobbin:</u> UR E59481, type +T373J, T375J from Chang Chun and PM-9820 from Sumitomo, UR (QMFZ2), rated 94V-0 at min thickness 1,6mm Measured thickness: 3,4 mm <u>Insulation:</u> Triple insulated wire, Furukawa, TEX-E, Class B (VDE 006735, UR E206440) or Totoku TIW-E class B (VDE 40052023, UR E166483) or GREAT LEOFLON INDUSTRIAL CO LTD TRW(B) class B (VDE 136581, UR E211989), Cosmolink /TIW-M (VDE 138053 UR E213764) Insulation class B	IEC/EN 62368-1	Accepted.
Optical Isolator (PC1)	+ Lite-on	LTV-817	Dti. = Min. 0,6mm Int. cr. = Min. 5,2mm Ext. cr. = Min. 7,8mm Minimum 3000 V ac isolation. Reinforced insulation. (Operation temperature 110°C). Vinia, Vinib=6000V	IEC/EN 60950-1 VDE 0884 (FPQU2)	VDE 40015248 UR E113898
(alternative)	Fairchild Semiconductor	H11A817	Dti > 0,4mm, Ext.cr. > 7,8 mm, Int cr ≥ 5,2mm Isolation 3000Vac min. 110°C min. Thermal cycling test	IEC/EN 60950-1 VDE 0884 (FPQU2)	FIMKO VDE 104801 UR E90700

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
(alternative)	Everlight	EL817	Dti. ≥ 0,4mm Ext. cr. ≥ Min. 8,0 mm; Thermal cycling test Isolation voltage min. 3000Vac, reinforced insulation (Operation temperature 110°C). Vinia=4000V Vinia=4000V	IEC/EN 60950-1 IEC/EN62368-1 VDE 0884 (FPQU2)	FIMKO, VDE 132249 UR E214129
(alternative)	Cosmo Electronics Corp	K1010, KP1010	Dti > 0,4mm, Int cr > 5,3mm, Ext cr > 8,0mm, Isolation 3000Vac min., 110°C min., Thermal cycling test Vinia=6800V Vinia=6800V	IEC/EN 60950-1 VDE 0884 (FPQU2)	VDE 101347 UR E169586
NF1 for all models	+ ENG GlobTek Sunycore Boam Hejia Haopuwei	NF00030	Open type construction with overall dimension approx. max. 17,5 mm by 18,0 mm by 13,5 mm Min. 9mH Bobbin: UR E59481, type +T373J, T375J from Chang Chun and PM-9820 from Sumitomo, UR (QMFZ2)	IEC/EN 62368-1	Accepted.
NF1 for all models (alternative)	+ ENG GlobTek Sunycore Boam Hejia Haopuwei	NF00001D	Open type construction with overall dimension approx. max. 17,5 mm by 18,0 mm by 13,5 mm Min. 32mH Bobbin: UR E59481, type +T373J, T375J from Chang Chun and PM-9820 from Sumitomo, UR (QMFZ2)	IEC/EN 62368-1	Accepted.
Internal & output wiring	Various	Various	FT-1 or WV-1	IEC/EN 62368-1	Accepted

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
<p>Supplementary information:</p> <p>1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.</p> <p>2) Description line content is optional. Main line description needs to clearly detail the component used for testing</p>					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.8.4, 4.8.5	TABLE: Lithium coin/button cell batteries mechanical tests		N/A
-----------------	--	--	-----

(The following mechanical tests are conducted in the sequence noted.)

4.8.4.2	TABLE: Stress Relief test		—
---------	---------------------------	--	---

Part	Material	Oven Temperature (°C)	Comments
--	--	--	--

4.8.4.3	TABLE: Battery replacement test		—
---------	---------------------------------	--	---

Battery part no. :			—
Battery Installation/withdrawal	Battery Installation/Removal Cycle		Comments
	1		-
	2		-
	3		-
	4		-
	5		-
	6		-
	8		-
	9		-
	10		-

4.8.4.4	TABLE: Drop test		—
---------	------------------	--	---

Impact Area	Drop Distance	Drop No.	Observations
		1	
		2	
		3	

4.8.4.5	TABLE: Impact		—
---------	---------------	--	---

Impacts per surface	Surface tested	Impact energy (Nm)	Comments

4.8.4.6	TABLE: Crush test		—
---------	-------------------	--	---

Test position	Surface tested	Crushing Force (N)	Duration force applied (s)

Supplementary information:

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.8.5	TABLE: Lithium coin/button cell batteries mechanical test result			N/A
Test position	Surface tested	Force (N)	Duration force applied (s)	
--	--	--	--	

Supplementary information:

5.2	Table: Classification of electrical energy sources						P
5.2.2.2 – Steady State Voltage and Current conditions							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				U (Vrms or Vpk)	I (Apk or Arms)	Hz	
1	100-240 V, 50-60 Hz	Output connector (+ to -)	Normal	5,12	/	DC	ES1 (*)
			Abnormal	/	/	/	
			Single fault – SC(*)	0 V	0 A	/	
2	100-240 V, 50-60 Hz	Output connector (+ to -) (prospective touch voltage)	Normal	/	0,14mApk	/	ES1 (*)
			Abnormal	/	/	/	
			Single fault – SC/OC	/	0,188mApk	/	

Supplementary information:
a.c. mains considered ES3.
(*) Circuits complied with with ES1 following Simulated Abnormal Operating Conditions/ Test Simulated Single Fault Condition. See Tables B.3 and B.4

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.2.2.3 - Capacitance Limits

No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters		ES Class
				Capacitance, nF	Upk (V)	
1	--	--	Normal	--	--	ES3
			Abnormal	--	--	
			Single fault – SC/OC	--	--	

5.2.2.4 - Single Pulses

No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Duration (ms)	Upk (V)	lpk (mA)	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	

5.2.2.5 - Repetitive Pulses

No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Off time (ms)	Upk (V)	lpk (mA)	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	

Test Conditions:
 Normal –
 Abnormal -
 Supplementary information: SC=Short Circuit, OC=Short Circuit
 No X-Capacitors used.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1824-X.X						P
	test voltage (V)	90*	264*	90**	264**		—
	Frequency (Hz)	50	50	50	50		—
	tamb1 (°C)	23,0	24,1	23,1	24,3		—
	tamb2 (°C)	40	40	40	40		—
maximum temperature T of part/at:		T (°C)				allowed Tmax (°C)	
1. transformer T1 coil	101,1	101,3	102,0	102,3		110	
2. transformer T1 core	96,7	96,2	97,2	97,3		110	
3. BD1 body	107,6	79,4	94,2	76,3		130	
4. Capacitor C1	83,4	73,7	81,3	70,2		105	
5. Capacitor CX1	71,9	67,7	72,0	67,6		105	
6. PCB (near Q1)	106,1	106,0	104,7	106,6		130	
7. Inductor L2 coil	88,6	89,1	90,9	92,6		105	
8. Inductor NF1 coil	86,0	72,6	84,0	70,9		105	
9. PCB (near D3)	106,4	107,1	105,9	109,4		130	
10. Capacitor C9	74,5	73,6	76,9	78,1		105	
11. Enclosure (inside)	86,7	85,7	87,1	87,2		--	
<p>Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.</p> <p>* vertical</p> <p>** horizontal</p>							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1818-X.X	P
	test voltage (V) :	90* 264* 90** 264**
	Frequency (Hz)	50 50 50 50
	tamb1 (°C) :	23,8 24,5 22,8 23,5
	tamb2 (°C) :	40 40 40 40

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. transformer T1 coil	90,2	97,4	90,6	95,8	110
2. transformer T1 core	92,8	100,3	92,0	98,6	110
3. BD1 body	92,5	81,1	89,2	77,7	130
4. Capacitor C1	76,0	73,0	74,7	71,6	105
5. Capacitor CX1	71,4	69,1	67,7	64,7	105
6. PCB (near Q1)	101,1	112,9	100,1	112,3	130
7. Inductor L2 coil	76,0	81,4	78,7	82,3	105
8. Inductor NF1 coil	81,6	74,6	78,0	70,6	105
9. PCB (near D3)	92,5	101,4	94,7	102,9	130
10. Capacitor C9	71,7	76,5	70,9	74,3	105
11. Enclosure (inside)	74,8	79,8	80,4	81,8	--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

* vertical

** horizontal

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1812-X.X					P
	test voltage (V)	90*	264*	90**	264**	—
	Frequency (Hz)	50	50	50	50	—
	tamb1 (°C)	22,8	24,7	22,4	22,8	—
	tamb2 (°C)	40	40	40	40	—
maximum temperature T of part/at:		T (°C)				allowed Tmax (°C)
1.	transformer T1 coil	97,5	98,2	94,8	100,1	110
2.	transformer T1 core	102,1	104,3	100,8	106,8	110
3.	BD1 body	92,2	77,2	90,6	71,2	130
4.	Capacitor C1	86,4	77,1	86,7	71,9	105
5.	Capacitor CX1	77,9	70,1	73,1	70,4	105
6.	PCB (near Q1)	105	107,1	104,5	105,5	130
7.	Inductor L2 coil	84,6	85,0	85,4	91,2	105
8.	Inductor NF1 coil	88,5	74,8	84,5	71,6	105
9.	PCB (near D3)	100,5	101,7	102,2	106,7	130
10.	Capacitor C9	77,3	77,0	74,8	83,8	105
11.	Enclosure (inside)	88,9	93,6	89,8	95,1	--
<p>Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.</p> <p>* vertical</p> <p>** horizontal</p>						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1805-X.X						P
	test voltage (V)	90*	264*	90**	264**		—
	Frequency (Hz)	50	50	50	50		—
	tamb1 (°C)	31,4	27,0	32,2	32,7		—
	tamb2 (°C)	40	40	40	40		—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. transformer T1 coil	97,9	107,1	94,5	98,6	110
2. transformer T1 core	90,5	99,2	88,5	91,9	110
3. BD1 body	84,2	75,7	85,1	75,0	130
4. Capacitor C1	78,8	74,7	78,9	74,2	105
5. Capacitor CX1	67,0	65,1	68,3	65,2	105
6. PCB (near Q1)	103,9	115,2	102,1	108,5	130
7. Inductor L2 coil	85,0	94,2	82,8	87,1	105
8. Inductor NF1 coil	78,5	69,9	79,3	69,0	105
9. PCB (near D3)	106,7	115,4	102,6	105,5	130
10. Capacitor C9	71,3	80,1	69,3	73,4	105
11. Enclosure (inside)	78,6	87,5	76,4	79,2	--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

* vertical

** horizontal

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1806-X.X					P
	test voltage (V)	90*	264*	90**	264**	—
	Frequency (Hz)	50	50	50	50	—
	tamb1 (°C)	33,0	24,1	32,4	23,9	—
	tamb2 (°C)	40	40	40	40	—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. transformer T1 coil	102,7	97,3	106,6	98,7	110
2. transformer T1 core	98,0	96,7	101,6	98,1	110
3. BD1 body	101,7	104,4	103,1	100,8	130
4. Capacitor C1	86,0	89,8	87,8	88,2	105
5. Capacitor CX1	87,5	79,2	87,1	78,8	105
6. PCB (near Q1)	112,0	111,3	115,2	110,5	130
7. Inductor L2 coil	84,7	85,9	87,8	87,5	105
8. Inductor NF1 coil	99,7	97,4	99,4	95,1	105
9. PCB (near D3)	106,3	100,6	112,4	102,0	130
10. Capacitor C9	79,5	72,9	83,3	75,5	105
11. Enclosure (inside)	78,1	84,2	80,8	85,7	--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

* vertical
** horizontal

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1807-X.X						P
	test voltage (V)	90*	264*	90**	264**		—
	Frequency (Hz)	50	50	50	50		—
	tamb1 (°C)	24,5	25,5	24,9	25,8		—
	tamb2 (°C)	40	40	40	40		—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. transformer T1 coil	94,3	97,4	94,5	97,2	110
2. transformer T1 core	89,8	92,4	90,0	82,5	110
3. BD1 body	96,8	80,9	98,6	75,8	130
4. Capacitor C1	81,3	74,9	83,1	80,1	105
5. Capacitor CX1	77,5	75,1	82,7	100,1	105
6. PCB (near Q1)	96,8	100,7	98,9	78,7	130
7. Inductor L2 coil	78,3	79,0	78,2	78,0	105
8. Inductor NF1 coil	86,9	74,8	90,4	96,5	105
9. PCB (near D3)	96,2	98,7	94,3	73,5	130
10. Capacitor C9	73,0	73,5	73,0	81,5	105
11. Enclosure (inside)	81,1	82,8	80,2	61,3	--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

* vertical

** horizontal

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1824-X.X-T2						P
	test voltage (V)	90	264				—
	Frequency (Hz)	50	50				—
	tamb1 (°C)	30,6	31,3				—
	tamb2 (°C)	40	40				—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. Transformer T1 coil	87,0	91,9			110
2. Transformer T1 core	88,4	92,7			110
3. NF1 coil	91,3	79,0			120
4. Inlet	68,9	66,4			90
5. Capacitor CX1	63,0	59,5			105
6. BD1 body	89,5	81,6			130
7. Capacitor C1	87,0	81,1			105
8. PC1 body	78,7	84,4			130
9. Inductor L1 (body)	66,1	69,2			120
10. Capacitor C8	70,7	74,5			105
11. PCB (near T1)	87,9	90,2			130
12. PCB (near Q1)	91,7	94,2			130
13. Enclosure (inside)	63,7	66,8			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1818-X.X-T2						P
	test voltage (V)	90	264				—
	Frequency (Hz)	50	50				—
	tamb1 (°C)	32,0	33,2				—
	tamb2 (°C)	40	40				—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. Transformer T1 coil	89,6	91,0			110
2. Transformer T1 core	89,2	90,6			110
3. NF1 coil	91,2	79,6			120
4. Inlet	59,0	58,2			90
5. Capacitor CX1	61,6	58,8			105
6. BD1 body	96,5	82,4			130
7. Capacitor C1	88,9	82,2			105
8. PC1 body	82,9	86,6			130
9. Inductor L1 (body)	67,0	68,9			120
10. Capacitor C8	76,4	79,0			105
11. PCB (near T1)	93,9	98,5			130
12. PCB (near Q1)	91,4	97,9			130
13. Enclosure (inside)	79,3	80,7			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1809-X.X-T2	P
	test voltage (V): 90 264	—
	Frequency (Hz): 50 50	—
	tamb1 (°C): 29,4 30,8	—
	tamb2 (°C): 40 40	—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. Transformer T1 coil	101,8	105,5			110
2. Transformer T1 core	93,5	106,3			110
3. NF1 coil	89,5	78,7			120
4. Inlet	60,4	66,5			90
5. Capacitor CX1	59,7	58,8			105
6. BD1 body	96,3	82,9			130
7. Capacitor C1	87,3	76,2			105
8. PC1 body	82,3	97,5			130
9. Inductor L1 (body)	72,4	79,4			120
10. Capacitor C8	78,9	86,5			105
11. PCB near T1	96,3	90,3			130
12. PCB near Q1	104,3	95,7			130
13. Enclosure (inside)	80,0	78,7			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1805-X.X-T2						P
	test voltage (V)	90	264				—
	Frequency (Hz)	50	50				—
	tamb1 (°C)	32,9	31,7				—
	tamb2 (°C)	40	40				—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. Transformer T1 coil	104,9	107,9			110
2. Transformer T1 core	106,2	107,2			110
3. NF1 coil	93,4	85,0			120
4. Inlet	52,5	56,9			90
5. Capacitor CX1	63,4	61,1			105
6. BD1 body	101,7	81,7			130
7. Capacitor C1	92,7	84,5			105
8. PC1 body	100,1	97,6			130
9. Inductor L1 (body)	89,7	80,3			120
10. Capacitor C8	80,6	89,0			105
11. PCB near T1	106,1	98,6			130
12. PCB near Q1	97,4	97,3			130
13. Enclosure (inside)	80,8	91,4			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1806-X.X-T2						P
	test voltage (V)	90	264				—
	Frequency (Hz)	50	50				—
	tamb1 (°C)	28,9	35,1				—
	tamb2 (°C)	40	40				—

maximum temperature T of part/at:	T (°C)					allowed Tmax (°C)
1. Transformer T1 coil	109,5	105,3				110
2. Transformer T1 core	105,8	101,7				110
3. NF1 coil	91,9	82,2				120
4. Inlet	64,0	62,8				90
5. Capacitor CX1	62,4	58,4				105
6. BD1 body	99,6	83,7				130
7. Capacitor C1	94,2	84,1				105
8. PC1 body	99,6	97,0				130
9. Inductor L1 (body)	97,0	88,9				120
10. Capacitor C8	100,0	91,7				105
11. PCB near T1	103,3	98,5				130
12. PCB near Q1	102,8	112,3				130
13. Enclosure (inside)	80,5	77,3				--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

Measurement uncertainty of temperature measurement is 3°C.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1807-X.X-T2					P
	test voltage (V)	90	264			—
	Frequency (Hz)	50	50			—
	tamb1 (°C)	34,3	35,2			—
	tamb2 (°C)	40	40			—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. Transformer T1 coil	104,7	106,9			110
2. Transformer T1 core	101,1	104,9			110
3. NF1 coil	88,7	83,4			120
4. Inlet	60,7	62,5			90
5. Capacitor CX1	60,1	57,7			105
6. BD1 body	94,4	85,0			130
7. Capacitor C1	91,3	85,2			105
8. PC1 body	94,4	100,3			130
9. Inductor L1 (body)	90,6	92,6			120
10. Capacitor C8	93,7	95,7			105
11. PCB near T1	100,0	101,7			130
12. PCB near Q1	99,2	111,5			130
13. Enclosure (inside)	77,2	79,6			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1824-X.X-T3; -T3A						P
	test voltage (V)	90	264				—
	Frequency (Hz)	50	50				—
	tamb1 (°C)	30,6	31,3				—
	tamb2 (°C)	40	40				—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. Transformer T1 coil	87,7	91,6			110
2. Transformer T1 core	88,1	92,9			110
3. NF1 coil	91,3	78,7			120
4. Inlet	68,8	65,7			90
5. Capacitor CX1	62,6	58,9			105
6. BD1 body	89,4	81,3			130
7. Capacitor C1	87,4	80,4			105
8. PC1 body	78,5	85,0			130
9. Inductor L1 (body)	65,8	69,2			120
10. Capacitor C8	71,0	74,9			105
11. PCB near T1	88,0	90,9			130
12. PCB near Q1	91,6	94,4			130
13. Enclosure (inside)	63,9	67,0			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1818-X.X-T3; -T3A						P
	test voltage (V)	90	264				—
	Frequency (Hz)	50	50				—
	tamb1 (°C)	32,0	33,2				—
	tamb2 (°C)	40	40				—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. Transformer T1 coil	89,5	91,5			110
2. Transformer T1 core	88,8	91,1			110
3. NF1 coil	91,2	79,1			120
4. Inlet	58,7	58,0			90
5. Capacitor CX1	61,9	58,6			105
6. BD1 body	95,9	82,3			130
7. Capacitor C1	88,6	82,3			105
8. PC1 body	83,4	86,2			130
9. Inductor L1 (body)	67,2	69,1			120
10. Capacitor C8	76,5	79,8			105
11. PCB near T1	93,6	98,8			130
12. PCB near Q1	91,5	97,3			130
13. Enclosure (inside)	79,8	80,7			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1809-X.X-T3; -T3A						P
	test voltage (V)	90	264				—
	Frequency (Hz)	50	50				—
	tamb1 (°C)	29,4	30,8				—
	tamb2 (°C)	40	40				—

maximum temperature T of part/at:	T (°C)					allowed Tmax (°C)
1. Transformer T1 coil	101,2	104,8				110
2. Transformer T1 core	93,2	105,7				110
3. NF1 coil	90,0	78,1				120
4. Inlet	60,3	66,3				90
5. Capacitor CX1	59,5	59,1				105
6. BD1 body	96,0	82,9				130
7. Capacitor C1	87,6	75,8				105
8. PC1 body	82,1	98,3				130
9. Inductor L1 (body)	71,8	79,5				120
10. Capacitor C8	79,2	86,6				105
11. PCB near T1	96,7	90,8				130
12. PCB near Q1	104,7	95,2				130
13. Enclosure (inside)	80,2	78,7				--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1805-X.X-T3; -T3A					P
	test voltage (V)	90	264			—
	Frequency (Hz)	50	50			—
	tamb1 (°C)	32,9	31,7			—
	tamb2 (°C)	40	40			—

maximum temperature T of part/at:	T (°C)				allowed Tmax(°C)
1. Transformer T1 coil	104,8	108,0			110
2. Transformer T1 core	106,6	107,0			110
3. NF1 coil	93,7	85,2			120
4. Inlet	52,7	56,9			90
5. Capacitor CX1	63,5	61,5			105
6. BD1 body	101,9	81,9			130
7. Capacitor C1	92,5	84,6			105
8. PC1 body	100,4	98,4			130
9. Inductor L1 (body)	90,1	79,9			120
10. Capacitor C8	80,9	88,9			105
11. PCB near T1	106,9	98,4			130
12. PCB near Q1	96,7	97,2			130
13. Enclosure (inside)	80,6	91,3			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1806-X.X-T3; -T3A					P
	test voltage (V)	90	264			—
	Frequency (Hz)	50	50			—
	tamb1 (°C)	28,9	35,1			—
	tamb2 (°C)	40	40			—

maximum temperature T of part/at:	T (°C)				allowed Tmax(°C)
1. Transformer T1 coil	107,2	104,6			110
2. Transformer T1 core	106,1	102,0			110
3. NF1 coil	91,7	82,6			120
4. Inlet	63,8	63,1			90
5. Capacitor CX1	61,7	58,5			105
6. BD1 body	99,9	83,5			130
7. Capacitor C1	94,8	83,3			105
8. PC1 body	99,9	97,4			130
9. Inductor L1 (body)	96,3	88,6			120
10. Capacitor C8	100,6	91,5			105
11. PCB near T1	103,9	98,9			130
12. PCB near Q1	103,0	112,5			130
13. Enclosure (inside)	81,2	77,2			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements GT-41062-1807-X.X-T3; -T3A						P
	test voltage (V)	90	264				—
	Frequency (Hz)	50	50				—
	tamb1 (°C)	34,3	35,2				—
	tamb2 (°C)	40	40				—

maximum temperature T of part/at:	T (°C)				allowed Tmax (°C)
1. Transformer T1 coil	104,4	107,0			110
2. Transformer T1 core	101,3	104,5			110
3. NF1 coil	88,9	83,4			120
4. Inlet	61,2	62,9			90
5. Capacitor CX1	60,9	57,7			105
6. BD1 body	94,1	85,5			130
7. Capacitor C1	91,1	85,4			105
8. PC1 body	94,7	100,1			130
9. Inductor L1 (body)	91,4	92,5			120
10. Capacitor C8	94,5	94,9			105
11. PCB near T1	99,7	101,8			130
12. PCB near Q1	98,9	112,2			130
13. Enclosure (inside)	77,3	79,6			--

Comment: The above temperatures are measured at tamb1. The values measured are subtracted with tamb1 and tamb2 (°C) added. Therefore above measured temperatures are the absolute temperatures in °C at maximum ambient.

IEC 62368-1						
Clause	Requirement + Test	Result - Remark				Verdict
5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements Accessible parts					P
	Supply voltage (V)	90 V / 50 Hz	90 V / 50 Hz	264 V /60Hz	264 V / 60Hz	—
	Ambient T _{min} (°C)	25,0	25,0	25,0	25,0	—
	Ambient T _{max} (°C)	25,0	25,0	25,0	25,0	—
	T _{ma} (°C)	--	--	--	--	—
Maximum measured temperature T of part/at:		T (°C)				Allowed T _{max} (°C)
GT-41062-1824-X.X						
Enclosure (outside)		53,4	55,7	52,4	54,8	60
Orientation		Vertical	Horizontal	Vertical	Horizontal	--
GT-41062-1805-X.X						
Enclosure (outside)		50,1	50,1	55,6	53,2	60
Orientation		Vertical	Horizontal	Vertical	Horizontal	--
GT-41062-1818-X.X-T2						
Enclosure (outside)		--	48,6	--	48,7	60
Orientation		Vertical	Horizontal	Vertical	Horizontal	--
GT-41062-1805-X.X-T2						
Enclosure (outside)		--	47,3	--	37,8	60
Orientation		Vertical	Horizontal	Vertical	Horizontal	--
GT-41062-1824-X.X-T3; -T3A						
Enclosure (outside)		--	38,0	--	40,1	60
Orientation		Vertical	Horizontal	Vertical	Horizontal	--
GT-41062-1805-X.X-T3; -T3A						
Enclosure (outside)		--	49,1	--	48,1	60
Orientation		Vertical	Horizontal	Vertical	Horizontal	--
Supplementary information:						
Note 1: T _{ma} should be considered as directed by applicable requirement						
Note 2: T _{ma} is not included in assessment of Touch Temperatures (Clause 9)						
Above models represents also all other models.						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics		N/A
Penetration (mm)			—
Object/ Part No./Material	Manufacturer/t rademark	T softening (°C)	
--	--	--	
Supplementary information:			

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics			P
Allowed impression diameter (mm)	≤ 2 mm			—
Object/Part No./Material	Manufacturer/trademark	Test temperature (°C)	Impression diameter (mm)	
Plug holder (GT-41062-WWVV-X.X-T2)	--	125	0,8	
Transformer bobbin XF00209	--	125	0,8	
Transformer bobbin XF00210	--	125	0,9	
Transformer bobbin XF00211	--	125	0,7	
Transformer bobbin XF00212	--	125	0,7	
Enclosure	--	125	0,6	
Supplementary information: The impression diameter caused by the ball did not exceed 2 mm. Approved materials are used. Refer to list of safety critical components.				

5.4.2.2, 5.4.2.4 and 5.4.3	TABLE: Clearance and creepage distance measurements					P
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)
GT-41062-WWVV-X.X-T3 and GT-41062-WWVV-X.X-T3A						
Primary to Primary before fuse (functional)	420	250	1,5	>5	2,5	>5
Primary to Primary after fuse (functional)	420	250	Method B.4.4 was used			
Primary to Earth (Basic)	420	250	3,0	3,0	3,0	3,0
Primary to Secondary (Reinforced) transformer *	455	250	3,0	5,0*	5,0	> 5,2*
Primary to Secondary on PCB	455	250	3,0	5,0	5,0	6,0

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)
Primary of transformer to secondary heatsink	455	250	3,0	5,0	5,0	>5,2
Transformer T1: Primary to Secondary	455	250	3,0	6,3	5,0	6,3
Transformer T1: Secondary to Core	455	250	3,0	5,3	5,0	> 5,2*
Secondary to Secondary	—	—	Method B.4.4 was used			
Supplementary information: * TIW is used Whole transformer outer is wrapped by 2 layers of insulating tape.						

5.4.2.2, 5.4.2.4 and 5.4.3	TABLE: Clearance and creepage distance measurements					P
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)
GT-41062-WVVV-X.X						
Primary to Primary before fuse(functional)	420	250	1,5	2,9	2,5	2,9
Primary to Primary after fuse(functional)	420	250	Method B.4.4 was used			
Primary to Secondary (Reinforced) transformer T1	475	250	3,0	5,0*	5,0	>5,2*
Primary to Secondary on PCB (near U2)	399	250	3,0	4,2	5,0	7,2
Primary to Secondary on PCB (near CY1)	475	250	3,0	5,5	5,0	5,5
Transformer T1: Primary to Secondary	475	250	3,0	5,3	5,0	6,3
Transformer T1: Secondary to Core	475	250	3,0	5,3	5,0	> 5,2*
Secondary to Secondary	—	—	Method B.4.4 was used			
Supplementary information: * TIW is used Whole transformer outer is wrapped by 2 layers of insulating tape.						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.2.3	TABLE: Minimum Clearances distances using required withstand voltage			P
	Overvoltage Category (OV):			II
	Pollution Degree:			2
Clearance distanced between:	Required withstand voltage	Required cl (mm)	Measured cl (mm)	
Basic/Supplementary ¹⁾	2500	1,5*	See Table 5.4.2.2, 5.4.2.4 and 5.4.3.	
Reinforced ¹⁾	2500	3,0*	See Table 5.4.2.2, 5.4.2.4 and 5.4.3.	
Supplementary information: /				

5.4.2.4	TABLE: Clearances based on electric strength test			N/A
Test voltage applied between:	Required cl (mm)	Test voltage (kV) peak/ r.m.s. / d.c.	Breakdown Yes / No	
Functional / basic and supplementary insulation				
--	--	--	--	
Reinforced / double insulation				
--	--	--	--	
Supplementary information: Clause 5.4.2.2 and 5.4.2.3 applied.				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.4.2, 5.4.4.5 c) 5.4.4.9	TABLE: Distance through insulation measurements					P
Distance through insulation di at/of:	Peak voltage (V)	Frequency (kHz)	Material	Required DTI (mm)	DTI (mm)	
Optocoupler (reinforced insulation)	<354	--	See Table 4.1.2.	0,4	>0,4	
Supplementary information: Approved optocouplers are used. See list of critical components.						

5.4.9	TABLE: Electric strength tests			P
Test voltage applied between:	Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No	
Functional:				
--	--	--	--	
Basic/supplementary:				
AC-Input to PE Pin	AC	1500	No	
Primary to PE	DC	2500	No	
Y-Capacitors Y2, TDK-EPC Corp., type CD	DC	2500	No	
Y-Capacitors Y2, Success, type SE, SB	DC	2500	No	
Y-Capacitors Y2, JYA-NAY Co., Ltd., type JN	DC	2500	No	
Y-Capacitors Y2, Haohua Electronic Co., type CT7	DC	2500	No	
Y-Capacitors Y2, Walsin Technology Corp, type AH	DC	2500	No	
Reinforced:				
AC-Input to DC Output (SELV)	AC	3000	No	
Primary to Secondary	DC	4000	No	
AC-Input to enclosure	AC	3000	No	
Transformer T1: Primary to Secondary	AC	3000	No	
Transformer T1: Secondary winding to core	AC	3000	No	
* Transformer T1: Primary winding to core	AC	1707	No	
Insulation foil wound around transformers (1 layer)	AC	3000	No	
Supplementary information: The test was done on each model. * Performed for information only.				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.5.2.2	TABLE: Stored discharge on capacitors					P
Supply Voltage (V), Hz	Test Location	Operating Condition (N, S)	Switch position On or off	Measured Voltage (after 2 seconds)	ES Classification	
240V,50 Hz	L to N	N	--	0	ES1	
240V,50 Hz	L to N	N	--	0	ES1	

Supplementary information:
 X-capacitors installed for testing are: 0,22uF
 bleeding resistor rating: 200kOhm (certified resistors are used)
 ICX:
 Notes:
 A. Test Location:
 Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth
 B. Operating condition abbreviations:
 N – Normal operating condition (e.g., normal operation, or open fuse); S –Single fault condition
 All models were tested.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.6.6.2	TABLE: Resistance of protective conductors and terminations				N/A
Accessible part	Test current (A)	Duration (min)	Voltage drop (mV)	Resistance (mΩ)	
PE pin of appliance inlet- PCB	40,0	2	2000	0,05	
PE pin of appliance inlet- PCB	40,0	2	2200	0,055	

Supplementary information:
 Models tested: GT-41062-WVVV-X.X-T3A and GT-41062-WVVV-X.X-T3
 The resistance of protective bonding path did not exceed 0,1 Ohm.

5.7.2.2, 5.7.4	TABLE: Earthed accessible conductive part		P
Supply voltage	264 Vac / 60Hz		—
Location	Test conditions specified in 6.1 of IEC 60990 or Fault Condition No in IEC 60990 clause 6.2.2.1 through 6.2.2.8, except for 6.2.2.7		Touch current (mA)
	1 (NP/RP)		0,14/0,13
	2*		0,18/0,19
	3		N/A
	4		N/A
	5		N/A
	6		N/A
	8		N/A

Supplementary Information:

Notes:

- [1] Supply voltage is the anticipated maximum Touch Voltage
- [2] Earthed neutral conductor [Voltage differences less than 1% or more]
- [3] Specify method used for measurement as described in IEC 60990 sub-clause 4.3
- [4] IEC60990, sub-clause 6.2.2.7, Fault 7 not applicable.
- [5] (*) IEC60990, sub-clause 6.2.2.2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided.

Faults:

- 1: PE of not reliable earthed equipment disconnected. Normal and reverse polarity.
- 2: Neutral of single-phase equipment open. Normal and reverse polarity.
- 3: EUT use on IT systems shall be tested with each phase conductor faulted to earth (switch g)
- 4: Three phase equipment should be tested with each phase conductor open, one at the time.
- 5: Single phase equipment use on IT system or on 3P delta-system shall be tested with a 3P power system, with each phase faulted to PE, one at the time in combination with normal and reverse polarity and separately with each phase conductor open one at the time and in combination with normal and reverse polarity.
- 6: Three phase equipment for use on centre-earthed delta supply systems shall be tested on a delta supply system with each delta-leg centre-earthed, one at the time.
- 8: Accessible conductive parts which are only incidentally electrically connected to other parts shall be tested

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

for both when connected electrically to other parts and when not. Examples of such parts: doors and assemblies attached by metal hinges, adhesively-bonded labels which have an accessible conductive part etc. For class I models only.

6.2.2	Table: Electrical power sources (PS) measurements for classification					P
Source	Description	Measurement	Max Power after 3 s	Max Power after 5 s	PS Classification	
24,0 (GT-41062-1824-X.X)	+ to -	Power (W) :	--	18,0	PS1	
		VA (V) :	--	24,0		
		IA (A) :	--	0,75		
24,0 (GT-41062-1824-X.X)	+ to -	Power (W) :	--	28,34	PS1	
		VA (V) :	--	24,44		
		IA (A) :	--	1,67		
18,0 (GT-41062-1818-X.X)	+ to -	Power (W) :	--	18,0	PS1	
		VA (V) :	--	18,0		
		IA (A) :	--	1,0		
18,0 (GT-41062-1818-X.X)	+ to -	Power (W) :	--	27,18	PS1	
		VA (V) :	--	18,42		
		IA (A) :	--	1,75		
12,0 (GT-41062-1812-X.X)	+ to -	Power (W) :	--	18,0	PS1	
		VA (V) :	--	12,0		
		IA (A) :	--	1,5		
12,0 (GT-41062-1812-X.X)	+ to -	Power (W) :	--	30,18	PS1	
		VA (V) :	--	12,13		
		IA (A) :	--	3,14		
5,0 (GT-41062-1805-X.X)	+ to -	Power (W) :	--	16,0	PS1	
		VA (V) :	--	5,0		
		IA (A) :	--	3,2		
5,0 (GT-41062-1805-X.X)	+ to -	Power (W) :	--	23,67	PS1	
		VA (V) :	--	5,28		
		IA (A) :	--	5,29		
6,0 (GT-41062-1806-X.X)	+ to -	Power (W) :	--	18,0	PS1	
		VA (V) :	--	6,0		
		IA (A) :	--	3,0		
6,0 (GT-41062-1806-X.X)	+ to -	Power (W) :	--	21,95	PS1	
		VA (V) :	--	6,22		
		IA (A) :	--	5,48		
7,0 (GT-41062-1807-X.X)	+ to -	Power (W) :	--	18,0	PS1	
		VA (V) :	--	7,0		

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
X.X		IA (A) :	--	2,58	
7,0 (GT-41062-1807-X.X)	+ to -	Power (W) :	--	22,07	PS1
		VA (V) :	--	7,24	
		IA (A) :	--	5,60	
Supplementary Information: These test results also represent other models with the same circuit diagram.					

6.2.3.1	Table: Determination of Potential Ignition Sources (Arcing PIS)				N/A
Location	Open circuit voltage After 3 s (V _p)	Measured r.m.s current (I _{rms})	Calculated value (V _p x I _{rms})	Arcing PIS? Yes / No	
--	--	--	--	--	
Supplementary information: An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V _p) and normal operating condition rms current (I _{rms}) is greater than 15. All internal circuits considered PS3 arcing PIS.					

6.2.3.2	Table: Determination of Potential Ignition Sources (Resistive PIS)				N/A
Circuit Location (x-y)	Operating Condition (Normal / Describe Single Fault)	Measured wattage or VA During first 30 s (W / VA)	Measured wattage or VA After 30 s (W / VA)	Protective Circuit, Regulator, or PTC Operated? Yes / No (Comment)	Resistive PIS? Yes/No
--	--	--	--	--	--
Supplementary Information: A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter. If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification. A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, <u>or</u> (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault. All internal circuits considered PS3, resistive PIS.					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

8.5.5	TABLE: High Pressure Lamp		N/A
Description	Values	Energy Source Classification	
Lamp type		—	
Manufacturer		—	
Cat no.		—	
Pressure (cold) (MPa)		MS_	
Pressure (operating) (MPa)		MS_	
Operating time (minutes)		—	
Explosion method		—	
Max particle length escaping enclosure (mm) ..		MS_	
Max particle length beyond 1 m (mm)		MS_	
Overall result			
Supplementary information:			

B.2.5	TABLE: Input test - GT-41062-1824-X.X						P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
50 Hz							
90	0,473	--	--	--	F1	2,0	24 Vdc; 0,75 A
100	0,436	0,6	--	--	F1	2,0	24 Vdc; 0,75 A
240	0,329	0,6	--	--	F1	2,0	24 Vdc; 0,75 A
254	0,334	--	--	--	F1	2,0	24 Vdc; 0,75 A
264	0,337	--	--	--	F1	2,0	24 Vdc; 0,75 A
60 Hz							
90	0,479	--	--	--	F1	2,0	24 Vdc; 0,75 A
100	0,443	0,6	--	--	F1	2,0	24 Vdc; 0,75 A
240	0,332	0,6	--	--	F1	2,0	24 Vdc; 0,75 A
254	0,335	--	--	--	F1	2,0	24 Vdc; 0,75 A
264	0,338	--	--	--	F1	2,0	24 Vdc; 0,75 A
Supplementary information:							
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test - GT-41062-1818-X.X							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,469	--	--	--	F1	2,0	18 Vdc; 1,0 A	
100	0,435	0,6	--	--	F1	2,0	18 Vdc; 1,0 A	
240	0,326	0,6	--	--	F1	2,0	18 Vdc; 1,0 A	
254	0,329	--	--	--	F1	2,0	18 Vdc; 1,0 A	
264	0,331	--	--	--	F1	2,0	18 Vdc; 1,0 A	
60 Hz								
90	0,472	--	--	--	F1	2,0	18 Vdc; 1,0 A	
100	0,442	0,6	--	--	F1	2,0	18 Vdc; 1,0 A	
240	0,328	0,6	--	--	F1	2,0	18 Vdc; 1,0 A	
254	0,333	--	--	--	F1	2,0	18 Vdc; 1,0 A	
264	0,335	--	--	--	F1	2,0	18 Vdc; 1,0 A	
Supplementary information: The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test - GT-41062-1812-X.X							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,476	--	--	--	F1	2,0	12 Vdc; 1,5 A	
100	0,439	0,6	--	--	F1	2,0	12 Vdc; 1,5 A	
240	0,322	0,6	--	--	F1	2,0	12 Vdc; 1,5 A	
254	0,323	--	--	--	F1	2,0	12 Vdc; 1,5 A	
264	0,325	--	--	--	F1	2,0	12 Vdc; 1,5 A	
60 Hz								
90	0,493	--	--	--	F1	2,0	12 Vdc; 1,5 A	
100	0,444	0,6	--	--	F1	2,0	12 Vdc; 1,5 A	
240	0,323	0,6	--	--	F1	2,0	12 Vdc; 1,5 A	
254	0,324	--	--	--	F1	2,0	12 Vdc; 1,5 A	
264	0,326	--	--	--	F1	2,0	12 Vdc; 1,5 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

B.2.5	TABLE: Input test - GT-41062-1805-X.X							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,429	--	--	--	F1	2,0	5 Vdc; 3,2 A	
100	0,396	0,6	--	--	F1	2,0	5 Vdc; 3,2 A	
240	0,270	0,6	--	--	F1	2,0	5 Vdc; 3,2 A	
254	0,264	--	--	--	F1	2,0	5 Vdc; 3,2 A	
264	0,262	--	--	--	F1	2,0	5 Vdc; 3,2 A	
60 Hz								
90	0,435	--	--	--	F1	2,0	5 Vdc; 3,2 A	
100	0,402	0,6	--	--	F1	2,0	5 Vdc; 3,2 A	
240	0,271	0,6	--	--	F1	2,0	5 Vdc; 3,2 A	
254	0,269	--	--	--	F1	2,0	5 Vdc; 3,2 A	
264	0,266	--	--	--	F1	2,0	5 Vdc; 3,2 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test - GT-41062-1806-X.X							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,425	--	--	--	F1	2,0	6 Vdc; 3,0 A	
100	0,379	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
240	0,227	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
254	0,218	--	--	--	F1	2,0	6 Vdc; 3,0 A	
264	0,212	--	--	--	F1	2,0	6 Vdc; 3,0 A	
60 Hz								
90	0,428	--	--	--	F1	2,0	6 Vdc; 3,0 A	
100	0,387	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
240	0,231	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
254	0,221	--	--	--	F1	2,0	6 Vdc; 3,0 A	
264	0,217	--	--	--	F1	2,0	6 Vdc; 3,0 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

B.2.5	TABLE: Input test - GT-41062-1807-X.X							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,439	--	--	--	F1	2,0	7 Vdc; 2,57 A	
100	0,387	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
240	0,238	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
254	0,225	--	--	--	F1	2,0	7 Vdc; 2,57 A	
264	0,221	--	--	--	F1	2,0	7 Vdc; 2,57 A	
60 Hz								
90	0,440	--	--	--	F1	2,0	7 Vdc; 2,57 A	
100	0,404	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
240	0,225	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
254	0,228	--	--	--	F1	2,0	7 Vdc; 2,57 A	
264	0,223	--	--	--	F1	2,0	7 Vdc; 2,57 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test - GT-41062-1824-X.X-T2							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,451	--	--	--	F1	2,0	24 Vdc; 0,75 A	
100	0,418	0,6	--	--	F1	2,0	24 Vdc; 0,75 A	
240	0,307	0,6	--	--	F1	2,0	24 Vdc; 0,75 A	
254	0,304	--	--	--	F1	2,0	24 Vdc; 0,75 A	
264	0,308	--	--	--	F1	2,0	24 Vdc; 0,75 A	
60 Hz								
90	0,456	--	--	--	F1	2,0	24 Vdc; 0,75 A	
100	0,422	0,6	--	--	F1	2,0	24 Vdc; 0,75 A	
240	0,312	0,6	--	--	F1	2,0	24 Vdc; 0,75 A	
254	0,307	--	--	--	F1	2,0	24 Vdc; 0,75 A	
264	0,311	--	--	--	F1	2,0	24 Vdc; 0,75 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

B.2.5	TABLE: Input test - GT-41062-1818-X.X-T2							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,449	--	--	--	F1	2,0	18 Vdc; 1,0 A	
100	0,419	0,6	--	--	F1	2,0	18 Vdc; 1,0 A	
240	0,311	0,6	--	--	F1	2,0	18 Vdc; 1,0 A	
254	0,308	--	--	--	F1	2,0	18 Vdc; 1,0 A	
264	0,306	--	--	--	F1	2,0	18 Vdc; 1,0 A	
60 Hz								
90	0,459	--	--	--	F1	2,0	18 Vdc; 1,0 A	
100	0,432	0,6	--	--	F1	2,0	18 Vdc; 1,0 A	
240	0,316	0,6	--	--	F1	2,0	18 Vdc; 1,0 A	
254	0,312	--	--	--	F1	2,0	18 Vdc; 1,0 A	
264	0,308	--	--	--	F1	2,0	18 Vdc; 1,0 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test - GT-41062-1809-X.X-T2							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,468	--	--	--	F1	2,0	9 Vdc; 2,0 A	
100	0,432	0,6	--	--	F1	2,0	9 Vdc; 2,0 A	
240	0,314	0,6	--	--	F1	2,0	9 Vdc; 2,0 A	
254	0,307	--	--	--	F1	2,0	9 Vdc; 2,0 A	
264	0,305	--	--	--	F1	2,0	9 Vdc; 2,0 A	
60 Hz								
90	0,471	--	--	--	F1	2,0	9 Vdc; 2,0 A	
100	0,437	0,6	--	--	F1	2,0	9 Vdc; 2,0 A	
240	0,318	0,6	--	--	F1	2,0	9 Vdc; 2,0 A	
254	0,312	--	--	--	F1	2,0	9 Vdc; 2,0 A	
264	0,308	--	--	--	F1	2,0	9 Vdc; 2,0 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

B.2.5	TABLE: Input test - GT-41062-1805-X.X-T2							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,486	--	--	--	F1	2,0	5 Vdc; 3,6 A	
100	0,447	0,6	--	--	F1	2,0	5 Vdc; 3,6 A	
240	0,316	0,6	--	--	F1	2,0	5 Vdc; 3,6 A	
254	0,312	--	--	--	F1	2,0	5 Vdc; 3,6 A	
264	0,309	--	--	--	F1	2,0	5 Vdc; 3,6 A	
60 Hz								
90	0,491	--	--	--	F1	2,0	5 Vdc; 3,6 A	
100	0,452	0,6	--	--	F1	2,0	5 Vdc; 3,6 A	
240	0,319	0,6	--	--	F1	2,0	5 Vdc; 3,6 A	
254	0,315	--	--	--	F1	2,0	5 Vdc; 3,6 A	
264	0,312	--	--	--	F1	2,0	5 Vdc; 3,6 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test - GT-41062-1806-X.X-T2							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,438	--	--	--	F1	2,0	6 Vdc; 3,0 A	
100	0,433	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
240	0,228	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
254	0,209	--	--	--	F1	2,0	6 Vdc; 3,0 A	
264	0,201	--	--	--	F1	2,0	6 Vdc; 3,0 A	
60 Hz								
90	0,441	--	--	--	F1	2,0	6 Vdc; 3,0 A	
100	0,433	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
240	0,229	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
254	0,209	--	--	--	F1	2,0	6 Vdc; 3,0 A	
264	0,202	--	--	--	F1	2,0	6 Vdc; 3,0 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

B.2.5	TABLE: Input test - GT-41062-1807-X.X-T2							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
90	0,428	--	--	--	F1	2,0	7 Vdc; 2,57 A	
100	0,391	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
240	0,229	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
254	0,221	--	--	--	F1	2,0	7 Vdc; 2,57 A	
264	0,213	--	--	--	F1	2,0	7 Vdc; 2,57 A	
60 Hz								
90	0,431	--	--	--	F1	2,0	7 Vdc; 2,57 A	
100	0,397	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
240	0,231	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
254	0,224	--	--	--	F1	2,0	7 Vdc; 2,57 A	
264	0,215	--	--	--	F1	2,0	7 Vdc; 2,57 A	
Supplementary information:								
The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

IEC 62368-1							
Clause	Requirement + Test				Result - Remark		Verdict
B.2.5	TABLE: Input test - GT-41062-1824-X.X-T3; -T3A						P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
50 Hz							
100	0,419	0,6	--	--	F1	2,0	24 Vdc; 0,75 A
240	0,307	0,6	--	--	F1	2,0	24 Vdc; 0,75 A
60 Hz							
100	0,424	0,6	--	--	F1	2,0	24 Vdc; 0,75 A
240	0,311	0,6	--	--	F1	2,0	24 Vdc; 0,75 A
Supplementary information: The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.							

IEC 62368-1							
Clause	Requirement + Test				Result - Remark		Verdict
B.2.5	TABLE: Input test - GT-41062-1818-X.X-T3; -T3A						P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
50 Hz							
100	0,419	0,6	--	--	F1	2,0	18 Vdc; 1,0 A
240	0,311	0,6	--	--	F1	2,0	18 Vdc; 1,0 A
60 Hz							
100	0,432	0,6	--	--	F1	2,0	18 Vdc; 1,0 A
240	0,315	0,6	--	--	F1	2,0	18 Vdc; 1,0 A
Supplementary information: The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.							

IEC 62368-1							
Clause	Requirement + Test				Result - Remark		Verdict
B.2.5	TABLE: Input test - GT-41062-1809-X.X-T3; -T3A						P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
50 Hz							
100	0,435	0,6	--	--	F1	2,0	9 Vdc; 2,0 A
240	0,313	0,6	--	--	F1	2,0	9 Vdc; 2,0 A
60 Hz							
100	0,441	0,6	--	--	F1	2,0	9 Vdc; 2,0 A
240	0,316	0,6	--	--	F1	2,0	9 Vdc; 2,0 A
Supplementary information: The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5	TABLE: Input test - GT-41062-1805-X.X-T3; -T3A							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
100	0,447	0,6	--	--	F1	2,0	5 Vdc; 3,6 A	
240	0,314	0,6	--	--	F1	2,0	5 Vdc; 3,6 A	
60 Hz								
100	0,451	0,6	--	--	F1	2,0	5 Vdc; 3,6 A	
240	0,317	0,6	--	--	F1	2,0	5 Vdc; 3,6 A	
Supplementary information: The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

B.2.5	TABLE: Input test - GT-41062-1806-X.X-T3; -T3A							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
100	0,431	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
240	0,224	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
60 Hz								
100	0,434	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
240	0,227	0,6	--	--	F1	2,0	6 Vdc; 3,0 A	
Supplementary information: The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

B.2.5	TABLE: Input test - GT-41062-1807-X.X-T3; -T3A							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
50 Hz								
100	0,392	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
240	0,227	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
60 Hz								
100	0,401	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
240	0,231	0,6	--	--	F1	2,0	7 Vdc; 2,57 A	
Supplementary information: The steady-state input current did not exceed the rated current at the rated voltage by more than 10% under the maximum normal load.								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.3		TABLE: Abnormal operating condition tests						P
Ambient temperature (°C)		23±3						—
Power source for EUT: Manufacturer, model/type, output rating ..		Elettrotest; TPS/M; 0-300V; 9kVA Short-circuit tests: mains network						—
Component No.	Abnormal Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-coupl e	Temp. (°C)	Observation
GT-41062-1824-X.X								
Output	Short	264Vac	1h	F1	--	--	--	Unit switched off, no hazard, no fire, no excessive temperatures.
Output	Overload	264Vac	2h	F1	0,22	--	--	Conditions: 0,91A output current. Temperature of T1 winding was 128,1°C.
GT-41062-1818-XX								
Output	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire, no excessive temperatures.
Output	overload	264Vac	2h	F1	0,22	--	--	Conditions:1,14A output current. Temperature of T1 winding was 135,9°C.
GT-41062-1812-XX								
Output	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire.
Output	overload	264Vac	>3h	F1	0,22	--	--	Conditions:1,66A output current. Temperature of T1 winding was 134,5°C.
GT-41062-1805-XX								
Output	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire, no excessive temperature.
Output	overload	264Vac	>3h	F1	0,23	--	--	Conditions: 3,24A output current. Temperature of T1 winding reached 121,7°C.
GT-41062-1806-XX								
Output	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire
Output	overload	264Vac	>3h	F1	0,24	--	--	Conditions: 3,62A output current. Temperature of T1 winding was 122,7°C.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.3	TABLE: Abnormal operating condition tests		P
Ambient temperature (°C)		23±3	—
Power source for EUT: Manufacturer, model/type, output rating ...:		Elettrotest; TPS/M; 0-300V; 9kVA Short-circuit tests: mains network	—

Component No.	Abnormal Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-coupl e	Temp. (°C)	Observation
---------------	--------------------	---------------------	----------------	----------	-------------------	-----------	------------	-------------

Supplementary Information:
 Abbreviations used:
 NF: No fire
 NB: No indication of dielectric breakdown
 ASRE: All safeguards remained effectively
 Temperature Measurement: See Table 5.4.1.4, 6.3.2, 9.0, B.2.6. ES Measurement: See Table 5.2.
 Test performed with all types of fuses as specified in list of critical components (table 1.5.1).
 When components were failing, the test was repeated two times (three times in total).
 There was no fire nor melted metal.
 Electric strength tests performed after abnormal testing and there was no breakdown of insulation.
 During the tests temperature on accesible parts never exceed limits for TS2.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.4		TABLE: Fault condition tests						P
Ambient temperature (°C)		23±3						—
Power source for EUT: Manufacturer, model/type, output rating .:		Elettrotest; TPS/M; 0-300V; 9kVA Short-circuit tests: mains network						—
Component No.	Fault Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-coupl e	Temp. (°C)	Observation
GT-41062-1824-X.X								
Output Diode D3	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire. Output voltage dropped to 0V immediately.
U2 (1-2)	Short	264Vac	>10min	F1	0,25	--	--	Unit worked normal and switched of after 12min. Q1, R6 defect. Fuse opened. Temperature of T1 was 113,2°C.
NF1	Short	264Vac	< 1sec	F1	--	--	--	F1 opened immediately. No hazard, no fire.
BD1	Short (+ to -)	264Vac	< 1sec	F1	--	--	--	F1 opened immediately. No hazard, no fire.
Bulk capacitor C1	Short	264Vac	< 1sec	F1	--	--	--	F1 opened immediately. No hazard, no fire.
Q1 (1-2)	Short	264Vac	< 1sec	F1	--	--	--	F1 opened immediately. No hazard, no fire. Q1, R6 defect.
Q1 (1-3)	Short	264Vac	< 1sec	F1	--	--	--	F1 opened immediately. No hazard, no fire. Q1, R6 defect.
D1	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire, no damage.
T1 (Pin 4-5)	Short	264Vac	< 1sec	F1	--	--	--	Fuse opened immediately, Q1 defect, no hazard, no fire.
T1 winding Pin A to B	Short	264Vac	1h	F1	--	--	--	Unit switched off. No hazard, no fire. Temperature of T1 winding was 52,2°C.

IEC 62368-1								
Clause	Requirement + Test					Result - Remark		Verdict
T1 winding Pin A to B	Overload	264Vac	1h	F1	0,23	--	--	Conditions: 0,93A output current. Temperature of T1 winding was 136,7°C.
GT-41062-1818-XX								
T1 (A-B)	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire, no excessive temperatures.
T1 (A-B)	Overload	264Vac	3h	F1	0,23	--	--	Conditions:1,21A output current. Temperature of T1 winding was 142,6°C.
GT-41062-1812-XX								
T1 (A-B)	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire
T1 (A-B)	Overload	264Vac	3h	F1	0,23	--	--	Conditions:1,68A output current. Temperature of T1 winding was 139,1°C.
GT-41062-1805-XX								
T1 (A-B)	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire, no excessive temperature.
T1 (A-B)	Overload	264Vac	3h	F1	0,24	--	--	Conditions:3,88A output current. Temperature of T1 was 131,4°C.
GT-41062-1806-XX								
T1 (A-B)	Short	264Vac	>10min	F1	--	--	--	Unit switched off, no hazard, no fire
T1 (A-B)	Overload	264Vac	>3h	F1	0,25	--	--	Conditions: 3,68A output current. Temperature of T1 winding was 126,9°C.
<p>Supplementary information:</p> <p>There was no fire or melted metal. 4000 tests performed after abnormal testing and there was no breakdown of insulation. After each above test, unit can pass the dielectric strength test specified in table 5.4.9.</p> <p>The fault test was running until thermal stabilization was reached.</p> <p>During the tests temperature on accesible parts never exceed limits for TS2.</p>								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Annex M	TABLE: Batteries								N/A
The tests of Annex M are applicable only when appropriate battery data is not available									--
Is it possible to install the battery in a reverse polarity position?								--	--
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition	--	--	--	--	--	--	--	--	--
Max. current during fault condition									
Test results:									Verdict
- Chemical leaks									--
- Explosion of the battery									--
- Emission of flame or expulsion of molten metal									--
- Electric strength tests of equipment after completion of tests									--
Supplementary information:									

Annex M.4	Table: Additional safeguards for equipment containing secondary lithium batteries							N/A
Battery/Cell No.	Test conditions	Measurements			Observation			
		U	I (A)	Temp (C)				
--	Normal	--	--	--	--			
	Abnormal							
	Single fault –SC/OC							
	Normal							
	Abnormal							
	Single fault – SC/OC							
Supplementary Information:								
Battery identification	Charging at T _{lowest} (°C)	Observation	Charging at T _{highest} (°C)	Observation				
--	--	--	--	--				
Supplementary Information:								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Annex Q.1	TABLE: Limited power sources						P
Circuit output tested:							
Note: Measured Uoc (V) with all load circuits disconnected:							
Components	Sample No.	Uoc (V)	Isc (A)		VA		
			Meas.	Limit	Meas.	Limit	
Normal operating condition (output)	GT-41062-1824-X.X	24,44	1,67	8,0	28,34	100	
Short (U2) (1-2)	GT-41062-1824-X.X	24,44	0,99	8,0	23,69	100	
open (U2) (1-2)	GT-41062-1824-X.X	24,44	0,82	8,0	18,95	100	
Short (U2) (3-4)	GT-41062-1824-X.X	24,44	--	8,0	--	100	
Short (R6)	GT-41062-1824-X.X	24,44	0,87	8,0	19,46	100	
Short (R14)	GT-41062-1824-X.X	24,44	1,51	8,0	26,27	100	
Normal operating condition (output)	GT-41062-1805-X.X	5,28	5,29	8,0	23,67	100	
Short (U2) (1-2)	GT-41062-1805-X.X	5,28	4,86	8,0	18,23	100	
open (U2) (1-2)	GT-41062-1805-X.X	5,28	3,79	8,0	16,38	100	
Short (R6)	GT-41062-1805-X.X	5,28	4,68	8,0	17,26	100	
Short (R14)	GT-41062-1805-X.X	5,28	4,91	8,0	18,34	100	
supplementary information:							
Sc=Short circuit, Oc=Open circuit							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

T.2, T.3, T.4, T.5	TABLE: Steady force test					P
Part/Location	Material	Thickness (mm)	Force (N)	Test Duration (sec)	Observation	
Components	See Table 4.1.2.	—	10 N	5	Passed, ZNR1 is glued	
Top/ Bottom of enclosure	See Table 4.1.2.	1,6 mm	250 N	5	No deflection	
Left/ Right Side of Enclosure	See Table 4.1.2.	1,6 mm	250 N	5	No deflection	

Comments: for all models.

T.6, T.9	TABLE: Impact tests				P
Part/Location	Material	Thickness (mm)	Vertical distance (mm)	Observation	
AC-Input to enclosure	--	1,5	--	No hazardous parts accessible.	
AC-Input to DC Output (SELV)	--	1,5	--	No hazardous parts accessible.	

Supplementary information: Direct plug-in equipment, test done for information only.

T.7	TABLE: Drop tests				P
Part/Location	Material	Thickness (mm)	Drop Height (mm)	Observation	
Enclosure/Top	See Table 4.1.2.	1,5	1000	1)	
Enclosure/ Bottom	See Table 4.1.2.	1,5	1000	1)	
Enclosure/ Right Side	See Table 4.1.2.	1,5	1000	1)	
Enclosure/ Left Side	See Table 4.1.2.	1,5	1000	1)	

Supplementary information:

1) No cracking, class 3 energy sources did not become accessible, and all safeguards remain effective. No indication of dielectric breakdown

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

T.8	TABLE: Stress relief test					P
Part/Location	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
Enclosure	See Table 4.1.2.	1,5	110	7	1)	

Supplementary information:

1)No shrinkage, warpage, or other distortion, class 3 energy sources did not become accessible. All safeguards remain effective.

Enclosure No. 1

**National differences according to
IEC 62368-1:2014 (Second Edition)**

(54 pages including this cover page)

Country	Australia
IECEE Member NCB	--
IEC Standard	IEC 62368-1:2014 (Ed. 2.0)
Corresponding National Standard	AS/NZS 62368.1:2018
Regulatory Requirements	N/A

IEC 62368_1B ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT IEC 62368-1 (AUSTRALIA / NEW ZEALAND) NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment)			
Differences according to: AS/NZS 62368.1:2018			
Attachment Form No.: AU_NZ_ND_IEC62368_1B			
Attachment Originator.....: JAS-ANZ			
Master Attachment: 2019-02-04			
Copyright © 2019 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		—
Appendix ZZ	Variations to IEC 62368-1:2014 (ED. 2.0) for Australia and New Zealand		—
ZZ1 Scope	This Appendix lists the normative variations to IEC 62368-1:2014 (ED. 2.0)		—
ZZ2 Variations	The following modifications are required for Australian/New Zealand conditions:		—
2	Add the following to the list of normative references: The following normative documents are referenced in Appendix ZZ: -AS/NZS 3112, <i>Approval and test specification—Plugs and socket-outlets</i> -AS/NZS 3123, <i>Approval and test specification—Plugs, socket-outlets and couplers for general industrial application</i> -AS/NZS 3191, <i>Electric flexible cords</i> -AS/NZS 60065, <i>Audio, video and similar electronic apparatus—Safety requirements (IEC 60065:2015 (ED.8.0) MOD)</i> -AS/NZS 60320.1, <i>Appliance couplers for household and similar general purposes, Part 1: General requirements (IEC 60320-1, Ed.2.1 (2007) MOD)</i> -AS/NZS 60320.2.2, <i>Appliance couplers for household and similar general purposes Part 2.2: Interconnection couplers for household and similar equipment (IEC 60320-2-2, Ed.2.0 (1998) MOD)</i> -AS/NZS 60695.2.11, <i>Fire hazard testing, Part</i>	Considered.	P

IEC 62368_1B ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>2.11: <i>Glowing/hot wire based test methods—Glow-wire flammability test method for end-products</i></p> <p>-AS/NZS 60695.11.5, <i>Fire hazard testing, Part 11.5: Test flames—Needle-flame test method—Apparatus, confirmatory test arrangement and guidance</i></p> <p>-AS/NZS 60695.11.10, <i>Fire hazard testing, Part 11.10: Test flames—50 W horizontal and vertical flame test methods</i></p> <p>-AS/NZS 60884.1, <i>Plugs and socket-outlets for household and similar purposes, Part 1: General requirements</i></p> <p>-AS/NZS 60950.1:2015, <i>Information technology equipment—Safety, Part 1: General requirements (IEC 60950-1, Ed.2.2 (2013), MOD)</i></p> <p>IEC 61032:1997, <i>Protection of persons and equipment by enclosures—Probes for verification</i></p> <p>-AS/NZS 61558.1:2008 (including Amendment 2:2015), <i>Safety of Power Transformers, Power Supplies, Reactors and Similar Products, Part 1: General requirements and tests (IEC 61558-1 Ed 2.1, MOD)</i></p> <p>-AS/NZS 61558.2.16, <i>Safety of transformers, reactors, power supply units and similar products for voltages up to 1 100 V, Part 2.16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units.</i></p>		
4.1.1	<p>Application of requirements and acceptance of materials, components and subassemblies</p> <p>1 <i>Replace the text ‘IEC 60950-1’ with ‘AS/NZS 60950.1:2015’.</i></p> <p>2 <i>Replace the text ‘IEC 60065’ with ‘AS/NZS 60065’.</i></p>	Considered.	P
4.7	Equipment for direct insertion into mains socket-outlets		N/A
4.7.2	<p>Requirements</p> <p><i>Delete the text of the second paragraph and replace with the following:</i></p> <p>Equipment with a plug portion, suitable for insertion into a 10 A 3-pin flat-pin socket-outlet complying with AS/NZS 3112 shall comply with the requirements in AS/NZS 3112 for equipment with integral pins for insertion into socket-outlets.</p>		N/A
4.7.3	<p>Compliance Criteria</p> <p><i>Delete the first paragraph and Note 1 and Note 2 and replace with the following:</i></p> <p><i>Compliance is checked by inspection and, if necessary, by the tests in AS/NZS 3112.</i></p>		N/A
4.8	<p><i>Delete existing clause title and replace with the following:</i></p> <p>4.8 Products containing coin/button cell batteries</p>		N/A

IEC 62368_1B ATTACHMENT					
Clause	Requirement + Test		Result - Remark		Verdict
4.8.1	General 1 Second dashed point, <i>delete</i> the text and <i>replace</i> with the following: – include coin/button cell batteries with a diameter of 32 mm or less. 2 After the second dashed point, <i>insert</i> the following Note: NOTE 1: Batteries are specified in IEC 60086-2. 3 After the third dashed point, <i>renumber</i> the existing Note as 'NOTE 2'. 4 Fifth dashed point, <i>delete</i> the word 'lithium'.				N/A
4.8.2	Instructional Safeguard First line, <i>delete</i> the word 'lithium'.				N/A
4.8.3	Construction First line, after the word 'Equipment' <i>insert</i> the words 'containing one or more coin/button batteries and'				N/A
4.8.5	Compliance criteria <i>Delete</i> the first paragraph and <i>replace</i> with the following: <i>Compliance is checked by applying a force of 30 N +/- 1 N for 10 s to the battery compartment door/cover by a rigid test finger according to test probe 11 of IEC 61032:1997 at the most unfavourable place and in the most unfavourable direction. The force shall be applied in one direction at a time.</i>				N/A
5.4.10.2	Test methods				N/A
5.4.10.2.1	General <i>Delete</i> the first paragraph and <i>replace</i> with the following: In Australia only, the separation is checked by the test of both Clause 5.4.10.2.2 and Clause 5.4.10.2.3. In New Zealand, the separation is checked by the test of either Clause 5.4.10.2.2 or Clause 5.4.10.2.3.				N/A
Table 29	<i>Replace</i> the table with the following:				N/A
	Parts	Impulse test		Steady state test	
		New Zealand	Australia	New Zealand	Australia
	Parts indicated in Clause 5.4.10.1 a) ^a	2.5 kV 10/700 µs	7.0 kV for hand-held telephones and headsets, 2.5 kV for other equipment. 10/700 µs	1.5 kV	3 kV
	Parts indicated in Clause 5.4.10.1 b) and c) ^b	1.5 kV 10/700 µs ^c		1.0 kV	1.5 kV
^a Surge suppressors shall not be removed. ^b Surge suppressors may be removed, provided that such devices pass the impulse test of Clause 5.4.10.2.2 when tested as components outside the equipment. ^c During this test, it is allowed for a surge suppressor to operate and for a sparkover to occur in a GDT.					

IEC 62368_1B ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.10.2.2	After the first paragraph, <i>insert</i> new Notes 201 and 202 as follows: NOTE 201 For Australia, the 7 kV impulse simulates lightning surges on typical rural and semi-rural network lines. NOTE 202 For Australia, the value of 2.5 kV for Clause 5.4.10.1 a) was chosen to ensure the adequacy of the insulation concerned and does not necessarily simulate likely overvoltages.		N/A
5.4.10.2.3	After the first paragraph, <i>insert</i> new Notes 201 and 202 as follows: NOTE 201 For Australia, where there are capacitors across the insulation under test, it is recommended that d.c. test voltages are used. NOTE 202 The 3 kV and 1.5 kV values for Australia have been determined considering the low frequency induced voltages from the power supply distribution system.		N/A
6	Electrically-caused fire		P
6.1	General After the first paragraph, <i>insert</i> the following new paragraph: Alternatively, the requirements of Clauses 6.2 to 6.5.2 are considered to be fulfilled if the equipment complies with the requirements of Clause 6.202		P
6.6	After Clause 6.6, <i>add</i> the new Clauses 6.201 and 6.202 as follows: 6.201 External power supplies, docking stations and other similar devices and 6.202 Resistance to fire—Alternative tests (see special national conditions)		P
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	Large data storage equipment In the first dashed row and the second dashed rows <i>replace</i> 'IEC 60950-1:2005' with 'AS/NZS 60950.1:2015'.		N/A
8.6	Stability of equipment		N/A

IEC 62368_1B ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
8.6.1 and Table 36	<p>Requirements</p> <p>1. Table 36, <i>insert</i> Footnote c at the end of the 'Glass slide' heading, and <i>add</i> a new Footnote c after the text of Footnote b in the last row of Table 36 as follows:</p> <p>^c The glass slide test is not applicable to floor standing equipment, even though the equipment may have controls or a display.</p> <p>2. Table 36, fifth row, <i>insert</i> ²⁰¹ at the end of 'No stability requirements'</p> <p>3. Table 36, ninth row, <i>insert</i> ²⁰¹ at the end of 'No stability requirements'</p> <p>4. Table 36, <i>add</i> the following new footnote: ²⁰¹ MS2 and MS3 television sets and display devices, designed only for fixing to a wall, ceiling or equipment rack, are not subjected to stability requirements only if the instructional safeguard of Clause 8.6.1.201 is provided. Otherwise, the glass slide requirements of Clause 8.6.4 and horizontal force requirements of Clause 8.6.5 apply.</p> <p>5. Second paragraph beneath Table 36, <i>delete</i> the words 'MS2 and MS3 television sets' and <i>replace</i> with 'MS2 and MS3 television sets and display devices'</p>		N/A
8.6.1	<p>After Clause 8.6.1 <i>add</i> the following new clauses: 8.6.1.201 Instructional safeguard for fixed-mount television sets (see special national conditions)</p>		N/A
Annex F Paragraph F.3.5.1	<p>Mains appliance outlet and socket-outlet markings</p> <p><i>Replace</i> 'IEC 60320-2-2' with 'AS/NZS 60320.2.2'.</p>		N/A
Annex G Paragraph G.4.2	<p>Mains connectors</p> <p>1 In the second line <i>insert</i> 'or AS/NZS 3123' after 'IEC 60906-1'.</p> <p>2 In the second line <i>insert</i> 'or AS/NZS 60320 series' after 'IEC 60320 series'</p> <p>3 <i>Add</i> the following new paragraph: 10 A or 15 A 250 V flat pin plugs for the connection of equipment to mains-powered socket-outlets for household or similar general use shall comply with AS/NZS 3112 or AS/NZS 60884.1.</p>		N/A
Paragraph G.5.3.1	<p>Transformers, General</p> <p>1 In the third dashed point <i>replace</i> 'IEC 61558-1 and the relevant parts of IEC 61558-2' with 'AS/NZS 61558-1 and the relevant parts of AS/NZS 61558.2'</p> <p>2 In the fourth dashed point <i>replace</i> 'IEC 61558-2-16' with 'AS/NZS 61558.2.16'.</p>		P
Paragraph G.7.1	<p>Mains supply cords, General</p> <p><i>In the fourth dashed paragraph, replace</i> 'IEC 60320-1' with 'AS/NZS 60320.1'</p>		N/A

IEC 62368_1B ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Table G.5	<p>Sizes of conductors</p> <p>1 In the second row, first column, <i>delete</i> '6' and <i>replace</i> with '7.5'</p> <p>2 In the second row, second column, <i>delete</i> '0,75' and <i>replace</i> with '0.75^b'</p> <p>3 <i>Delete</i> Note 1.</p> <p>4 <i>Replace</i> 'NOTE 2' with 'NOTE:'.</p> <p>5 <i>Delete</i> the text of 'Footnote b' and <i>replace</i> with the following: ^b This nominal cross-sectional area is only allowed for Class II appliances if the length of the power supply cord, measured between the point where the cord, or cord guard, enters the appliance, and the entry to the plug does not exceed 2 m (0.5 mm² three-core supply flexible cords are not permitted; see AS/NZS 3191).</p> <p>6 In Footnote c <i>replace</i> 'IEC 60320-1' with 'AS/NZS 60320.1'</p> <p>7 In Footnote d <i>replace</i> 'IEC 60320-1' with 'AS/NZS 60320.1'</p>		N/A
Annex M Paragraph M.3.2	<p>Protection circuits for batteries provided within the equipment, Test method</p> <p>After the first dashed point <i>add</i> the following Note: NOTE 201: In cases where the voltage source is provided by power from an unassociated power source, consideration should be given to the effects of possible single fault conditions in the unassociated equipment. If the power source is unknown then it should be assumed that the maximum limit of SELV may be applied to the source input under assumed single fault conditions in the source when assessing the charging circuit in the equipment under test.</p>		N/A
	Special national conditions (if any)		N/A

IEC 62368_1B ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
6.201	<p>External power supplies, docking stations and other similar devices For external power supplies, docking stations and other similar devices, during and after abnormal operating conditions and during single fault conditions the output voltage— – at all ES1 outlets or connectors shall not increase by more than 10% of its rated output voltage under normal operating condition; and – of a USB outlet or connector shall not increase by more than 3 V or 10% of its rated output voltage under normal operating conditions, whichever is higher. For equipment with multiple rated output voltages, the requirements apply with the equipment configured for each rated output voltage in turn. NOTE: This is intended to reduce the possibility of battery fire or explosion in attached equipment or accessories when charging secondary lithium batteries. <i>Compliance shall be checked by measurement, taking into account the abnormal operating conditions of Annex B.3 and the simulated single-fault conditions of Annex B.4</i></p>		P
6.202	<p>Resistance to fire—Alternative tests</p>		N/A
6.202.1	<p>General Parts of non-metallic material shall be resistant to ignition and spread of fire. This requirement does not apply to decorative trims, knobs and other parts unlikely to be ignited or to propagate flames from inside the equipment, or the following: a) Components that are contained in an enclosure having a flammability category of V-0 according to AS/NZS 60695.11.10 and having openings only for the connecting wires filling the openings completely, and for ventilation not exceeding 1 mm in width regardless of length. b) The following parts which would contribute negligible fuel to a fire: – small mechanical parts, the mass of which does not exceed 4 g, such as mounting parts, gears, cams, belts and bearings; – small electrical components, such as capacitors with a volume not exceeding 1 750 mm³, integrated circuits, transistors and optocoupler packages, if these components are mounted on material of flammability category V-1, or better, according to AS/NZS 60695.11.10. NOTE: In considering how to minimize propagation of fire and what 'small parts' are, account should be taken of the cumulative effect of small parts adjacent to each other for the possible effect of propagating the fire from one part to another.</p>		N/A

IEC 62368_1B ATTACHMENT									
Clause	Requirement + Test	Result - Remark	Verdict						
	<p><i>Compliance shall be checked by the tests of Clauses 6.202.2, 6.202.3 and 6.202.4.</i></p> <p>For the base material of printed boards, compliance shall be checked by the test of Clause 6.202.5.</p> <p>The tests shall be carried out on parts of non-metallic material which have been removed from the equipment. When the glow-wire test is carried out, the parts shall be placed in the same orientation as they would be in normal use.</p> <p>These tests are not carried out on internal wiring.</p>		N/A						
6.202.2	<p>Testing of non-metallic materials</p> <p>Parts of non-metallic material shall be subject to the glow-wire test of AS/NZS 60695.2.11 which shall be carried out at 550°C.</p> <p>Parts for which the glow-wire test cannot be carried out, such as those made of soft or foamy material, shall meet the requirements specified in ISO 9772 for category FH-3 material. The glow-wire test shall be not carried out on parts of material classified at least FH-3 according to ISO 9772 provided that the relevant part is not thinner than the sample tested.</p>		N/A						
6.202.3	<p>Testing of insulating materials</p> <p>Parts of insulating material supporting Potential Ignition Sources shall be subject to the glow-wire test of AS/NZS 60695.2.11 which shall be carried out at 750°C.</p> <p>The test shall be also carried out on other parts of insulating material which are within a distance of 3 mm of the connection.</p> <p>NOTE: Contacts in components such as switch contacts are considered to be connections</p>		N/A						
	<p>For parts which withstand the glow-wire test but produce a flame, other parts above the connection within the envelope of a vertical cylinder having a diameter of 20 mm and a height of 50 mm shall be subjected to the needle-flame test.</p> <p>However, parts shielded by a barrier which meets the needle-flame test need not be tested</p>		N/A						
	<p>The needle-flame test shall be made in accordance with AS/NZS 60695.11.5 with the following modifications:</p> <table border="1" data-bbox="359 1675 940 2056"> <tr> <td>Clause of AS/NZS 60695.11.5</td> <td>Change</td> </tr> <tr> <td>9 Test procedure</td> <td></td> </tr> <tr> <td>9.2 Application of needle-flame</td> <td><i>Delete</i> the first and second paragraphs and <i>replace</i> with the following: The specimen shall be arranged so that</td> </tr> </table>	Clause of AS/NZS 60695.11.5	Change	9 Test procedure		9.2 Application of needle-flame	<i>Delete</i> the first and second paragraphs and <i>replace</i> with the following: The specimen shall be arranged so that		N/A
Clause of AS/NZS 60695.11.5	Change								
9 Test procedure									
9.2 Application of needle-flame	<i>Delete</i> the first and second paragraphs and <i>replace</i> with the following: The specimen shall be arranged so that								

IEC 62368_1B ATTACHMENT				
Clause	Requirement + Test		Result - Remark	Verdict
		<p>the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 1. If possible the flame shall be applied at least 10 mm from a corner.</p> <p>The duration of application of the test flame shall be 30 s ± 1 s.</p>		
	9.3 Number of test specimens	<p><i>Replace</i> with the following: The test shall be made on one specimen. If the specimen does not withstand the test, the test may be repeated on two further specimens, both of which shall withstand the test.</p>		
	11 Evaluation of test results	<p><i>Replace</i> with the following: The duration of burning (tb) shall not exceed 30 s. However, for printed circuit boards, it shall not exceed 15 s.</p>		
	<p>The needle-flame test shall not be carried out on parts of material classified as V-0 or V-1 according to AS/NZS 60695.11.10, provided that the relevant part is not thinner than the sample tested.</p>			
6.202.4	<p>Testing in the event of non-extinguishing material</p> <p>If parts, other than enclosures, do not withstand the glow wire tests of Clause 6.202.3, by failure to extinguish within 30 s after the removal of the glow wire tip, the needle-flame test detailed in Clause 6.202.3 shall be made on all parts of non-metallic material which are within a distance of 50 mm or which are likely to be impinged upon by flame during the tests of Clause 6.202.3. Parts shielded by a separate barrier which meets the needle-flame test need not be tested.</p> <p>NOTE 1: If the enclosure does not withstand the glow-wire test the equipment is considered to have failed to meet the requirements of Clause 6.202 without the need for consequential testing.</p>			N/A

IEC 62368_1B ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>NOTE 2: If other parts do not withstand the glow-wire test due to ignition of the tissue paper and if this indicates that burning or glowing particles can fall onto an external surface underneath the equipment, the equipment is considered to have failed to meet the requirements of Clause 6.202 without the need for consequential testing.</p> <p>NOTE 3: Parts likely to be impinged upon by the flame are considered to be those within the envelope of a vertical cylinder having a radius of 10 mm and a height equal to the height of the flame, positioned above the point of the material supporting, in contact with, or in close proximity to, connections.</p>		
6.202.5	<p>Testing of printed boards</p> <p>The base material of printed boards shall be subjected to the needle-flame test of Clause 6.202.3. The flame shall be applied to the edge of the board where the heat sink effect is lowest when the board is positioned as in normal use. The flame shall not be applied to an edge, consisting of broken perforations, unless the edge is less than 3 mm from a potential ignition source.</p> <p>The test is not carried out if—</p> <ul style="list-style-type: none"> – the printed board does not carry any potential ignition source; – the base material of printed boards, on which the available apparent power at a connection exceeds 15 VA operating at a voltage exceeding 50 V and equal or less than 400 V (peak) a.c. or d.c. under normal operating conditions, is of flammability category V-1 or better according to AS/NZS 60695.11.10, or the printed boards are protected by an enclosure meeting the flammability category V-0 according to AS/NZS 60695.11.10, or made of metal, having openings only for connecting wires which fill the openings completely; or – the base material of printed boards, on which the available equipment power at a connection exceeds 15 VA operating at a voltage exceeding 400 V (peak) a.c. or d.c. under normal operating conditions, and base material of printed boards supporting spark gaps which provides protection against overvoltages, is of flammability category V-0 according to AS/NZS 60695.11.10 or the printed boards are contained in a metal enclosure, having openings only for connecting wires which fill the openings completely. <p><i>Conformance shall be determined using the smallest thickness of the material.</i></p> <p>NOTE: Available apparent power is the maximum apparent power which can be drawn from the supplying circuit through a resistive load whose value is chosen to maximize the apparent power for more than 2 min when the circuit supplied is disconnected.</p>		N/A
6.202.6	<p>For open circuit voltages greater than 4 kV</p> <p>Potential ignition sources with open circuit voltages exceeding 4 kV (peak) a.c. or d.c. under normal operating conditions shall be contained in a FIRE ENCLOSURE which shall comply with</p>		N/A

IEC 62368_1B ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	flammability category V-1 or better according to AS/NZS 60695.11.10.		
8.6.1.201	<p>8.6.1.201 Instructional safeguard for fixed-mount television sets</p> <p>MS2 and MS3 television sets and display devices designed only for fixed mounting to a wall of ceiling or equipment rack shall, where required in Table 36, footnote 201, have an instructional safeguard in accordance with Clause F.5 which may be on the equipment or included in the installation instructions or equivalent document accompanying the equipment. The elements of the instructional safeguard shall be as follows:</p> <ul style="list-style-type: none"> – element 1a: not available; – element 2: ‘Stability Hazard’ or equivalent wording; – element 3: ‘The television set may fall, causing serious personal injury or death’ or equivalent text; – element 4: the following or equivalent text: To prevent injury, this television set must be securely attached to the floor/wall in accordance with the installation instructions 		N/A
8.6.1.202	<p>Restraining device</p> <p>MS2 and MS3 television sets and display devices that are not solely fixed-mounted should be provided with a restraining device such as a fixing point to facilitate restraining the equipment from toppling forward. The restraining device shall be capable of withstanding a pull of 100 N in all directions without damage. Where a restraining device is provided, instructions shall be provided in the instructions for installation or instructions for use to ensure correct and safe installation.</p>		N/A

Country	Canada
IECEE Member NCB	CSA International
IEC Standard	IEC 62368-1:2014 (Ed. 2.0)
Corresponding National Standard	CAN/CSA C22.2 No. 62368-1-14
Regulatory Requirements	N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
1DV.1	Battery backup systems that are not an integral part of stationary equipment, such as provided in separate cabinets, are subject to the appropriate standard for battery backup systems, such as UL 1973, Batteries for Use in Light Electric Rail (LER) Applications and Stationary Applications.		N/A
1DV.2	For equipment intended for outdoor installation, additional requirements for Information and communication technology equipment are covered by CSA/UL 60950-22 and for Audio/video equipment are covered by the relevant requirements in CSA C22.2 No. 60065 or UL 60065.		N/A
1DV.3.1	Standard is applicable to equipment designed to be installed in accordance with the Canadian Electrical Code, Part I, C22.1-12; Canadian Electrical Code, Part II, General Requirements, CAN/CSA C22.2 No. 0-10; the National Electrical Code, NFPA 70-2014; and the National Electrical Safety Code, IEEE C2-2012.		P
1DV.3.2	For equipment designed to be installed in accordance with Article 645 of the National Electrical Code, NFPA 70-2014, and the Standard for the Protection of Information Technology Equipment, NFPA 75-2013, identification by a marking or instruction [see Annex DVK (Annex DVA, Clause 1)] is required.		N/A
1DV.3.3	Additional regulatory requirements that apply to this equipment per Annex DVA, as applicable.		N/A
1DV.4.1	Additional requirements for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities per Annex DVB.		N/A
1DV.4.2	This standard includes additional requirements for equipment intended for mounting under kitchen cabinets. See Annex DVC.		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
1DV.4.3	This standard does not apply to equipment having Remote Feeding Telecommunication (RFT) circuits. Equipment having RFT circuits is covered by CSA/UL 60950-21.		N/A
1DV.4.4	Additional requirements may apply to large data storage equipment. Refer to CSA/UL 60950-23.		N/A
1DV.4.5	Does not cover Modular Data Centers (MDCs) but only the information and communication technology equipment contained within.		N/A
1DV.5.1	Power Distribution Equipment and Sub-Assemblies		N/A
1DV.5.1.1	Power distribution sub-assemblies connected to a mains used to distribute power entirely within a system of equipment, such as power distribution units (PDUs), cord-connected power strips, shelves with multiple power outlets (receptacles) etc., and intended to be installed in system racks, cabinets, home entertainment centers, etc. are covered by this standard		N/A
1DV.5.1.2	For equipment covered by this standard that incorporates components and sub-assemblies that perform a power distribution and control function covered by other standards, such as panelboards, load transfer equipment, or uninterruptible power systems utilized in power conditioners and computer power centers, this standard only may be used for investigation of safety for those aspects not covered by the other standards.		N/A
1DV.5.1.3	This standard also does not apply to stand-alone equipment used for distribution of mains power that is covered by individual power distribution equipment standards.		N/A
1DV.5.1.4	Based on the specific function, the following requirements are applicable to the stand-alone distribution equipment, or apply additionally to power distribution sub-assemblies and components of equipment covered by this standard, as described in 1DV.5.1.2 and 1DV.5.1.3:		N/A
	– For Industrial Control Equipment, see CSA C22.2 No. 14 and UL 508.		N/A
	– For Panelboards, see CSA C22.2 No. 29 and UL 67.		N/A
	– For Switchboards, see CSA C22.2 No 244 and UL 891.		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	– For Transfer Switch Equipment, see CSA C22.2 No 178.1 and UL 1008.		N/A
	– For Uninterruptible Power Systems, see CSA C22.2 No. 107.3 and UL 1778.		N/A
	– For Power Distribution Centers for Communications Equipment, see UL Subject 1801.		N/A
	<p>– Other forms of power distribution units for general applications, such as,</p> <ul style="list-style-type: none"> • Relocatable Power Taps, CSA-C22.2 No. 21, Cord Sets and Power Supply Cords, and UL 1363, Relocatable Power Taps. • Cord connected Surge Protective Devices, CSA Technical Information Letter No. A-24, Interim Certification Requirements for AC Line Connected Wiring Devices with Varistors, and UL 1449, Surge Protective Devices. • Furniture Power Distribution Units, CSA-C22.2 No. 21, Cord Sets and Power Supply Cords and UL 962A, Furniture Power Distribution Units. 		N/A
3.3.1.2DV D2	For additional information regarding low voltage d.c. mains (centralized d.c. power systems) equipment, refer to Annex DVD. This standard covers high voltage d.c. mains up to 600 Vdc.		N/A
3.3.1.3DV. 1	<p>New definition: telecommunication network – metallicly terminated transmission medium intended for communication between equipment that may be located in separate buildings, excluding:</p> <ul style="list-style-type: none"> – the mains system for supply, transmission and distribution of electrical power, if used as a telecommunication transmission medium; – cable distribution systems; – ES1 circuits connecting units of audio/video, information and communication technology equipment. 		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
4.1.1DV.1 D2	In the U.S. and Canada, components and subassemblies that comply with the standards referenced in Annex DVE are required in addition to or as a replacement for the requirements in this standard. Components complying with these standards are considered acceptable as part of equipment covered by this standard without further evaluation other than to give consideration to the appropriate use of the component or subassembly in the end product.		P
4.1.1DV.2 DC	In the U.S. and Canada, components and subassemblies that comply with the standards referenced in Annex DVG are acceptable as an alternative to requirements as part of equipment covered by this standard without further evaluation other than to give consideration to the appropriate use of the component or subassembly in the end product.		P
4.1.2DV DC	In the U.S. and Canada, some UL/CSA component standards may be used as alternatives to referenced IEC standards for the purposes of North America certifications or surveillance programs. Components and subassemblies that comply with the standards referenced in Annex DVF are acceptable as part of equipment covered by this standard without further evaluation other than to give consideration to the appropriate use of the component or subassembly in the end product.		P
4.1.16DV.1	Mains connections		P
4.1.16DV.1 .1 DE, 4.1.16DV.1 .2 DR	Requirements for Mains Supply Cords for Pluggable (Cord Connected) Equipment (Canadian and U.S. regulatory based requirements) - Annex G.7 and G.7ADV	Supply cord not part of the product.	N/A
4.1.16DV.1 .3 D2, 4.1.16DV.1 .4 DR	Requirements for Permanently Connected Equipment. (Canadian and U.S. regulatory-based requirements) – Annex DVH		N/A
4.1.17DV.1	External interconnecting cable and wiring		P

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
4.1.17DV.1 .1	General External interconnecting cable and wiring are investigated to the requirements of 6.5 and either 4.1.17DV.1.2 or 4.1.17DV.1.3, as appropriate.	Output cable complies with VW-1 or FT-1.	P
	– External interconnecting cable and wiring 3,05 m or less may be investigated as part of the equipment (system) to the requirements of this standard. See 4.1.17DV.1.2.		P
	– External interconnect cable and wiring longer than 3,05 m are regulated by the Canadian Electrical Code, C22.1, and the National Electrical Code, NFPA 70, and are subject to associated requirements. See 4.1.17DV.1.3.		N/A
	– External interconnect cable longer than 3,05 m designed to carry audio and/or video signals only, and that is not specified by the manufacturer to be routed inside the building structure (e.g., walls, ceilings, etc.), is subject to the applicable requirements of 4.1.17DV.1.2. For purposes of 4.1.17DV.1.2, it is assumed such cables are connected to PS1 circuits.		N/A
	Alternatively, detachable external interconnecting cable and wiring (with terminations) may be excluded from the equipment evaluation if specified by the manufacturer.		N/A
4.1.17DV.1 .2	Equipment (system) interconnecting cable and wiring		P
	The following requirements apply to detachable and nondetachable external interconnecting cable and wiring investigated as part of the equipment (system).		N/A
	– The length of the external interconnecting cable or wiring shall not exceed 3,05 m;		N/A
	– For external interconnecting cable and wiring connected to PS2 and PS3 circuits, see 6.5 for fire (flammability) considerations;		P
	– There are no fire (flammability) considerations for external interconnecting cable and wiring specified by the manufacturer for connection to circuits that are PS1.		N/A
	– External interconnecting cable and wiring intended to be connected to an ES3 or PS3 circuit require a jacket for mechanical protection in accordance with Table G.7ADV.2, or equivalent;		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>– Detachable external interconnecting cable and wiring (with terminations) intended to be connected to a PS2, PS3, ES2 or ES3 circuit and furnished as part of the equipment shall be either marked, or similarly identified in the installation instructions with (a) the name, trademark or trade name of the organization that is responsible for the equipment, and (b) the organization's identifying number or equivalent designation for the cable. See Annex DVK.</p> <ul style="list-style-type: none"> – The marking may be applied on the cable and wiring at any location – This marking is not required to comply with the test for permanence of markings, F.3.9 	Not detachable.	N/A
	Optical fiber interconnecting cables 3,05 m or less are not subject to the above requirements		N/A
4.1.17DV.1 .3	External interconnecting cable and wiring considered part of the building installation.		N/A
	External interconnecting cables and wiring longer than 3,05 m are regulated by the Canadian Electrical Code, C22.1, and the National Electrical Code, NFPA 70. See Annex DVA(Annex Q entry).		N/A
4.6.2DV D2	<p>Additional examples of compliance:</p> <ul style="list-style-type: none"> - wire-wrap terminals used for the connection of ES1 and ES2 that are: <ul style="list-style-type: none"> • provided on equipment that forms part of the telecommunication network, up to and including the demarcation point, and are located in service access areas only. (This equipment is generally considered Central Office Equipment, although it may be deployed elsewhere in similarly controlled environments.) and • provided with a guard or cover that prevents unintentional contact during normal operation. <p>are tested with a steady force of 2,5 N ± 0,25 N.</p>	No wire-wrap terminal used.	N/A
4.8.3DV D2	If screws or similar fasteners are used to secure the door/cover providing access to the battery compartment, the fasteners shall be captive to ensure that they remain with the door/cover. This does not apply to side panel doors on larger devices which are necessary for the functioning of the equipment and which are not likely to be discarded or left off the equipment	No battery compartment.	N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
4.8.4.5DV D2	0,5 J impact test deleted.		N/A
4.8.5DV.1 D2	Replace 30 N battery compartment door/cover test with 45 N		N/A
4.8.5DV.2 D2	Additional compliance criteria replaced with: - the battery compartment door/cover shall not open; and - the battery shall not become accessible		N/A
5.4.4.1DV D1	For printed boards, see Clause G.13		P
	For antenna terminals, see Clause 5.4.5		N/A
	For solid insulation on internal and external wiring, see Clause G.6.		P
	Additionally, for internal wiring accessible to an ordinary person, see Clause 5.4.6.	No internal wiring accessible to ordinary person.	N/A
5.6.3DV.1 DR to 5.6.3DV.3 DR	Protective earthing conductors shall comply with the minimum conductor sizes in Table G.5, except as required by • Table G.7ADV.1 for cord connected equipment; or • Annex DVH for permanently connected equipment.	Power supply cord not part of the unit.	N/A
5.6.4.1DV DR	Minimum conductor size alternative compliance to Table G.5 or Table G.7ADV.1 as applicable, or Table 31 Minimum protective bonding conductor size of copper conductors	For Class I model only. N/A for Class II model.	P
5.6.4.4DV DR	Protective bonding conductor sizes alternative compliance to Table G.7ADV.1 in addition to Table 31 or Table G.5		N/A
Table 32 DV DR	Include alternative conductor size compliance with Table G.7ADV.1 in the first column heading for protective conductor terminals.		N/A
5.6.6.1 DV DR	Protective bonding conductors that meet the minimum conductor sizes in Table G.5 or Table G.7ADV.1 as applicable, throughout their length and whose terminals all meet the minimum sizes in Table 32 are considered to comply without test.		N/A
5.7.6.2DV DE	Clause title modified to read “Prospective touch voltage and touch current to external circuits”		N/A
5.7.7DV.1 D2	Clause 5.7.7 to apply to stationary pluggable equipment type A or pluggable equipment type B		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.7DV.2 D2	Summation of touch currents not exceeding the limits of ES2 exception per Clause 5.7.7(a)(1)		N/A
5.7.7DV.3 D2	Clause 5.7.7(a)(2) replaced with: Such equipment shall comply with Clause 5.7.5. The value of S(I1) shall be added to the measured protective conductor current to determine compliance with the 5 % input current limit per phase specified in Clause 5.7.5.		N/A
5.7.7.1DV D2	<p>Limitation of touch current due to ringing signals</p> <p>Equipment containing input telecommunication network leads over which ringing voltages are applied to the equipment shall be tested using the circuit of Figure 5.7.7.1DV.1 for mains-connected equipment or Figure 5.7.7.1DV.2 for other equipment. For any position of the selector switches, the total touch current including consideration of 5.7.7 shall not exceed the relevant limits for ES2 specified in Table 4, unless the equipment complies with 5.7.7(a) with the protective conductor current due to ringing signal taken into account.</p> <p>An EUT that receives ringing voltages on up to three telecommunication network connection ports shall have simulated ringing applied to each network connection.</p> <p>For four or more ports receiving ringing, simulated ringing shall be applied to three ports and an additional 3 % (rounding down) of the remaining ports.</p> <p>Compliance is checked by the following tests, which are conducted using the measuring network described in IEC 60990, Figure 4. Simulated ringing at 120 V, 50 to 60 Hz, shall be applied to ringing input telecommunication network leads, either one lead at a time or connected together. Other telecommunication network leads shall be left disconnected.</p> <p>Equipment shall be evaluated in each operating state, including ground start. The general test methods of 5.7 shall apply, checking touch current for all positions of switches S1, S2, and S3 in Figure 5.7.7.1DV.1. In case the total touch current exceeds the ES2 limits, the protective conductor current is measured using the test set up of Figure 5.7.7.1DV.1 or Figure 5.7.7.1DV.2 with the measuring instrument replaced with an ammeter having negligible impedance.</p>		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
6.5.1DV.1 DC	Add the following text to the end of the second, third and fourth paragraphs: or the insulation of the conductor or cable assembly shall be rated VW-1 or FT-1.		P
6.5.1DV.2 D2	Add the following after the third paragraph: PS3 wiring outside a fire enclosure shall comply with single fault testing in B.4. Alternatively, the following constructions are considered to comply: – conductors provided with overcurrent protection in accordance with Article 240 of the National Electrical Code, NFPA 70, and the Canadian Electrical Code, Part I, C22.1, Section 14; – internal conductors supplied by a power source that is limited to the output voltage and current values specified in Table Q.1 or is limited to the output voltage values and provided with an overcurrent protective device with a rated current value as specified in Table Q.2; – interconnecting cables supplied by a limited power source (see Q.1); – a 20-A protective device used with any size wire in the primary.		N/A
6.7DV.1	Safeguards against electrically-caused fire due to overvoltage from power line crosses		N/A
6.7DV.1.1	Equipment with external circuits intended for connection to a telecommunication network that uses outside cable subject to overvoltage from power line failures shall comply with Annex DVI.		N/A
10.6.1DV D2	For telecommunication-network connected equipment, see Annex DVJ.		N/A
F.1DV DR	F.1DV.1 See Annex DVK for U.S. and Canadian markings and instructions.		N/A
F.3.3.9DV. 1	Equipment with output terminals Output terminals provided for supply of other equipment except mains supply shall be marked with the nominal output voltage and frequency, and, in addition, the maximum output current or power, unless the terminals are marked with the type references of the equipment which are permitted to be connected. When intended to be installed or interconnected in the field by a skilled person, the Class of wiring shall be marked adjacent to the terminals.		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.3DV D2	Delete the 2nd sentence reference to “banana plug” of the EXAMPLE.		N/A
G.7.2DV DR	In the second paragraph, replace the reference to Table G.4 with a reference to Table G.7ADV.1.		N/A
G.7ADV DR	Additional requirements: Power supply cords – detachable and non-detachable		N/A
G.7ADV.1	<p>General</p> <p>Flexible cords and plugs are permitted for movable equipment, hand-held equipment, stationary equipment and transportable equipment, and for fixed equipment where the fastening means and mechanical connections of the equipment are designed to permit removal for maintenance and repair.</p>		N/A
G.7ADV.2	<p>Methods of connection</p> <p>Flexible cords shall be provided with an attachment plug for connection to the branch circuit.</p>		N/A
G.7ADV.3	<p>Sizing and ratings</p> <p>The attachment plug configuration shall be one that is rated not less than 125 percent of the current rating of the equipment.</p>		N/A
	<p>Power supply cords shall have conductors with cross-sectional areas sufficient for the rated current of the equipment. Conductors shall be sized based on the requirements in the National Electrical Code (NEC), NFPA 70, and the Canadian Electrical Code, Part I, C22.1.</p>		N/A
	<p>Table G.7ADV.1 provides allowable ampacity for flexible cords and cables based on Table 400.5(a)(1) of the NEC.</p> <p>See Table 400.5(a)(2) of the NEC for ampacity information on portable power cables.</p>		N/A
	<p>For equipment with a rated current up to and including 2 A, 20 AWG is acceptable provided that the mains plug is provided with a 2 A fuse maximum and the equipment is not provided with a socket outlet.</p>		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
G.7ADV.4	Serviceability Power supply cords and cord sets shall incorporate flexible cords suitable for the particular application or shall be of a type at least as serviceable for the particular application. Table G.7ADV.2 lists common applications and associated suitable cord types.		N/A
G.7ADV.5. 1	Minimum length The minimum length of a power supply cord shall be 1,5 m unless it is intended for a special installation, such as dedicated equipment intended to be mounted near a mains socket-outlet. For equipment provided with an external power supply, the minimum length of the power supply cord shall be 0,5 m, provided that the total length of the conductive path from the receptacle to the equipment is 1,5 m or greater.		N/A
G.7ADV.5. 2	Maximum length For equipment intended for installation in ITE Rooms, the length of a power supply cord shall not exceed 4,5 m. For other intended installations, see Table G.7ADV.2.		N/A
H.2DV D2	item a: Continuous ringing signals shall: <ul style="list-style-type: none"> • be located only in areas where a skilled person has access during servicing; • be so located and guarded that unintentional contact with such parts is unlikely during servicing by a skilled person, or be provided with a marking to warn a skilled person of the presence of continuous ringing signals; and <ul style="list-style-type: none"> • not become accessible to an ordinary person under single fault conditions. 		N/A
H.4DV.1	Other telecommunication signals: Telecommunication signaling systems (e.g., some message waiting systems) using voltages or current, or both, greater than those specified in 5.2.1.1 and 5.2.1.2 shall be permitted if they comply with the following:		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	– continuous signal: For a signal of duration greater than 5 s, the current through the relevant measuring instrument described in IEC 60990:1999, Figure 4, shall be not greater than 7.1 mA peak a.c., or 30 mA d.c., or the limit shown in Figure H.4DV.1 for combinations of a.c. and d.c., when measured in accordance with 5.7.		N/A
	– intermittent signal: For a signal of duration less than 5 s, the current through the relevant measuring instrument described in IEC 60990:1999, Figure 4, shall be not greater than the limit specified in Figure H.4DV.2. The signal shall be followed by a quiet interval of at least 1 s before the next intermittent signal. During the quiet interval, either the voltage is less than 56,6 V d.c., or the current measured is less than 0,5 mA.		N/A
M.2.1DV DC	Battery packs with sealed secondary cells and batteries (other than button) containing alkaline or other non-acid electrolyte and used in stationary equipment shall comply with either IEC 62133, UL 2054 or UL 1973. Additionally, such battery packs that rely on solid-state circuits and software controls as safeguards shall comply with either the requirements in UL 1973 for System Safety Analysis (5.7) and Protective Circuit and Controls (5.8), or similar requirements in an appropriate standard for electronic safety-related controls that are suitable for investigation of such protection of secondary cells and batteries.		N/A
P.4.1DV DE	Additional text added to correct for editing error: For metalized coatings, clearances and creepage distances for pollution degree 3 shall be maintained instead of the tests of P.4.2DV.1.		N/A
P.4.2DV DE	Added test requirements text from Clause P.5 as new Clause P.4.2DV DE to correct for editing error.		N/A
P.5DV DE	Clause P.5 relocated to P.4.1 and P.4.2		N/A
U.1DV D1	Added the following text: The outer enclosure housing a CRT shall have no opening that exceeds 130 mm ² unless the minor dimension of the opening is 10 mm or less.		N/A

CANADA NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
Table W.3DV DE	Modify Table W.3 by replacing the entry for 1.2.8.14 in the first column with the following to correct a typographical error: TNV-3 CIRCUIT TNV CIRCUIT – whose normal operating voltages exceed the limits for an SELV circuit under normal operating conditions and – on which overvoltages from telecommunication networks and cable distribution systems are possible		N/A
Annex DVA	(normative) Canadian and U.S. regulatory-based requirements		N/A
Annex DVB	(normative) Equipment used in health care facilities		N/A
Annex DVC	(normative) Under kitchen cabinet equipment		N/A
Annex DVD	(informative) D.C. powered equipment and centralized d.c. power systems (DC mains)		N/A
Annex DVE	(normative) UL and CSA component requirements (mandatory)		N/A
Annex DVF	(normative) UL and CSA component requirements (alternative to IEC standards)		N/A
Annex DVG	(normative) UL and CSA component requirements (alternative)		N/A
Annex DVH	(normative) Permanently connected equipment – mains connections		N/A
Annex DVI	(normative) Safeguards against electrically-caused fire due to overvoltage from power line crosses		N/A
Annex DVJ	(normative) Acoustic tests for telecommunications equipment		N/A
Annex DVK	(normative) Canadian and U.S. marking and instructions		N/A

Country	Denmark
IECEE Member NCB	UL (Demko)
IEC Standard	IEC 62368-1:2014 (Ed. 2.0)
Corresponding National Standard	DS/EN 62368-1:2014
Regulatory Requirements	N/A

DENMARK NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
Various	Please see the EN version of the standard where the Denmark National and Special National Deviations are stated.		—

Country	European Group Differences and National Differences
IECEE Member NCB	--
IEC Standard	IEC 62368-1:2014 (Ed. 2.0)
Corresponding National Standard	EN 62368:2014 + A11:2017
Regulatory Requirements	N/A

GROUP DIFFERENCES (CENELEC common modifications EN)							
Clause	Requirement + Test			Result - Remark		Verdict	
Contents	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZD (informative) A-deviations Annex ZD (informative) IEC and CENELEC code designations for flexible cords					P	
General	Delete all the “country” notes in the reference document according to the following list:						P
	0.2.1	Note	1	Note 3	4.1.15	Note	
	4.7.3	Note 1 and 2	5.2.2.2	Note	4.5.2.3.2.2 Table 13	Note c	
	5.4.2.3.2.4	Note 1 and 3	5.4.2.5	Note 2	5.4.5.1	Note	
	5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3	
	5.7.5	Note	5.7.6.1	Note 1 and 2	10.2.1 Table 39	Note 2,3 and 4	
	10.5.3	Note 2	10.6.2.1	Note 3	F3.3.6	Note 3	
For special national conditions, see Annex ZB.							
1	Add the following note: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.					P	
4.Z1	Add the following new subclause after 4.9: To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. mains, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment;					P	
	b) for components in series with the mains input					N/A	

GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;		
	c) it is permitted for pluggable equipment type B or permanently connected equipment, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.		N/A
	If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for pluggable equipment type A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.		N/A
5.4.2.3.2.4	Add the following to the end of this subclause: The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.		N/A
10.2.1	Add the following to c) and d) in Table 39: For additional requirements, see 10.5.1.		N/A
10.5.1	Add the following after the first paragraph: For RS 1 compliance is checked by measurement under the following conditions: In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or presets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made. NOTE Z1 Soldered joints and paint lockings are examples of adequate locking. The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm ² , at any point 10 cm from the outer surface of the apparatus. Moreover, the measurement shall be made under fault conditions causing an increase of the high-voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made. For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level. NOTE Z2 These values appear in Directive		N/A

GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	96/29/Euratom of 13 May 1996.		
10.6.2.1	Add the following paragraph to the end of the subclause: EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.		N/A
10.Z1	Add the following new subclause after 10.6.5. 10.Z1 Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz). For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body-mounted devices, attention is drawn to EN 50360 and EN 50566.		N/A
G.7.1	Add the following note: NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.		N/A
Bibliography	Additional EN standards.		—

ZA	Normative references to international publications with their corresponding European publications	—
-----------	--	---

ZB	Special National Conditions	—
4.1.15	Denmark, Finland, Norway and Sweden To the end of the subclause the following is added: Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet. The marking text in the applicable countries shall be as follows: In Denmark : “Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til	N/A

GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>stikproppens jord.”</p> <p>In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p>		
4.7.3	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex</p>		N/A
5.2.2.2	<p>Denmark</p> <p>After the 2nd paragraph add the following:</p> <p>A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>		N/A
5.4.11.1 And Annex G	<p>Finland and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>For separation of the telecommunication network from earth the following is applicable:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), and 		N/A

GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<ul style="list-style-type: none"> • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> • the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; • the additional testing shall be performed on all the test specimens as described in EN 60384-14; <p>the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</p>		
5.5.2.1	<p>Norway</p> <p>After the 3rd paragraph the following is added: Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).</p>		N/A
5.5.6	<p>Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added: Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.</p>		N/A
5.6.1	<p>Denmark</p> <p>Add to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment.</p> <p><i>Justification:</i> In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p>		N/A
5.6.4.2.1	<p>Ireland and United Kingdom</p> <p>After the indent for pluggable equipment type</p>		N/A

GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>A, the following is added:</p> <p>– the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.</p>		
5.6.5.1	<p>To the second paragraph the following is added:</p> <p>The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is:</p> <p>1,25 mm² to 1,5 mm² in cross-sectional area.</p>		N/A
5.7.5	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>		N/A
5.7.6.1	<p>Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical</p>		N/A

GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway): "Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplede utstyr – og er tilkoplede et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet."</p> <p>Translation to Swedish: "Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet."</p>		
5.7.6.2	<p>Denmark</p> <p>To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA.</p>		N/A
B.3.1 and B.4	<p>Ireland and United Kingdom</p> <p>The following is applicable: To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met</p>		N/A
G.4.2	<p>Denmark</p> <p>To the end of the subclause the following is added: Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended</p>		N/A

GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p><i>Justification:</i> Heavy Current Regulations, Section 6c</p>		
G.4.2	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.</p>		N/A
G.7.1	<p>United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations.</p> <p>NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>		N/A

GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	<p>Ireland</p> <p>To the first paragraph the following is added: Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard</p>		N/A
G.7.2	<p>Ireland and United Kingdom</p> <p>To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm² is allowed for equipment which is rated over 10 A and up to and including 13 A.</p>		N/A
ZC	A-deviations		—
	<p>A-deviation: National deviation due to regulations, the alteration of which is for the time being outside the competence of the CEN/CENELEC national member.</p> <p>This European Standard falls under Directive 2006/95/EC.</p> <p>NOTE (from CEN/CENELEC IR Part 2:2011, 2.17): Where standards fall under EU Directives, it is the view of the Commission of the European Communities (OJ No C 59; 1982-03-09) that the effect of the decision of the Court of Justice in case 815/79 Cremonini/Vrankovich (European Court Reports 1980, p. 3583) is that compliance with A-deviations is no longer mandatory and that the free movement of products complying with such a standard should not be restricted except under the safeguard procedure provided for in the relevant Directive.</p> <p>A-deviations in an EFTA-country are valid instead of the relevant provisions of the European Standard in that country until they have been removed.</p>		—
10.5.2	<p>Germany</p> <p>The following requirement applies: For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p><i>Justification:</i> German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.</p> <p>NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de</p>		N/A

Annex ZD (informative) IEC and CENELEC code designations for flexible cords		
Type of flexible cord	Code designations	
	IEC	CENELEC
PVC insulated cords		
Flat twin tinsel cord	60227 IEC 41	H03VH-Y
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F
Ordinary polyvinyl chloride sheathed flexible cord	60277 IEC 53	H05VV-F H05VVH2-F
Rubber insulated cords		
Braided cord	60245 IEC 51	H03RT-F
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F
Cords having high flexibility		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H
Cords insulated and sheathed with halogen-free thermoplastic compounds		
Light halogen-free thermoplastic insulated and sheathed flexible cords		H03Z1Z1-F H03Z1Z1H2-F
Ordinary halogen-free thermoplastic insulated and sheathed flexible cords		H05Z1Z1-F H05Z1Z1H2-F

Country	Italy
IECEE Member NCB	IMQ S.p.A.
IEC Standard	IEC 62368-1:2014 (Ed. 2.0)
Corresponding National Standard	CEI EN 62368-1:2016
Regulatory Requirements	N/A

ITALY NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
Various	Please see the EN version of the standard where the Italian National and Special National Deviations are stated.		—



Country	Japan
IECEE Member NCB	IECEE-JP
IEC Standard	IEC 62368-1:2014 (Ed. 2.0)
Corresponding National Standard	J62368-1 (H30)
Regulatory Requirements	Electrical Appliances and Materials Safety Act Article 8, 9 and Appendix 12

Clause and Sub-clause	Exact wording Requirement + Test	Result - Remark	Verdict
3.3.15.1	Add the following new note after Note 2 to entry. Note 3 to entry: See 3.3.15.4A for class I equipment, when 2-pin adaptor with earthing lead wire or cord set having 2-pin plug with earthing lead wire is provided or recommended.		N/A
3.3.15.4A	Add the following new clause after 3.3.15.4. 3.3.15.4A Class 0I equipment Equipment having attachment plug without earthing blade, where protection against electric shock is achieved by using basic insulation and providing the protective earthing terminal or earthing lead wire in order to connect accessible conductive parts to the protective earthing conductor in the building wiring as supplementary safeguard. The above includes the equipment provided with, or recommend user to use the accessory of 2-pin plug adaptor with protective earthing lead wire that adapts class I (earthed) plug into 2-pin plug or power supply cord set having 2-pin plug		N/A

	<p>with earthing lead wire.</p> <p>Note 1 to entry: Class 0I equipment may have a part constructed with Class II.</p>		
4.1.2	<p>Modify the first paragraph as follows:</p> <p>Where the component, or a characteristic of a component, is a safeguard or a part of a safeguard, components shall comply with the requirements of this standard or, where specified in a requirements clause, with the safety aspects of the relevant JIS component standards or IEC component standards, or components shall have properties equivalent to or better than these.</p> <p>Add the following Note before Note 1</p> <p>NOTE 0A Components complying with the interpretation of Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance is regarded to have equivalent to or better properties.</p>		N/A
4.1.3	<p>Add the following Note before the compliance statement:</p> <p>NOTE Considering the wiring circumstance in Japan, transportable or similar type of equipment that is frequently moved for intended usage, or equipment intended to be installed where the provision for earthing connection is unlikely should not be designed as class I or class 0I equipment unless it is intended to be installed by skilled persons or instructed persons.</p>		N/A
5.4.1.4.3	<p>Add the following as a note to Table 10:</p> <p>NOTE In case no data for the material is available, Appendix 4, 1.(1).b. 3 of the Interpretation on the Ministerial Ordinance stipulating Technical Specifications for Electrical Appliances is regarded as maximum temperature limit of the material.</p>		N/A
5.4.9.2	<p>Add the following text to the NOTE:</p>		N/A

	Alternatively, routine test in production-line may be in accordance with 5.2 (electric strength test) of IEC 62911.		
5.6.1	<p>Add the following:</p> <p>Mains socket-outlet and appliance outlet shall comply with Clause G.4.2A if they are incorporated as part of the equipment.</p>		N/A
5.6.2.1	<p>Add the following to the third paragraph:</p> <p>Mains connection of class 0I equipment provided with instructional safeguard in accordance with Clause F.3.6.1A is considered to meet this requirement.</p> <p>Add the following at the end of the subclause:</p> <p>Mains plug having a lead wire for protective earthing connection of class 0I equipment shall comply with all of the following:</p> <ul style="list-style-type: none"> – Not to be used for equipment having a rated voltage of 150 V or more – The lead wire for earthing is not connected to the earth by means of clip – The lead wire for earthing is at least 10 cm long <p>If class 0I equipment provides an independent main protective earthing terminal and is intended to be installed by ordinary person, earthing wire shall be provided within the package for the equipment.</p>		N/A
5.6.2.2	<p>Add the following after the first sentence.</p> <p>However, this requirement does not apply to internal conductor of the cord set that is covered by the sheath of mains cord and is formed together with mains plug and appliance connector.</p>		N/A
5.6.3	<p>Add the following after NOTE 2.</p> <p>In addition, for class 0I equipment using power supply cord having two conductors (no earthing conductor), the conductor of protective earthing lead wire shall also comply with either of the following:</p> <ul style="list-style-type: none"> – use of annealed copper wire with 1.6 mm diameter or corrosion-inhibiting metal wire having size and strength that are equivalent to or more than the above copper wire – single core cord or single core cable with 1.25 mm² or more cross-sectional area 		N/A

	<p>Replace NOTE 3 with the following</p> <p>NOTE 3 Heavy duty is defined in IEC 62440.</p>		
5.6.4.2.1	<p>Add NOTE 4 as follows:</p> <p>NOTE 4 In Japan, 20 A is widely used as protective current rating for mains circuit in case of mains outlet rated 20 A or less.</p>		N/A
5.7.3	<p>Change present NOTE to NOTE 1, and add the following paragraph after the NOTE 1:</p> <p>For class 0I equipment that is provided with mains socket-outlet in the configuration as specified in JIS C 8282 series or JIS C 8303, or otherwise being considered to comply with relevant regulations, or that is provided with mains appliance outlet as specified in JIS C 8283-2-2 for the purpose of interconnection, the measurement is conducted on the system of the interconnected equipment having a single connection to the mains.</p> <p>NOTE 2 Limits for class 0I equipment is specified in 5.7.4</p> <p>NOTE 3 It is regarded as being in compliance with the relevant regulations if a connector complies with Appendix 4 of the interpretation of Ministerial Ordinance on stipulating technical requirements for the Electrical Appliances.</p>		N/A
5.7.4	<p>Add the following paragraph at the end of the first paragraph:</p> <p>In case of class 0I equipment, touch current shall not exceed 1.41 mA peak or for sinusoidal wave, 1.0 mA r.m.s. when measured using the network specified in Figure 4 of IEC 60990.</p>		N/A
6.4.3.3	<p>Replace the first dash paragraph with following:</p> <ul style="list-style-type: none"> – a fuse complying with JIS C 6575 series or a fuse having equivalent characteristics shall open within 1 s; or <p>NOTE 3 A fuse is considered to have equivalent characteristics to those complying with JIS C 6575 series if it complies with appendix 3 of the Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance and Material.</p> <p>Add the following before the last paragraph:</p> <p>A fuse having time/current characteristics other than those specified in IEC 60127 shall be</p>		N/A

	<p>tested with the characteristics taken into account. In case of Class A fuse of JIS C 6575, replace “2.1 times” by “1.35 times” and in case of Class B fuse of JIS C 6575, replace “2.1 times” by “1.6 times”.</p> <p>NOTE 4 The above replacements apply also to fuses having equivalent characteristics to those specified in JIS C 6575 series.</p>		
<p>8.5.4.2.1</p>	<p>Add the following before NOTE 2:</p> <p>However, only stationary equipment that is directly connected to the three-phase supply rated more than 200 V ac can be considered for use in locations where children are not likely to be present, when complying with Clause F.4.</p>		<p>N/A</p>
<p>8.5.4.2.2</p>	<p>Replace the first paragraph with the following:</p> <p>For equipment installed where children may be present, an instructional safeguard shall be provided by easily understandable wording in accordance with Clause F.5, except that element 3 is optional.</p> <p>Replace the first dash with the following:</p> <p>– element 1a and element 2:  IEC 60417-6057 (2011-05) or  (JIS S 0101:2000, 6.2.1) and the following precautions</p> <ul style="list-style-type: none"> • “The use by infants/children may cause a hazard of injury.” or equivalent 子供が使用することによって、傷害などの危害が発生するおそれがある。 Example in Japanese: • “A hand can be drawn into the mechanical section for shredding when touching the document-slot.” or equivalent Example in Japanese: 文書投入口に手を触れることによって、細断機構に引き込まれるおそれがある。 • “Clothing can be drawn into the mechanical section for shredding when touching the document-slot.” or equivalent Example in Japanese: 文書投入口に衣類が触れることによって、細断機構に引き込まれるおそれがある。 • “Hairs can be drawn into the mechanical section for shredding when touching the 		<p>N/A</p>

	<p>document-slot.” or equivalent Example in Japanese: 文書投入口に髪の毛が触れることによって、細断機構に引き込まれるおそれがある。</p> <p>In case of equipment incorporating a commutator motor: • “The equipment may catch fire or explode by spraying of flammable gas.” or equivalent Example in Japanese: 可燃性ガスを噴射することによって引火又は爆発するおそれがある。</p> <p>Delete the second dash.</p>		
8.5.4.2.4	<p>Replace the first statement with the following: The media destruction device is tested according to Clause V.1.2 with applicable jointed test probes to the opening. And then, tested with the wedge probe of Figure V.4 applied in any direction relative to the opening:</p>		N/A
8.5.4.2.5	<p>Replace the second sentence in the first paragraph with the following: The wedge probe of Figure V.4 and applicable jointed test probes specified in Clause V.1.2 shall not contact any moving part.</p> <p>Add the following after the second paragraph: Instructional safeguard shall not substitute an equipment safeguard for preventing access to hazardous moving parts.</p>		N/A
9.2.6, Table 38	<p>Replace the top row of TS2 in column of “Accessible parts” with the following: Handles, Knobs, grips, etc. and external surfaces either held, touched or worn against the body in normal use (> 1 min)^{b,c}</p>		N/A
Annex F F.3.5.1	<p>Add the following after the second paragraph. Class 0I equipment shall be provided with an instructional safeguard in accordance with Clause F.5 when a mains socket-outlet as specified in JIS C 8282 series, JIS C 8303 or relevant regulation to which class I equipment can be connected is provided in accordance with Clause G.4.2A except for the cases where the socket-outlet is accessible only to skilled persons.</p> <p>NOTE Appendix 4 of the Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance is an example of the relevant regulation.</p>		N/A

	<p>The elements of the instructional safeguard shall be as follows:</p> <ul style="list-style-type: none"> – element 1a: not applicable – element 2: “Only for (equipment name)” or equivalent text Example in Japanese: (equipment name) 専用コンセント – element 4: “This socket-outlet is for use only with (manufacturer’s name), (model number or series), (equipment name)” or equivalent text Example in Japanese: このコンセントは, (manufacturer's name), (model number or series), (equipment name) だけが接続することを意図しています。 – element 3: “Use with other equipment may result in electric shock” or equivalent text Example in Japanese: その他の機器を接続すると感電の危険があります。 <p>The elements shall be in the order 2, 4, and 3. The element 2 shall be marked adjacent to the mains socket-outlet. The rated voltage and assigned current or power of a mains socket-outlet need not be marked on the equipment provided with this instructional safeguard.</p>		
<p>Annex F F.3.5.3</p>	<p>Replace the third dashed paragraph with the following.</p> <ul style="list-style-type: none"> – if the fuse is necessary for the safeguard function, the symbols indicating pre-arcing time-current characteristic. <p>Example F: Fast blow T: Time-delay Ⓐ: Class A Ⓑ: Class B</p>		<p>N/A</p>
<p>Annex F F.3.6.1A</p>	<p>Add the following new clause after F.3.6.1.3.</p> <p>F.3.6.1A Marking for class 0I equipment The requirements of Clauses F.3.6.1.1 and F.3.6.1.3 also apply to class 0I equipment. For class 0I equipment, the following or equivalent instructions shall be marked on the mains plug or on the visible place of the main body.</p>		<p>N/A</p>

	<p>“Provide an earthing connection” Example in Japanese: “必ず接地接続を行ってください。”</p> <p>In addition to the above, for class 0I equipment, the following instructional safeguard shall be marked on the visible place of the main body or shall be in the text of an accompanying document.</p> <p>“Provide an earthing connection before the mains plug is connected to the mains. And, when disconnecting the earthing connection, be sure to disconnect after pulling out the mains plug from the mains.” Example in Japanese: 接地接続は必ず、電源プラグを電源につなぐ前に行ってください。 また、接地接続を外す場合は、必ず電源プラグを電源から切り離してから行ってください。</p>		
<p>Annex F F.3.6.2.1</p>	<p>Replace the third paragraph with the following:</p> <p>The above symbols shall not be used for class I equipment or class 0I equipment.</p>		<p>N/A</p>
<p>Annex F F.4</p>	<p>Replace the fourth dashed paragraph with the following:</p> <ul style="list-style-type: none"> – For audio equipment with terminals classified as ES3 in accordance with Table E.1, and for other equipment with terminals marked in accordance with F.3.6.1 and F.3.6.1A, the instructions shall require that the external wiring connected to these terminals shall be installed by a skilled person, or shall be connected by means of ready-made leads or cords that are constructed in a way that would prevent contact with any ES3 circuit. <p>Add the following after the ninth dashed paragraph.</p> <ul style="list-style-type: none"> – For class 0I equipment provided with independent main protective earthing terminal, where the cord for the protective earthing connection is not provided within the package for the equipment, if the protective earthing connection is made by instructed person or skilled person, the suitable installation instruction for the protective earthing connection shall be provided. 		<p>N/A</p>
<p>Annex G G.3.2.1</p>	<p>Replace the paragraph a) with the following.</p> <p>a) The thermal link when tested as a separate component, shall comply with the requirements of JIS C 6691 or have properties equivalent to or better than that.</p>		<p>N/A</p>

	<p>NOTE Thermal links complying with appendix 3 of the Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance and Material are considered to have equivalent or better properties.</p>		
Annex G G.3.4	<p>Replace the first paragraph by the following.</p> <p>Except for devices covered by Clause G.3.5, overcurrent protective devices used as a safeguard shall comply with the relevant JIS harmonizing with IEC standard, or shall have equivalent or better properties. If there are no applicable JIS, they shall comply with relevant IEC standard.</p> <p>NOTE Fuses complying with appendix 3, or circuit breakers or residual current circuit breakers complying with appendix 4 of Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance and Material are considered to have equivalent or better properties.</p>		N/A
Annex G G.4.1	<p>Add the following sentence at the end of this clause.</p> <p>This requirement is not applicable to Clauses G.4.2 and G.4.2A.</p>		N/A
Annex G G.4.2	<p>Replace with the following.</p> <p>G.4.2 Mains connectors (including mains plug and socket-outlet) Mains connector shall comply with JIS C 8282 series, JIS C 8283 series, JIS C 8285, JIS C 8303 or IEC 60309 series. Mains plugs and socket-outlets shall comply with JIS C 8282 series, JIS C 8303, IEC 60309 series, or have equivalent or better properties.</p> <p>NOTE Mains plug complying with appendix 4 of the interpretation of Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance is regarded to have equivalent or better properties.</p> <p>A power supply cord set provided with appliance connector that can fit appliance inlet complying with JIS C 8283-1 shall comply with JIS C 8286. Equipment shall be constructed so that mechanical stress does not transmit to the soldering part of inlet terminal during insertion or removal of the connector. Construction that the body of the inlet is secured and the securement not relied on soldering only is considered to</p>		P

	<p>comply.</p> <p>When an equipment is rated not more than 125 V and complies with all the following requirements, Type C14 and C18 appliance coupler complying with JIS C 8283 series can be considered as rated 15 A</p> <ul style="list-style-type: none"> – The temperature of appliance coupler does not exceed the value specified in JIS C 8283-1 under the most unfavorable normal operating condition. – " Use only designated cord set attached in this equipment " or equivalent text is described in the operating instruction. If the cord set is not provided within the package for the equipment, suitable information regarding to the cord set is described in the operating instruction. <p>Example in Japanese: “この機器に同こん(梱)した指定の電源コードセットだけを使用して下さい。”</p>		
<p>Annex G G.4.2A</p>	<p>Add the following new clause after G.4.2.</p> <p>G.4.2A Mains socket-outlet and interconnection coupler provided with the equipment The equipment provided with mains socket-outlet configured in accordance with JIS C 8282 series, JIS C 8303 or relevant standards or with interconnection coupler configured in accordance with JIS C 8283-2-2 shall comply with the following:</p> <ul style="list-style-type: none"> – Socket-outlet and interconnection coupler provided in class II equipment can connect other class II equipment only. – Socket-outlet and interconnection coupler provided in class I equipment can connect other class II equipment only, or is provided with protective earthing pole that is reliably connected to protective earthing terminal or point of the equipment. –Interconnection coupler provided in class 0I equipment can connect other class II equipment only. If the all the followings are met, class I equipment can be connected. <ul style="list-style-type: none"> • The interconnection coupler is provided with a protective earthing pole that is reliably connected to the protective earthing point or terminal of the equipment. • Touch current measured according to 5.7.3 as a system of interconnected equipment with one connection to the mains does not exceed the limit for class 0I equipment specified in 5.7.4. – Socket-outlet provided in class 0I equipment can connect other class II equipment only. If the socket-outlet is provided for interconnection and 		<p>N/A</p>

	<p>the all the followings are met, class I equipment can be connected.</p> <ul style="list-style-type: none"> • Socket-outlet is provided with protective earthing pole that is reliably connected to protective earthing point or terminal of the equipment. • Except for socket-outlet which only skilled person can access, instructional safeguard specified in Clause F.3.5.1 is provided so that only equipment intended by the manufacturer is connected. • Touch current measured according to 5.7.3 as a system of interconnected equipment with one connection to the mains does not exceed the limited for class 0I equipment specified in 5.7.4. <p>– Cord set for interconnection provided within the package for the equipment providing the interconnection coupler complying with JIS C 8283-2-2 complies with JIS C 8286.</p> <p>NOTE 1 Considering the wiring circumstance in Japan, transportable or similar type of equipment that is frequently moved for intended usage, class 0I equipment should not be provided with mains socket-outlet configured in accordance with JIS C 8282 series, JIS C 8303 or relevant regulation unless it is intended to be installed by skilled person.</p> <p>NOTE 2 Acceptable configuration of relevant regulation refers to appendix 4 of the interpretation of Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance.</p>		
<p>Annex G G.4.3</p>	<p>Add following NOTE after EXAMPLE.</p> <p>NOTE The statement, “An example of a connector not meeting the requirements of this subclause is the so called “banana” plug” is deleted from above EXAMPLE.</p>		<p>N/A</p>
<p>Annex G G.7.1</p>	<p>Replace the third dashed paragraph with the following.</p> <p>– other types of cords may be used if they have equivalent electro-mechanical and fire safety properties as above.</p> <p>Add the following after NOTE 3.</p> <p>NOTE 3A Sheathed mains cords complying with appendix 1 of the interpretation of Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance are considered to</p>		<p>N/A</p>

	<p>have equivalent or better electro-mechanical and fire safety properties.</p> <p>Add the following after the first sentence in the paragraph after present NOTE 3:</p> <p>However, a mains supply cord need not include the protective earthing conductor for class 0I equipment provided with independent protective earthing conductor.</p>		
Annex G G.7.2	<p>Add the following new NOTE 0A after the first sentence.</p> <p>NOTE 0A The cross-sectional area of mains cords may comply with relevant Japanese wiring regulation if it complies with appendix 1 of the interpretation of Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance that is referenced in Clause G.7.1 as having equivalent or better electro-mechanical and safety properties.</p>		N/A
Annex G G.7.6.1	<p>Add the following new NOTE 0A to end of this sub-clause.</p> <p>NOTE 0A The cross-sectional area of mains cords may comply with relevant Japanese wiring regulation if it complies with appendix 1 of the interpretation of Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance that is referenced in Clause G.7.1 as having equivalent or better electro-mechanical and safety properties.</p>		N/A
Annex G G.8.3.3	<p>Replace the first dotted paragraph in the first dashed paragraph with the following:</p> <ul style="list-style-type: none"> • withstand $1,71 \times 1.1 \times U_0$ for 5 s. <p>Replace the NOTE 2 with the following.</p> <p>NOTE 2 For different power distribution systems, the temporary overvoltages are defined in Table B.3 of JIS C 5381-11 (TOV test parameters for Japanese systems)</p>		N/A

Country	Sweden
IECEE Member NCB	Intertek Semko AB
IEC Standard	IEC 62368-1:2014 (Ed. 2.0)
Corresponding National Standard	SS-EN 62368-1:2014
Regulatory Requirements	N/A

SWEDEN NATIONAL DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
Various	Please see the EN version of the standard where the Swedish National and Special National Deviations are stated.		—

ATTACHMENT TO TEST REPORT IEC 62368-1 2th Ed. U.S.A. NATIONAL DIFFERENCES Audio/video, information and communication technology equipment – Part 1: Safety requirements
Differences according to : CSA/UL 62368-1:2014
Attachment Form No. : US&CA_ND_IEC623681B
Attachment Originator : UL(US)
Master Attachment : Date 2015-06
Copyright © 2015 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

IEC 62368-1 - US and Canadian National Differences Special National Conditions based on Regulations and Other National Differences			
1.1	All equipment is to be designed to allow installation according to the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CEC), Part I, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2. Also, for such equipment marked or otherwise identified, installation is allowed per the Standard for the Protection of Information Technology Equipment, ANSI/NFPA 75.		P
1.4	Additional requirements apply to some forms of power distribution equipment, including sub-assemblies.		P
4.1.17	For lengths exceeding 3.05 m, external interconnecting flexible cord and cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the NEC.		N/A
	For lengths 3.05 m or less, external interconnecting flexible cord and cable assemblies that are not types specified in the NEC generally are required to have special construction features and identification markings.		P
4.8	Lithium coin / button cell batteries have modified special construction and performance requirements.		N/A
5.6.3	Protective earthing conductors comply with the minimum conductor sizes in Table G.5, except as required by Table G.7ADV.1 for cord connected equipment, or Annex DVH for permanently connected equipment		N/A
5.7.7	Equipment intended to receive telecommunication ringing signals complies with a special touch current measurement tests.		N/A

Clause	Requirement + Test	Result - Remark	Verdict
6.5.1	PS3 wiring outside a fire enclosure complies with single fault testing in B.4, or be current limited per one of the permitted methods.		P
Annex F (F.3.3.8)	Output terminals provided for supply of other equipment, except mains, supply are marked with a maximum rating or references to which equipment it is permitted to be connected.		P
Annex G (G.7.1)	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.		N/A
Annex G (G.7.3)	Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.		N/A
	Flexible power supply cords are required to be compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.		N/A
Annex G (G.7.5)	Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement. Power supply cords are required to be no longer than 4.5 m in length if used in ITE Rooms.		N/A
Annex H.2	Continuous ringing signals under normal operating conditions up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.		N/A
Annex H.4	For circuits with other than ringing signals and with voltages exceeding 42.4 V _{peak} or 60 V d.c., the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.		N/A
Annex M	Battery packs for stationary applications comply with special component requirements.		N/A
Annex DVA (1)	Equipment intended for use in spaces used for environmental air are subjected to special flammability requirements for heat and visible smoke release.		N/A
	For ITE room applications, automated information storage systems with combustible media greater than 0.76 m ³ (27 cu ft) have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.		N/A
	Consumer products designed or intended primarily for children 12 years of age or younger are subject to additional requirements in accordance with U.S. & Canadian Regulations.		N/A

Clause	Requirement + Test	Result - Remark	Verdict
	Baby monitors additionally comply with ASTM F2951, Consumer Safety Specification for Baby Monitors.		N/A
Annex DVA (5.6.3)	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.		P
Annex DVA (6.3)	The maximum quantity of flammable liquid stored in equipment complies with NFPA 30.		N/A
Annex DVA (6.4.8)	For ITE room applications, enclosures with combustible material measuring greater than 0.9 m ² (10 sq ft) or a single dimension greater than 1.8 m (6 ft) have a flame spread rating of 50 or less. For equipment with the same dimensions for other applications, an external surface that is not a fire enclosure requires a min. flammability classification of V-1.		N/A
Annex DVA (10.3.1)	Equipment with lasers meets the U.S. Code of Federal Regulations 21 CFR 1040 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (10.5.1)	Equipment that produces ionizing radiation complies with the U.S. Code of Federal Regulations, 21 CFR 1020 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (F.3.3.3)	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings. Additional considerations apply for voltage ratings that exceed the attachment cap rating or are lower than the "Normal Operating Condition" in Table 2 of CAN/CSA C22.2 No. 235."		N/A
Annex DVA (F.3.3.5)	Equipment identified for ITE (computer) room installation is marked with the rated current		N/A
Annex DVA (G.1)	Vertically-mounted disconnect switches and circuit breakers have the "on" position indicated by the handle in the up position		N/A
Annex DVA (G.3.4)	Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.		N/A
Annex DVA (G.4.2)	Equipment with isolated ground (earthing) receptacles complies with NEC 250.146(D) and CEC 10-112 and 10-906(8).		N/A
Annex DVA (G.4.3)	Where a fuse is used to provide Class 2 or Class 3 current limiting, it is not operator-accessible unless it is non- interchangeable.		N/A

Clause	Requirement + Test	Result - Remark	Verdict
Annex DVA (G.5.3)	Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection.		N/A
Annex DVA (G.5.4)	Motor control devices are required for cord-connected equipment with a mains-connected motor if the equipment is rated more than 12 A, or if the equipment has a nominal voltage rating greater than 120 V, or if the motor is rated more than 1/3 hp (locked rotor current over 43 A).		N/A
Annex DVA (Annex M)	For ITE room applications, equipment with battery systems capable of supplying 750 VA for five minutes have a battery disconnect means that may be connected to the ITE room remote power-off circuit.		N/A
Annex DVA (Q)	Wiring terminals intended to supply Class 2 outputs according to the NEC or CEC Part 1 are marked with the voltage rating and “Class 2” or equivalent; marking is located adjacent to the terminals and visible during wiring.		N/A
Annex DVB (1)	Additional requirements apply for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities.		N/A
Annex DVC (1)	Additional requirements apply for equipment intended for mounting under kitchen cabinets.		N/A
Annex DVE (4.1.1)	Some equipment, components, sub-assemblies and materials associated with the risk of fire, electric shock, or personal injury have component or material ratings in accordance with the applicable national (U.S. and Canadian) component or material requirements. Components required to comply include: appliance couplers, attachment plugs, battery back-up systems, battery packs, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), power supply cords, direct plug-in equipment, electrochemical capacitor modules (energy storage modules with ultra-capacitors), enclosures (outdoor), flexible cords and cables, fuses (branch circuit), ground-fault current interrupters, interconnecting cables, data storage equipment, printed wiring, protectors for communications circuits, receptacles, surge protective devices, vehicle battery adapters, wire connectors, and wire and cables.		N/A
Annex DVH	Equipment for permanent connection to the mains supply is subjected to additional requirements.		N/A
Annex DVH (DVH.1)	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains are in accordance with the NEC/CEC.		N/A

Clause	Requirement + Test	Result - Remark	Verdict
Annex DVH (DVH.3.2)	Terminals for permanent wiring, including protective earthing terminals, are suitable for U.S./Canadian wire gauge sizes, rated 125 percent of the equipment rating, and are specially marked when specified.		N/A
Annex DVH (DVH.3.2)	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm ²).		N/A
Annex DVH (DVH.4)	Permanently connected equipment is required to have a suitable wiring compartment and wire bending space.		N/A
Annex DVH (DVH 5.5)	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, complies with special earthing, wiring, marking and installation instruction requirements.		N/A
Annex DVI (6.7)	Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses.		N/A
Annex DVJ (10.6.1)	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.		N/A

Enclosure No. 2

Pictures of the unit

(10 pages including this cover page)

Input, (GT-41062-WVVV-X.X-T2)



Inside 1, (GT-41062-WVVV-X.X-T2)




Inside 2, (GT-41062-WVVV-X.X-T2)



Input, (GT-41062-WVVV-X.X-T3)




Inside, (GT-41062-WVVV-X.X-T3)

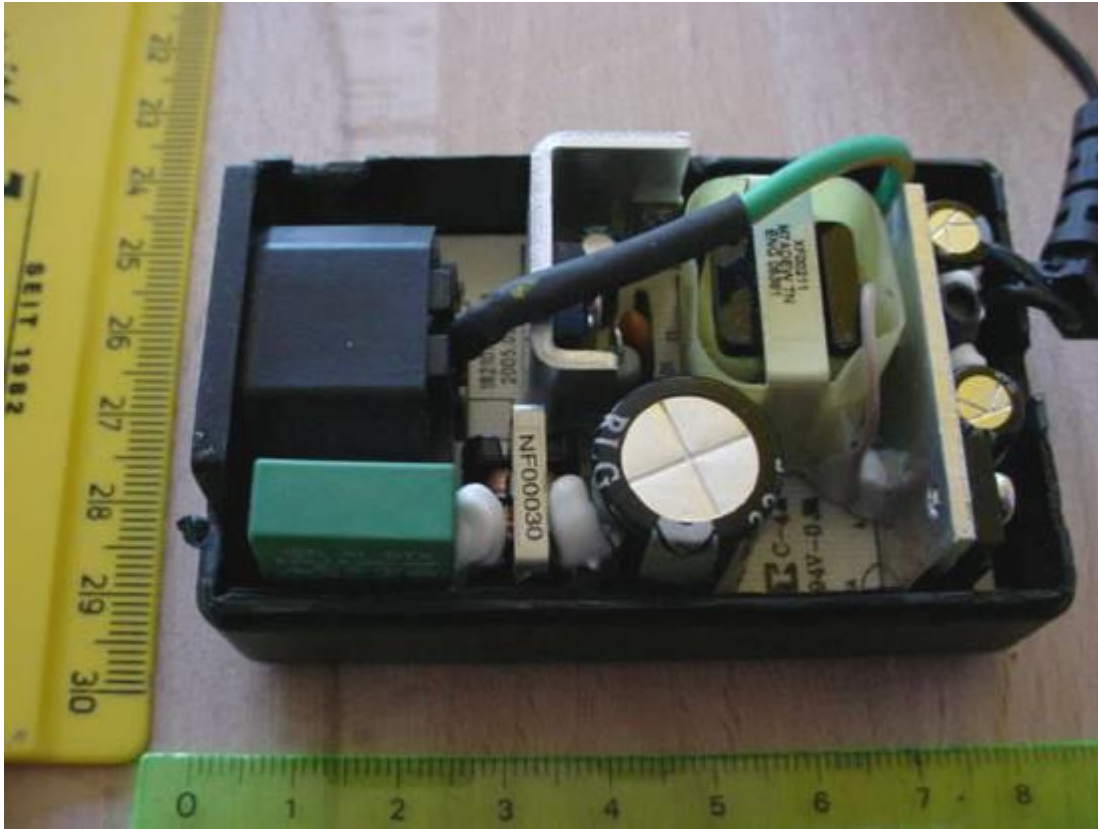

Input, (GT-41062-WVVV-X.X-T3A)



Inside 1, (GT-41062-WVVV-X.X-T3A)

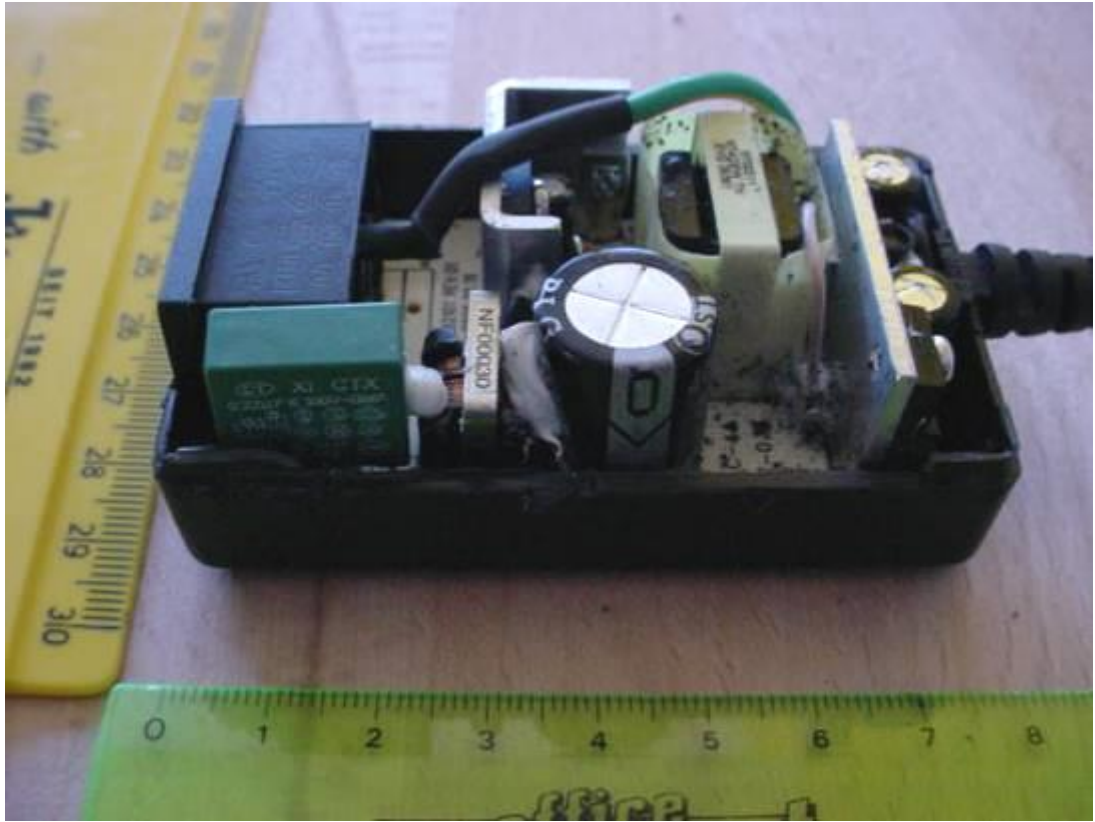

Inside 2, (GT-41062-WVVV-X.X-T3A)




Enclosure, (GT-41062-WVVV-X.X)





PCB top, (GT-41062-WVVV-X.X)




PCB bottom, (GT-41062-WVVV-X.X-T3A)

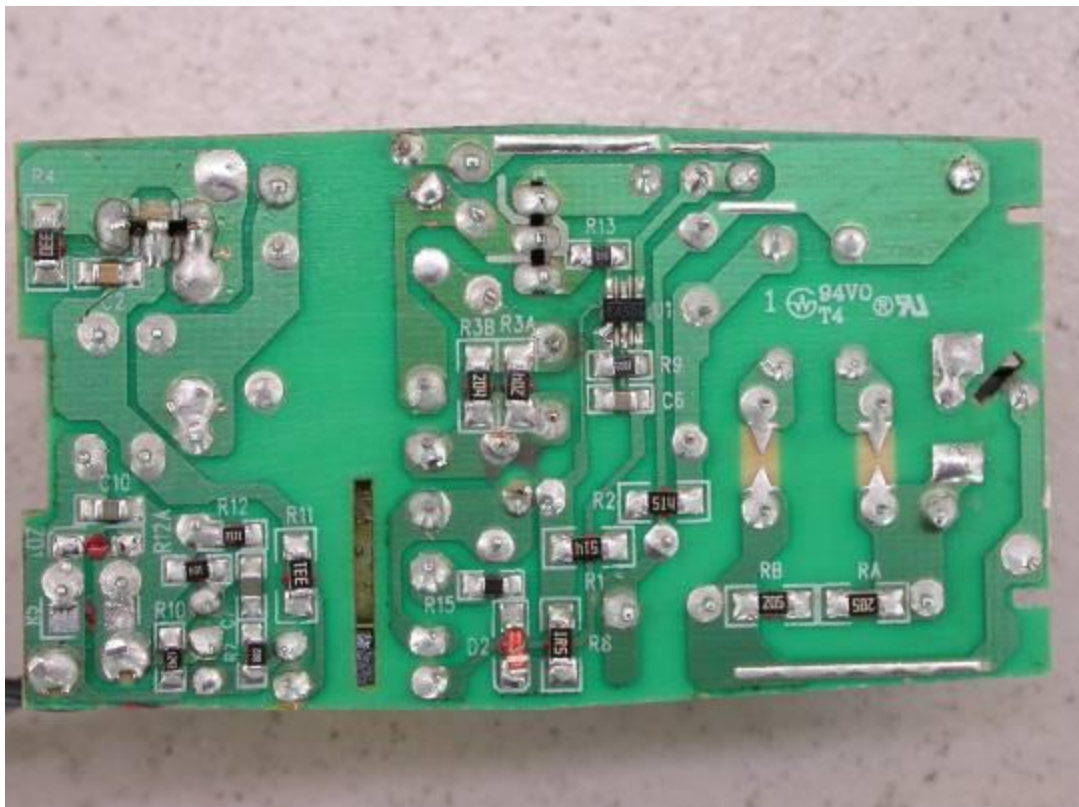

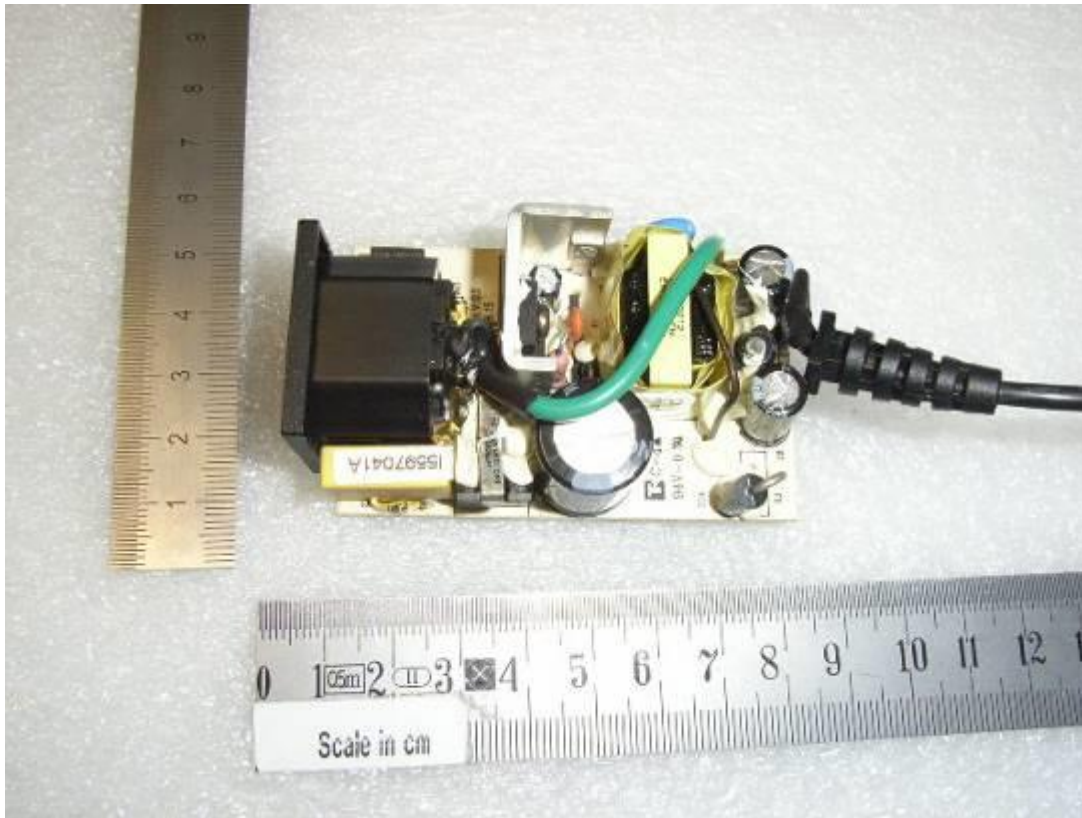

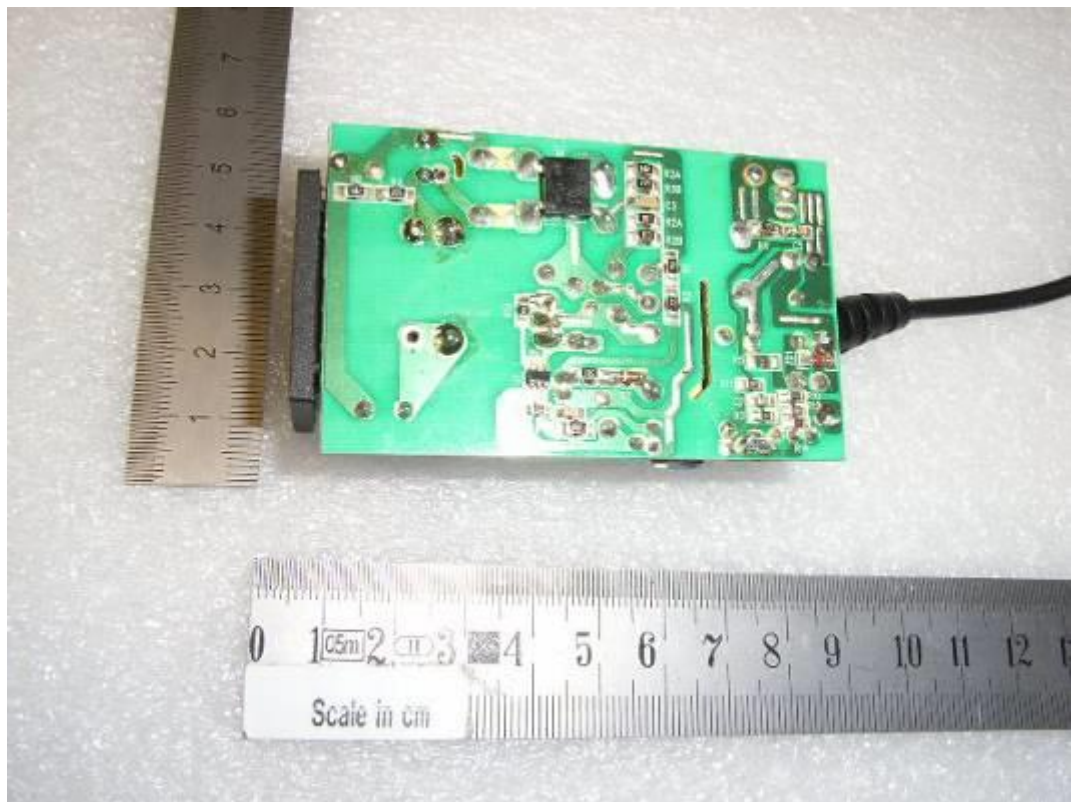

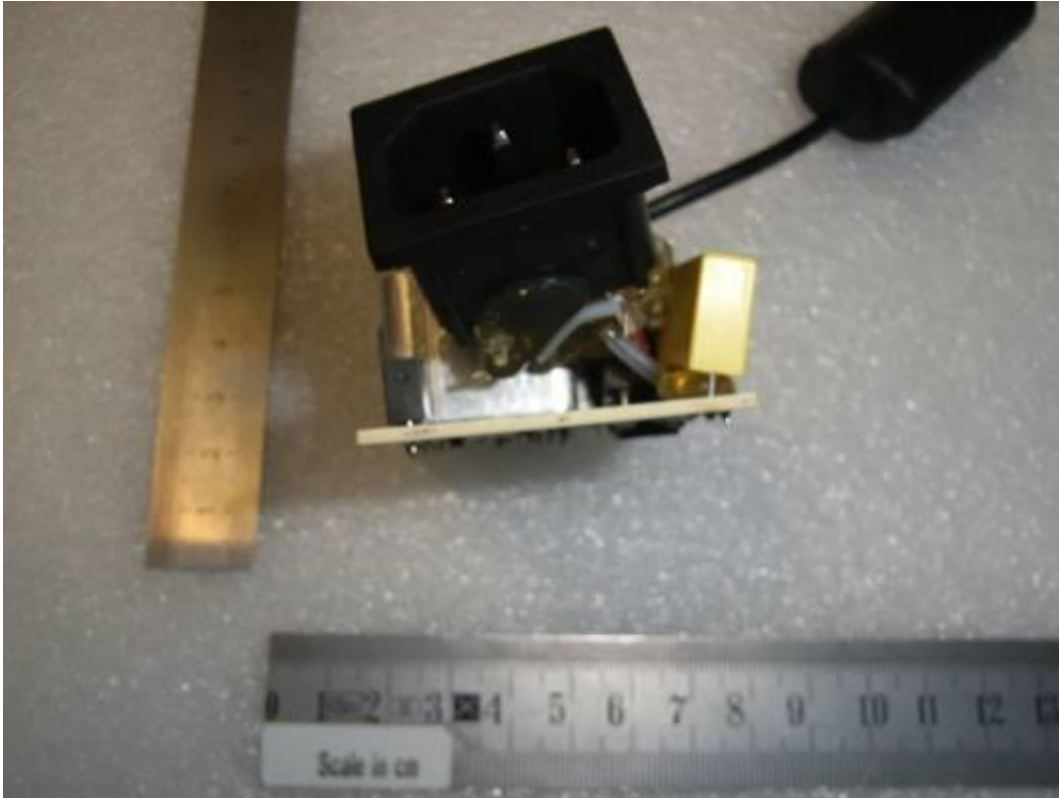

UL
Online Certifications Directory

QMFZ2.E42956

Plastics - Component

[Questions?](#)

[Page Bottom](#)

Plastics - Component

Guide Information

E42956

HITACHI CHEMICAL CO LTD
SHIBAURA SQUARE BLDG
4-9-25 SHIBAURA
MINATO-KU
TOKYO 108-0023, JAPAN

										H	D
		Mil.	H	H	RTI	V	4	C			
		Thk	Flame	W A	Elec	Mech	T	9	T		
Material Dsg	Color	mm	Class	I	I	Imp	Str	R	5	I	

Acrylic Acrylonitrils Styrene (AAS), modified, furnished as pellets.

CP-J-8600, CP-J-ALPHA-C												
	BK	0.38	V-0	3	3	150	150	150	4	4	3	
		0.75	V-0	1	2	150	150	150				
		1.5	V-0	0	2	150	150	150				
		3.0	V-0	0	2	150	150	150				
CP-J-8700	BK	0.39	V-0	-	-	150	150	150	0	4	3	
		0.66	V-0	2	0	150	150	150				
		3.00	V-0	0	1	150	150	150				
CP-J-8800, CP-J-NAF, CP-J-F(N)												
	BN, BK	0.38	V-0	3	0	150	150	150	0	5	3	
		0.46	V-0	0	0	150	150	150				
		0.87	V-0	0	0	150	150	150				
		1.6	V-0	0	0	150	150	150				
		3.0	V-0	0	0	150	150	150				
CP-J-F	BK	0.75	V-0	1	0	150	150	150	5	4		
		1.5	V-0	1	0	150	150	150				



Online Certifications Directory

OBMW2.E196072

(Systems, Electrical Insulation - Component) Magnet Wire - Component

Page Bottom

Questions?

Previous Page

(Systems, Electrical Insulation - Component) Magnet Wire - Component

Guide Information

PROSPERITY ELECTRIC WIRE & CABLE CO
 SHIN SHUI KOU ADMINISTRATIVE DISTRICT
 CHAO TOW TOWN
 DONGGUAN GUANGDONG, CHINA
 E196072

Mtd Dsg	Mark Dsg	Coat Typ		ANSI Type	Temp Class
		BC	OC		
PEW	---	Polyester	---	MW5	155
EIW	---	Polyesterimide	---	MW74-C	200
UEW	---	Polyurethane	---	MW75	130
UEW-NY	---	Polyurethane	Polyamide	MW28C	130
UEWF	(1)	Polyurethane	---	MW79C	155
UEWFNY	(1)	Polyurethane	Polyamide	MW80C	155

(1)-Marked designations are the same as the material designations.

Marking: Company name and material designation on packages or reels.

[Page Top](#)
 [Notice of Disclaimer](#)
 [Questions?](#)
 [Previous Page](#)
[UL Listed and Classified Products](#)
 [UL Recognized Components](#)
 [Products Certified for Canada](#)

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information, Design and/or Listings (files) must be presented in their entirety and as a non-manipulating manner, without any manipulation of the data (or drawings); 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the reprinted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2004 Underwriters Laboratories Inc.®"

http://database.ul.com/cgi-bin/XYV/template/LISEXT/IFRAME/showpage.html?name=OBMW2.E196072&cc=... 2004/5/3



Online Certifications Directory

Your Search Results

Number of hits: 1		
Refine Your Search · Home		
Company Name	Category Name	Link to File
PROSPERITY ELECTRIC WIRE & CABLE CO	(Systems, Electrical Insulation - Component) Magnet Wire - Component	OBMW2.E196072
Notice of Disclaimer · Questions?		



OBMW2.E201757
(Systems, Electrical Insulation - Component) Magnet Wire - Component
[Page Bottom](#) [Questions?](#) [Previous Page](#)

(Systems, Electrical Insulation - Component) Magnet Wire - Component

Guide Information

PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD
 607 BAOLONG INDUSTRIAL ESTATE
 LONGGANG
 SHENZHEN GUANGDONG, CHINA
 E201757

[Questions?](#)

[Page Bottom](#)

(Systems, Electrical Insulation - Component)
Magnet Wire - Component

Guide Information

PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD
 607 BAOLONG INDUSTRIAL ESTATE
 LONGGANG
 SHENZHEN GUANGDONG, CHINA
 E201757

Mtl Dsg	Coating Type		ANSI Type	TI
	BC	TC		
UEW/U	Polyurethane	—	—	130
PEW/U	Modified Polyester	—	MW5-C	155°C
PEW/U	Polyester-imide	—	MW30-C	180
PEW/U	Modified Polyester	Polyamide	MW24-C	155
HAI/U	Polyester(Amide)(imide)	Polyamidimide	MW35, 73	200
UEWN/U	Polyurethane	Polyamide	MW 80-C	155
UEWS/U	Polyurethane	—	MW28-C	130
UEWS/U	Polyurethane	—	MW75-C	130

Marking: Company name, material designation or marked designation on package or reel, and Recognized Component Mark.

[Page Top](#) [Notice of Disclaimer](#) [Questions?](#) [Previous Page](#)
[UL Listed and Classified Products](#) [UL Recognized Components](#) [Products Certified for Canada](#)

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information, Design and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear on the page. <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OBMW2.E201757&c...> 2004/2/21

Online Certifications Directory

Online Certifications Directory



OBJT2.E206440
(Plastic Materials and Electrical Insulation Systems - Component)
Special Transformer Winding Wire - Component

[Page Bottom](#) [Questions?](#) [Previous Page](#)

Your Search Results

Number of hits: 1	
Refine Your Search · Home	
Company Name	Link to File
FURUKAWA ELECTRIC CO LTD	OBJT2.E206440
Category Name	
(Plastic Materials and Electrical Insulation Systems - Component) Special Transformer Winding Wire - Component	
Notice of Disclaimer · Questions?	

Guide Information

FURUKAWA ELECTRIC CO LTD E206440
HIRATSUKA MAGNET WIRE WORKS
 5-1-9 HIGASHI YAHATA
HIRATSUKA-SHI
KANAGAWA 254-0016, JAPAN

- Cat Nos. FSX-E, SX-E, basic insulation rated 105° C, working voltage 354 Vdc or Vp.
- Cat No. FWX-E, supplementary insulation rated 120° C, working voltage 354 V dc or Vp.
- Cat Nos. TEX-E, TEX-EA, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.
- Cat No. TEX-ELZ, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.
- Cat No. TEX-ECEW3, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.
- Cat No. TEX-F, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.
- Cat No. TEX-B, reinforced insulation rated 130° C, working voltage of up to 1.4 kV.

Marking: Company name and material designation on package, reel or on tag attached to the end of the wire and Recognized Component Mark.

[Page Top](#) [Notice of Disclaimer](#) [Questions?](#) [Previous Page](#)
[UL Listed and Classified Products](#) [UL Recognized Components](#) [Products Certified for Canada](#)

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information, <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1/Frameshowpage.html?name=OBJT2.E206440&cn...> 2004/2/2.



Your Search Results

Number of hits: 1		
Refine Your Search · Home		
Company Name	Category Name	Link to File
3M COMPANY	Insulating Taps - Component	OANZ2.E17385
Notice of Disclaimers · Questions?		

OANZ2.E17385
Insulating Tape - Component

[Questions?](#)

[Page Bottom](#)

Insulating Tape - Component

[Guide Information](#)

E17385

3M COMPANY
ELECTRICAL PRODUCTS DIV
3M AUSTIN CENTER
6801 RIVER PLACE BLVD
AUSTIN, TX 78726 USA



Polyester film/mat composite insulating tape, No. 55, for use at temperatures not exceeding 130 C.

Polyester film insulating tapes, Nos. 5, 54(a), 56(a), 75, 1318-1(a), 1318-2(a), 1318 clear (#)(a), 1318, MVV (#)(a) for use at temperatures not exceeding 130 C.

Polyester film insulating tape, No. 1169, for use at temperatures not exceeding 130 C.

Polyester film insulating tape, Nos. 57(a), 58(a), 1291, for use at temperatures not exceeding 130 C.

Polyester film insulating tape, No. 74(a) for use at temperatures not exceeding 130 C.

Flame retardant polyester film insulating tape, Nos. 1298(b), 1298CR, 1350-1(b), 1350-2(b1), 1350CR-1, 1350CR-2, 1350F-1(b), 1350F-2(b1), for use at temperatures not exceeding 130 C.*

Flame retardant polyester film insulating tape, Nos. 1351-1(a) and 1351-2(a), for use at temperatures not exceeding 130* C*.

Flame retardant multilayer polyethylene terephthalate film tape, Nos. 1350T-1(b), 1350T-2(b), 1350T-3(b), for use as reinforced insulation at temperatures not exceeding 130 C.

*Complies with weather resistance and exposure to cold requirements when so marked.

*Complies with flame retardant requirements when so marked.

#Complies with cold and weather resistant requirements when so marked.

+Tested for flame retardant properties only.

(a)-Comparative Tracking Index (CTI)% performance level indicates material Group I, PLC=0, CTI equal to or greater than 600V.

(b)-Comparative Tracking Index (CTI)% performance level indicates material Group II, PLC=1, CTI equal to or greater than 400 but less than 600V also applies to Cat. Nos. 1350F-1 and 1350-1, (yellow color only.)

(b1)-Comparative Tracking Index (CTI)% performance level indicates material group IIIa, PLC=3, CTI equal to or greater than 175 but less than 400V. Also applies to Cat. Nos. 1350F-1, 1350F-2, 1350-1, 1350-2 in all colors (exception: see item (b) referring to 1350-1 in yellow color.

(bb)-Comparative Tracking Index (CTI)% performance level indicates material Group II, PLC=1, CTI equal to or greater than 400 but less than 600V.

(c)-Comparative Tracking Index (CTI)% performance level indicates material Group IIIa, PLC=2 or 3, CTI equal to or greater than 175 but less than 400V.

Online Certifications Directory



Online Certifications Directory

OANZ2.E34833

Insulating Tape - Component

Page Bottom

Questions?

Previous Page

Insulating Tape - Component

Guide Information

NITTO DENKO CORP

SANKEI BLDG 27

4-9 UMEDA-CHO 2-CHOME

KITA-KU

OSAKA 530-0001, JAPAN

E34833

Composite PET tape with an acrylic adhesive, Cat. No. 343BN or 343BN@, for use at temperatures not exceeding 130 C. The backing and adhesive sides have a CTI PLC of 0.

Composite polyester tape with a synthetic polymer adhesive, Cat. No. 341E for use at temperatures not exceeding 130C. The backing and adhesive sides have a CTI PLC of 0.

Flame retardant acetate cloth tape, Cat. No. 156A.

Flame retardant composite PET tape with an acrylic adhesive, Cat. No. 343B for use at temperatures not exceeding 130C. The backing and adhesive sides have a CTI PLC of 0.

Flame retardant composite polyester tape with a synthetic polymer adhesive, Cat. No. 341K for use at temperatures not exceeding 130C.

Flame retardant epoxy/alkyd varnish impregnated polyester tapes, Cat. Nos. 35B** or 350A** for use at temperatures not exceeding 130C; Cat. No. 35B or 350A has a CTI PLC of 0 (backing side and adhesive side); Cat. No. 353**.

Flame retardant epoxy impregnated polyester cloth tape, Cat. No. 354H, maximum operating temperature 130C.

Flame retardant epoxy impregnated polyester tape with synthetic rubber adhesive, Cat. Nos. 355, 355G for use at temperature not exceeding 130C.

Flame retardant epoxy resin impregnated polyester nonwoven adhesive tape, Cat. No. 354E and 354E-15 for use at temperatures not exceeding 130C.

Flame retardant epoxy resin impregnated nonwoven polyester tape, Cat. No. 354F.

Flame retardant epoxy resin, polyester nonwoven backing with an acrylic adhesive, Cat. No. 354 for use at temperatures not exceeding 135C.

Flame retardant glass cloth tape, Cat. No. 188UL(%).

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OANZ2.E34833&ccn...> 2004/2/20

OANZ2.E34833 - Insulating Tape - Component

Flame retardant nomex tapes, Cat. Nos. 381, 386UL.

Flame retardant PET tape, Cat. No. 31CTE for use at temperatures not exceeding 130C C.T.I. PLC = 0.

Flame retardant PET tape, Cat. Nos. 3161FT, 3161-FT**, 3161-FT1** and 3161-FT2** for use at temperatures not exceeding 130 C.

Flame retardant PTFE tape, Cat. No. 9030 or 9030UL.

Flame retardant polyester tape, Model 3161-F max operating temp. 130C, with a synthetic polymer adhesive, 3161, 3161-F for use at temperatures not exceeding 130 C; Model 3161H for use at temperature not exceeding 130C.

Flame retardant polyimide tapes, Cat. Nos. 360B, -N, -U, -UL.

with a synthetic polymer adhesive, Cat. No. 360A.

Flame retardant polypropylene laminated polyester tape with synthetic polymer adhesive, Cat. No. 35 for use at temperatures not exceeding 130C. The backing side of Cat. No. 35 has a CTI PLC of 0. The adhesive side of Cat. No. 35 (white only) has a PLC of 0.

Flame retardant PTFE impregnated glass cloth tape, Cat. Nos. 973 UL or 973UL-S or 973 or 973 UL Tack or 9730UL Tack or 9730UL タック or 9730UL タック or 9730UL タック

Flame retardant PTFE tapes, Cat. Nos. 901TS, 923, 923S(#), 923SL, 923UL, 923UT.

Cat. No. 903UL or 903 TACK or 903 UL TACK or 903R-HEAT SEAL TAPE or 9030UL or 9030.

Flame retardant PVC tape, Cat. No. 227* for use at temperatures not exceeding 105C.

Flame retardant synthetic fiber tape, Cat. No. 160UL.

Polyester tapes, Cat. Nos. 31B-N, -UL, 31C-UL, max operating temp 130 C; Cat. Nos. 31CT, 31CT-1 and 31CT-2 max operating temp 130C. The backing and adhesive sides have a CTI PLC of 0.

Polyimide film insulating tape, Cat. No. 360PC**, rntd 180° C.

Polypheylene sulfide film insulating tape, Cat. No. 320 AUL or 320A-UL max. operating temp. 155C.

Epoxy resin impregnated non-woven polyester tape , Cat. No. 348. The backing and adhesive side have a CTI PLC of 0. The CTI is the only property evaluated.

* Complies with weather resistant and exposure to cold requirements when so marked.

** Complies with flame retardant requirements, when so marked.

(%) May also be designated 188K or 188K-UL.

(#) May also be designated 9230S.

@/ Is replaced by numeric characters from 27-43 incl., denoting product thickness.

Comparative Tracking Performance Level Categories

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OANZ2.E34833&ccn...> 2004/2/20

1.07.14.2007 - LAST MODIFIED: 14.07.2014 - 10:00:00



Online Certifications Directory

Online Certifications Directory



YDPU2.E64007
Extruded Tubing, Electrical - Component
 Questions?

Previous Page

Fast Bottom

Extruded Tubing, Electrical - Component

Your Search Results

Number of hits: 1	
Refine Your Search · Home	
Company Name	Category Name
ZEUS INDUSTRIAL PRODUCTS INC	Extruded Tubing, Electrical - Component
Link to File	
YDPU2.E64007	
Notice of Disclaimer · Questions?	

Guide Information

ZEUS INDUSTRIAL PRODUCTS INC
 48 ORLANDO DR
 PO BOX 298
 RARITAN, NJ 08869 USA

E64007

Cat. No.	Max V	Max Temp C	Col Recognized	Max Temp Rated Oil Resistance * °C	VW-1 Rated #
Polytetrafluoroethylene (PTFE).					
TFE-LW-150	150	200	Any	—	Yes
TFE-TW-300	300	200	Any	—	Yes
TFE-SW-600	600	200	Any	—	Yes
TFE-HW-600	600	200	Any	—	Yes
Fluorinated ethylene propylene (FEP).					
FEP-TW-300	300	200	Any	—	Yes
FEP-SW-600	600	200	Any	—	Yes
Cat. No.	Max Oper Temp	Shrinkdown Class	Col Recognized	Max Temp Rated Oil Resistance * °C	VW-1 Rated #
Heat shrinkable polytetrafluoroethylene (PTFE).					
4:1	300	200	I	Any	Yes
%2:1	300	200	II	Any	Yes
Heat shrinkable fluorinated ethylene propylene (FEP).					
1:3:1	150	200	II	Any	—

*Tubing is considered to comply with the optional oil resistant requirements only if it is so marked.

#Tubing is considered to comply with the optional VW-1 flammability requirements only if it is so marked.

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.htm?name=YDPU2.E64007&con...> 2004/2/2

Online Certifications Directory

OBOR2.E83702

(Systems, Electrical Insulation - Component)

Varnishes - Component

[Questions?](#)

[Page Bottom](#)

(Systems, Electrical Insulation - Component)

Varnishes - Component

Supplier Information

KYOCERA CHEMICAL CORP

E83702

KAWAGUCHI WORKS

5-14-25 RYOKE

KAWAGUCHI

SAITAMA 332-8533, JAPAN

	Helical coil	Polyester	Polyamide-imide	MW35	200
TVB-2176	Twisted pair	Polyester	—	MW5	180
	Helical coil	Polyester	—	MW5	180
TVB-2178	Twisted pair	Polyester	Polyamide-imide	MW35	220
			imide		
	Helical coil	Polyester	Polyamide-imide	MW35	220
			imide		
TVB-2180T++	Twisted pair	Polyester	—	MW5	155
	Helical coil	Polyester	—	MW5	130
	Twisted pair	Polyurethane	Polyamide	MW28	130
TVB-2190	Twisted pair	Polyester	Polyamide-imide	MW35	155
			imide		
	Helical coil	Polyester	Polyamide-imide	MW35	155
			imide		
TVB-2190D	Twisted pair	Polyester	—	MW5	155
	Helical coil	Polyester	—	MW5	155

Online Certifications Directory



OBOR2.E72979

(Systems, Electrical Insulation - Component)

Varnishes - Component

[Questions?](#)

[Page Bottom](#)

(Systems, Electrical Insulation - Component)

Varnishes - Component

[Guide Information](#)

HITACHI CHEMICAL CO LTD

SHIBAURA SQUARE BLDG

4-9-25 SHIBAURA

MINATO-KU

TOKYO 108-0023, JAPAN

E72979

WP-2790	MW35	220	220	—
WP-2820	MW5	155	155	—
WP-2952	MW5	155	155	—
		—	—	130
WP-2952	MW28, MDM75, M1079, MW80	130	130	—
WP-2782	MW35	200	200	—
WP-2782F	MW35	200	200	—
WA-238A	MW28, MDM75, MW79, MW80	130	130	—
WP-285	MW28, MDM75, MW79, MW80	130	130	—
WP-2952-1G	MW28, MDM75, MW79, MW80	130	130	—
WP-2952F-2G	MW28, MDM75, MW79, MW80	130	130	—


@Polyamide-imide.

Marking: Company name and varnish designation on shipping container.

[Questions?](#)

[Notice of Disclaimer](#)

[Page Top](#)



Online Certifications Directory

OBJY2.E212542

Systems, Electrical Insulation - Component

[Page Bottom](#)
[Questions?](#)
[Previous Page](#)



Online Certifications Directory

Systems, Electrical Insulation - Component

Your Search Results

[Guide Information](#)

TOP NATION ELECTRONIC LTD
 JUZHOU 3 INDUSTRIAL AREA
 SHIJI TOWN
 DONGGUAN GUANGDONG, CHINA

- Class 130 (B) insulation system, designated M7A90, maximum 600 V.
- Class 130 (B) insulation system, designated RXT-1, maximum 600 V
- Class 155 (F) insulation system, designated RXT-2, maximum 600 V.

Number of hits: 1

[Refine Your Search](#) · [Home](#)

Company Name	Category Name	Link to File
TOP NATION ELECTRONIC LTD	Systems, Electrical Insulation - Component	OBJY2.E212542

[Notice of Disclaimer](#) · [Questions?](#)

Marking: Company name and system designation.

Page Top	Notice of Disclaimer	Questions?
UL Listed and Classified Products	UL Recognized Components	Products Certified for Canada

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc. ®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide information, Design and/or Listing(s) files must be presented in their entirety and in a non-modifying manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2004 Underwriters Laboratories Inc. ®"

承 認 書
SPECIFICATION FOR APPROVAL

Customer: _____

Description: VF211

Part No.: _____

Sample No.: _____

Date: _____

Please return on copy after approved

Authorized Signature		

耀勝電子股份有限公司
YAO SHENG ELECTRONIC CO., LTD.
台北縣五股鄉五股工業區五權六路15號5樓
5TH FL NO.15 WU CHUANG 6TH RD.,
WU KU INDUSTRIAL ZONE WU KU SHIANG,
TAIPEI HSIEN TAIWAN R.O.C.
TEL:(02)22902373 FAX:(02)22988583,22902369
E-Mail:ystrns@ms62.hinet.net



東莞石碣首邦電子廠
DONG-GUAN SHEK-KIT TOP NATION ELECTRONIC FACTORY
廣東省東莞石碣鎮桔洲第三工業區
NO.3 INDUSTRIAL AREA, JUZHOU SHI JIE TOWN
CERTIFICATE NO.:4164 ISSUE NO.1 OF ISO 9001
TEL:86-769-6636606,6632772,6637039 FAX:86-769-6311267
E-Mail:tneeng@top-nation.com,tne@pub.dgnet.gd.cn,
HTTP://www.top-nation.com



首邦電子(蘇州)有限公司
TOP NATION ELECTRONIC (SUZHOU) CO., LTD.
吳江市汾湖經濟開發區
WUJIANG FENHU ECONOMIC DEVELOPMENT ZONE
JIANGSU PROVINCE CHINA
TEL:86-512-63271988 ,63271989 FAX:86-512-63271990
HTTP://www.top-nation.com

SPECIFICATION APPROVAL

Customer	[REDACTED]	P/N:	XF00211
1. DIMENSION: Unit: mm		Sheet 1 of 4	
<p style="text-align: center;"> BOTTOM VIEW TOP VIEW </p>			
<p>NOTE: 1. Pin 2, 6, 7, 9, 10 no.</p> <p>2. Warped mylar tape 2Ts around the X'FMR. before out of copper foil: 0.025tx7mm+tape and leadwire 0.3φ to pin 4 (with TFL-TW-300 tube).</p> <p>3. Wrapped mylar tape 2Ts around the X'FMR.</p>			
DRAWN	CHECKED	APPROVED	Mfgr. Part No.
			YSTPA450550G
		REV. 0	04.06.02
		6	05.01.28
Date: Feb 21, 2005			


TOP NATION ELECTRONIC CO., LTD. TEL: 86-769-6636606 FAX: 86-769-6311267
YAO SHENG ELECTRONIC CO., LTD. TEL: (02)2290-2373 FAX: (02)2290-2369

SPECIFICATION APPROVAL


Customer	████████████████████	P/N:	XF00211
----------	----------------------	------	---------

2. SCHEMATIC:

Sheet 2 of 4

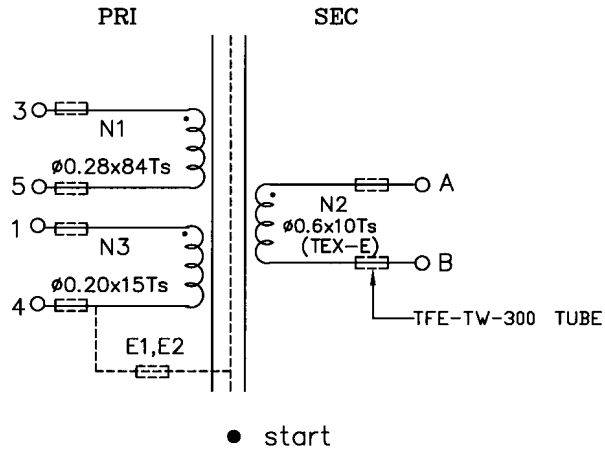

2.1 WINDING SEQUENCE:

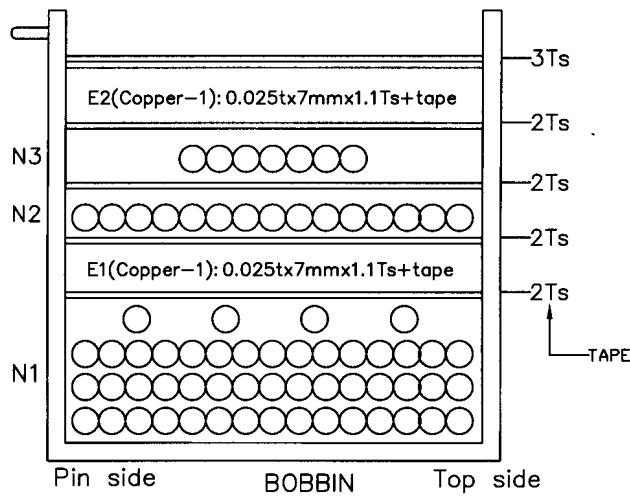

Mfgr. Part No.	YSTPA450550G	REV.0	04.06.02	
		6	05.01.28	
		Date: Feb 21, 2005		

TOP NATION ELECTRONIC CO., LTD. TEL: 86-769-6636606 FAX: 86-769-6311267
 YAO SHENG ELECTRONIC CO., LTD. TEL: (02)2290-2373 FAX: (02)2290-2369

SPECIFICATION APPROVAL

Customer	[REDACTED]	P/N:	XF00211
			Sheet 3 of 4
<p>3. ELECTRICAL SPECIFICATION:</p> <p>3.1 Inductance test: at 1KHz, 0.3V P(3-5): 1.2 mH±10%</p> <p>3.2 DCR test: at 25°C P(3-5): 0.98 Ohm max P(1-4): 0.47 Ohm max P(A-B): 44.1 mOhm max</p> <p>3.3 Hi-pot test: AC 3.6KV/60Hz/5mA hi-pot for two seconds between pri to sec. AC 1.8KV/60Hz/5mA hi-pot for two seconds between pri to core. AC 1.8KV/60Hz/5mA hi-pot for two seconds between sec to core.</p> <p>3.4 Insulation test: The insulation resistance is between pri to sec and windings to core measured by DC 500v, must be over 100 Mohm.</p> <p>4. TERMINAL STRENGTH:</p> <p>1.0 Kg on terminals for 30 seconds. test the breakdown.</p>			
Mfgr. Part No. YSTPA450550G		REV.0	04.06.02
		6	05.01.28
		Date: Feb 21, 2005	

TOP NATION ELECTRONIC CO., LTD. TEL: 86-769-6636606 FAX: 86-769-6311267
YAO SHENG ELECTRONIC CO., LTD. TEL: (02)2290-2373 FAX: (02)2290-2369

SPECIFICATION APPROVAL

Customer		P/N:	XF00211
Sheet 4 of 4			
MATERIALS LIST:			
COMPONENT PART.	MAT'L	MANUFACTURE	FILE NO.
1. Bobbin	Phenolic 94V-0 CP-J-8800 150°C	Hitachi Chemical co.,ltd.	E42956(R)
2. Core	PC40,3C90 P4,6H20	Ferrite core: EE22 TDK,Ferroxcube,ACME,FDK.	
3. Wire	UEW 130°C	Prosperity electric wire & cable co.,	E196072
	UEWN/U 130°C	Pacific electric wire & cable co.,ltd	E201757
	TEX-E 105°C	Furukawa electric co.,ltd.	E206440
4. Mylar tape	POLYESTER 3M #1350F-1 130°C	Minnesota mining & MFG co., ltd.	E17385(N)
	31CT 130°C	Nitto denko corp.	E34833(M)
5. Tube	TFE-TW-300 300V,200°C	Zues inducatrinal products inc	E64007(M)
6. Terminals	Tin coated- copper wire	Will Fore Special wire corp.	
7. Varnish	TVB-2180T 155°C	Toshiba Chemical Corp.	E83702(S)
	WP-2952F-2G 130°C	Hitachi Chemical co.,ltd	E72979
8. Shield	copper foil	Hitachi cable ltd. (Copper foil: 0.025tx7mm+tape)	
9. Solder	JW-8 Pb<1000ppm	Chenzhou gold arrow co.,ltd.	
	GRWQ Pb<1000ppm	Guangdong Guangyan co.,ltd.	
Mfgr. Part No.	YSTPA450550G	REV.0	04.06.02
		6	05.01.28
Date: Feb 21, 2005			

TOP NATION ELECTRONIC CO., LTD. TEL: 86-769-6636606 FAX: 86-769-6311267
YAO SHENG ELECTRONIC CO., LTD. TEL: (02)2290-2373 FAX: (02)2290-2369



QMFZ2.E42956

Plastics - Component

Questions?

Page Bottom

Plastics - Component

Guide Information

HITACHI CHEMICAL CO LTD

SHIBAURA SQUARE BLDG

4-9-25 SHIBAURA

MINATO-KU

TOKYO 108-0023, JAPAN

E42956

Material Deg	Color	mm	Class	I	I	Imp	Str	R	S	I	H D							
											V	4	C					

Acrylic Acrylonitrile Styrene (AAS), modified, furnished as pellets.

		3.0	V-0	0	0	150	150	150
CP-J-8600, CP-J-ALPFA-G								
	BK	0.38	V-0	3	3	150	150	150 150 150
			V-0	1	2	150	150	150
		1.5	V-0	0	2	150	150	150
		3.0	V-0	0	2	150	150	150
CP-J-8700	BK	0.39	V-0	-	-	150	150	150 0 4 3
		0.66	V-0	2	0	150	150	150
		3.00	V-0	0	1	150	150	150
CP-J-8800, CP-J-NAE, CP-J-F(N)								
	BN, BK	0.38	V-0	3	0	150	150	150 0 5 3
		0.46	V-0	0	0	150	150	150
		0.87	V-0	0	0	150	150	150
		1.6	V-0	0	0	150	150	150
		3.0	V-0	0	0	150	150	150
CP-J-F	BK	0.75	V-0	1	0	150	150	150 5 4
		1.5	V-0	1	0	150	150	150

OBMW2.E196072

(Systems, Electrical Insulation - Component) Magnet Wire - Component

Page Bottom

Questions?

Previous Page

(Systems, Electrical Insulation - Component) Magnet Wire - Component

Guide Information

PROSPERITY ELECTRIC WIRE & CABLE CO
 SHIN SHUI KOU ADMINISTRATIVE DISTRICT
 CHAO TOU TOWN
 DONGGUAN GUANGDONG, CHINA

E196072

Mtd Dsg	Mark Dsg	Coat Typ		ANSI Type	Temp Class
		BC	OC		
PEW	—	Polyester	—	MW5	155
EIW	—	Polyesterimide	—	MW74-C	200
UEW	—	Polyurethane	—	MW75	130
UEW-NY	—	Polyurethane	Polyamide	MW28C	130
UEWF	(1)	Polyurethane	—	MW79C	155
UEWFNY	(1)	Polyurethane	Polyamide	MW80C	155

(1)-Marked designations are the same as the material designations.

Marking: Company name and material designation on packages or reels.

Page Top	Notice of Disclaimer	Questions?	Previous Page
UL Listed and Classified Products	UL Recognized Components	Products Certified for Canada	

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information, Design and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings); 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2004 Underwriters Laboratories Inc.®"

http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OBMW2.E196072&cc... 2004/3/3

Your Search Results

Number of hits: 1			
Refine Your Search · Home			
Company Name	Category Name	Link to File	
PROSPERITY ELECTRIC WIRE & CABLE CO	(Systems, Electrical Insulation - Component) Magnet Wire - Component	OBMW2.E196072	
Notice of Disclaimer · Questions?			



Online Certifications Directory

Online Certifications Directory



OBMW2.E201757
(Systems, Electrical Insulation - Component) Magnet Wire - Component
[Page Bottom](#) [Questions?](#) [Previous Page](#)

(Systems, Electrical Insulation - Component) Magnet Wire - Component

OBMW2.E201757
(Systems, Electrical Insulation - Component)
Magnet Wire - Component

[Questions?](#)

[Page Bottom](#)

(Systems, Electrical Insulation - Component)
Magnet Wire - Component

Guide Information

**PACIFIC ELECTRIC WIRE &
 CABLE (SHENZHEN) CO LTD**
 607 BAOLONG INDUSTRIAL ESTATE
 LONGGANG
 SHENZHEN GUANGDONG, CHINA

E201757

Guide Information

**PACIFIC ELECTRIC WIRE &
 CABLE (SHENZHEN) CO LTD**
 607 BAOLONG INDUSTRIAL ESTATE
 LONGGANG
 SHENZHEN GUANGDONG, CHINA

E201757

Mtl Dsg	Coating Type		ANSI Type	TI
	BC	TC		
UEW/U	Polyurethane	---	---	130
PEWF/U	Modified Polyester	---	MW5-C	155°C
PEWH/U	Polyester-imide	---	MW30-C	180
PEWN/U	Modified Polyester	Polyamide	MW24-C	155
HA/U	Polyester(Amide)(imide)	Polyamideimide	MW35, 73	200
UEWN/U	Polyurethane	Polyamide	MW 80-C	155
UEWS/U	Polyurethane	---	MW28-C	130
UEWS/U	Polyurethane	---	MW75-C	130

Marking: Company name, material designation or marked designation on package or reel, and Recognized Component Mark.

[Page Top](#) [Notice of Disclaimer](#) [Questions?](#) [Previous Page](#)
[UL Listed and Classified Products](#) [UL Recognized Components](#) [Products Certified for Canada](#)

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information, Design and/or Listing (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OBMW2.E201757&c...> 2004/2/21



OBJT2.E206440

**(Plastic Materials and Electrical Insulation Systems - Component)
Special Transformer Winding Wire - Component**

Page Bottom [Questions?](#) [Previous Page](#)

Your Search Results

Number of hits: 1	
Refine Your Search · Home	
Company Name	Category Name
FURUKAWA ELECTRIC CO LTD	(Plastic Materials and Electrical Insulation Systems - Component) Special Transformer Winding Wire - Component
Link to File	
OBJT2.E206440	
Notice of Disclaimer · Questions?	

Guide Information

FURUKAWA ELECTRIC CO LTD E206440
HIRATSUKA MAGNET WIRE WORKS
 5-1-9 HIGASHI YAHATA
HIRATSUKA-SHI
KANAGAWA 254-0016, JAPAN

Cat Nos. FSX-E, SX-E, basic insulation rated 105° C, working voltage 354 Vdc or Vp.

Cat No. FWX-E, supplementary insulation rated 120° C, working voltage 354 V dc or Vp.

Cat Nos. TEX-E, TEX-EA, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.

Cat No. TEX-ELZ, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.

Cat No. TEX-ECEW3, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.

Cat No. TEX-F, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.

Cat No. TEX-B, reinforced insulation rated 130° C, working voltage of up to 1.4 kV.

Marking: Company name and material designation on package, reel or tag attached to the end of the wire and Recognized Component Mark.

Page Top	Notice of Disclaimer	Questions?	Previous Page
UL Listed and Classified Products	UL Recognized Components	Products Certified for Canada	

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information,

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OBJT2.E206440&con...> 2004/2/2



Online Certifications Directory

Online Certifications Directory



Your Search Results

Number of hits: 1		
Refine Your Search · Home		
Company Name	Category Name	Link to File
3M COMPANY	Insulating Tape - Component	OANZ2.E17385
Notice of Disclaimer · Questions?		

OANZ2.E17385

Insulating Tape - Component

[Questions?](#)[Page Bottom](#)

Insulating Tape - Component

[Guide Information](#)

E17385

3M COMPANY
ELECTRICAL PRODUCTS DIV
3M AUSTIN CENTER
6801 RIVER PLACE BLVD
AUSTIN, TX 78726 USA



Polyester film/mat composite insulating tape, No. 55, for use at temperatures not exceeding 130 C.

Polyester film insulating tapes, Nos. 5, 54(a), 56(a), 75, 1318-1(a), 1318-2(a), 1318 clear (#)(a), 1318, MW (#)(a) for use at temperatures not exceeding 130 C.

Polyester film insulating tape, No. 1169, for use at temperatures not exceeding 130 C.

Polyester film insulating tape, Nos. 57(a), 58(a), 1291, for use at temperatures not exceeding 130 C.

Polyester film insulating tape, No. 74(a) for use at temperatures not exceeding 130 C.

Flame retardant polyester film insulating tape, Nos. 1298(b), 1298CR, 1350-1(b), 1350-2(b1), 1350CR-1, 1350CR-2, 1350F-1(b), 1350F-2(b1), for use at temperatures not exceeding 130 C.*

Flame retardant polyester film insulating tape, Nos. 1351-1(a) and 1351-2(a), for use at temperatures not exceeding 130* C*.

Flame retardant multilayer polyethylene terephthalate film tape, Nos. 1350T-1(b), 1350T-2(b), 1350T-3(b), for use as reinforced insulation at temperatures not exceeding 130 C.

*Complies with weather resistance and exposure to cold requirements when so marked.

*Complies with flame retardant requirements when so marked.

#Complies with cold and weather resistant requirements when so marked.

+Tested for flame retardant properties only.

(a)-Comparative Tracking Index (CTI)% performance level indicates material Group I, PLC=0, CTI equal to or greater than 600V.

(b)-Comparative Tracking Index (CTI)% performance level indicates material Group II, PLC=1, CTI equal to or greater than 400 but less than 600V also applies to Cat. Nos. 1350F-1 and 1350-1, (yellow color only.)

(b)-Comparative Tracking Index (CTI)% performance level indicates material group IIIa, PLC=3, CTI equal to or greater than 175 but less than 400V. Also applies to Cat. Nos. 1350F-1, 1350F-2, 1350-1, 1350-2 in all colors (exception: see item (b) referring to 1350-1 in yellow color.

(bb)-Comparative Tracking Index (CTI)% performance level indicates material Group II, PLC=1, CTI equal to or greater than 400 but less than 600V.

(c)-Comparative Tracking Index (CTI)% performance level indicates material Group IIIa, PLC=2 or 3, CTI equal to or greater than 175 but less than 400V.

UL
<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OANZ2.E34833&ccn...>

Online Certifications Directory

OANZ2.E34833

Insulating Tape - Component

Questions?

Page Bottom

Previous Page

Insulating Tape - Component

Guide Information

NITTO DENKO CORP
 SANKI BLDG 27
 4-9 UMEDA-CHO 2-CHOME
 KITA-KU
 OSAKA 530-0001, JAPAN

E34833

Composite PET tape with an acrylic adhesive, Cat. No. 343BN or 343BN@, for use at temperatures not exceeding 130 C. The backing and adhesive sides have a CTI PLC of 0.

Composite polyester tape with a synthetic polymer adhesive, Cat. No. 341E for use at temperatures not exceeding 130C. The backing and adhesive sides have a CTI PLC of 0.

Flame retardant acetate cloth tape, Cat. No. 156A.

Flame retardant composite PET tape with an acrylic adhesive, Cat. No. 343B for use at temperatures not exceeding 130C. The backing and adhesive sides have a CTI PLC of 0.

Flame retardant composite polyester tape with a synthetic polymer adhesive, Cat. No. 341K for use at temperatures not exceeding 130C.

Flame retardant epoxy/alkyd varnish impregnated polyester tapes, Cat. Nos. 35B** or 350A** for use at temperatures not exceeding 130C; Cat. No. 35B or 350A has a CTI PLC of 0 (backing side and adhesive side); Cat. No. 353**.

Flame retardant epoxy impregnated polyester cloth tape, Cat. No. 354H, maximum operating temperature 130C.

Flame retardant epoxy impregnated polyester tape with synthetic rubber adhesive, Cat. Nos. 355, 355G for use at temperatures not exceeding 130C.

Flame retardant epoxy resin impregnated polyester nonwoven adhesive tape, Cat. No. 354E and 354E-15 for use at temperatures not exceeding 130C.

Flame retardant epoxy resin impregnated nonwoven polyester tape, Cat. No. 354F.

Flame retardant epoxy resin, polyester nonwoven backing with an acrylic adhesive, Cat. No. 354 for use at temperatures not exceeding 135C.

Flame retardant glass cloth tape, Cat. No. 188UL(%)

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OANZ2.E34833&ccn...> 2004/2/20

OANZ2.E34833 - Insulating Tape - Component

Flame retardant nomex tapes, Cat. Nos. 381, 386UL.

Flame retardant PET tape, Cat. No. 31CTF for use at temperatures not exceeding 130C C.T.I. PLC = 0.

Flame retardant PET tape, Cat. Nos. 3161FT, 3161-FT**, 3161-FT1** and 3161-FT2** for use at temperatures not exceeding 130 C.

Flame retardant PTFE tape, Cat. No. 9030 or 9030UL.

Flame retardant polyester tape, Model 3161-F max operating temp. 130C, with a synthetic polymer adhesive, 3161, 3161-F for use at temperatures not exceeding 130 C; Model 3161H for use at temperature not exceeding 130C.

Flame retardant polyimide tapes, Cat. Nos. 360B, -N, -U, -UL.

with a synthetic polymer adhesive, Cat. No. 360A.

Flame retardant polypropylene laminated polyester tape with synthetic polymer adhesive, Cat. No. 35 for use at temperatures not exceeding 130C. The backing side of Cat. No. 35 has a CTI PLC of 0. The adhesive side of Cat. No. 35 (white only) has a PLC of 0.

Flame retardant PTFE impregnated glass cloth tape, Cat. Nos. 973 UL or 973UL-S or 973 or 973 UL Tack or 973UL or 973UL Tack or 9730UL or 9730 Tack or 9730 タック or 9730UL タック or 9730UL タック

Flame retardant PTFE tapes, Cat. Nos. 901TS, 923, 923S(#), 923SL, 923UL, 923UT.

Cat. No. 903UL or 903 TACK or 903 UL TACK or 903R-HEAT SEAL TAPE or 9030UL or 9030.

Flame retardant PVC tape, Cat. No. 227* for use at temperatures not exceeding 105C.

Flame retardant synthetic fiber tape, Cat. No. 160UL.

Polyester tapes, Cat. Nos. 31B-N, -UL, 31C-UL, max operating temp 130 C; Cat. Nos. 31CT, 31CT-1 and 31CT-2 max operating temp 130C. The backing and adhesive sides have a CTI PLC of 0.

Polyimide film insulating tape, Cat. No. 360FC**, rated 180° C.

Polyphenylene sulfide film insulating tape, Cat. No. 320 AUL or 320A-UL max. operating temp. 155C.

Epoxy resin impregnated non-woven polyester tape, Cat. No. 348. The backing and adhesive side have a CTI PLC of 0. The CTI is the only property evaluated.

* Complies with weather resistant and exposure to cold requirements when so marked.

** Complies with flame retardant requirements, when so marked.

(%) May also be designated 188K or 188K-UL.

(#) May also be designated 9230S.

@ is replaced by numeric characters from 27-43 incl., denoting product thickness.

Comparative Tracking Performance Level Categories

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OANZ2.E34833&ccn...> 2004/2/20



YDPU2.E64007
Extruded Tubing, Electrical - Component

Extruded Tubing, Electrical - Component

Your Search Results

E64007

Guide Information

ZEUS INDUSTRIAL PRODUCTS INC
 48 ORLANDO DR
 PO BOX 298
 RARITAN, NJ 08869 USA

Cat. No.	Max V	Max Temp C	Col Recognized	Max Temp Rated Oil Resistance °C	VW-1 Rated #
Polytetrafluoroethylene (PTFE)					
TFE-LW-150	150	200	Any	—	Yes
TFE-TW-300	300	200	Any	—	Yes
TFE-SW-600	600	200	Any	—	Yes
TFE-HW-600	600	200	Any	—	Yes
Fluorinated ethylene propylene (FEP)					
FEP-TW-300	300	200	Any	—	Yes
FEP-SW-600	600	200	Any	—	Yes
Cat. No.	Max Oper Temp	Shrinkdown Class	Col Recognized	Max Temp Rated Oil Resistance °C	VW-1 Rated #
Heat shrinkable polytetrafluoroethylene (PTFE)					
4:1	300	200	I	Any	Yes
%2:1	300	200	II	Any	Yes
Heat shrinkable fluorinated ethylene propylene (FEP)					
1.3:1	150	200	II	Any	—

*Tubing is considered to comply with the optional oil resistant requirements only if it is so marked.

#Tubing is considered to comply with the optional VW-1 flammability requirements only if it is so marked.

http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=YDPU2.E64007&ccn... 2004/2/2

Number of hits: 1	
Refine Your Search	Home
Company Name	Category Name
ZEUS INDUSTRIAL PRODUCTS INC	Extruded Tubing, Electrical - Component
Link to File	
YDPU2.E64007	
Notice of Disclaimer · Questions?	



OBOR2.E83702

(Systems, Electrical Insulation - Component)

Varnishes - Component

[Questions?](#)

[Page Bottom](#)

(Systems, Electrical Insulation - Component)

Varnishes - Component

[Guida Informazione](#)

KYOCERA CHEMICAL CORP

KAWAGUCHI WORKS

S-14-25 RYOKE

KAWAGUCHI

SAITAMA 332-8533, JAPAN

E83702

	Helical coil	Polyester	Polyamide-imide	MW35	200
TVB-2176	Twisted pair	Polyester	—	MW5	180
	Helical coil	Polyester	—	MW5	180
TVB-2178	Twisted pair	Polyester	Polyamide-imide	MW35	220
			imide		
	Helical coil	Polyester	Polyamide-imide	MW35	220
			imide		
TVB-2180T++	Twisted pair	Polyester	—	MW5	155
	Helical coil	Polyester	—	MW5	130
	Twisted pair	Polyurethane	Polyamide	MW28	130
TVB-2190	Twisted pair	Polyester	Polyamide-imide	MW35	155
			imide		
	Helical coil	Polyester	Polyamide-imide	MW35	155
			imide		
TVB-2190D	Twisted pair	Polyester	—	MW5	155
	Helical coil	Polyester	—	MW5	155

Online Certifications Directory

OBOR2.E72979
(Systems, Electrical Insulation - Component)
Varnishes - Component

[Questions?](#)

[Page Bottom](#)

(Systems, Electrical Insulation - Component)
Varnishes - Component

Guide Information

HITACHI CHEMICAL CO LTD E72979
 SHIBAURA SQUARE BLDG
 4-9-25 SHIBAURA
 MINATO-KU
 TOKYO 106-0023, JAPAN

WP-2790	MW35	220	220	—
WP-2820	MW5	155	155	—
WP-2952	MW5	155	155	—
	—	—	—	130
WP-2952	MW28, MDM75, MI1079, MW80	130	130	—
WP-2782	MW35	200	200	—
WP-2782F	MW35	200	200	—
WA-238A	MW28, MDM75, MW79, MW80	130	130	—
WP-285	MW28, MDM75, MW79, MW80	130	130	—
WP-2952-1G	MW28, MDM75, MW79, MW80	130	130	—
WP-2952F-2G	MW28, MDM75, MW79, MW80	130	130	—

@Polyamide-imide.

Marking: Company name and varnish designation on shipping container.

[Questions?](#)

[Notice of Disclaimer](#)

[Page Top](#)

OBJY2.E212542
Systems, Electrical Insulation - Component

[Page Bottom](#) [Questions?](#) [Previous Page](#)

Systems, Electrical Insulation - Component

Guide Information

TOP NATION ELECTRONIC LTD E212542
 JIUZHOU 3 INDUSTRIAL AREA
 SHIHE TOWN
 DONGGUAN GUANGDONG, CHINA

- Class I30 (B) insulation system, designated M7A90, maximum 600 V.
- Class I30 (B) insulation system, designated RXT-1, maximum 600 V.
- Class I55 (F) insulation system, designated RXT-2, maximum 600 V.

Marking: Company name and system designation.

Page Top	Notice of Disclaimer	Questions?	Previous Page
UL Listed and Classified Products	UL Recognized Components	Products Certified for Canada	

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc. ®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2004 Underwriters Laboratories Inc. ®"

Your Search Results

Number of hits: 1	
Refine Your Search · Home	
Company Name	Category Name
TOP NATION ELECTRONIC LTD	Systems, Electrical Insulation - Component
Link to File	
OBJY2.E212542	
Notice of Disclaimer · Questions?	

承 認 書
SPECIFICATION FOR APPROVAL

Customer: _____

Description: XF212

Part No.: _____

Sample No.: _____

Date: _____

Please return on copy after approved

Authorized Signature		

耀勝電子股份有限公司
YAO SHENG ELECTRONIC CO., LTD.
台北縣五股鄉五股工業區五權六路15號5樓
5TH FL NO.15 WU CHUANG 6TH RD.,
WU KU INDUSTRIAL ZONE WU KU SHIANG,
TAIPEI HSIEN TAIWAN R.O.C.
TEL:(02)22902373 FAX:(02)22988583,22902369
E-Mail:ystrns@ms62.hinet.net



東莞石碣首邦電子廠
DONG-GUAN SHEK-KIT TOP NATION ELECTRONIC FACTORY
廣東省東莞石碣鎮桔洲第三工業區
NO.3 INDUSTRIAL AREA, JUZHOU SHI JIE TOWN
CERTIFICATE NO.:4164 ISSUE NO.1 OF ISO 9001
TEL:86-769-6636606,6632772,6637039 FAX:86-769-6311267
E-Mail:tneeng@top-nation.com,tne@pub.dgnet.gd.cn,
HTTP://www.top-nation.com



首邦電子(蘇州)有限公司
TOP NATION ELECTRONIC (SUZHOU) CO., LTD.
吳江市汾湖經濟開發區
WUJIANG FENHU ECONOMIC DEVELOPMENT ZONE
JIANGSU PROVINCE CHINA
TEL:86-512-63271988,63271989 FAX:86-512-63271990
HTTP://www.top-nation.com

SPECIFICATION APPROVAL

Customer	[REDACTED]	P/N:	XF00212
1. DIMENSION: Unit: mm		Sheet 1 of 4	
<p style="text-align: center;"> BOTTOM VIEW TOP VIEW </p>			
<p>NOTE: 1. Pin 2, 6, 7, 9, 10 no.</p> <p>2. Warpped mylar tape 2Ts around the X'FMR. before out of copper foil: 0.025tx7mm+tape and leadwire 0.3ϕ to pin 4 (with TFL-TW-300 tube).</p> <p>3. Wrapped mylar tape 2Ts around the X'FMR.</p>			
DRAWN	CHECKED	APPROVED	Mfgr. Part No.
			YSTPA450548G
		REV. 0	04.06.02
		4	05.02.02
Date: Feb 02, 2005			


TOP NATION ELECTRONIC CO., LTD. TEL: 86-769-6636606 FAX: 86-769-6311267
YAO SHENG ELECTRONIC CO., LTD. TEL: (02)2290-2373 FAX: (02)2290-2369

SPECIFICATION APPROVAL


Customer	██	P/N:	XF00212
----------	--	------	---------

Sheet 2 of 4

2. SCHEMATIC:

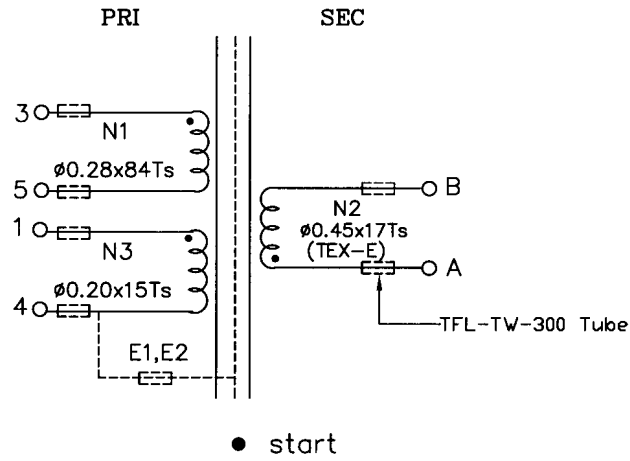

2.1 WINDING SEQUENCE:

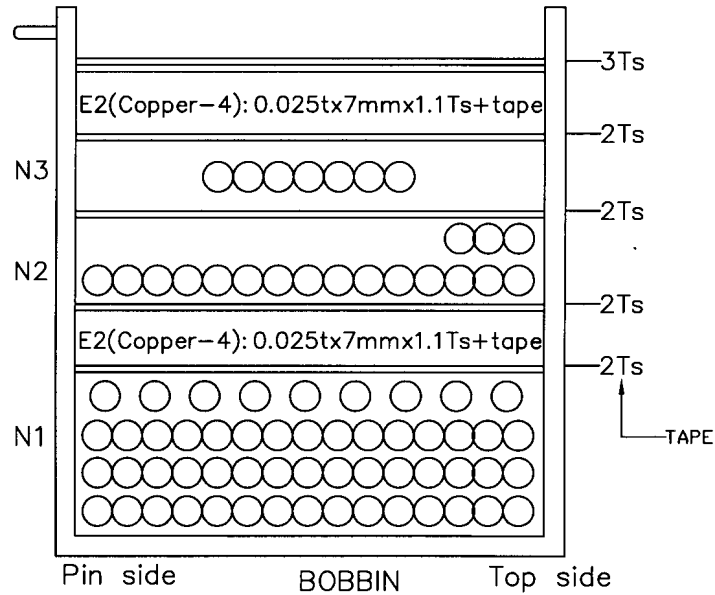

Mfgr. Part No.	YSTPA450548G	REV.0	04.06.02	
		4	05.02.02	
		Date: Feb 02, 2005		

TOP NATION ELECTRONIC CO., LTD. TEL: 86-769-6636606 FAX: 86-769-6311287
 YAO SHENG ELECTRONIC CO., LTD. TEL: (02)2290-2373 FAX: (02)2290-2369

SPECIFICATION APPROVAL

Customer	[REDACTED]	P/N:	XF00212
Sheet 3 of 4			
<p>3. ELECTRICAL SPECIFICATION:</p> <p>3.1 Inductance test: at 1KHz, 0.3V P(3-5): 1.2 mH±10%</p> <p>3.2 DCR test: at 25°c P(3-5): 972 mOhm max P(A-B): 103.6 mOhm max P(1-4): 504 mOhm max</p> <p>3.3 Hi-pot test: AC 3.6KV/60Hz/5mA hi-pot for two seconds between pri to sec. AC 1.8KV/60Hz/5mA hi-pot for two seconds between pri to core. AC 1.8KV/60Hz/5mA hi-pot for two seconds between sec to core.</p> <p>3.4 Insulation test: The insulation resistance is between pri to sec and windings to core measured by DC 500v, must be over 100 Mohm.</p> <p>4. TERMINAL STRENGTH:</p> <p>1.0 Kg on terminals for 30 seconds. test the breakdown.</p>			
Mfgr. Part No.	YSTPA450548G	REV.0	04.06.02
		4	05.02.02
		Date: Feb 02, 2005	

TOP NATION ELECTRONIC CO., LTD. TEL: 86-769-6636606 FAX: 86-769-6311267
 YAO SHENG ELECTRONIC CO., LTD. TEL: (02)2290-2373 FAX: (02)2290-2369

SPECIFICATION APPROVAL

Customer		P/N:	XF00212
Sheet 4 of 4			
MATERIALS LIST:			
COMPONENT PART.	MAT'L	MANUFACTURE	FILE NO.
1. Bobbin	Phenolic 94V-0 CP-J-8800 150°C	Hitachi Chemical co.,ltd.	E42956(R)
2. Core	PC40,P4	Ferrite core: EE22 TDK.ACME	
3. Wire	UEW 130°C	Prosperity electric wire & cable co.,	E196072
	UEWN/U 130°C	Pacific electric wire & cable co.,ltd	E201757
	TEX-E 130°C	Furukawa electric co.,ltd.	E206440
4. Mylar tape	Polyester 3M #1350F-1 130°C	Minnesota mining & MFG co., ltd.	E17385(N)
	31CT 130°C	Nitto denko corp.	E34833(M)
5. Varnish	TVB-2180T 155°C	Toshiba Chemical Corp.	E83702(S)
	WP-2952F-2G 130°C	Hitachi Chemical co.,ltd	E72979
6. Tube	TFE-TW-300 300V 200°C	Zeus industrial products inc.	E64007(M)
7. Terminals	Tin coated- copper wire	Will Fore Special wire corp.	
8. Shield	copper foil	Hitachi cable ltd. (copper foil: 0.025x7mm+tape)	
9. Solder	JW-8 Pb<1000ppm	Chenzhou gold arrow co.,ltd.	
	GRWQ Pb<1000ppm	Guangdong Guangyan co.,ltd.	
Mfgr. Part No.	YSTPA450548G	REV.0	04.06.02
		4	05.02.02
		Date: Feb 02, 2005	

TOP NATION ELECTRONIC CO., LTD. TEL: 86-769-6636606 FAX: 86-769-6311267
YAO SHENG ELECTRONIC CO., LTD. TEL: (02)2290-2373 FAX: (02)2290-2369

Online Certifications Directory



QMFZ2.E42956

Plastics - Component

Questions?

Page Bottom

Plastics - Component

Guide Information

E42956

HITACHI CHEMICAL CO LTD
 SHIBAURA SQUARE BLDG
 4-9-25 SHIBAURA
 MINATO-KU
 TOKYO 108-0023, JAPAN

Material Dtg	Color	mm	Class	Flame	W A	Elec	Mech	RTI	H	D
			I 1					V 4 C		

Acrylic Acrylonitrile Styrene (AAS), modified, furnished as pellets.

		3.0	V-0	0	0	150	150	150	150		
CP-J-8600, CP-J-ALPHA-C											
	BK	0.38	V-0	3	3	150	150	150	150	4	3
		0.75	V-0	1	2	150	150	150	150		
		1.5	V-0	0	2	150	150	150	150		
		3.0	V-0	0	2	150	150	150	150		
CP-J-8700											
	BK	0.39	V-0	-	-	150	150	150	150	0	4
		0.66	V-0	2	0	150	150	150	150		
		3.00	V-0	0	1	150	150	150	150		
CP-J-8800, CP-J-NAF, CP-J-F(N)											
	BN, BK	0.38	V-0	3	0	150	150	150	150	0	5
		0.46	V-0	0	0	150	150	150	150		
		0.87	V-0	0	0	150	150	150	150		
		1.6	V-0	0	0	150	150	150	150		
		3.0	V-0	0	0	150	150	150	150		
CP-J-F											
	BK	0.75	V-0	1	0	150	150	150	150	5	4
		1.5	V-0	1	0	150	150	150	150		



Online Certifications Directory

OBMW2.E196072

(Systems, Electrical Insulation - Component) Magnet Wire - Component

[Page Bottom](#)

[Questions?](#)

[Previous Page](#)

(Systems, Electrical Insulation - Component) Magnet Wire - Component

Guide Information

PROSPERITY ELECTRIC WIRE & CABLE CO E196072
 SHIN SHUI KOU ADMINISTRATIVE DISTRICT
 CHAO TOU TOWN
 DONGGUAN GUANGDONG, CHINA

Mtl Dsg	Mark Dsg	Coat Typ		ANSI Type	Temp Class
		BC	OC		
PEW	—	Polyester	—	MW5	155
EIW	—	Polyesterimide	—	MW74-C	200
UEW	—	Polyurethane	—	MW75	130
UEW-NY	—	Polyurethane	Polysimide	MW28C	130
UEWF	(1)	Polyurethane	—	MW79C	155
UEWFNY	(1)	Polyurethane	Polysimide	MW80C	155

(1)-Marked designations are the same as the material designations.

Marking: Company name and material designation on packages or reels.

[Page Top](#) [Notice of Disclaimer](#) [Questions?](#) [Previous Page](#)
[UL Listed and Classified Products](#) [UL Recognized Components](#) [Products Certified for Canada](#)

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information, Design and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the enclosed material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2004 Underwriters Laboratories Inc.®"

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OBMW2.E196072&cc...> 2004/03



Online Certifications Directory

Your Search Results

Number of hits: 1		
Refine Your Search · Home		
Company Name	Category Name	Link to File
PROSPERITY ELECTRIC WIRE & CABLE CO	(Systems, Electrical Insulation - Component) Magnet Wire - Component	OBMW2.E196072
Notice of Disclaimer · Questions?		



Online Certifications Directory

OBMW2.E201757

(Systems, Electrical Insulation - Component) Magnet Wire - Component

Page Bottom [Questions?](#) [Previous Page](#)

(Systems, Electrical Insulation - Component) Magnet Wire - Component

Guide Information

PACIFIC ELECTRIC WIRE &
CABLE (SHENZHEN) CO LTD
607 BAOLONG INDUSTRIAL ESTATE
LONGGANG
SHENZHEN GUANGDONG, CHINA

E201757

[Questions?](#)

[Page Bottom](#)

(Systems, Electrical Insulation - Component)

Magnet Wire - Component

Guide Information

PACIFIC ELECTRIC WIRE &
CABLE (SHENZHEN) CO LTD
607 BAOLONG INDUSTRIAL ESTATE
LONGGANG
SHENZHEN GUANGDONG, CHINA

E201757

Mtl Dsg	Coating Type		ANSI Type	TI
	BC	TC		
UEW/U	Polyurethane	—	—	130
PEW/U	Modified Polyester	—	MW5-C	155°C
PEWH/U	Polyester-imide	—	MW30-C	180
PEWN/U	Modified Polyester	Polyamide	MW24-C	155
HAI/U	Polyester(Amide)(imide)	—	MW35, 73	200
UEWN/U	Polyurethane	Polyamide	MW 80-C	155
UEWS/U	Polyurethane	—	MW28-C	130
UEWS/U	Polyurethane	—	MW75-C	130

Marking: Company name, material designation or marked designation on package or reel, and Recognized Component Mark.

Page Top [Notice of Disclaimer](#) [Questions?](#) [Previous Page](#)
[UL Listed and Classified Products](#) [UL Recognized Components](#) [Products Certified for Canada](#)

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information, Design and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OBMW2.E201757&c...> 2004/2/21

Online Certifications Directory



Online Certifications Directory



OBJT2.E206440
(Plastic Materials and Electrical Insulation Systems - Component)
Special Transformer Winding Wire - Component

[Page Bottom](#) [Questions?](#) [Previous Page](#)

Your Search Results

Number of hits: 1	
Refine Your Search · Home	
Company Name	Link to File
FURUKAWA ELECTRIC CO LTD	OBJT2.E206440
Category Name (Plastic Materials and Electrical Insulation Systems - Component) Special Transformer Winding Wire - Component	
Notice of Disclaimer · Questions?	

Guide Information

FURUKAWA ELECTRIC CO LTD E206440
HIRATSUKA MAGNET WIRE WORKS
 5-1-9 HIGASHI YAHATA
HIRATSUKA-SHI
KANAGAWA 254-0016, JAPAN

- Cat Nos. FSX-E, SX-E, basic insulation rated 105° C, working voltage 354 Vdc or Vp.
 Cat No. FWX-E, supplementary insulation rated 120° C, working voltage 354 V dc or Vp.
 Cat Nos. TEX-E, TEX-EA, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.
 Cat No. TEX-ELZ, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.
 Cat No. TEX-ECEW3, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.
 Cat No. TEX-F, reinforced insulation rated 105° C, working voltage of up to 1.4 kV.
 Cat No. TEX-B, reinforced insulation rated 130° C, working voltage of up to 1.4 kV.

Marking: Company name and material designation on package, reel or on tag attached to the end of the wire and Recognized Component Mark.

[Page Top](#) [Notice of Disclaimer](#) [Questions?](#) [Previous Page](#)
[UL Listed and Classified Products](#) [UL Recognized Components](#) [Products Certified for Canada](#)

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc.®
 The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.
 UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide Information, <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OBJT2.E206440&cncl...> 2004/2/2.



Your Search Results

Number of hits: 1		
Refine Your Search · Home		
Company Name	Category Name	Link to File
3M COMPANY	Insulating Tape - Component	OANZ2.E17385
Notice of Disclaimers · Questions?		

OANZ2.E17385

Insulating Tape - Component

[Questions?](#)

[Page Bottom](#)

Insulating Tape - Component

[Guide Information](#)

E17385

3M COMPANY
ELECTRICAL PRODUCTS DIV
3M AUSTIN CENTER
6801 RIVER PLACE BLYD
AUSTIN, TX 78726 USA

•

€

Polyester film/mat composite insulating tape, No. 55, for use at temperatures not exceeding 130 C.

Polyester film insulating tapes, Nos. 5, 54(a), 58(a), 75, 1318-1(a), 1318-2(a), 1318 clear (#)(a), 1318, MW (#)(a) for use at temperatures not exceeding 130 C.

Polyester film insulating tape, No. 1169, for use at temperatures not exceeding 130 C.

Polyester film insulating tape, Nos. 57(a), 58(a), 1291, for use at temperatures not exceeding 130 C.

Polyester film insulating tape, No. 74(a) for use at temperatures not exceeding 130 C.

Flame retardant polyester film insulating tape, Nos. 1298(b), 1298CR, 1350-(b), 1350-2(b1), 1350CR-1, 1350CR-2, 1350F-1(b), 1350F-2(b1), for use at temperatures not exceeding 130 C*.

Flame retardant polyester film insulating tape, Nos. 1351-1(a) and 1351-2(a), for use at temperatures not exceeding 130* C*.

Flame retardant multilayer polyethylene terephthalate film tape, Nos. 1350T-1(bb), 1350T-2(bb), 1350T-3(bb), for use as reinforced insulation at temperatures not exceeding 130 C.

⊗ Complies with weather resistance and exposure to cold requirements when so marked.

*Complies with flame retardant requirements when so marked.

#Complies with cold and weather resistant requirements when so marked.

- Tested for flame retardant properties only.

(a)-Comparative Tracking Index (CTI)% performance level indicates material Group I, PLC=0, CTI equal to or greater than 600V.

(b)-Comparative Tracking Index (CTI)% performance level indicates material Group II, PLC=1, CTI equal to or greater than 400 but less than 600V also applies to Cat. Nos. 1350F-1 and 1350-1. (yellow color only.)

(b1)-Comparative Tracking Index (CTI)% performance level indicates material group IIIa, PLC=3, CTI equal to or greater than 175 but less than 400V. Also applies to Cat. Nos. 1350F-1, 1350F-2, 1350-1, 1350-2 in all colors (expectation: see item (b) referring to 1350-1 in yellow color.

(bb)-Comparative Tracking Index (CTI)% performance level indicates material Group II, PLC=1, CTI equal to or greater than 400 but less than 600V.

(c)-Comparative Tracking Index (CTI)% performance level indicates material Group IIIa, PLC=2 or 3, CTI equal to or greater than 175 but less than 400V.



Online Certifications Directory

OANZ2.E34833

Insulating Tape - Component

Questions?

Page Bottom

Previous Page

Insulating Tape - Component

Guide Information

NITTO DENKO CORP

SANKEI BLDG 27

4-9 UMEDA-CHO 2-CHOME

KITA-KU

OSAKA 530-0001, JAPAN

E34833

Composite PET tape with an acrylic adhesive, Cat. No. 343BN or 343BN@@, for use at temperatures not exceeding 130 C. The backing and adhesive sides have a CTI PLC of 0.

Composite polyester tape with a synthetic polymer adhesive, Cat. No. 341E for use at temperatures not exceeding 130C. The backing and adhesive sides have a CTI PLC of 0.

Flame retardant acetate cloth tape, Cat. No. 156A.

Flame retardant composite PET tape with an acrylic adhesive, Cat. No. 343B for use at temperatures not exceeding 130C. The backing and adhesive sides have a CTI PLC of 0.

Flame retardant composite polyester tape with a synthetic polymer adhesive, Cat. No. 341K for use at temperatures not exceeding 130C.

Flame retardant epoxy/alkyd varnish impregnated polyester tapes, Cat. Nos. 35B** or 350A** for use at temperatures not exceeding 130C; Cat. No. 35B or 350A has a CTI PLC of 0 (backing side and adhesive side); Cat. No. 353**.

Flame retardant epoxy impregnated polyester cloth tape, Cat. No. 354H, maximum operating temperature 130C.

Flame retardant epoxy impregnated polyester tape with synthetic rubber adhesive, Cat. Nos. 355, 355G for use at temperature not exceeding 130C.

Flame retardant epoxy resin impregnated polyester nonwoven adhesive tape, Cat. No. 354E and 354E-15 for use at temperatures not exceeding 130C.

Flame retardant epoxy resin impregnated nonwoven polyester tape, Cat. No. 354F.

Flame retardant epoxy resin, polyester nonwoven backing with an acrylic adhesive, Cat. No. 354 for use at temperatures not exceeding 135C.

Flame retardant glass cloth tape, Cat. No. 188UL(%)

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OANZ2.E34833&ccn...> 2004/2/20

OANZ2.E34833 - Insulating Tape - Component

Flame retardant nonex tapes, Cat. Nos. 381, 386UL.

Flame retardant PET tape, Cat. No. 31CTF for use at temperatures not exceeding 130C C.T.I. PLC = 0.

Flame retardant PET tape, Cat. Nos. 3161FT, 3161-FT**, 3161-FTI** and 3161-FT2** for use at temperatures not exceeding 130 C.

Flame retardant PTFE tape, Cat. No. 9030 or 9030UL.

Flame retardant polyester tape, Model 3161-F max operating temp. 130C, with a synthetic polymer adhesive, 3161, 3161-F for use at temperatures not exceeding 130 C; Model 3161H for use at temperature not exceeding 130C.

Flame retardant polyimide tapes, Cat. Nos. 360B, -N, -U, -UL,

with a synthetic polymer adhesive, Cat. No. 360A.

Flame retardant polypropylene laminated polyester tape with synthetic polymer adhesive, Cat. No. 35 for use at temperatures not exceeding 130C. The backing side of Cat. No. 35 has a CTI PLC of 0. The adhesive side of Cat. No. 35 (white only) has a PLC of 0.

Flame retardant PTFE impregnated glass cloth tape, Cat. Nos. 973 UL or 973UL-S or 973 or 973 UL Tack or 973UL Tack or 9730UL タック or 9730UL Tack or 9730UL タック

or 973 R - Heat Seal Tape or 9730 or 9730UL or 9730 Tack or 9730 タック

Flame retardant PTFE tapes, Cat. Nos. 901TS, 923, 923S(#), 923SL, 923UL, 923UT.

Cat. No. 903UL or 903 or 903 TACK or 903 UL TACK or 903R-HEAT SEAL TAPE or 9030UL or 9030.

Flame retardant PVC tape, Cat. No. 227* for use at temperatures not exceeding 105C.

Flame retardant synthetic fiber tape, Cat. No. 160UL.

Polyester tapes, Cat. Nos. 31B-N, -UL, 31C-UL, max operating temp 130 C; Cat. Nos. 31CT, 31CT-1 and 31CT-2 max operating temp 130C. The backing and adhesive sides have a CTI PLC of 0.

Polyimide film insulating tape, Cat. No. 360PC**, rated 180° C.

Polypheylene sulfide film insulating tape, Cat. No. 320 AUL or 320A-UL max. operating temp. 155C.

Epoxy resin impregnated non-woven polyester tape, Cat. No. 348. The backing and adhesive side have a CTI PLC of 0. The CTI is the only property evaluated.

* Complies with weather resistant and exposure to cold requirements when so marked.

** Complies with flame retardant requirements, when so marked.

(%) May also be designated 188K or 188K-UL.

(#) May also be designated 9230S.

@/ is replaced by numeric characters from 27-43 incl., denoting product thickness.

Comparative Tracking Performance Level Categories

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/showpage.html?name=OANZ2.E34833&ccn...> 2004/2/20

1.17.12.200007 - Extruded Tubing, Electrical - Component



Online Certifications Directory

Online Certifications Directory



YDPU2.E64007
Extruded Tubing, Electrical - Component
 Questions?

Page Bottom

Previous Page

Extruded Tubing, Electrical - Component

Your Search Results

Number of hits: 1	
Refine Your Search · Home	
Company Name	Category Name
ZEUS INDUSTRIAL PRODUCTS INC	Extruded Tubing, Electrical - Component
Link to File	
YDPU2.E6400Z	
Notice of Disclaimer · Questions?	

Guide Information

ZEUS INDUSTRIAL PRODUCTS INC
 48 ORLANDO DR
 PO BOX 298
 RARITAN, NJ 08869 USA

E64007

Cat. No.	Max V	Max Temp C	Col Recognized	Max Temp Rated Oil Resistance * °C	VW-1 Rated #
Polytetrafluoroethylene (PTFE).					
TFE-LW-150	150	200	Any	—	Yes
TFE-TW-300	300	200	Any	—	Yes
TFE-SW-600	600	200	Any	—	Yes
TFE-HW-600	600	200	Any	—	Yes
Fluorinated ethylene propylene (FEP).					
FEP-TW-300	300	200	Any	—	Yes
FEP-SW-600	600	200	Any	—	Yes
Cat. No.	Max Oper Temp	Shrinkdown Class	Col Recognized	Max Temp Rated Oil Resistance * °C	VW-1 Rated #
Heat shrinkable polytetrafluoroethylene (PTFE).					
4:1	300	200	I	Any	—
%2:1	300	200	II	Any	—
Heat shrinkable fluorinated ethylene propylene (FEP).					
1.3:1	150	200	II	Any	—

*Tubing is considered to comply with the optional oil resistant requirements only if it is so marked.

#Tubing is considered to comply with the optional VW-1 flammability requirements only if it is so marked.
<http://database.ul.com/cgi-bin/XY/template/LISEXT/1FRAME/showpage.html?name=YDPU2.E64007&con...> 2004/2/2

Online Certifications Directory

OBOR2.E83702

(Systems, Electrical Insulation - Component)

Varnishes - Component

[Questions?](#)

[Page Bottom](#)

(Systems, Electrical Insulation - Component)

Varnishes - Component

Grade Information

KYOCERA CHEMICAL CORP

KAWAGUCHI WORKS

5-14-25 RYOKE

KAWAGUCHI

SAITAMA 332-8533, JAPAN

E83702

	Helical coil	Polyester	Polyamide-	MW35	200
			imide		
TVB-2176	Twisted pair	Polyester	—	MW5	180
	Helical coil	Polyester	—	MW5	180
TVB-2178	Twisted pair	Polyester	Polyamide-	MW35	220
			imide		
	Helical coil	Polyester	Polyamide-	MW35	220
			imide		
TVB-2180T++	Twisted pair	Polyester	—	MW5	155
	Helical coil	Polyester	—	MW5	130
	Twisted pair	Polyurethane	Polyamide	MW28	130
TVB-2190	Twisted pair	Polyester	Polyamide-	MW35	155
			imide		
	Helical coil	Polyester	Polyamide-	MW35	155
			imide		
TVB-2190D	Twisted pair	Polyester	—	MW5	155
	Helical coil	Polyester	—	MW5	155



OBOR2.E72979
(Systems, Electrical Insulation - Component)
Varnishes - Component

[Questions?](#)

[Page Bottom](#)

(Systems, Electrical Insulation - Component)
Varnishes - Component

Guide Information

HITACHI CHEMICAL CO LTD E72979
 SHIBAURA SQUARE BLDG
 4-9-23 SHIBAURA
 MINATO-KU
 TOKYO 108-0023, JAPAN

WP-2790	MW35	220	220	—
WP-2820	MW5	155	155	—
WP-2952	MW5	155	155	—
		—	—	130
WP-2952	MW28, MM75, M1079, MW80	130	130	—
WP-2782	MW35	200	200	—
WP-2782F	MW35	200	200	—
WA-238A	MW28, MM75, MW79, MW80	130	130	—
WP-285	MW28, MM75, MW79, MW80	130	130	—
WP-2952-1G	MW28, MM75, MW79, MW80	130	130	—
WP-2952F-2G	MW28, MM75, MW79, MW80	130	130	—


@Polyamide-imide.

Marking: Company name and varnish designation on shipping container.

[Questions?](#)

[Notice of Disclaimer](#)

[Page Top](#)



Online Certifications Directory

OBJY2.E212542

Systems, Electrical Insulation - Component

[Page Bottom](#) [Questions?](#) [Previous Page](#)



Online Certifications Directory

Systems, Electrical Insulation - Component

Guide Information

TOP NATION ELECTRONIC LTD E212542
 JIUSHOU 3 INDUSTRIAL AREA
 SHIHE TOWN
 DONGGUAN GUANGDONG, CHINA

Class 130 (B) insulation system, designated M7A90, maximum 600 V.
Class 130 (B) insulation system, designated RXT-1, maximum 600 V.
Class 155 (F) insulation system, designated RXT-2, maximum 600 V.

Marking: Company name and system designation.

Page Top	Notice of Disclaimer	Questions?	Previous Page
UL Listed and Classified Products	UL Recognized Components	Products Certified for Canada	

This page and all contents are Copyright © 2004 by Underwriters Laboratories Inc. ®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained on UL's Website subject to the following conditions: 1. The Guide information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2004 Underwriters Laboratories Inc. ®".

Your Search Results

Number of hits: 1		
Refine Your Search · Home		
Company Name	Category Name	Link to File
TOP NATION ELECTRONIC LTD	Systems, Electrical Insulation - Component	OBJY2.E212542
Notice of Disclaimer · Questions?		

Enclosure No. 4

Additional Test Data (9 pages including this cover page)

5.4.1.8	TABLE: evaluation of voltage limiting components in SELV circuits - GT-41062-WVVV-X.X			P
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components
		V peak	V d.c.	
GT-41062-1824-X.X				
T1 (Pin A – Pin B)		86 Vpk	--	D3
T1 (Pin B to after D3 (C8 → + to -))		24,7 Vpk	--	--
GT-41062-1818-X.X				
T1 (Pin A – Pin B)		85 Vpk	--	D3
T1 (Pin B to after D3 (C8 → + to -))		21,2 Vpk	--	--
GT-41062-1812-X.X				
T1 (Pin A – Pin B)		45,3 Vpk	--	D3
T1 (Pin B to after D3 (C8 → + to -))		14,4 Vpk	--	--
GT-41062-1805-X.X				
T1 (Pin A – Pin B)		25,4 Vpk	--	--
GT-41062-1806-X.X				
T1 (Pin A – Pin B)		26,2 Vpk	--	--
GT-41062-1807-X.X				
T1 (Pin A – Pin B)		26,9 Vpk	--	--
Fault test performed on voltage limiting components		Voltage measured (V) in SELV circuits (V peak or V d.c.)		
D3		See table D.4 (fault condition test).		
supplementary information:				

5.4.1.8	TABLE: evaluation of voltage limiting components in SELV circuits - GT-41062-WVVV-X.X-T2			P
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components
		V peak	V d.c.	
GT-41062-WVVV-X.X-T2				
T1 (Pin A – Pin B)		87 Vpk	--	D3
T1 (Pin B to after D3 (C8 → + to -))		25,0 Vpk	--	--
Fault test performed on voltage limiting components		Voltage measured (V) in SELV circuits (V peak or V d.c.)		
D3		See table D.4 (fault condition test).		
supplementary information:				

5.4.1.8	TABLE: evaluation of voltage limiting components in SELV circuits - GT-41062-WVVV-X.X-T3; 3A			P
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components
		V peak	V d.c.	
GT-41062-WVVV-X.X-T3; 3A				
T1 (Pin A – Pin B)		87 Vpk	--	D3
T1 (Pin B to after D3 (C8 → + to -))		24,8 Vpk	--	--
Fault test performed on voltage limiting components		Voltage measured (V) in SELV circuits (V peak or V d.c.)		
D3		See table D.4 (fault condition test).		
supplementary information:				

5.4.1.8	TABLE: evaluation of voltage limiting components in SELV circuits - GT-41062-WWVV-X.X-T3; 3A			P
Component (measured between)	max. voltage (V) (normal operation)		Voltage Limiting Components	
	V peak	V d.c.		
GT-41062-WWVV-X.X-T3; 3A				
T1 (Pin A – Pin B)	87 Vpk	--	D3	
T1 (Pin B to after D3 (C8 → + to -))	24,8 Vpk	--	--	
Fault test performed on voltage limiting components	Voltage measured (V) in SELV circuits (V peak or V d.c.)			
D3	See table D.4 (fault condition test).			
supplementary information:				

5.4.1.8	Table: working voltage measurement			P
Location	RMS voltage (V)	Peak voltage (V)	Comments	
GT-41062-1824-X.X				
T1 (pin2 to A)	225	447	--	
T1 (pin2 to B)	223	475	Max RMS and PK voltage	
T1 (pin3 to A)	223	428	--	
T1 (pin3 to B)	223	349	--	
T1 (pin4 to A)	218	362	--	
T1 (pin4 to B)	218	349	--	
T1 (pin5 to A)	218	349	--	
T1 (pin5 to B)	218	399	--	
GT-41062-1824-X.X-T2				
T1 (pin2 to A)	226	354	--	
T1 (pin2 to B)	227	419	--	
T1 (pin3 to A)	233	455	Max RMS and PK voltage	
T1 (pin3 to B)	228	338	--	
T1 (pin4 to A)	229	379	--	
T1 (pin4 to B)	226	356	--	
T1 (pin5 to A)	227	431	--	
T1 (pin5 to B)	227	353	--	
GT-41062-1824-X.X-T3 and GT-41062-1824-X.X-T3A				

T1 (pin2 to A)	226	354	--
T1 (pin2 to B)	227	419	--
T1 (pin3 to A)	233	455	Max RMS and PK voltage
T1 (pin3 to B)	228	338	--
T1 (pin4 to A)	229	379	--
T1 (pin4 to B)	226	356	--
T1 (pin5 to A)	227	431	--
T1 (pin5 to B)	227	353	--
supplementary information:			
Input voltage: 240 Vac; 50 Hz. Test Condition was: Rated output load. The following terminals were connected to earth: Minus of the output, Neutral. Working voltage was recorded for model with highest output voltage.			

5.2.2		TABLE: Energy source classification of unearthed accessible parts			P
GT-41062-1605					
Polarity switch	PE fault	Neutral fault	Measured voltage U2 of network Fig F4	Operating condition NC 7 SFC of a component	
Switch p	switch e	switch n	(mVpk) <Apk>		
NP	Closed	Closed	61,4 <0,123>	Output + Limit: 0,707mApk	
RP	Closed	Closed	65,65 <0,131>	Output - Limit: 0,707mApk	
NP	Closed	Closed	59,74 <0,119>	Output + Limit: 0,707mApk	
RP	Closed	Closed	58,26 <0,117>	Output – Limit: 0,707mApk	
Polarity	PE fault	Neutral fault	Measured voltage U3 of network Fig F5	Operating condition SFC of a safeguard	
Switch p	switch e	switch n	(mVpk) <mApk>		
--	--	--	--	--	
Supplementary information: NP: Normal polarity RP: reverse polarity Results are the same with or without load.					

5.2.2		TABLE: Energy source classification of unearthed accessible parts			P
GT-41062-1805-T2					
Polarity switch	PE fault	Neutral fault	Measured voltage U2 of network Fig F4	Operating condition NC 7 SFC of a component	
Switch p	switch e	switch n	(mVpk) <Apk>		
NP	Closed	Closed	70,16 <0,140>	Output + Limit: 0,707mApk	
RP	Closed	Closed	69,82 <0,140>	Output - Limit: 0,707mApk	
NP	Closed	Closed	66,1 <0,132>	Output + Limit: 0,707mApk	
RP	Closed	Closed	65,44 <0,131>	Output – Limit: 0,707mApk	
Polarity	PE fault	Neutral fault	Measured voltage U3 of network Fig F5	Operating condition SFC of a safeguard	
Switch p	switch e	switch n	(mVpk) <mApk>		
--	--	--	--	--	
<p>Supplementary information: NP: Normal polarity RP: reverse polarity Results are the same with or without load.</p>					

5.2.2		TABLE: Energy source classification of unearthed accessible parts (for class I models only)			P
Polarity switch	PE fault	Neutral fault	Measured voltage U2 of network Fig F4	Operating condition NC 7	
Switch p	switch e	switch n	(mVpk) <Apk>	SFC of a component	
NP	Closed	Closed	*	--	
RP	Closed	Closed	*	--	
NP	Closed	Closed	*	--	
RP	Closed	Closed	*	--	
Polarity	PE fault	Neutral fault	Measured voltage U3 of network Fig F5	Operating condition SFC of a safeguard	
Switch p	switch e	switch n	(mVpk) <mApk>		
NP	Closed	Closed	70,32 <0,141>	L to PE	
RP	Closed	Closed	66,16 <0,132>	N to PE	
NP	Closed	Open	89,40 <0,179>	N disconnected to PE	
RP	Closed	Open	94,0 <0,188>	L disconnected to PE	
Supplementary information: NP: Normal polarity RP: reverse polarity *PE is connected to output. Results are the same with or without load.					

5.4.1.3, 5.4.8		TABLE: Humidity test		P
<p>A humidity chamber was maintained within 1°C of temperature “t” at a temperature of 25°C. The unit and any other separate components were brought to a temperature between t and t + 4°C They were then placed in the chamber and held at a relative humidity of 94% for a period of 48 hours. Prior to conditioning, parts of the unit (covers) which could be removed without the use of tools were removed and separately placed in the chamber. During conditioning, cable entrances and/or a conduit openings were left open. During this treatment, the unit was not energized.</p> <p>While still in the humidity chamber, but after all parts have been placed back on the unit, a dielectric potential was applied and maintained for a period of one minute between the points indicated below. During this test, all switching devices (switches, relays, triacs, etc.) in the primary circuit were closed.</p>				
Location		Insulation type		Potential used
Primary to Secondary (GT-41062-WVVV-X.X-T2)		Reinforced		3000 Vac
Primary to Secondary (GT-		Reinforced		3000 Vac

41062-WVVV-X.X-T3,-3A)		
Primary to Secondary GT-41062-WVVV-X.X)	Reinforced	3000 Vac
Comment: There was no breakdown of insulation. All components were tested.		

Annex F.3.10	TABLE: Test For The Permanence Of Markings		P
Part of Marking	Test condition	Remarks	
Marking Plate Label	Water 15 seconds Hexane 15 seconds	No damage.	

2.4	TABLE: Limited current circuit - GT-41062-1824-X.X		P
The unit was connected to 264 Vac, 60 Hz. A 2000 Ohms non-inductive resistor and a switch were connected between the user accessible part of a limited current circuit and either pole of the limited current circuit or earth. A storage oscilloscope was connected across the points under consideration. The switch was closed and voltages on resistor were measured.			
Limit values	0,7mA		
Circuit(s) tested	CY1		
Measured working voltage:	< 250 Vr.m.s.		
Measured frequency	<1kHz		
Measured current through 2000Ω	0,73V I = 0,365mA		
Measured capacitance	2200pF		
Comments: The dielectric test was performed on the unit (see table dielectric testing) before the above measurements were done.			

2.4	TABLE: Limited current circuit - GT-41062-1824-X.X-T2		P
The unit was connected to 264 Vac, 60 Hz. A 2000 Ohms non-inductive resistor and a switch were connected between the user accessible part of a limited current circuit and either pole of the limited current circuit or earth. A storage oscilloscope was connected across the points under consideration. The switch was closed and voltages on resistor were measured.			
Limit values		0,7mA	
Circuit(s) tested		CY1	
Measured working voltage:		< 250 Vr.m.s.	
Measured frequency		< 1 kHz	
Measured current through 2000Ω		0,78V = 0,39mA	
Measured capacitance		2200pF	
Comments: The dielectric test was performed on the unit (see table dielectric testing) before the above measurements were done.			