

# EMC Measurement and Test Report

For

**GlobTek, Inc.**

**186 Veterans Dr. Northvale, NJ 07647 USA**

<b>Test Standards:</b>	EN 55022:2010 EN 61000-3-2:2006+A1:2009+A2:2009 EN 61000-3-3:2008 <u>EN 55024:2010</u>
<b>Product Description:</b>	<u>Power supply</u> GT-41062-WWVV-X.X and
<b>Tested Model:</b>	<u>GT-41062-WWVV-X.X-TZ series</u>
<b>Report No.:</b>	<u>STR12078302E</u>
<b>Tested Date:</b>	<u>2012-07-30 to 2012-08-16</u>
<b>Issued Date:</b>	<u>2012-08-16</u>
<b>Tested By:</b>	<u>Vigoss Xiong / Engineer</u> 
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> 
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> 
<b>Prepared By:</b>	<b>SEM.Test Compliance Service Co., Ltd</b> 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION .....4**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

    1.2 TEST STANDARDS .....5

    1.3 TEST METHODOLOGY .....5

    1.4 TEST FACILITY .....5

    1.5 EUT SETUP AND OPERATION MODE .....6

    1.6 PERFORMANCE CRITERIA FOR EMS .....6

**2. SUMMARY OF TEST RESULTS .....7**

**3. CONDUCTED DISTURBANCE .....8**

    3.1 MEASUREMENT UNCERTAINTY .....8

    3.2 TEST EQUIPMENT LIST AND DETAILS .....8

    3.3 TEST PROCEDURE .....8

    3.4 BASIC TEST SETUP BLOCK DIAGRAM .....8

    3.5 ENVIRONMENTAL CONDITIONS .....9

    3.6 SUMMARY OF TEST RESULTS/PLOTS .....9

    3.7 CONDUCTED EMISSIONS TEST DATA .....9

**4. RADIATED DISTURBANCE .....22**

    4.1 MEASUREMENT UNCERTAINTY .....22

    4.2 TEST EQUIPMENT LIST AND DETAILS .....22

    4.3 TEST PROCEDURE .....22

    4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION .....23

    4.5 ENVIRONMENTAL CONDITIONS .....23

    4.6 SUMMARY OF TEST RESULTS/PLOTS .....23

**5. HARMONIC CURRENT EMISSIONS .....36**

    5.1 TEST EQUIPMENT LIST AND DETAILS .....36

    5.2 TEST PROCEDURE .....36

    5.3 TEST STANDARDS .....36

    5.4 HARMONIC CURRENT EMISSIONS TEST DATA .....36

**6. VOLTAGE FLUCTUATION AND FLICKER .....37**

    6.1 TEST EQUIPMENT LIST AND DETAILS .....37

    6.2 TEST PROCEDURE .....37

    6.3 TEST STANDARDS .....37

    6.4 VOLTAGE FLUCTUATION AND FLICKER TEST DATA .....37

**7. ELECTROSTATIC DISCHARGES (ESD) .....44**

    7.1 TEST EQUIPMENT LIST AND DETAILS .....44

    7.2 TEST PROCEDURE .....44

    7.3 ELECTROSTATIC DISCHARGE IMMUNITY TEST DATA .....44

**8. CONTINUOUS RADIATED DISTURBANCES (R/S) .....51**

    8.1 TEST EQUIPMENT LIST AND DETAILS .....51

    8.2 TEST PROCEDURE .....51

    8.3 CONTINUOUS RADIATED DISTURBANCES TEST DATA .....51

**9. ELECTRICAL FAST TRANSIENTS (EFT) .....53**

    9.1 TEST EQUIPMENT LIST AND DETAILS .....53

    9.2 TEST PROCEDURE .....53

    9.3 ELECTRICAL FAST TRANSIENTS TEST DATA .....53

**10. SURGES .....57**

    10.1 TEST EQUIPMENT LIST AND DETAILS .....57

    10.2 TEST PROCEDURE .....57

    10.3 SURGE TEST DATA .....57

**11. CONTINUOUS CONDUCTED DISTURBANCES (C/S) .....59**

    11.1 TEST EQUIPMENT LIST AND DETAILS .....59

    11.2 TEST PROCEDURE .....59

    11.3 CONTINUOUS CONDUCTED DISTURBANCES TEST DATA .....59

**12. POWER-FREQUENCY MAGNETIC FIELDS (PFMF) .....62**  
12.1 TEST EQUIPMENT LIST AND DETAILS .....62  
12.2 TEST PROCEDURE .....62  
12.3 POWER-FREQUENCY MAGNETIC FIELD TEST DATA .....62

**13. VOLTAGE DIPS AND INTERRUPTIONS.....64**  
13.1 TEST EQUIPMENT LIST AND DETAILS .....64  
13.2 TEST PROCEDURE .....64  
13.3 VOLTAGE DIPS AND INTERRUPTIONS TEST DATA .....64

**EXHIBIT 1- PRODUCT LABELING .....66**  
PROPOSED CE LABEL FORMAT .....66  
PROPOSED LABEL LOCATION ON EUT .....66

**EXHIBIT 2 - EUT PHOTOGRAPHS.....70**

**EXHIBIT 3 - TEST SETUP PHOTOGRAPHS .....85**

SEM. Test Compliance

# 1.GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: GlobTek, Inc.  
 Address of applicant: 186 Veterans Dr. Northvale, NJ 07647 USA  
 Manufacturer: 1. GlobTek, Inc.  
 2. GlobTek (Suzhou) Co., Ltd  
 Address of manufacturer: 1. 186 Veterans Dr. Northvale, NJ 07647 USA  
 2. Building 4, No. 76, Jin Ling East Rd., Suzhou Industrial Park, Suzhou, JiangSu 215021, China

General Description of EUT	
Product Name:	Power supply
Trade Name:	GlobTek
Model No.:	GT-41062-WWVV-X.X and GT-41062-WWVV-X.X-TZ series
Adding Model(s):	/
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. Where "41062" represents Series Code;"VV" denotes Rated Output Voltage;"-X.X" is optional or blank and denotes voltage differentiator (subtracting X.X Volts from standard output voltage VV in 0,1 V increments) "TZ" = plug connection, where "2" is C8; "3" is C14, "3A" is C6 and model without -"TZ" is for direct plug in</i></p>	

Technical Characteristics of EUT	
Rated Voltage:	AC 100-240V
Rated Current:	0.6A
Rated Power:	Max.18W
Power Adaptor Model:	/
Highest Internal Frequency:	/
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the GlobTek, Inc. in accordance with EN55022, Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement, and EN61000-3-2, Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase), and EN61000-3-3, Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current  $\leq 16$  A per phase and not subject to conditional connection, and EN55024, Immunity characteristics Limits and methods of measurement.

The objective of the manufacturer is to demonstrate compliance with the standards EN55022, EN61000-3-2, EN61000-3-3, and EN55024 for Information Technology Equipment.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with the standards EN55022, EN61000-3-2, EN61000-3-3, and EN55024 for Information Technology Equipment, and all related testing and measurement techniques intentional standards.

## 1.4 Test Facility

- **FCC – Registration No.: 994117**  
SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.
- **Industry Canada (IC) Registration No.: 7673A**  
The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.
- **CNAS Registration No.: L4062**  
Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

### 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission/immunity level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Full Load	/

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
AC Cable	1.2	Unshielded	Without Core
DC Cable	1.8	Unshielded	With Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

### 1.6 Performance Criteria for EMS

All the test data has been collected, reduced, and analyzed within this report in accordance with Immunity requires the following as specific performance criteria:

- A. The apparatus shall continue to operate as intended during and after the test. The manufacturer specifies some minimum performance level. The performance level may be specified by the manufacturer as a permissible loss of performance.
- B. The apparatus shall continue to operate as intended after the test. This indicates that the EUT does not need to function at normal performance levels during the test, but must recover. Again some minimal performance is defined by the manufacture. No change in operating state or loss or data is permitted.
- C. Temporary loss of function is allowed. Operation of the EUT may stop as long as it is either automatically reset or can be manually restored by operation of the controls.

## 2. SUMMARY OF TEST RESULTS

Standards	Description of Test Item	Result
EN55022	Conducted Disturbance	Compliant
	Radiated Disturbance	Compliant
EN61000-3-2	Harmonic Current Emission	Compliant
EN61000-3-3	Voltage Fluctuation and Flicker	Compliant
EN55024	Electrostatic Discharge Immunity in accordance with IEC 61000-4-2	Compliant
	Continuous Radiated Disturbances Immunity in accordance with IEC 61000-4-3	Compliant
	Electrical Fast Transient/Burst Immunity in accordance with IEC 61000-4-4	Compliant
	Surges Immunity in accordance with IEC 61000-4-5	Compliant
	Continuous Conducted Disturbances Immunity in accordance with IEC 61000-4-6	Compliant
	Power-frequency Magnetic Fields Immunity in accordance with IEC 61000-4-8	Compliant
	Voltage Dips/Interruptions Immunity in accordance with IEC 61000-4-11	Compliant

N/A: not applicable

### 3. Conducted Disturbance

#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.


#### 3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2012-03-28	2013-03-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2012-03-28	2013-03-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2012-03-28	2013-03-27
Current Probe	FCC	F-33-4	091684	2012-03-28	2013-03-27

#### 3.3 Test Procedure

Test is conducting under the description of EN55022 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.

#### 3.4 Basic Test Setup Block Diagram

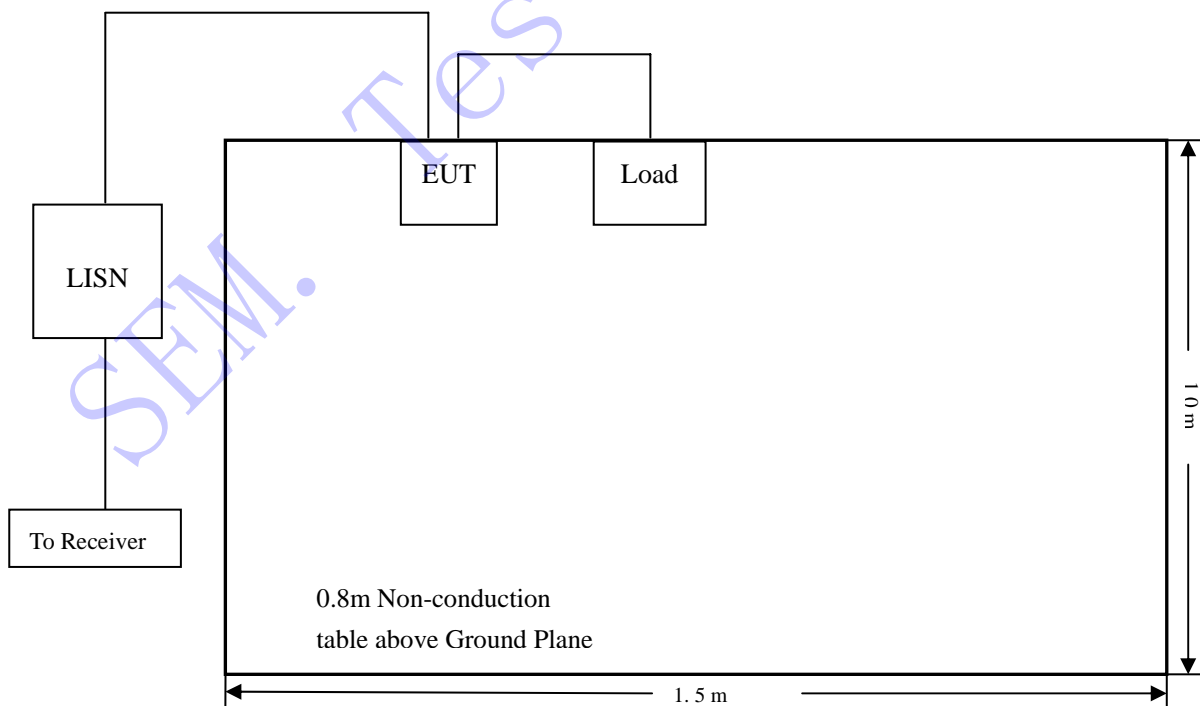



### 3.5 Environmental Conditions

Temperature:	22 ° C
Relative Humidity:	55 %
ATM Pressure:	1015 mbar

### 3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the EN55022 Conducted margin for a Class B device, with the *worst* margin reading of:

**-2.47 dB $\mu$ V at 0.182 MHz in the Neutral mode, Peak detector, GT-41062-1812 Model, 0.15-30MHz**


### 3.7 Conducted Emissions Test Data

SEM. Test Compliance

**Plot of Conducted Emissions Test Data**


EUT: Power supply  
 Tested Model: GT-41062-1805  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz

Test Specification: Line

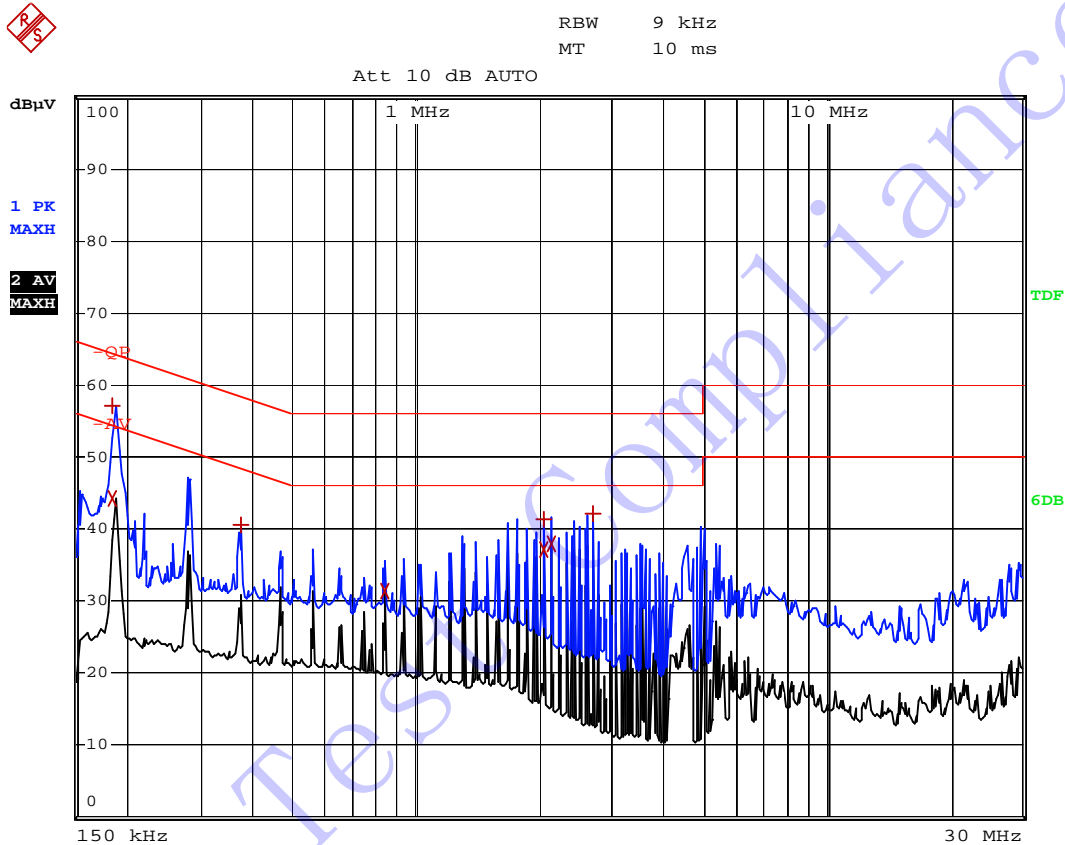

EDIT PEAK LIST (Prescan Results)			
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
1 Max Peak	186 kHz	57.17	-7.03
2 Average	186 kHz	44.13	-10.07
1 Max Peak	374 kHz	40.58	-17.82
2 Average	838 kHz	31.44	-14.56
1 Max Peak	2.05 MHz	41.35	-14.65
2 Average	2.05 MHz	37.25	-8.74
2 Average	2.146 MHz	37.89	-8.11
1 Max Peak	2.702 MHz	42.25	-13.74

Test Specification: Neutral

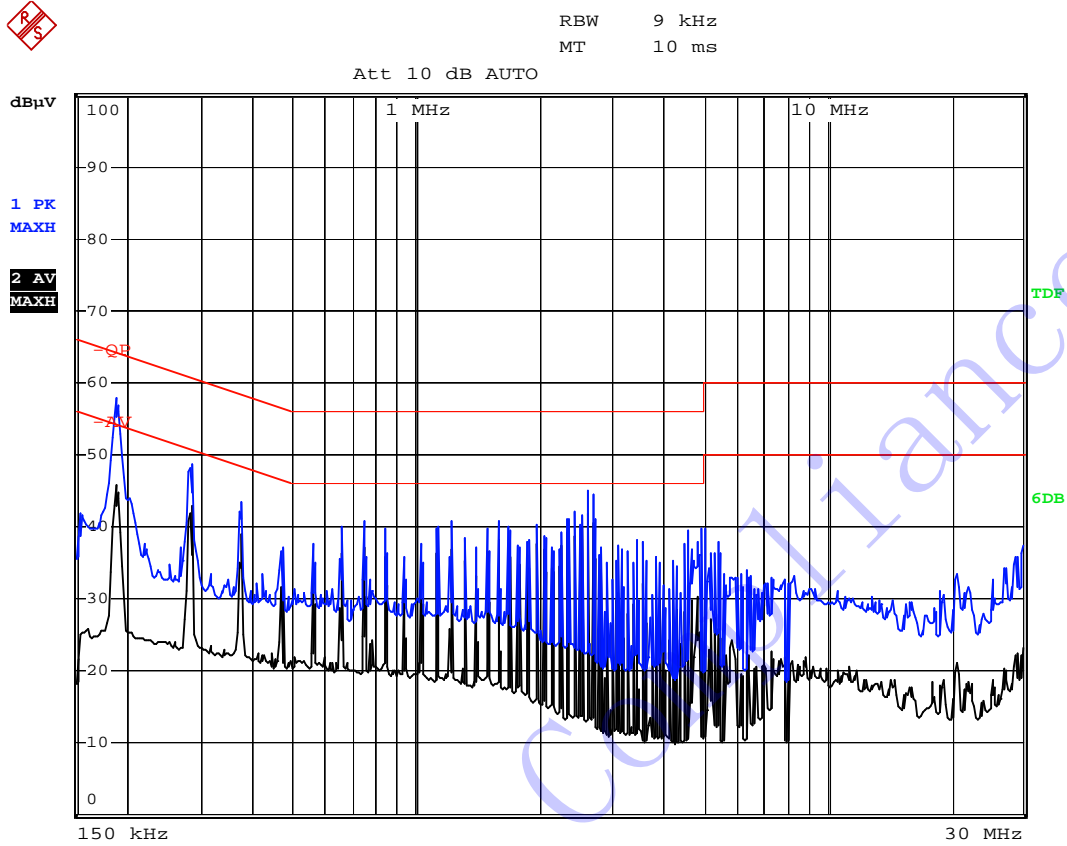


EDIT PEAK LIST (Prescan Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Max Peak	214 kHz	51.18	-11.86
2 Average	214 kHz	48.65	-4.39
1 Max Peak	638 kHz	41.78	-14.21
2 Average	638 kHz	38.97	-7.02
1 Max Peak	1.062 MHz	39.90	-16.09
2 Average	1.062 MHz	38.12	-7.87
1 Max Peak	2.442 MHz	36.93	-19.06
2 Average	2.442 MHz	35.18	-10.81
2 Average	6.478 MHz	32.73	-17.27
2 Average	19.862 MHz	33.56	-16.44

**Plot of Conducted Emissions Test Data**


EUT: Power supply  
 Tested Model: GT-41062-1806-T2  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz

Test Specification: Line

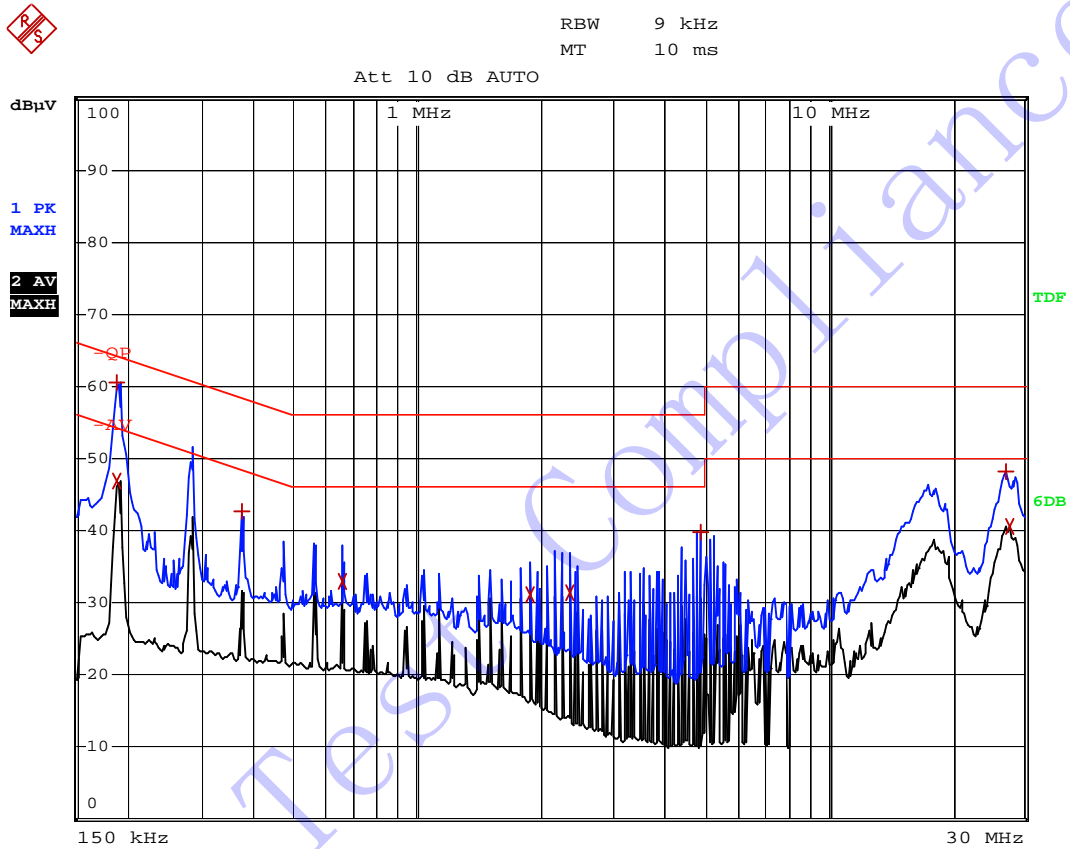

EDIT PEAK LIST (Prescan Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Max Peak	190 kHz	60.59	-3.44
2 Average	190 kHz	46.86	-7.17
1 Max Peak	374 kHz	42.77	-15.63
2 Average	658 kHz	32.84	-13.15
2 Average	1.882 MHz	31.00	-14.99
2 Average	2.35 MHz	31.47	-14.52
1 Max Peak	4.886 MHz	39.85	-16.14
1 Max Peak	27.046 MHz	48.08	-11.91
2 Average	27.418 MHz	40.65	-9.34

Test Specification: Neutral

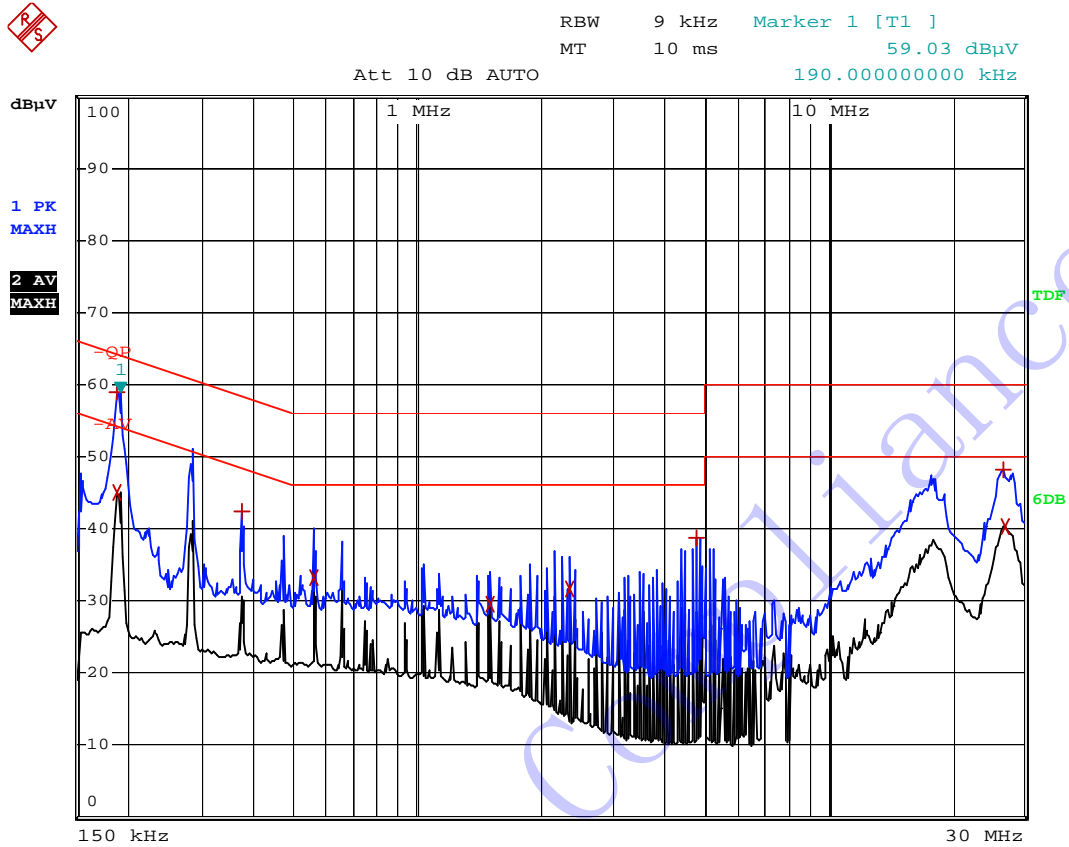


EDIT PEAK LIST (Prescan Results)				
Trace1:		-QP		
Trace2:		-AV		
Trace3:		---		
TRACE		FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1	Max Peak	190 kHz	59.02	-5.00
2	Average	190 kHz	45.13	-8.89
1	Max Peak	374 kHz	42.37	-16.03
2	Average	562 kHz	33.17	-12.83
2	Average	1.502 MHz	29.64	-16.35
2	Average	2.346 MHz	31.65	-14.34
1	Max Peak	4.786 MHz	38.79	-17.20
1	Max Peak	26.63 MHz	48.05	-11.95
2	Average	26.906 MHz	40.34	-9.65

**Plot of Conducted Emissions Test Data**


EUT: Power supply  
 Tested Model: GT-41062-1812  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz

Test Specification: Line

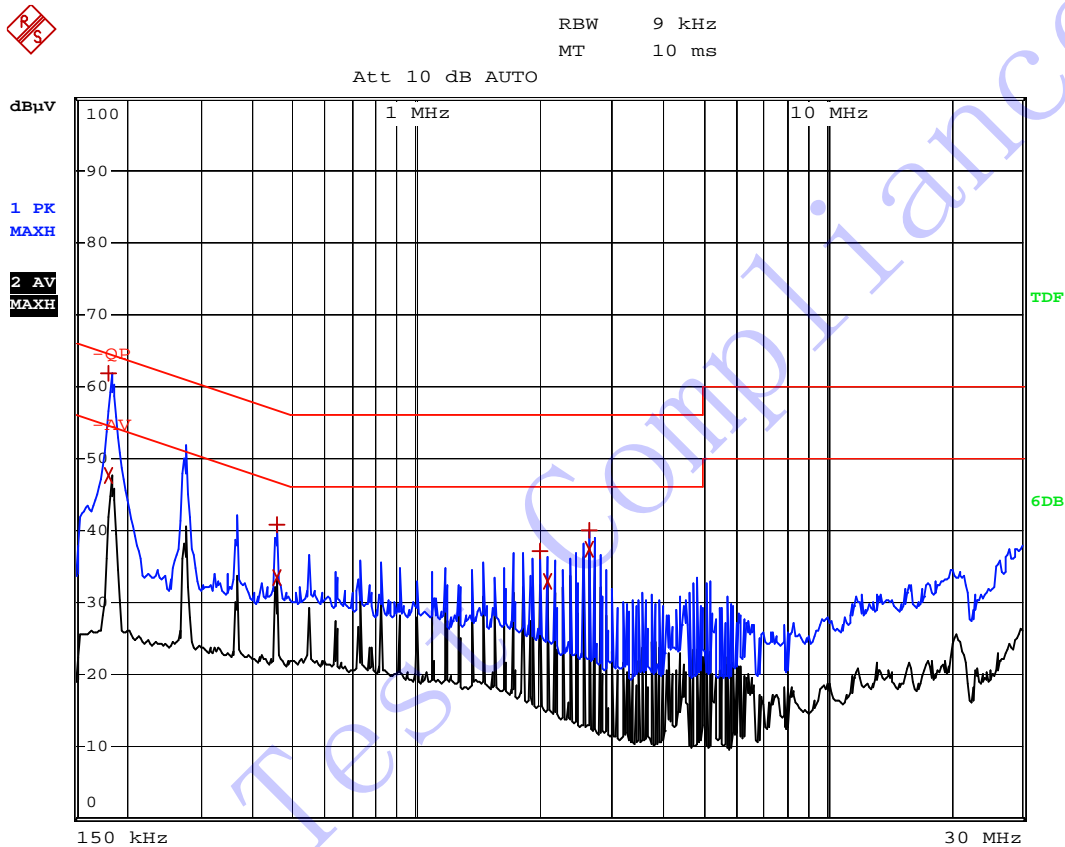

EDIT PEAK LIST (Prescan Results)				
Trace1:		-QP		
Trace2:		-AV		
Trace3:		---		
TRACE		FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1	Max Peak	182 kHz	61.86	-2.52
2	Average	182 kHz	47.53	-6.85
1	Max Peak	458 kHz	40.86	-15.86
2	Average	458 kHz	33.44	-13.28
1	Max Peak	2.01 MHz	37.10	-18.89
2	Average	2.102 MHz	32.99	-13.00
1	Max Peak	2.646 MHz	39.97	-16.02
2	Average	2.65 MHz	37.29	-8.70

Test Specification: Neutral

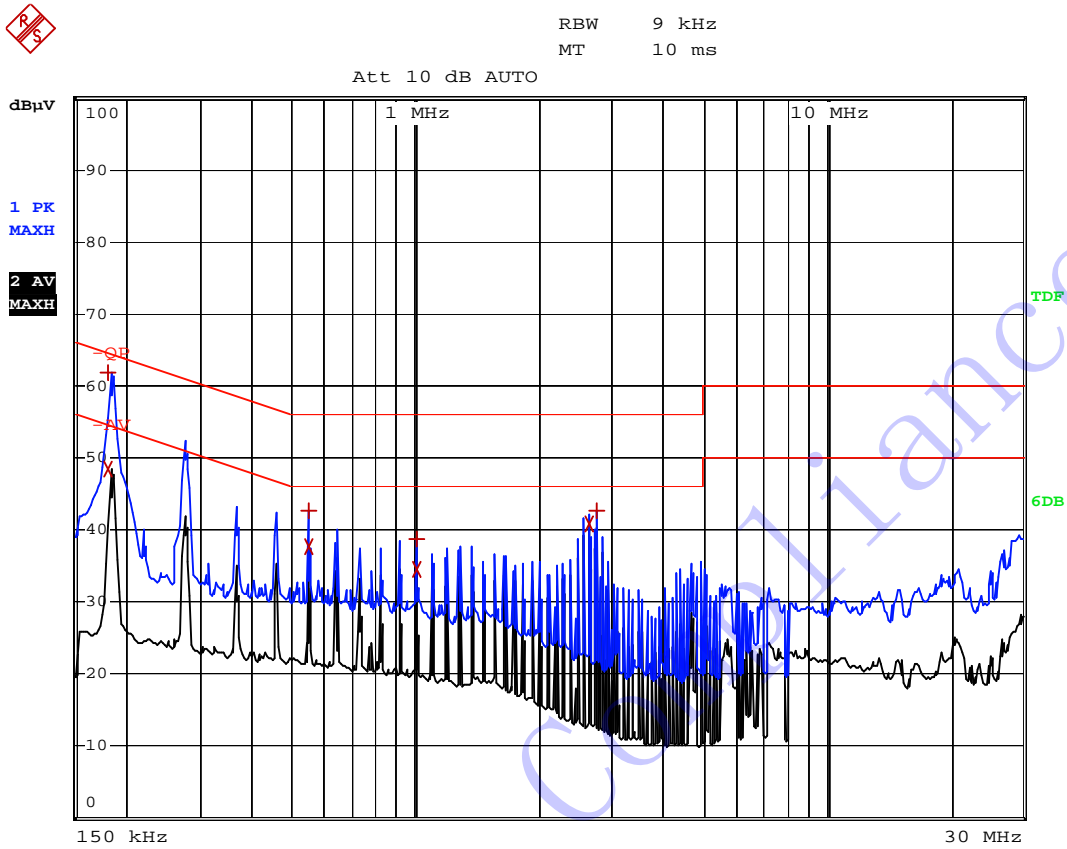


EDIT PEAK LIST (Prescan Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Max Peak	182 kHz	61.91	-2.47
2 Average	182 kHz	48.34	-6.05
1 Max Peak	550 kHz	42.68	-13.32
2 Average	550 kHz	37.65	-8.34
1 Max Peak	1.006 MHz	38.78	-17.21
2 Average	1.006 MHz	34.64	-11.36
2 Average	2.658 MHz	40.72	-5.27
1 Max Peak	2.75 MHz	42.55	-13.44

**Plot of Conducted Emissions Test Data**

EUT: Power supply  
 Tested Model: GT-41062-1812-T2  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz


Test Specification: Line

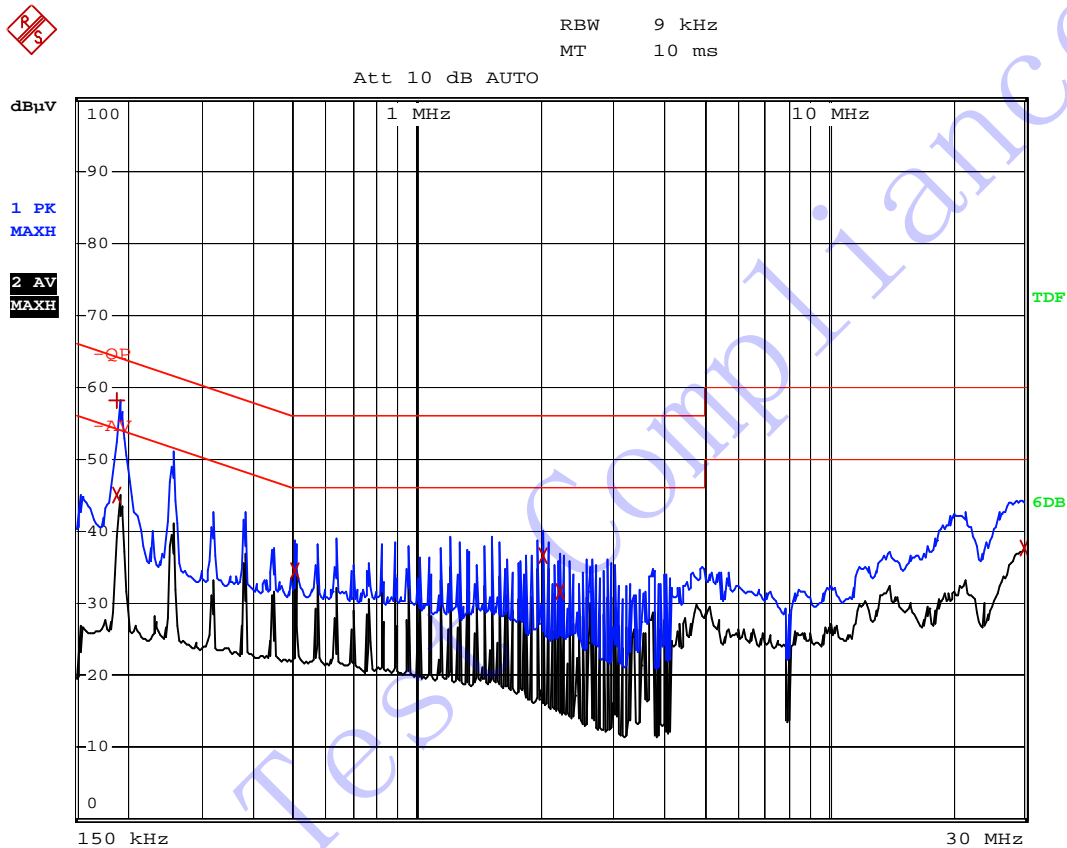

EDIT PEAK LIST (Prescan Results)				
Trace1:		-QP		
Trace2:		-AV		
Trace3:		---		
TRACE		FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1	Max Peak	190 kHz	58.15	-5.87
2	Average	190 kHz	44.91	-9.12
2	Average	506 kHz	34.58	-11.41
2	Average	2.03 MHz	36.55	-9.44
2	Average	2.222 MHz	31.69	-14.30
2	Average	29.942 MHz	37.54	-12.45



Test Specification: Neutral

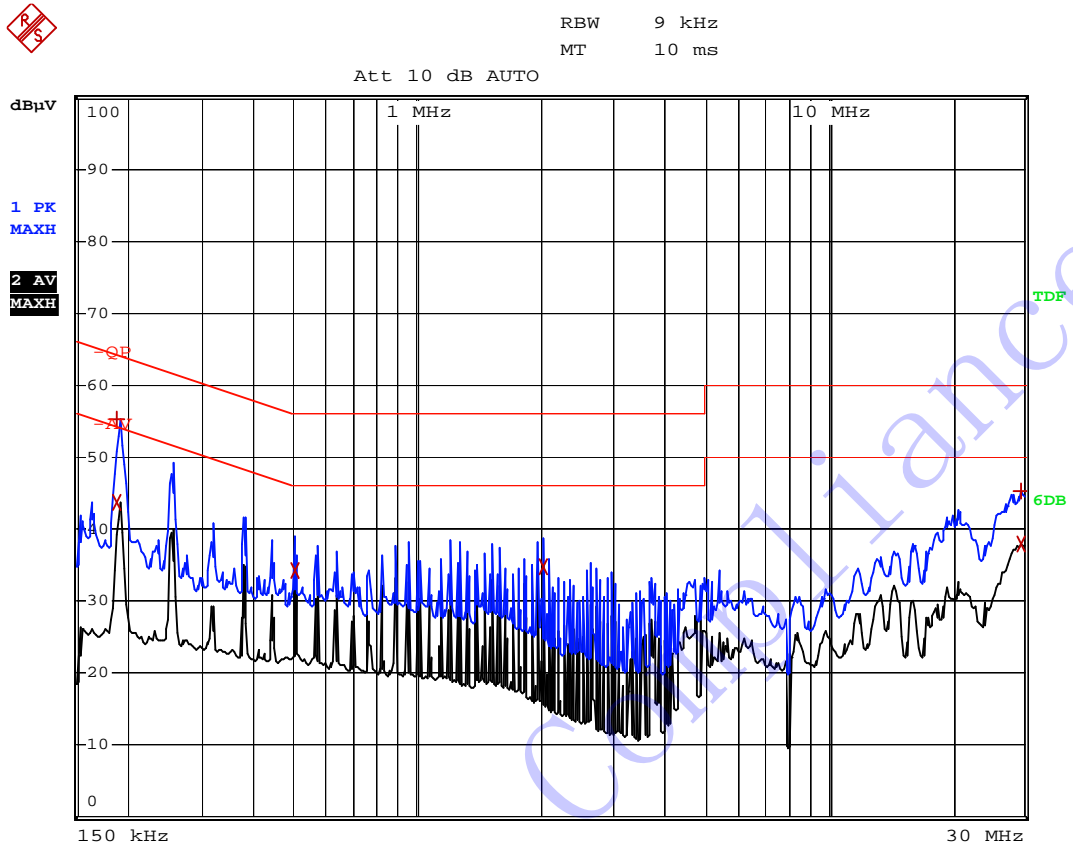


EDIT PEAK LIST (Prescan Results)				
Trace1:		-QP		
Trace2:		-AV		
Trace3:		---		
TRACE		FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Max Peak	190 kHz	55.30	-8.73
2	Average	190 kHz	43.63	-10.40
2	Average	506 kHz	34.27	-11.72
2	Average	2.026 MHz	34.81	-11.18
1	Max Peak	29.23 MHz	45.33	-14.66
2	Average	29.29 MHz	38.03	-11.96

**Plot of Conducted Emissions Test Data**


EUT: Power supply  
 Tested Model: GT-41062-1812-T3  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz

Test Specification: Line

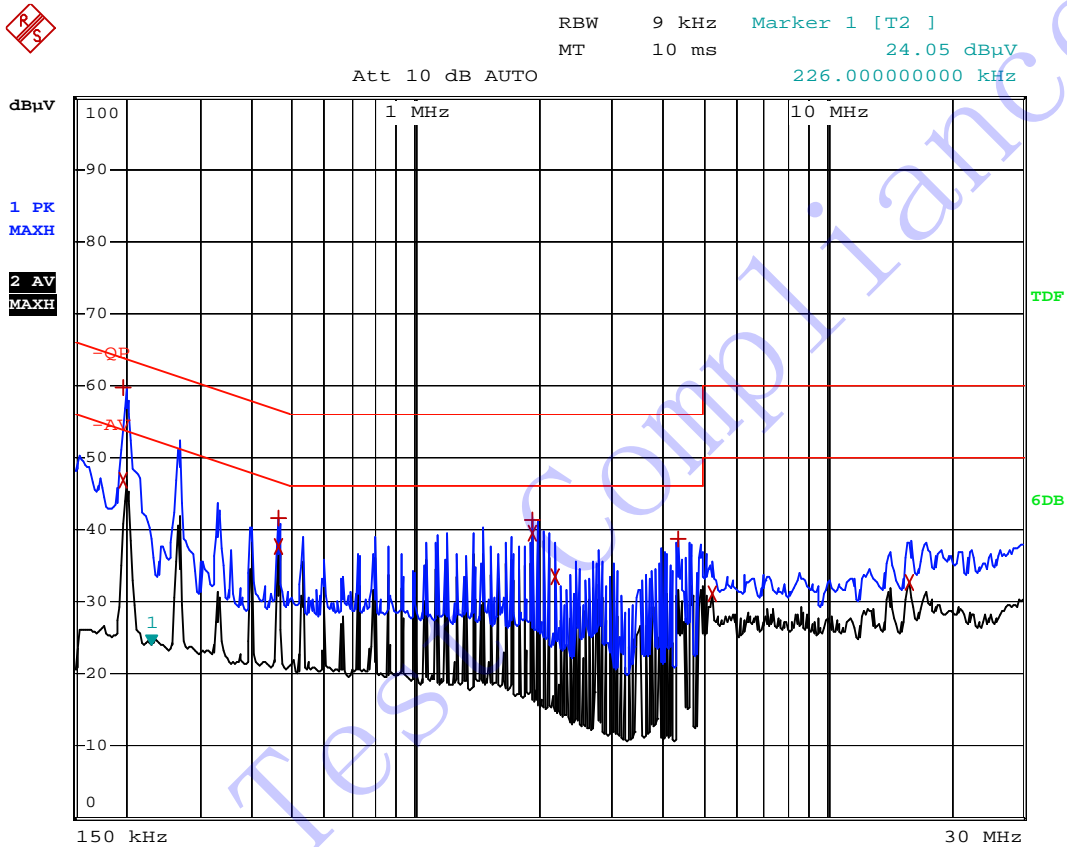

EDIT PEAK LIST (Prescan Results)				
TRACE		FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
Trace1:	-QP			
Trace2:	-AV			
Trace3:	---			
1	Max Peak	198 kHz	59.79	-3.89
2	Average	198 kHz	46.93	-6.76
1	Max Peak	462 kHz	41.49	-15.16
2	Average	462 kHz	37.59	-9.05
1	Max Peak	1.918 MHz	41.46	-14.53
2	Average	1.918 MHz	39.39	-6.60
2	Average	2.182 MHz	33.36	-12.63
1	Max Peak	4.366 MHz	38.63	-17.36
2	Average	5.29 MHz	31.05	-18.94
2	Average	15.87 MHz	32.69	-17.30

Test Specification: Neutral

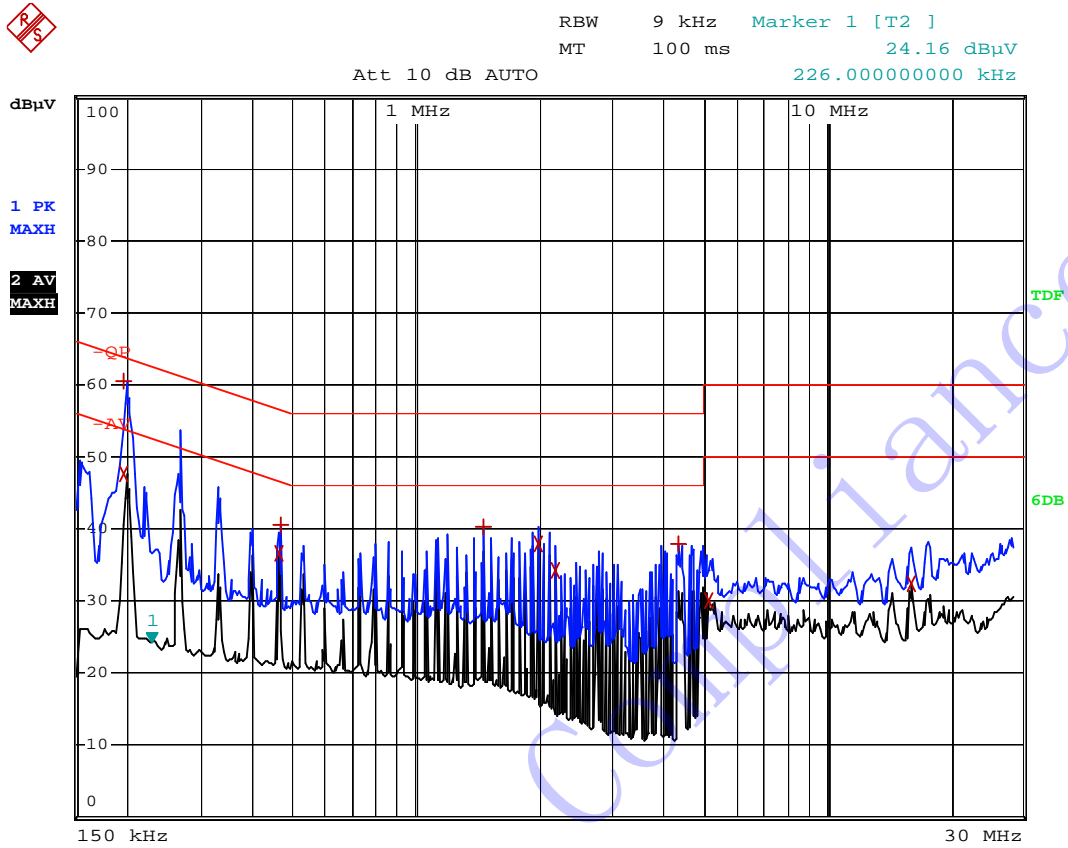


EDIT PEAK LIST (Prescan Results)			
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
1 Max Peak	198 kHz	60.57	-3.11
2 Average	198 kHz	47.58	-6.11
2 Average	462 kHz	36.59	-10.06
1 Max Peak	466 kHz	40.62	-15.96
1 Max Peak	1.454 MHz	40.39	-15.60
2 Average	1.982 MHz	37.82	-8.17
2 Average	2.182 MHz	34.33	-11.66
1 Max Peak	4.362 MHz	37.81	-18.18
2 Average	5.158 MHz	30.01	-19.98
2 Average	16.062 MHz	32.44	-17.55

**Plot of Conducted Emissions Test Data**


EUT: Power supply  
 Tested Model: GT-41062-1824-T3  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz

Test Specification: Line

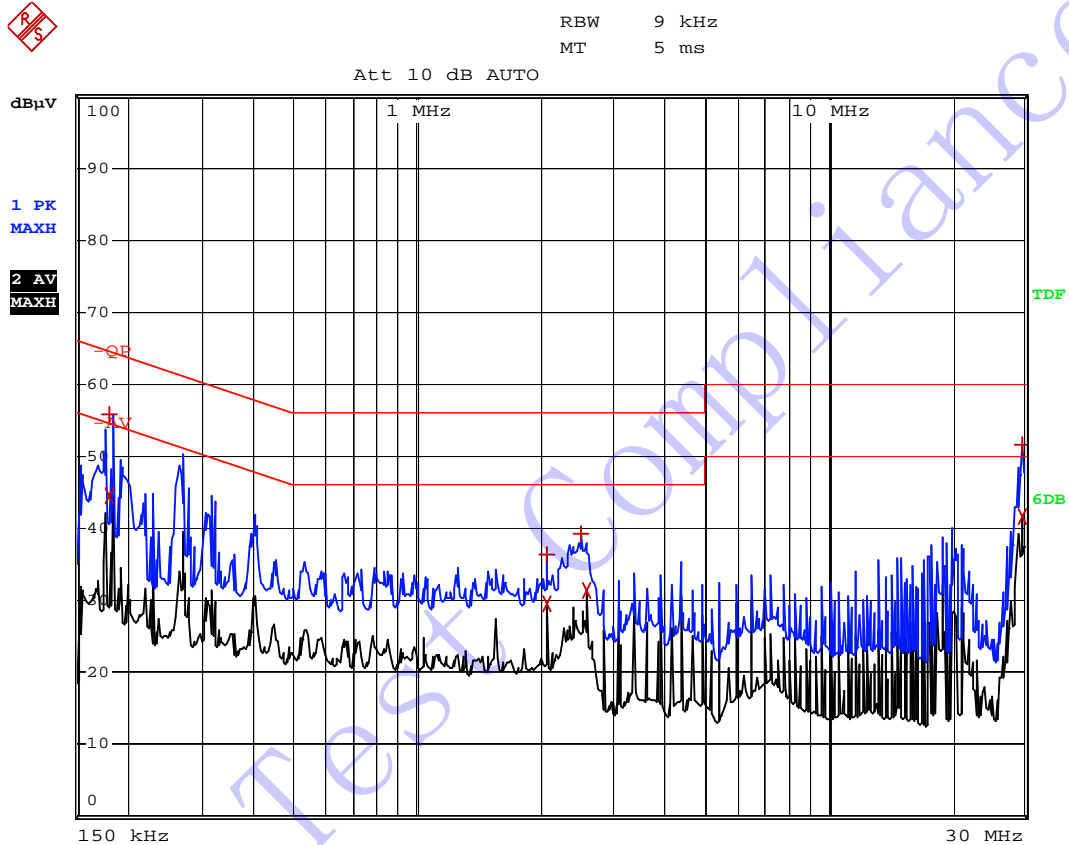

EDIT PEAK LIST (Prescan Results)				
TRACE		FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
Trace1:	-QP			
Trace2:	-AV			
Trace3:	---			
1	Max Peak	182 kHz	55.68	-8.70
2	Average	182 kHz	44.44	-9.95
1	Max Peak	2.078 MHz	36.33	-19.66
2	Average	2.078 MHz	29.55	-16.44
1	Max Peak	2.502 MHz	39.18	-16.81
2	Average	2.598 MHz	31.38	-14.61
1	Max Peak	29.618 MHz	51.58	-8.41
2	Average	29.618 MHz	41.63	-8.36

Test Specification: Neutral

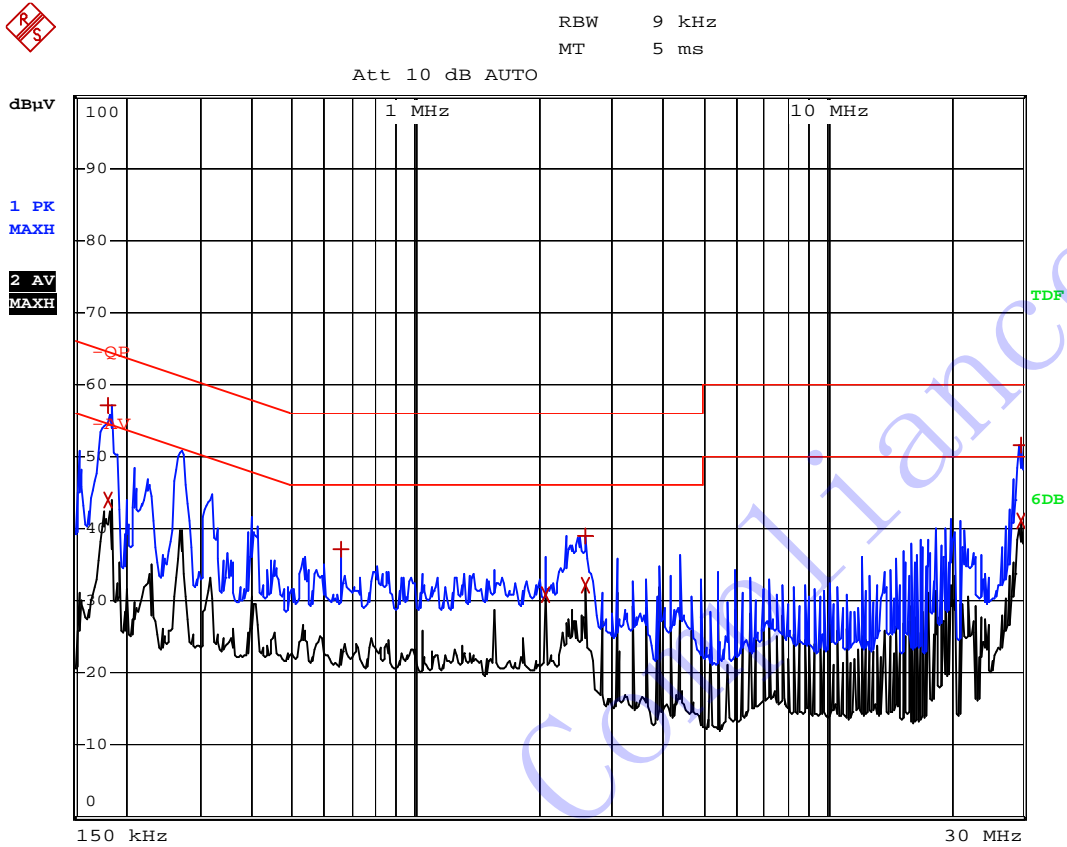

EDIT PEAK LIST (Prescan Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Max Peak	182 kHz	57.07	-7.31
2 Average	182 kHz	44.01	-10.37
1 Max Peak	658 kHz	37.02	-18.97
2 Average	2.078 MHz	30.86	-15.13
1 Max Peak	2.598 MHz	39.00	-16.99
2 Average	2.598 MHz	32.04	-13.95
1 Max Peak	29.626 MHz	51.49	-8.50
2 Average	29.626 MHz	40.97	-9.02

## 4. Radiated Disturbance

### 4.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24

### 4.3 Test Procedure

Test is conducting under the description of EN55022 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.

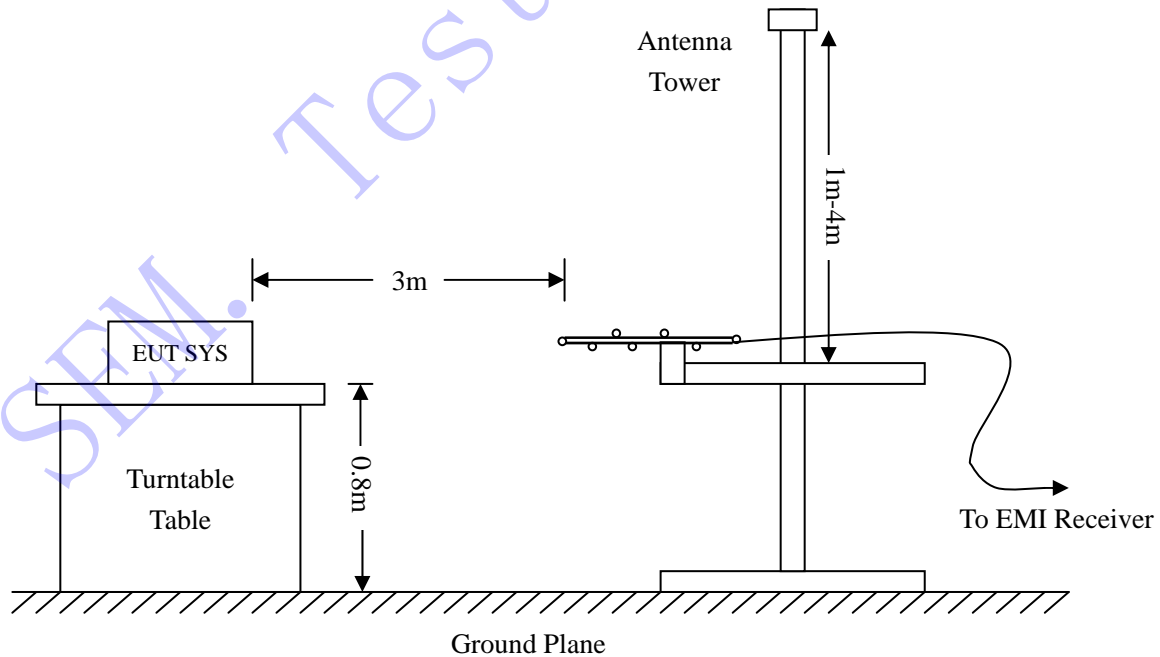

#### 4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{EN55022 Class B Limit}$$

#### 4.5 Environmental Conditions

Temperature:	23° C
Relative Humidity:	53%
ATM Pressure:	1011 mbar


#### 4.6 Summary of Test Results/Plots

According to the data in section 4.6, the EUT complied with the EN55022 Class B standards, and had the worst margin is:

**-1.46 dBμV at 30.0000 MHz in the, Vertical polarization, GT-41062-1812-T2 Model, 30 MHz to 1 GHz, 3Meters**

**Plot of Radiated Emissions Test Data**


EUT: Power supply  
 Tested Model: GT-41062-1805  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz  
  
 Test Specification: Horizontal

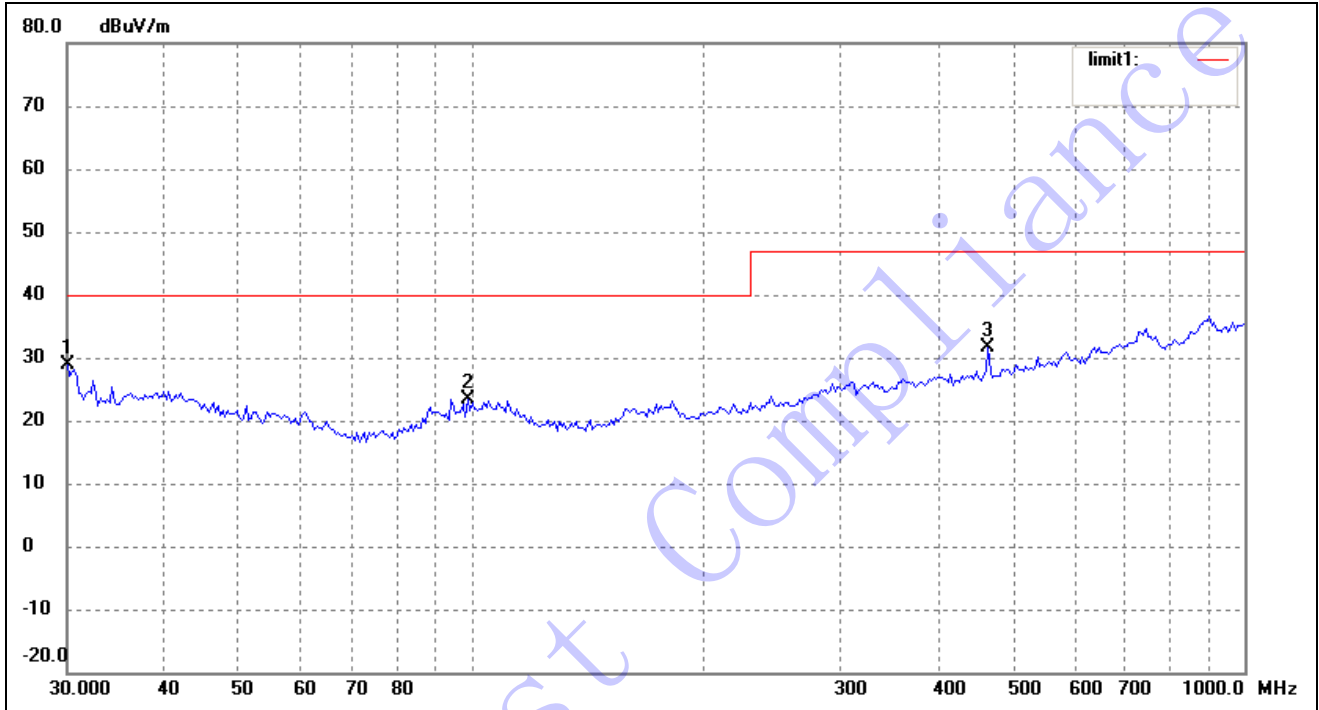

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.0000	20.95	8.04	28.99	40.00	-11.01	359	200	peak
2	98.8325	16.89	6.55	23.44	40.00	-16.56	359	200	peak
3	465.5994	19.86	11.69	31.55	47.00	-15.45	359	200	peak




Test Specification: Vertical

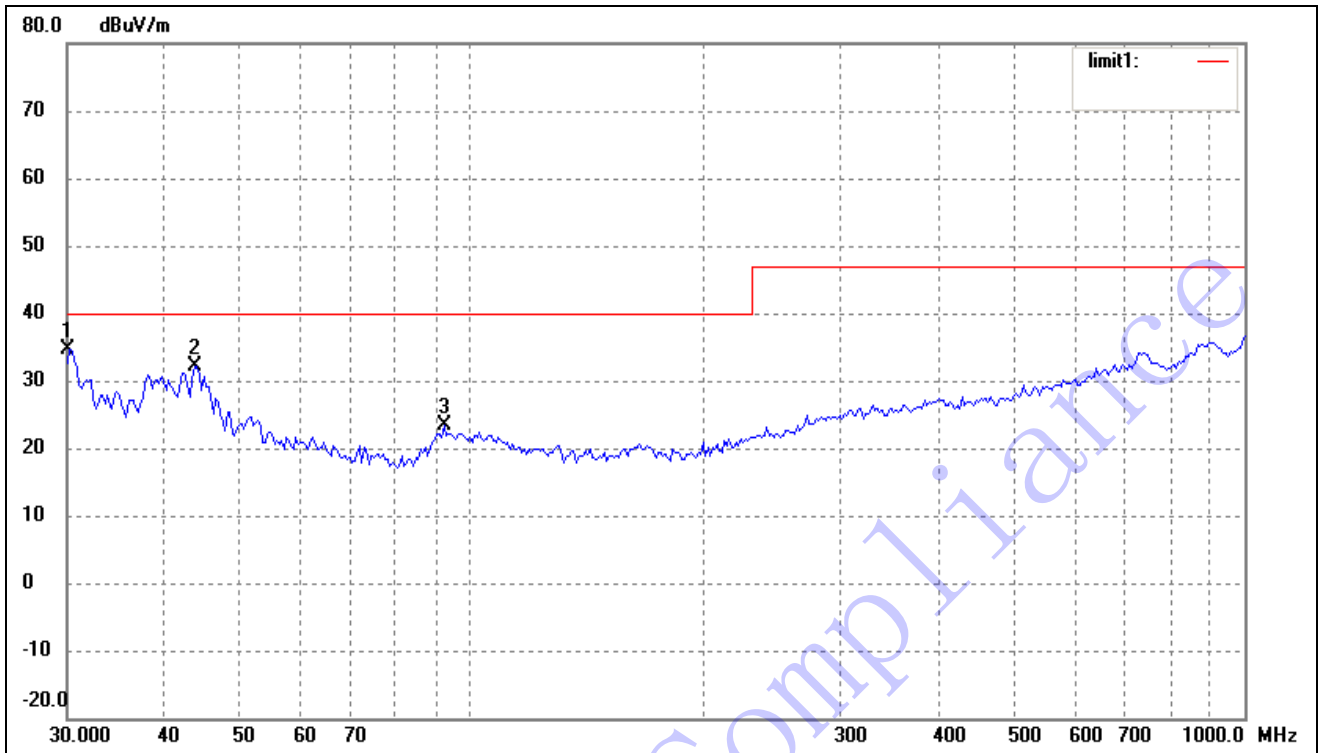

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.2110	26.56	8.07	34.63	40.00	-5.37	359	100	peak
2	43.8119	23.54	8.53	32.07	40.00	-7.93	359	100	peak
3	92.1388	18.61	4.89	23.50	40.00	-16.50	359	100	peak


**Plot of Radiated Emissions Test Data**

EUT: Power supply  
 Tested Model: GT-41062-1806-T2  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz  
 Test Specification: Horizontal

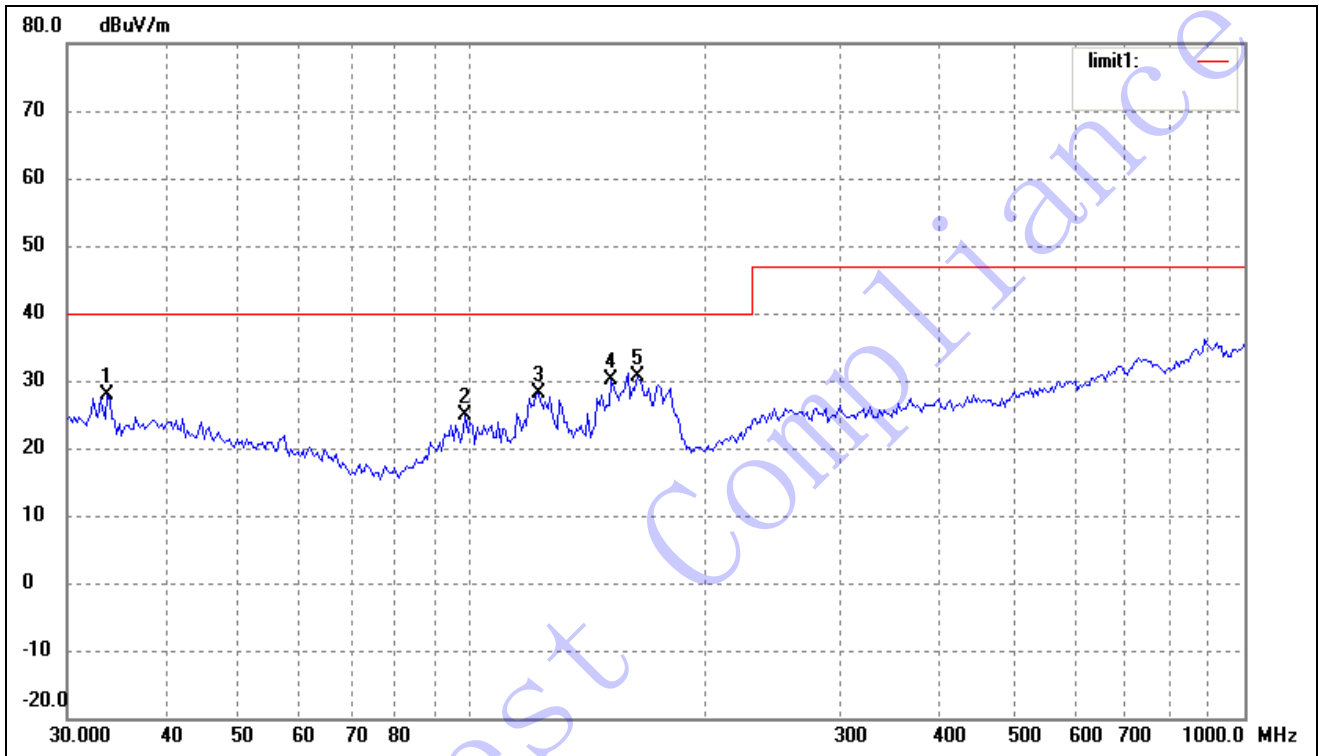

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.7986	19.23	8.68	27.91	40.00	-12.09	359	100	peak
2	98.1419	18.47	6.39	24.86	40.00	-15.14	359	100	peak
3	121.9755	23.38	4.71	28.09	40.00	-11.91	359	200	peak
4	151.5972	26.66	3.57	30.23	40.00	-9.77	359	200	peak
5	163.7550	26.84	3.67	30.51	40.00	-9.49	359	200	peak


Test Specification: Vertical

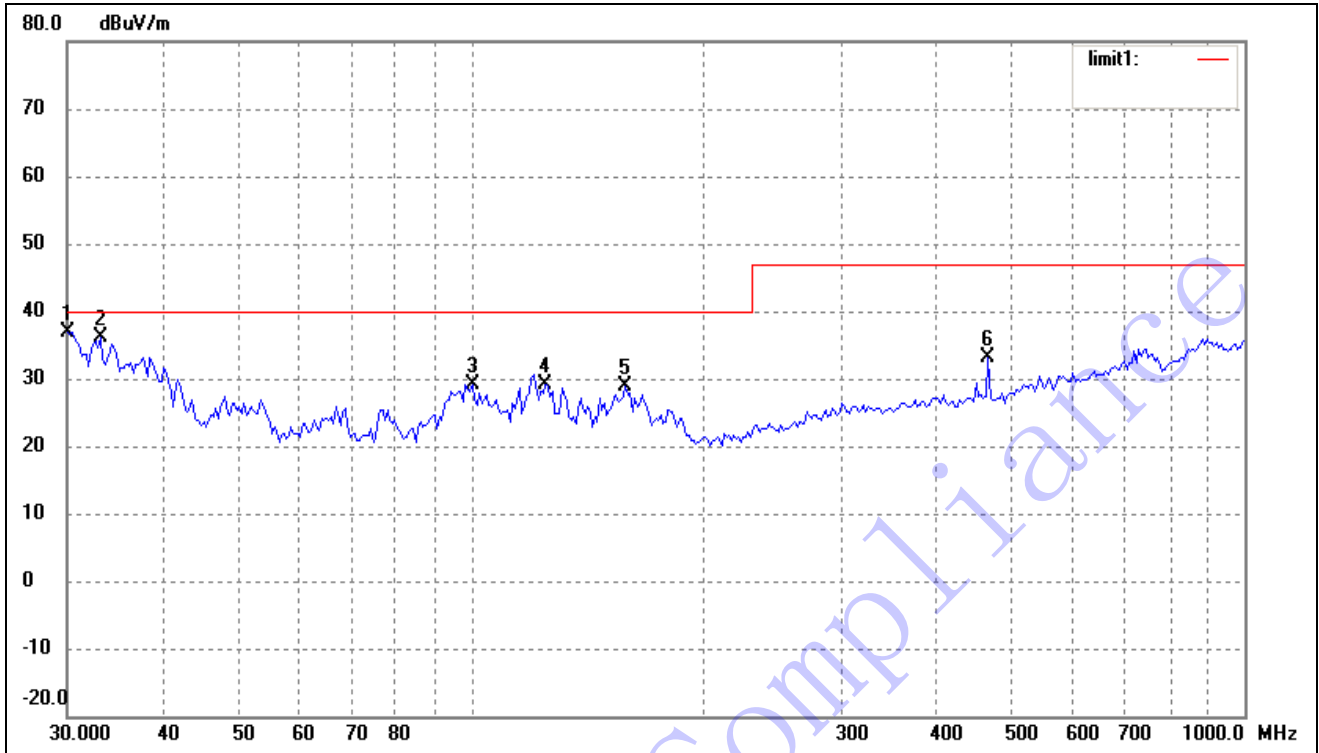

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.0000	28.91	8.04	36.95	40.00	-3.05	359	100	peak
2	33.0950	27.45	8.56	36.01	40.00	-3.99	359	100	peak
3	100.2286	22.29	6.81	29.10	40.00	-10.90	359	100	peak
4	124.5690	24.65	4.53	29.18	40.00	-10.82	359	100	peak
5	158.1123	25.16	3.63	28.79	40.00	-11.21	359	100	peak
6	465.5994	21.40	11.69	33.09	47.00	-13.91	359	100	peak


**Plot of Radiated Emissions Test Data**

EUT: Power supply  
 Tested Model: GT-41062-1812  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz  
  
 Test Specification: Horizontal

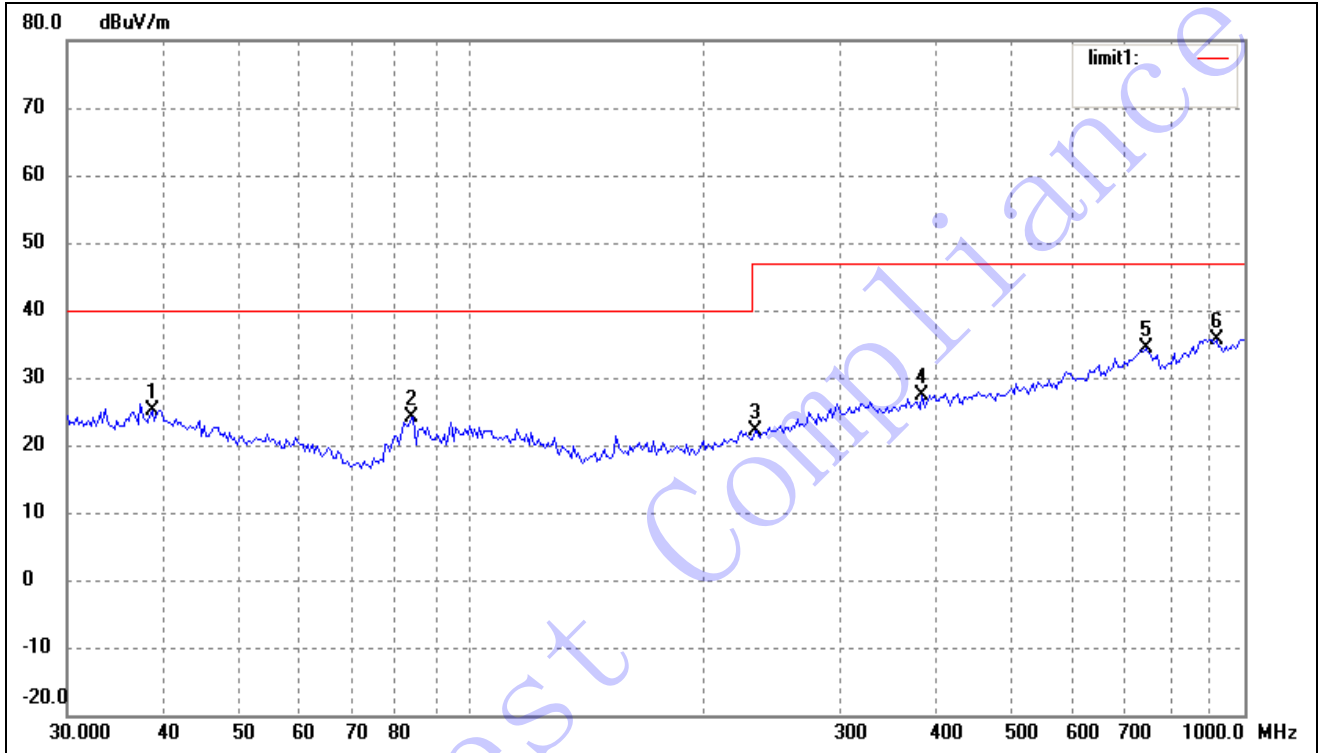

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.6161	15.63	9.46	25.09	40.00	-14.91	359	200	peak
2	83.5222	21.44	2.68	24.12	40.00	-15.88	359	200	peak
3	232.5318	15.66	6.59	22.25	47.00	-24.75	359	200	peak
4	382.5879	16.72	10.74	27.46	47.00	-19.54	359	200	peak
5	744.8661	16.55	17.95	34.50	47.00	-12.50	359	200	peak
6	919.2866	17.00	18.70	35.70	47.00	-11.30	359	200	peak


Test Specification: Vertical

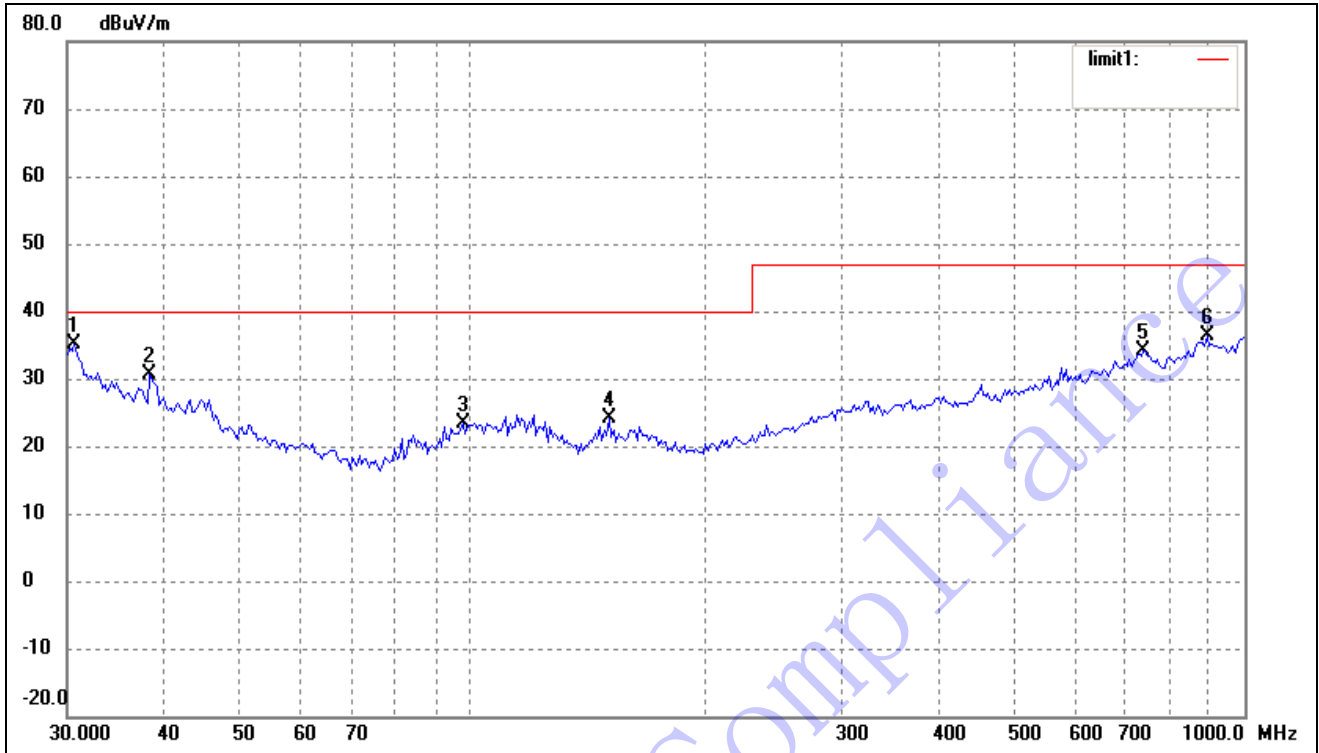

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.6379	26.98	8.15	35.13	40.00	-4.87	359	100	peak
2	38.3462	21.15	9.42	30.57	40.00	-9.43	359	100	peak
3	97.4560	17.06	6.21	23.27	40.00	-16.73	359	100	peak
4	150.5378	20.56	3.55	24.11	40.00	-15.89	359	100	peak
5	739.6605	16.02	18.07	34.09	47.00	-12.91	359	100	peak
6	893.8567	17.12	19.27	36.39	47.00	-10.61	359	100	peak


**Plot of Radiated Emissions Test Data**

EUT: Power supply  
 Tested Model: GT-41062-1812-T2  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz  
  
 Test Specification: Horizontal

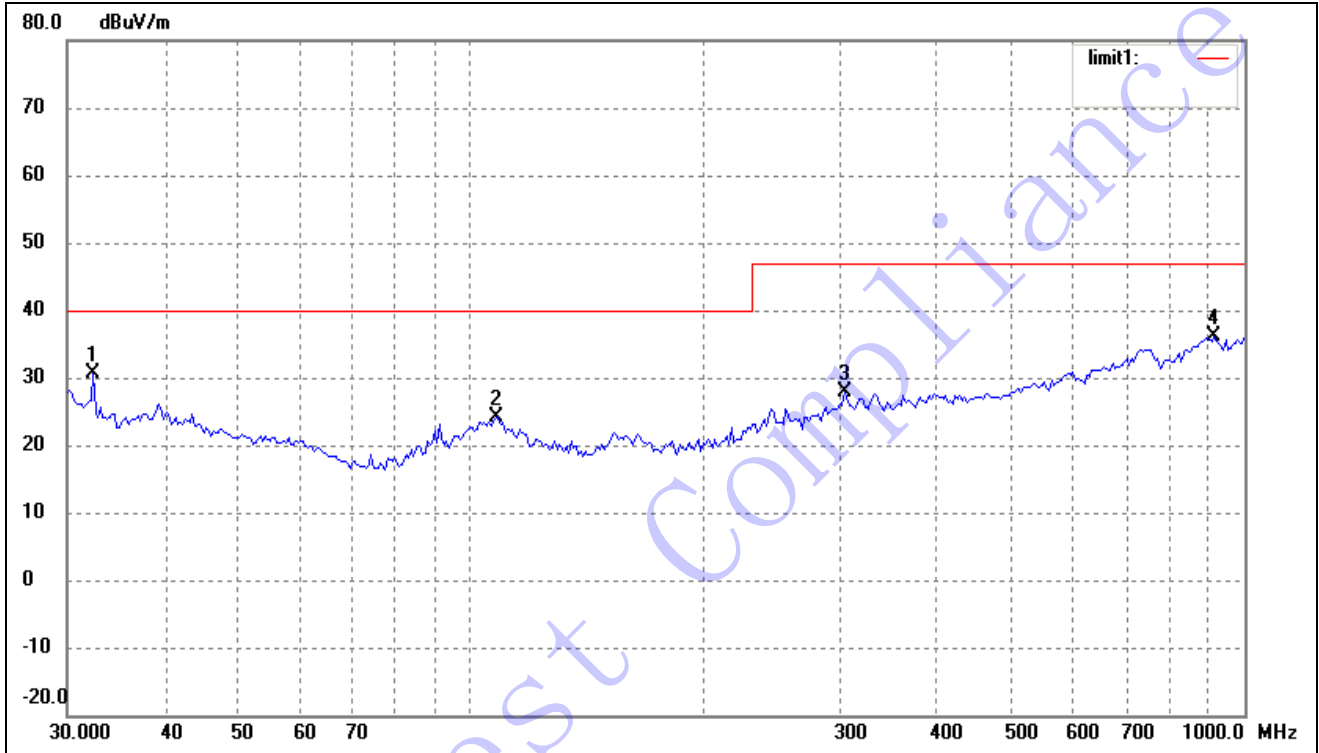

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	22.15	8.44	30.59	40.00	-9.41	359	200	peak
2	107.5101	18.08	6.10	24.18	40.00	-15.82	359	200	peak
3	303.5437	17.57	10.24	27.81	47.00	-19.19	359	200	peak
4	912.8620	17.27	18.93	36.20	47.00	-10.80	359	200	peak


Test Specification: Vertical

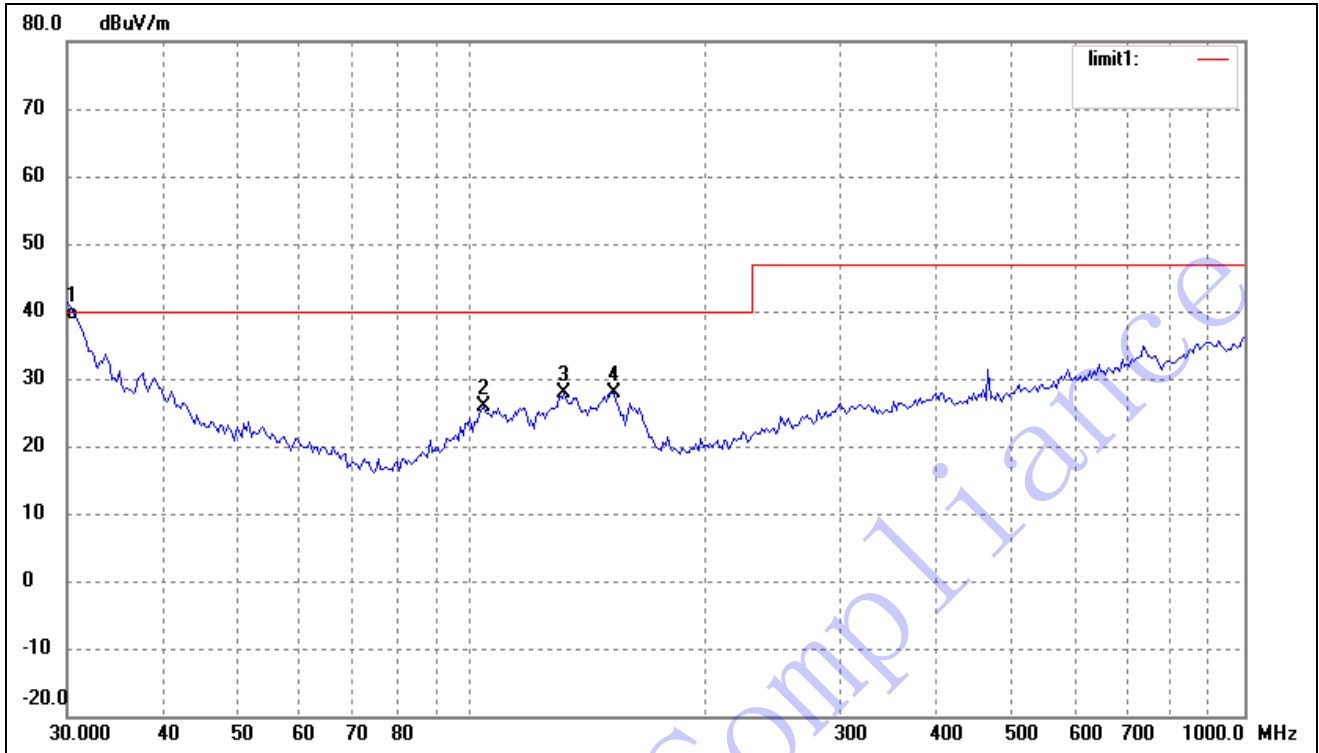

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.0000	30.50	8.04	38.54	40.00	-1.46	359	100	QP
2	103.8055	19.38	6.46	25.84	40.00	-14.16	359	100	peak
3	131.7577	23.82	4.00	27.82	40.00	-12.18	359	100	peak
4	152.6641	24.32	3.58	27.90	40.00	-12.10	359	100	peak

**Plot of Radiated Emissions Test Data**

EUT: Power supply  
 Tested Model: GT-41062-1812-T3  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz  
  
 Test Specification: Horizontal

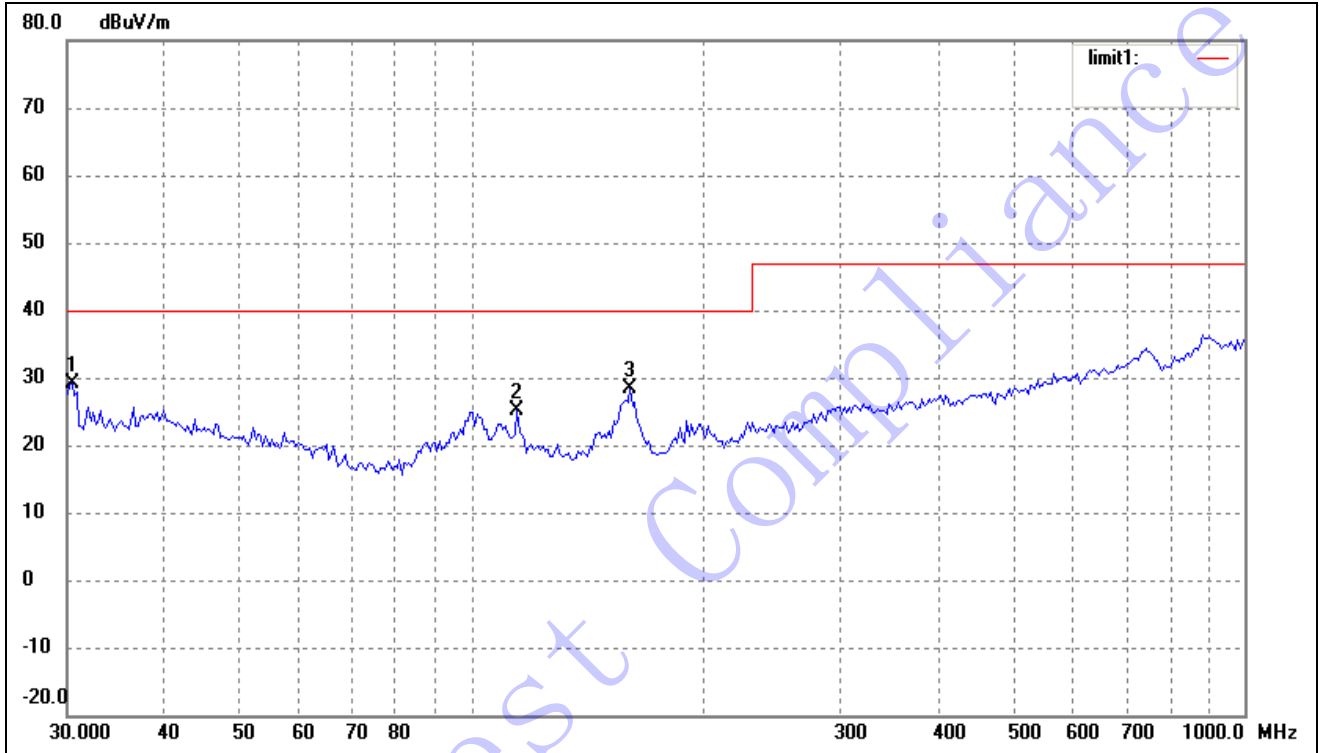

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.4237	21.05	8.11	29.16	40.00	-10.84	359	200	peak
2	114.5146	19.70	5.41	25.11	40.00	-14.89	359	200	peak
3	160.3456	24.71	3.65	28.36	40.00	-11.64	359	200	peak




Test Specification: Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.5478	22.71	9.29	32.00	40.00	-8.00	359	100	peak
2	98.8325	24.02	6.55	30.57	40.00	-9.43	359	100	peak
3	161.4741	20.70	3.66	24.36	40.00	-15.64	359	100	peak


**Plot of Radiated Emissions Test Data**

EUT: Power supply  
 Tested Model: GT-41062-1824-T3  
 Operating Condition: Full Load  
 Comment: AC 230V/50Hz  
  
 Test Specification: Horizontal

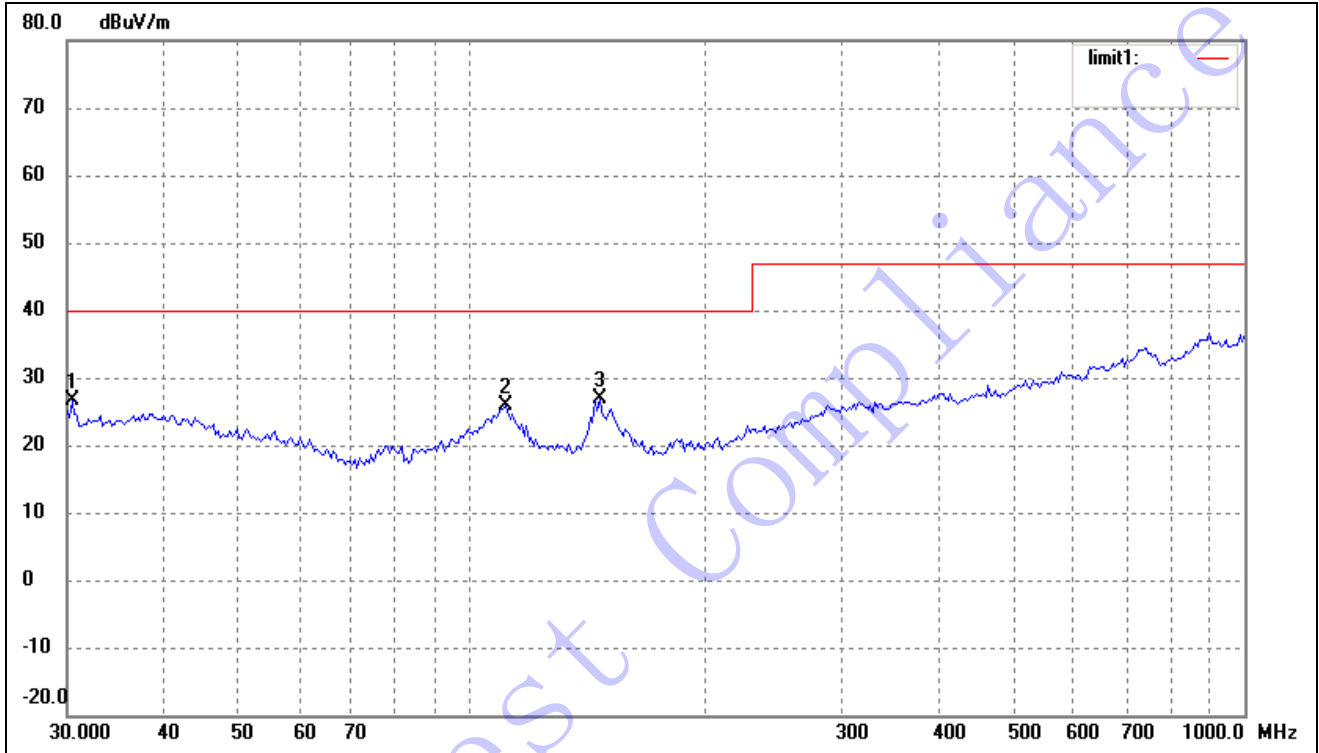

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.4237	18.58	8.11	26.69	40.00	-13.31	359	200	peak
2	110.5687	20.16	5.80	25.96	40.00	-14.04	359	200	peak
3	146.3735	23.30	3.49	26.79	40.00	-13.21	359	200	peak

Test Specification: Vertical

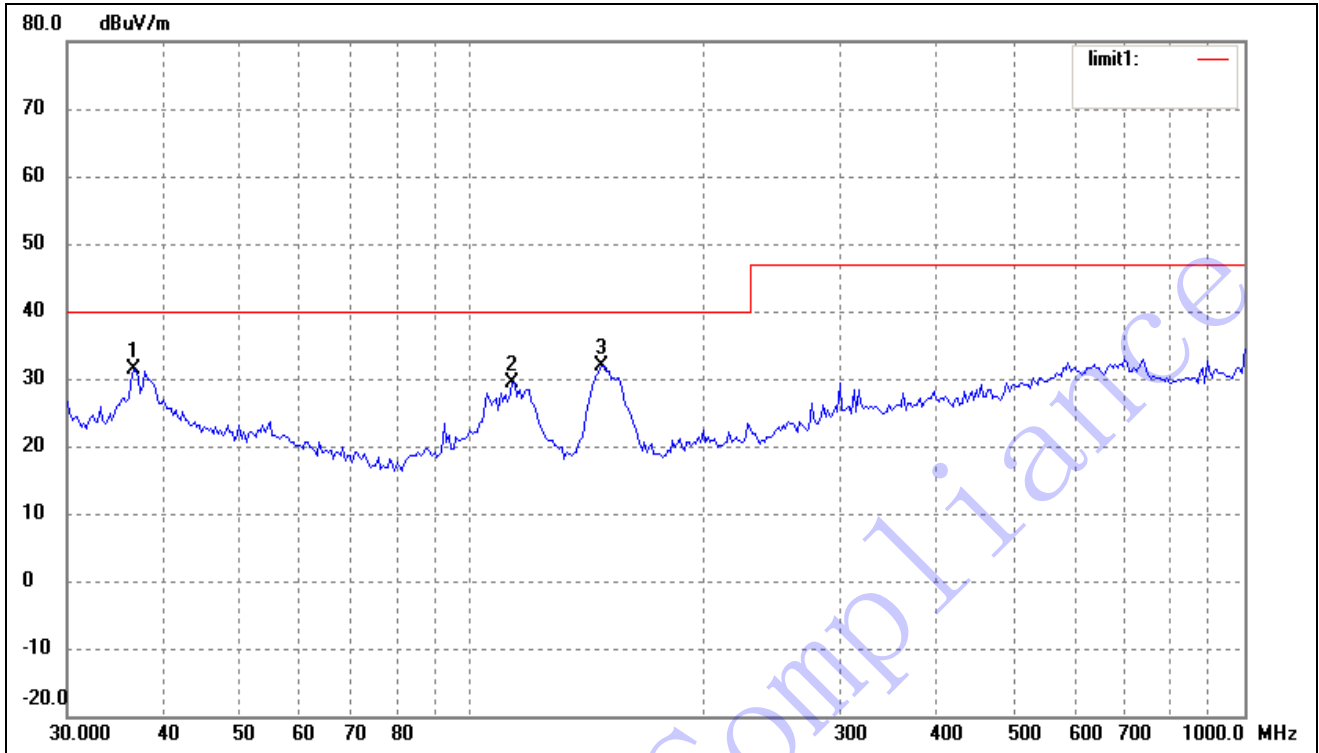

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.5091	22.25	9.13	31.38	40.00	-8.62	359	100	peak
2	112.9196	23.92	5.56	29.48	40.00	-10.52	359	100	peak
3	147.4036	28.31	3.52	31.83	40.00	-8.17	359	100	peak

## 5. Harmonic Current Emissions

### 5.1 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Digital Power Analyzer	California Instrument	CTS	72831	2012-03-28	2013-03-27
Power Source	California Instrument	5001IX-CTS-400	60077	2012-03-28	2013-03-27

### 5.2 Test Procedure

Test is conducting under the description of EN61000-3-2.

### 5.3 Test Standards

EN61000-3-2, Clause 7.1 Limits for Class A equipment.

### Environmental Conditions

Temperature:	22 °C
Relative Humidity:	48%
ATM Pressure:	1022 mbar

### 5.4 Harmonic Current Emissions Test Data

According to Clause 7 of EN61000-3-2, the EUT (rated power is Max.18W) is less than 75W, belong to 'equipment with a rated power of 75W or less', therefore 'limits are not specified in this edition of the standards'. It is deem to full fit the requirements of the standards.

Result: The EUT is compliance with the requirements of this section.

## 6. Voltage Fluctuation and Flicker

### 6.1 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Digital Power Analyzer	California Instrument	CTS	72831	2012-03-28	2013-03-27
Power Source	California Instrument	5001IX-CTS-400	60077	2012-03-28	2013-03-27

### 6.2 Test Procedure

Test is conducting under the description of EN61000-3-3.

### 6.3 Test Standards

EN61000-3-3, Limit: Clause 5.

### Environmental Conditions

Temperature:	22 °C
Relative Humidity:	48%
ATM Pressure:	1022 mbar

### 6.4 Voltage Fluctuation and Flicker Test Data


### Flicker Test Summary per EN/IEC61000-3-3 (Run time)

EUT: Power Supply (GT-41062-1805) Tested by: Vigoss  
 Test category: All parameters (European limits) Test Margin: 100  
 Test date: 2012-08-16 Start time: 10:14:07 AM End time: 10:24:28 AM  
 Test duration (min): 10 Data file name: F-000190.cts\_data  
 Comment: Full Load  
 Customer: GlobTek


Test Result: Pass Status: Test Completed

Pst<sub>i</sub> and limit line

European Limits

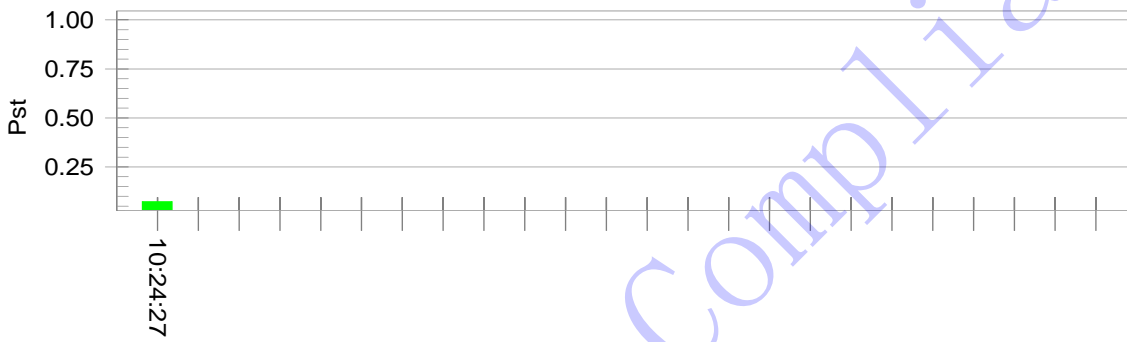

Plt and limit line

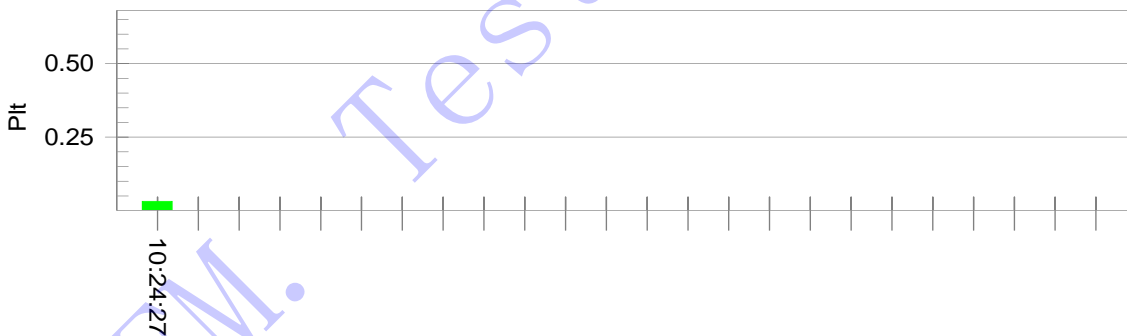

**Parameter values recorded during the test:**

Vrms at the end of test (Volt):	230.44			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.073	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.032	Test limit:	0.650	Pass


### Flicker Test Summary per EN/IEC61000-3-3 (Run time)

EUT: Power Supply (GT-41062-1806-T2) Tested by: Vigoss  
 Test category: All parameters (European limits) Test Margin: 100  
 Test date: 2012-08-16 Start time: 04:44:07 PM End time: 04:54:23 PM  
 Test duration (min): 10 Data file name: F-000038.cts\_data  
 Comment: Full Load  
 Customer: GlobTek

Test Result: Pass Status: Test Completed

Pst<sub>i</sub> and limit line

European Limits

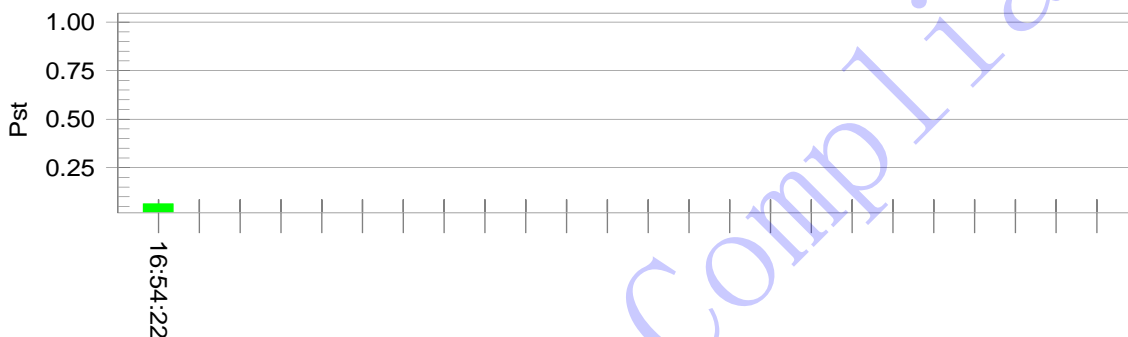

Plt and limit line



**Parameter values recorded during the test:**

Vrms at the end of test (Volt):	230.28			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass


**Flicker Test Summary per EN/IEC61000-3-3 (Run time)**

EUT: Power Supply (GT-41062-1812) Tested by: Vigoss  
 Test category: All parameters (European limits) Test Margin: 100  
 Test date: 2012-08-16 Start time: 05:01:56 PM End time: 05:12:12 PM  
 Test duration (min): 10 Data file name: F-000039.cts\_data  
 Comment: Full Load  
 Customer: GlobTek


Test Result: Pass Status: Test Completed

Pst<sub>j</sub> and limit line

European Limits

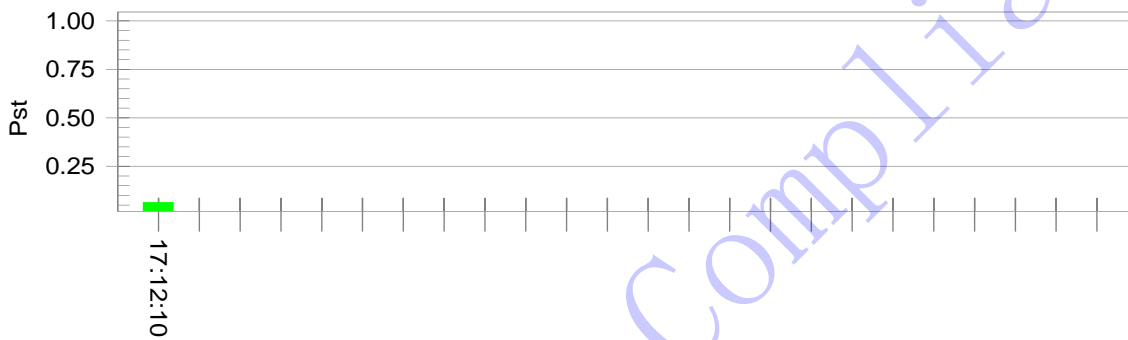

Plt and limit line

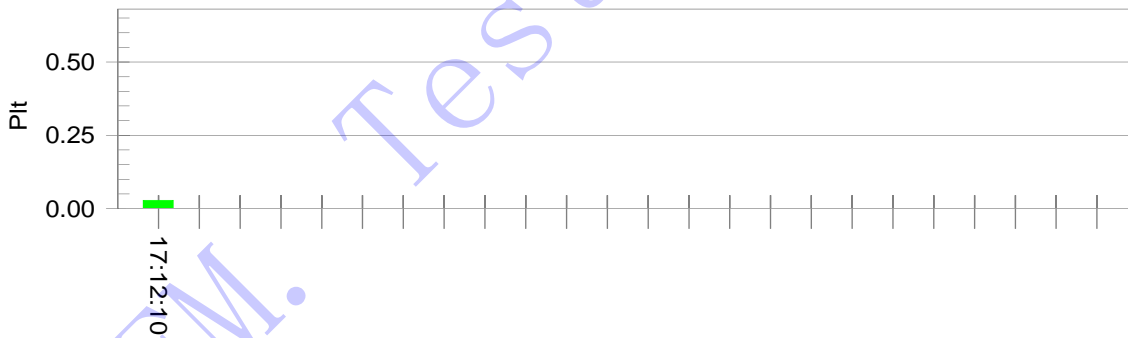

**Parameter values recorded during the test:**

Vrms at the end of test (Volt):	230.27			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass




**Flicker Test Summary per EN/IEC61000-3-3 (Run time)**

EUT: Power Supply (GT-41062-1812-T2) Tested by: vigoss  
 Test category: All parameters (European limits) Test Margin: 100  
 Test date: 2012-08-06 Start time: 10:12:23 AM End time: 10:22:39 AM  
 Test duration (min): 10 Data file name: F-000154.cts\_data  
 Comment: Full Load  
 Customer: GlobTek, Inc


Test Result: Pass Status: Test Completed

**Pst<sub>i</sub> and limit line**

**European Limits**

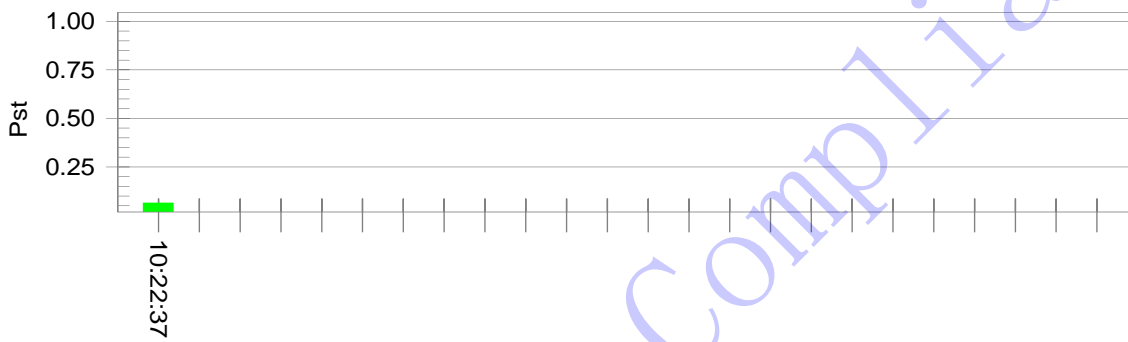

**Plt and limit line**

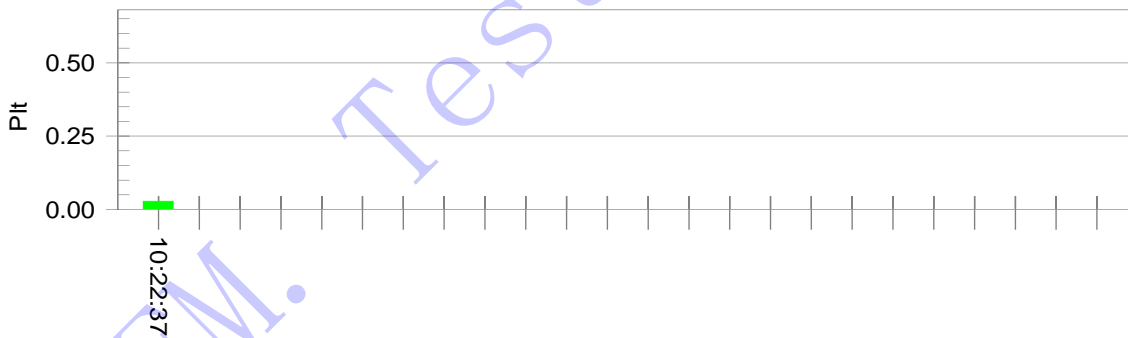

**Parameter values recorded during the test:**

Vrms at the end of test (Volt):	230.44			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass

**Flicker Test Summary per EN/IEC61000-3-3 (Run time)**

EUT: Power Supply (GT-41062-1812-T3)

Tested by: Vigoss

Test category: All parameters (European limits)

Test Margin: 100

Test date: 2012-08-16

Start time: 04:37:24 PM

End time: 04:47:40 PM

Test duration (min): 10

Data file name: F-000095.cts\_data

Comment: Full Load


Customer: GlobTek

Test Result: Pass

Status: Test Completed

**Pst<sub>i</sub> and limit line**

**European Limits**

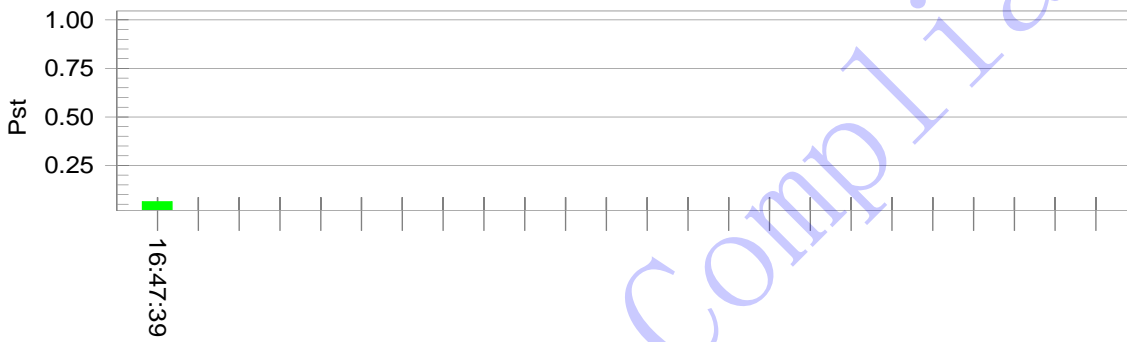

**Plt and limit line**



**Parameter values recorded during the test:**

Vrms at the end of test (Volt): 230.41

Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass


**Flicker Test Summary per EN/IEC61000-3-3 (Run time)**

EUT: Power Supply (GT-41062-1824-T3) Tested by: vigoss  
 Test category: All parameters (European limits) Test Margin: 100  
 Test date: 2012-08-16 Start time: 10:28:05 AM End time: 10:38:21 AM  
 Test duration (min): 10 Data file name: F-000155.cts\_data  
 Comment: Full Load  
 Customer: GlobTek


Test Result: Pass Status: Test Completed

Pst<sub>i</sub> and limit line

European Limits

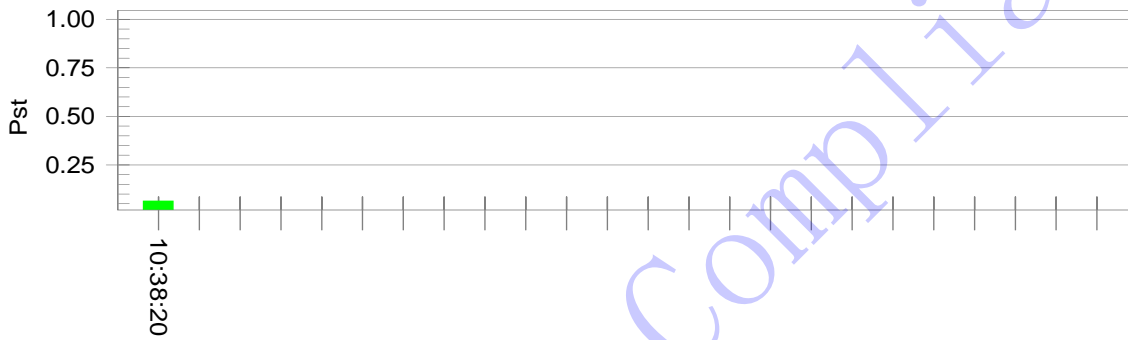

Plt and limit line

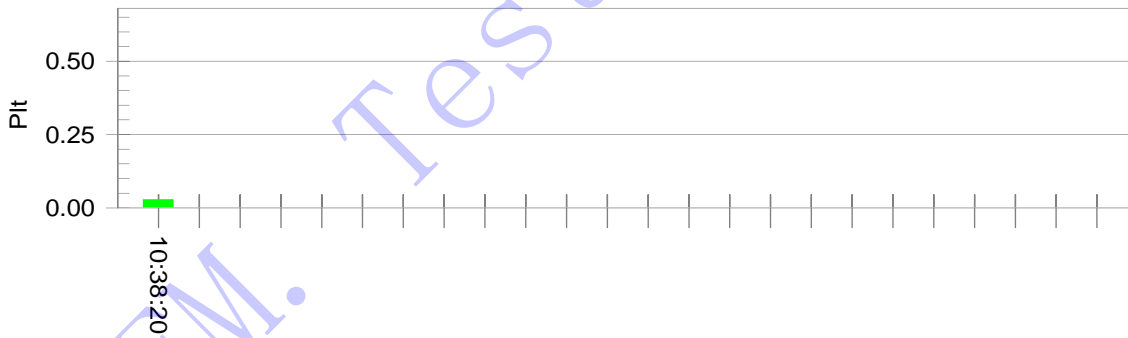

**Parameter values recorded during the test:**

Vrms at the end of test (Volt):	230.61			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass

## 7. Electrostatic Discharges (ESD)

### 7.1 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
ESD Generator	TESQ AG	NSG 437	161	2012-03-28	2013-03-27

### 7.2 Test Procedure

Test is conducting under the description of IEC61000-4-2.

### Test Performance

Performance Criterion: B

### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

### 7.3 Electrostatic Discharge Immunity Test Data

Tested Model: GT-41062-1805

Table 1: Electrostatic Discharge Immunity (Air Discharge)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Slot	A	A	A	A	A	A	B	B		
Surface	A	A	A	A	A	A	B	B		

Table 2: Electrostatic Discharge Immunity (Direct Contact)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
/	/	/	/	/						

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

SEM. Test Compliance

Tested Model: GT-41062-1806-T2

Table 1: Electrostatic Discharge Immunity (Air Discharge)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Slot	A	A	A	A	A	A	B	B		
Surface	A	A	A	A	A	A	B	B		

Table 2: Electrostatic Discharge Immunity (Direct Contact)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
/	/	/	/	/						

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Tested Model: GT-41062-1812

Table 1: Electrostatic Discharge Immunity (Air Discharge)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Slot	A	A	A	A	A	A	B	B		
Surface	A	A	A	A	A	A	B	B		

Table 2: Electrostatic Discharge Immunity (Direct Contact)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
/	/	/	/	/						

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Tested Model: GT-41062-1812-T2

Table 1: Electrostatic Discharge Immunity (Air Discharge)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Slot	A	A	A	A	A	A	B	B		
Surface	A	A	A	A	A	A	B	B		

Table 2: Electrostatic Discharge Immunity (Direct Contact)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
/	/	/	/	/						

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						



Tested Model: GT-41062-1812-T3

Table 1: Electrostatic Discharge Immunity (Air Discharge)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Slot	A	A	A	A	A	A	A	A		
Surface	A	A	A	A	A	A	A	A		

Table 2: Electrostatic Discharge Immunity (Direct Contact)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
/	/	/	/	/						

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Tested Model: GT-41062-1824-T3

Table 1: Electrostatic Discharge Immunity (Air Discharge)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Slot	A	A	A	A	A	A	A	A		
Surface	A	A	A	A	A	A	A	A		

Table 2: Electrostatic Discharge Immunity (Direct Contact)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
/	/	/	/	/						

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

EN 61000-4-2 Test Points	Test Levels (kV)									
	-2	+2	-4	+4	-6	+6	-8	+8	-15	+15
Front Side	A	A	A	A						
Top Side	A	A	A	A						
Back Side	A	A	A	A						
Left Side	A	A	A	A						
Right Side	A	A	A	A						

Test Result: Pass

## 8. Continuous Radiated Disturbances (R/S)

### 8.1 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Signal Generator	Rohde & Schwarz	SMT03	100059	2012-03-28	2013-03-27
Voltage Probe	Rohde & Schwarz	URV5-Z2	100013	2012-03-28	2013-03-27
Power Amplifier	AR	150W1000	300999	2012-03-28	2013-03-27
Power Amplifier	AR	25S1G4AM1	305993	2012-03-28	2013-03-27
Trilog Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Anechoic chamber	Albatross Projects	MCDC	----	2012-03-20	2014-03-19

### 8.2 Test Procedure

Test is conducting under the description of IEC61000-4-3.

### Test Performance

Performance Criterion: A

### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1010 mbar

### 8.3 Continuous Radiated Disturbances Test Data

Frequency step: 1% of fundamental

Dwell time: 1 second

Modulation: AM by 1kHz sine wave with 80% modulation depth

Tested Model: GT-41062-1805

Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A

Tested Model: GT-41062-1806-T2

Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A

Tested Model: GT-41062-1812

Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A

Tested Model: GT-41062-1812-T2

Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A

Tested Model: GT-41062-1812-T3

Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A

Tested Model: GT-41062-1824-T3

Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A

Test Result: Pass

## 9. Electrical Fast Transients (EFT)

### 9.1 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Transient 2000	EMC PARTNER	TRA2000	863	2012-03-28	2013-03-27
Couple Clamp	EMC PARTNER	CN-EFT1000	513	2012-03-28	2013-03-27

### 9.2 Test Procedure

Test is conducting under the description of IEC61000-4-4.

### Test Performance

Performance Criterion: B

### Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

### 9.3 Electrical Fast Transients Test Data

Tested Model: GT-41062-1805

EN 61000-4-4 Test Points		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
Power Supply Power Port of EUT	L1	A	A	A	A	/	/	/	/
	L2	A	A	A	A	/	/	/	/
	PE	/	/	/	/	/	/	/	/
	L1+L2	A	A	A	A	/	/	/	/
	L1 + PE	/	/	/	/	/	/	/	/
	L2 + PE	/	/	/	/	/	/	/	/
	L1+L2+PE	/	/	/	/	/	/	/	/
Signal ports		/	/	/	/	/	/	/	/

Tested Model: GT-41062-1806-T2

EN 61000-4-4 Test Points		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
Power Supply  Power Port of EUT	L1	A	A	A	A	/	/	/	/
	L2	A	A	A	A	/	/	/	/
	PE	/	/	/	/	/	/	/	/
	L1+L2	A	A	A	A	/	/	/	/
	L1 + PE	/	/	/	/	/	/	/	/
	L2 + PE	/	/	/	/	/	/	/	/
	L1+L2+PE	/	/	/	/	/	/	/	/
Signal ports		/	/	/	/	/	/	/	/

Tested Model: GT-41062-1812

EN 61000-4-4 Test Points		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
Power Supply  Power Port of EUT	L1	A	A	A	A	/	/	/	/
	L2	A	A	A	A	/	/	/	/
	PE	/	/	/	/	/	/	/	/
	L1+L2	A	A	A	A	/	/	/	/
	L1 + PE	/	/	/	/	/	/	/	/
	L2 + PE	/	/	/	/	/	/	/	/
	L1+L2+PE	/	/	/	/	/	/	/	/
Signal ports		/	/	/	/	/	/	/	/

Tested Model: GT-41062-1812-T2

EN 61000-4-4 Test Points		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
Power Supply  Power Port of EUT	L1	A	A	A	A	/	/	/	/
	L2	A	A	A	A	/	/	/	/
	PE	/	/	/	/	/	/	/	/
	L1+L2	A	A	A	A	/	/	/	/
	L1 + PE	/	/	/	/	/	/	/	/
	L2 + PE	/	/	/	/	/	/	/	/
	L1+L2+PE	/	/	/	/	/	/	/	/
Signal ports		/	/	/	/	/	/	/	

Tested Model: GT-41062-1812-T3

EN 61000-4-4 Test Points		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
Power Supply  Power Port of EUT	L1	A	A	A	A	/	/	/	/
	L2	A	A	A	A	/	/	/	/
	PE	A	A	A	A	/	/	/	/
	L1+L2	A	A	A	A	/	/	/	/
	L1 + PE	A	A	A	A	/	/	/	/
	L2 + PE	A	A	A	A	/	/	/	/
	L1+L2+PE	A	A	A	A	/	/	/	/
Signal ports		/	/	/	/	/	/	/	

Tested Model: GT-41062-1824-T3

EN 61000-4-4 Test Points		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
Power Supply  Power Port of EUT	L1	A	A	A	A	/	/	/	/
	L2	A	A	A	A	/	/	/	/
	PE	A	A	A	A	/	/	/	/
	L1+L2	A	A	A	A	/	/	/	/
	L1 + PE	A	A	A	A	/	/	/	/
	L2 + PE	A	A	A	A	/	/	/	/
	L1+L2+PE	A	A	A	A	/	/	/	/
Signal ports		/	/	/	/	/	/	/	

Test Result: Pass

SEM. Test Compliance



## 10. Surges

### 10.1 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Transient 2000	EMC PARTNER	TRA2000	863	2012-03-28	2013-03-27

### 10.2 Test Procedure

Test is conducting under the description of IEC 61000-4-5.

### Test Performance

Performance Criterion: B

### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

### 10.3 Surge Test Data

Tested Model: GT-41062-1805

Level	Voltage	Poll	Path	Pass	Fail
1	0.5kV	±	L-N	A	/
2	1kV	±	L-N	A	/
3	2kV	±	L-N, L-PE, N-PE	/	/
4	4kV	±	L-N, L-PE, N-PE	/	/

Tested Model: GT-41062-1806-T2

Level	Voltage	Poll	Path	Pass	Fail
1	0.5kV	±	L-N	A	/
2	1kV	±	L-N	A	/
3	2kV	±	L-N, L-PE, N-PE	/	/
4	4kV	±	L-N, L-PE, N-PE	/	/

Tested Model: GT-41062-1812

Level	Voltage	Poll	Path	Pass	Fail
1	0.5kV	±	L-N	A	/
2	1kV	±	L-N	A	/
3	2kV	±	L-N, L-PE, N-PE	/	/
4	4kV	±	L-N, L-PE, N-PE	/	/

Tested Model: GT-41062-1812-T2

Level	Voltage	Poll	Path	Pass	Fail
1	0.5kV	±	L-N	A	/
2	1kV	±	L-N	A	/
3	2kV	±	L-N, L-PE, N-PE	/	/
4	4kV	±	L-N, L-PE, N-PE	/	/

Tested Model: GT-41062-1812-T3

Level	Voltage	Poll	Path	Pass	Fail
1	0.5kV	±	L-N, L-PE, N-PE	A	/
2	1kV	±	L-N, L-PE, N-PE	B	/
3	2kV	±	L-PE, N-PE	B	/
4	4kV	±	L-N, L-PE, N-PE	/	/

Tested Model: GT-41062-1824-T3

Level	Voltage	Poll	Path	Pass	Fail
1	0.5kV	±	L-N, L-PE, N-PE	A	/
2	1kV	±	L-N, L-PE, N-PE	B	/
3	2kV	±	L-PE, N-PE	B	/
4	4kV	±	L-N, L-PE, N-PE	/	/

Test Result: Pass

## 11. Continuous Conducted Disturbances (C/S)

### 11.1 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
CS Immunity Tester	EMTEST	CWS500	0900-03	2012-03-28	2013-03-27
Attenuator	EMTEST	MA-500	1009	2012-03-28	2013-03-27
CDN	Luthi	L-801M2/M3	2665	2012-03-28	2013-03-27

### 11.2 Test Procedure

Test is conducting under the description of IEC 61000-4-6.

### Test Performance

Performance Criterion: A

### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

### 11.3 Continuous Conducted Disturbances Test Data

Sweep frequency range: 150kHz~80MHz

Frequency step: 1% of fundamental

Dwell time: 1 second

Tested Model: GT-41062-1805

Level	Voltage Level (e.m.f.) $U_0$	Modulation:	Pass	Fail
1	1	AM 80%, 1kHz sinewave	/	/
2	3	AM 80%, 1kHz sinewave	A	/
3	10	AM 80%, 1kHz sinewave	/	/
X	Special	/	/	/

Tested Model: GT-41062-1806-T2

Level	Voltage Level (e.m.f.) U <sub>0</sub>	Modulation:	Pass	Fail
1	1	AM 80%, 1kHz sinewave	/	/
2	3	AM 80%, 1kHz sinewave	A	/
3	10	AM 80%, 1kHz sinewave	/	/
X	Special	/	/	/

Tested Model: GT-41062-1812

Level	Voltage Level (e.m.f.) U <sub>0</sub>	Modulation:	Pass	Fail
1	1	AM 80%, 1kHz sinewave	/	/
2	3	AM 80%, 1kHz sinewave	A	/
3	10	AM 80%, 1kHz sinewave	/	/
X	Special	/	/	/

Tested Model: GT-41062-1812-T2

Level	Voltage Level (e.m.f.) U <sub>0</sub>	Modulation:	Pass	Fail
1	1	AM 80%, 1kHz sinewave	/	/
2	3	AM 80%, 1kHz sinewave	A	/
3	10	AM 80%, 1kHz sinewave	/	/
X	Special	/	/	/

Tested Model: GT-41062-1812-T3

Level	Voltage Level (e.m.f.) U <sub>0</sub>	Modulation:	Pass	Fail
1	1	AM 80%, 1kHz sinewave	/	/
2	3	AM 80%, 1kHz sinewave	A	/
3	10	AM 80%, 1kHz sinewave	/	/
X	Special	/	/	/

Tested Model: GT-41062-1824-T3

<b>Level</b>	<b>Voltage Level (e.m.f.) <math>U_0</math></b>	<b>Modulation:</b>	<b>Pass</b>	<b>Fail</b>
1	1	AM 80%, 1kHz sinewave	/	/
2	3	AM 80%, 1kHz sinewave	A	/
3	10	AM 80%, 1kHz sinewave	/	/
X	Special	/	/	/

Test Result: Pass

SEM. Test Compliance

## 12. Power-Frequency Magnetic Fields (PFMF)

### 12.1 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMCPRO	KEYTEK	EMCPro	0509124	2012-03-28	2013-03-27
Coil	KEYTEK	F-1000-4-8	0533	2012-03-28	2013-03-27

### 12.2 Test Procedure

Test is conducting under the description of IEC 61000-4-8.

### Test Performance

Performance Criterion: A

### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

### 12.3 Power-Frequency Magnetic Field Test Data

Tested Model: GT-41062-1805

Level	Magnetic Field Strength (r.m.s) A/m	Frequency Hz	Induction Coil Postion	Pass	Fail
1	1	50	X, Y, Z	A	/
2	3	50	X, Y, Z	/	/
3	10	50	X, Y, Z	/	/
X	Special	/		/	/

Tested Model: GT-41062-1806-T2

Level	Magnetic Field Strength (r.m.s) A/m	Frequency Hz	Induction Coil Postion	Pass	Fail
1	1	50	X, Y, Z	A	/
2	3	50	X, Y, Z	/	/
3	10	50	X, Y, Z	/	/
X	Special	/		/	/

Tested Model: GT-41062-1812

Level	Magnetic Field Strength (r.m.s) A/m	Frequency Hz	Induction Coil Postion	Pass	Fail
1	1	50	X, Y, Z	A	/
2	3	50	X, Y, Z	/	/
3	10	50	X, Y, Z	/	/
X	Special	/		/	/

Tested Model: GT-41062-1812-T2

Level	Magnetic Field Strength (r.m.s) A/m	Frequency Hz	Induction Coil Postion	Pass	Fail
1	1	50	X, Y, Z	A	/
2	3	50	X, Y, Z	/	/
3	10	50	X, Y, Z	/	/
X	Special	/		/	/

Tested Model: GT-41062-1812-T3

Level	Magnetic Field Strength (r.m.s) A/m	Frequency Hz	Induction Coil Postion	Pass	Fail
1	1	50	X, Y, Z	A	/
2	3	50	X, Y, Z	/	/
3	10	50	X, Y, Z	/	/
X	Special	/		/	/

Tested Model: GT-41062-1824-T3

Level	Magnetic Field Strength (r.m.s) A/m	Frequency Hz	Induction Coil Postion	Pass	Fail
1	1	50	X, Y, Z	A	/
2	3	50	X, Y, Z	/	/
3	10	50	X, Y, Z	/	/
X	Special	/		/	/

Test Result: Pass

## 13. Voltage Dips and Interruptions

### 13.1 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Transient 2000	EMC PARTNER	TRA2000	863	2012-03-28	2013-03-27

### 13.2 Test Procedure

Test is conducting under the description of IEC 61000-4-11.

#### Test Performance

Performance Criterion: B/C

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

### 13.3 Voltage Dips And Interruptions Test Data

U: Vlotage dips in %  $U_T$  ( $U_T$  is rated voltage for the EUT)

T: Test duration

Tested Model: GT-41062-1805

Level	U	T	Phase Angle	N	Pass	Fail
1	>95%	10ms	0/90/180/270	3	A	/
2	30%	500ms	0/90/180/270	3	B	/
3	>95%	5000ms	0/90/180/270	3	C	/

Tested Model: GT-41062-1806-T2

Level	U	T	Phase Angle	N	Pass	Fail
1	>95%	10ms	0/90/180/270	3	A	/
2	30%	500ms	0/90/180/270	3	B	/
3	>95%	5000ms	0/90/180/270	3	C	/

Tested Model: GT-41062-1812

Level	U	T	Phase Angle	N	Pass	Fail
1	>95%	10ms	0/90/180/270	3	A	/
2	30%	500ms	0/90/180/270	3	B	/
3	>95%	5000ms	0/90/180/270	3	C	/



Tested Model: GT-41062-1812-T2

Level	U	T	Phase Angle	N	Pass	Fail
1	>95%	10ms	0/90/180/270	3	A	/
2	30%	500ms	0/90/180/270	3	B	/
3	>95%	5000ms	0/90/180/270	3	C	/

Tested Model: GT-41062-1812-T3

Level	U	T	Phase Angle	N	Pass	Fail
1	>95%	10ms	0/90/180/270	3	A	/
2	30%	500ms	0/90/180/270	3	B	/
3	>95%	5000ms	0/90/180/270	3	C	/

Tested Model: GT-41062-1824-T3

Level	U	T	Phase Angle	N	Pass	Fail
1	>95%	10ms	0/90/180/270	3	A	/
2	30%	500ms	0/90/180/270	3	B	/
3	>95%	5000ms	0/90/180/270	3	C	/

Test Result: Pass

SEM. Test Compliance



Tested Model: GT-41062-1806-T2



Tested Model: GT-41062-1812



Tested Model: GT-41062-1812-T2



Tested Model: GT-41062-1812-T3



Tested Model: GT-41062-1824-T3



SEM. Test Compliance

## EXHIBIT 2 - EUT PHOTOGRAPHS

Tested Model: GT-41062-1805

EUT View 1



EUT View 2




**EUT Housing and Board View 1**



**Solder Board-Component View 1**



**Solder Board-Component View 2**

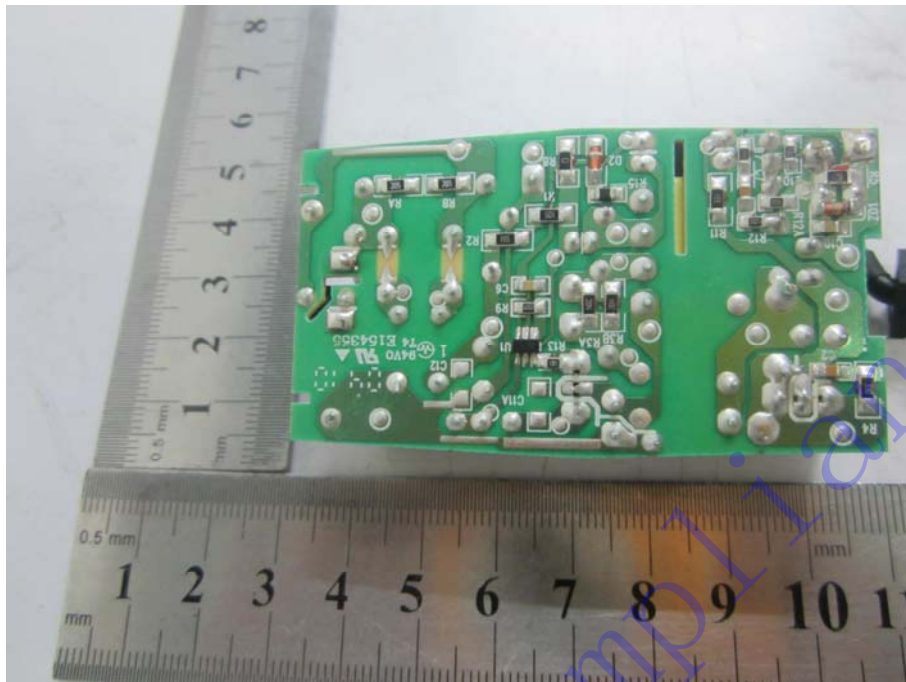

**Tested Model: GT-41062-1806-T2**

**EUT View 1**






**EUT View 2**




**EUT Housing and Board View 1**



**Solder Board-Component View 1**

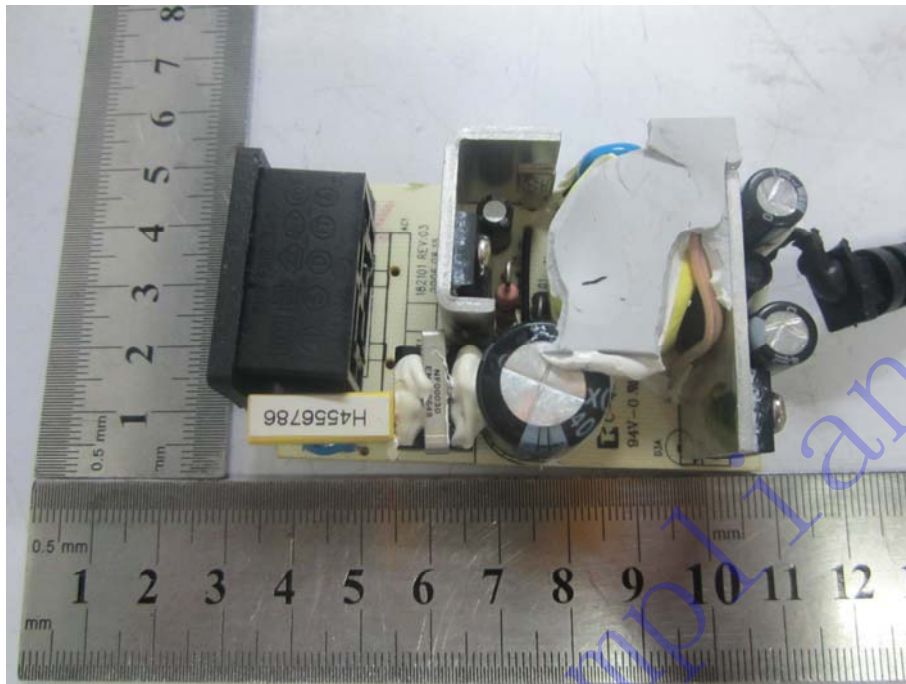

**Solder Board-Component View 2**

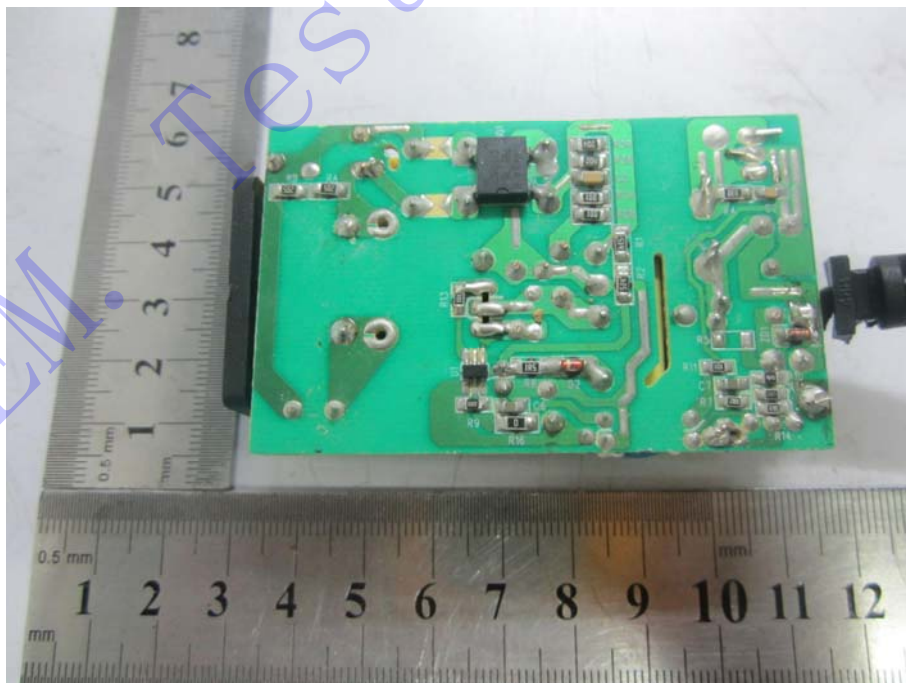

**Tested Model: GT-41062-1812**

**EUT View 1**




**EUT View 2**




**EUT Housing and Board View 1**



**Solder Board-Component View 1**

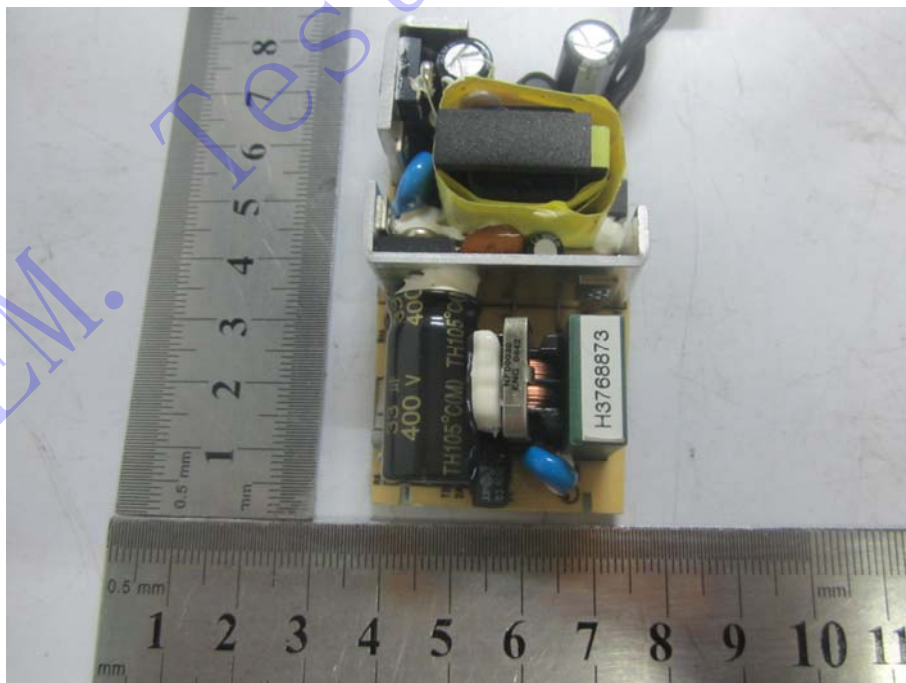

**Solder Board-Component View 2**

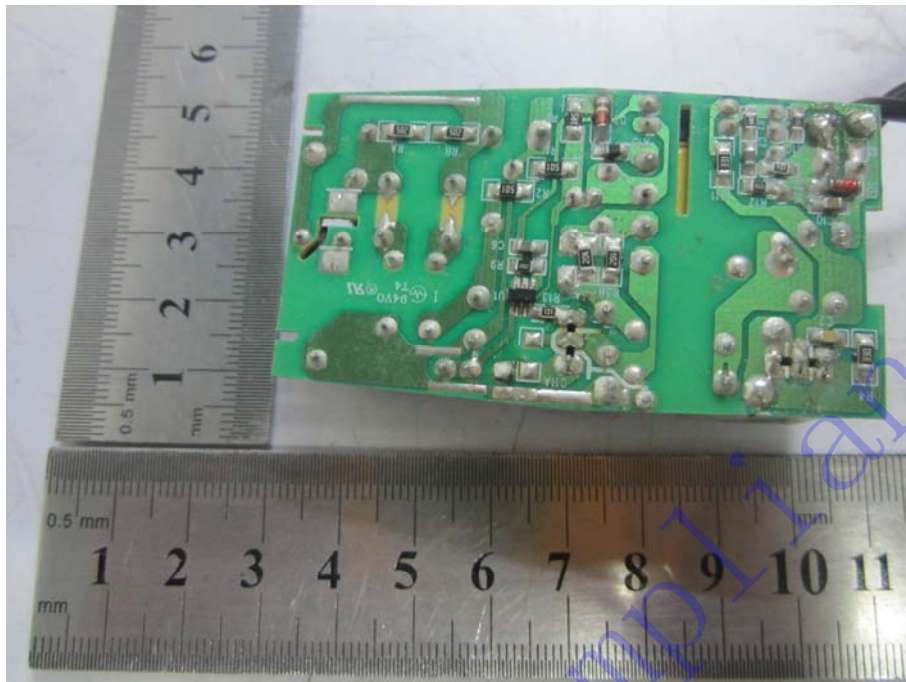

**Tested Model: GT-41062-1812-T2**

**EUT View 1**



**EUT View 2**




**EUT Housing and Board View 1**



**Solder Board-Component View 1**



**Solder Board-Component View 2**

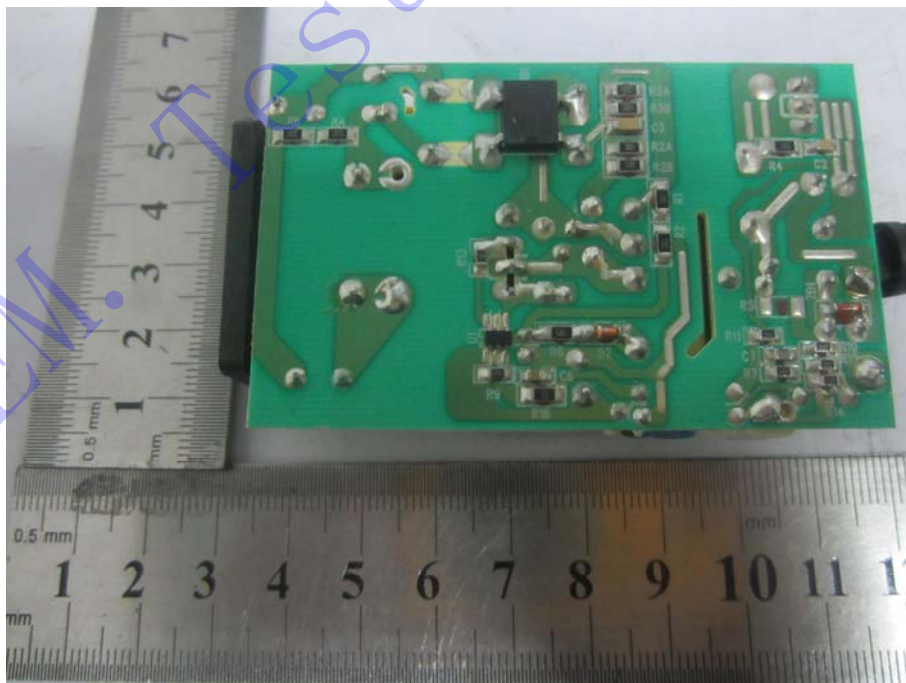

**Tested Model: GT-41062-1812-T3**

**EUT View 1**



**EUT View 2**





**EUT Housing and Board View 1**



**Solder Board-Component View 1**



**Solder Board-Component View 2**



**Tested Model: GT-41062-1824-T3**

**EUT View 1**




**EUT View 2**




**EUT Housing and Board View 1**



**Solder Board-Component View 1**

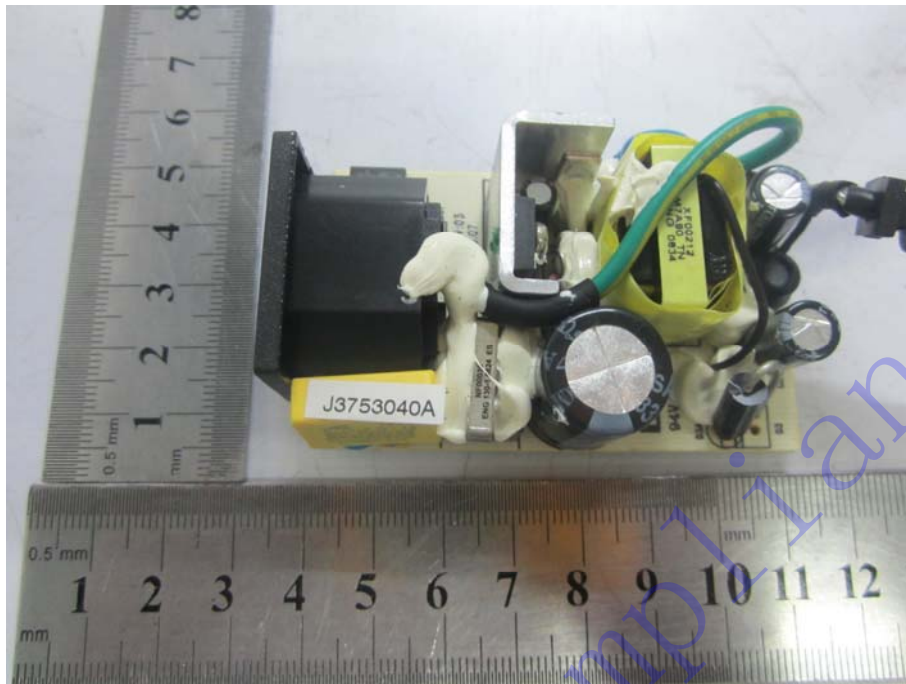

**Solder Board-Component View 2**

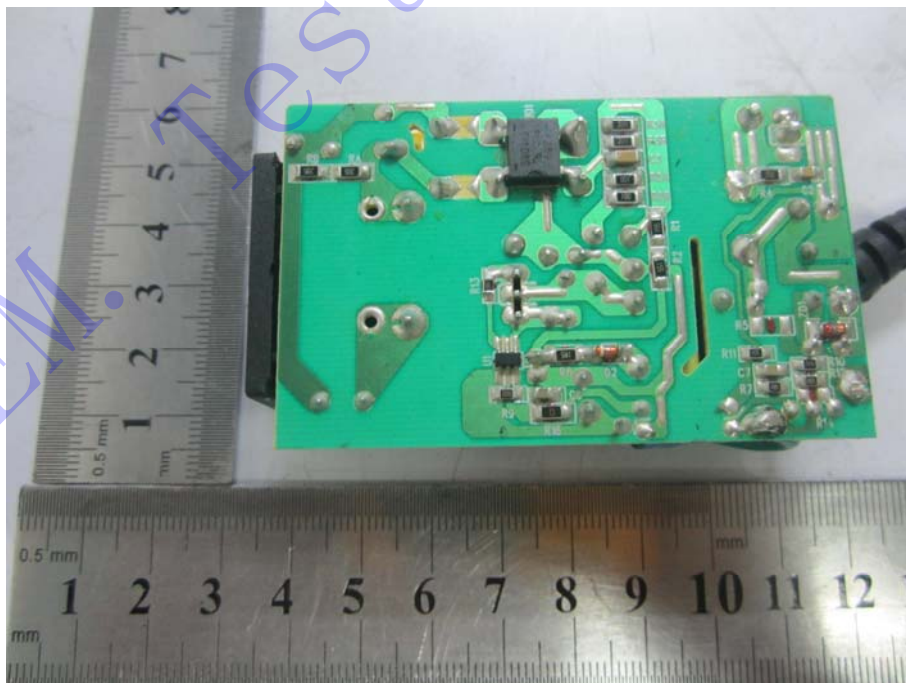

### EXHIBIT 3 - TEST SETUP PHOTOGRAPHS

**Tested Model: GT-41062-1805**


**Conduction Emission Test View**



**Radiation Emission Test View**




**Flicker Test View**

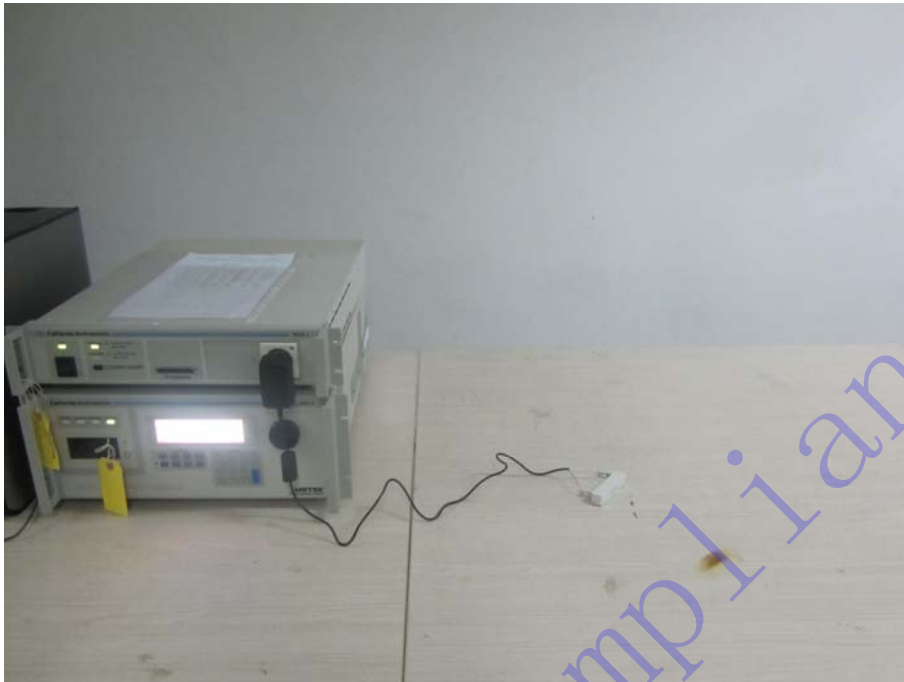

**IEC61000-4-2 Test View**



**IEC61000-4-3 Test View**

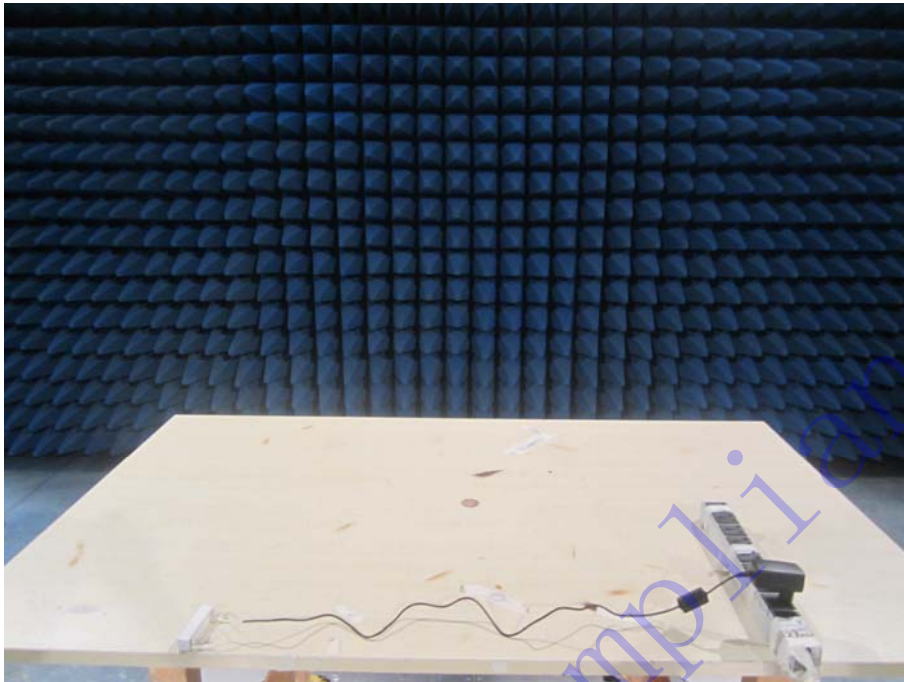

**IEC61000-4-4/5/11 Test View**



**IEC61000-4-6 Test View**



**Tested Model: GT-41062-1806-T2**

**Conduction Emission Test View**





**Radiation Emission Test View**




**Flicker Test View**



**IEC61000-4-2 Test View**



**IEC61000-4-3 Test View**

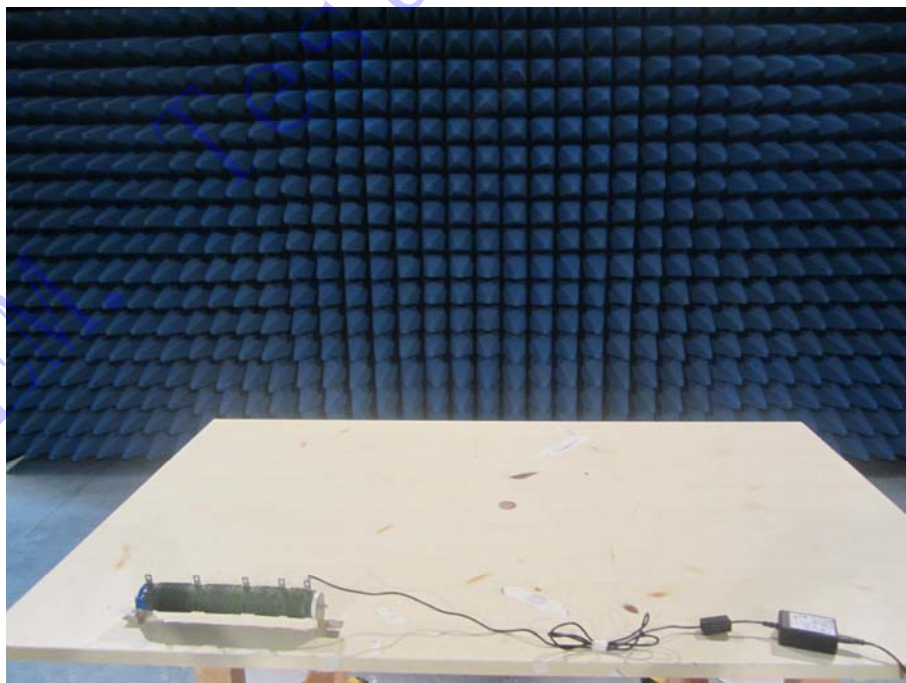

**IEC61000-4-4/5/11 Test View**



**IEC61000-4-6 Test View**



**Tested Model: GT-41062-1812**

**Conduction Emission Test View**



**Radiation Emission Test View**




**Flicker Test View**



**IEC61000-4-2 Test View**



**IEC61000-4-3 Test View**

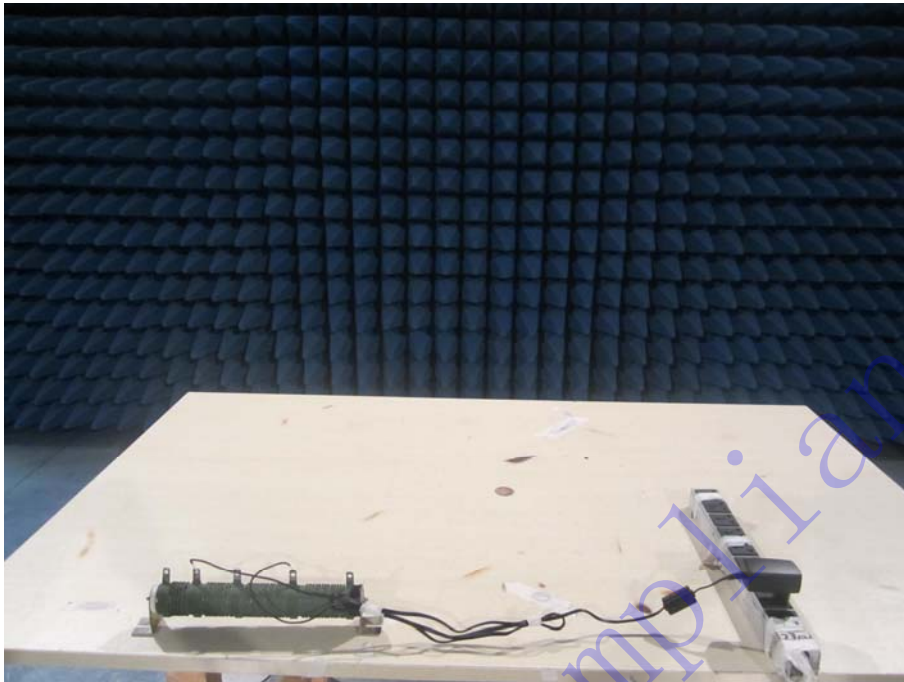

**IEC61000-4-4/5/11 Test View**



**IEC61000-4-6 Test View**



**Tested Model: GT-41062-1812-T2  
Conduction Emission Test View**



**Radiation Emission Test View**



**Flicker Test View**






**IEC61000-4-2 Test View**



**IEC61000-4-3 Test View**

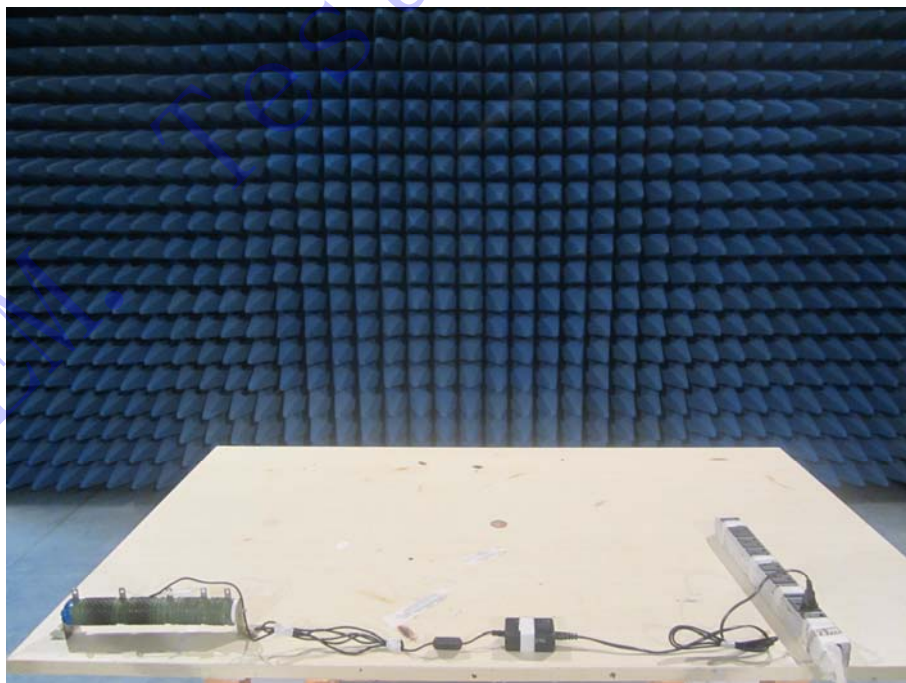

**IEC61000-4-4/5/11 Test View**



**IEC61000-4-6 Test View**



**Tested Model: GT-41062-1812-T3**

**Conduction Emission Test View**



**Radiation Emission Test View**




**Flicker Test View**



**IEC61000-4-2 Test View**



**IEC61000-4-3 Test View**

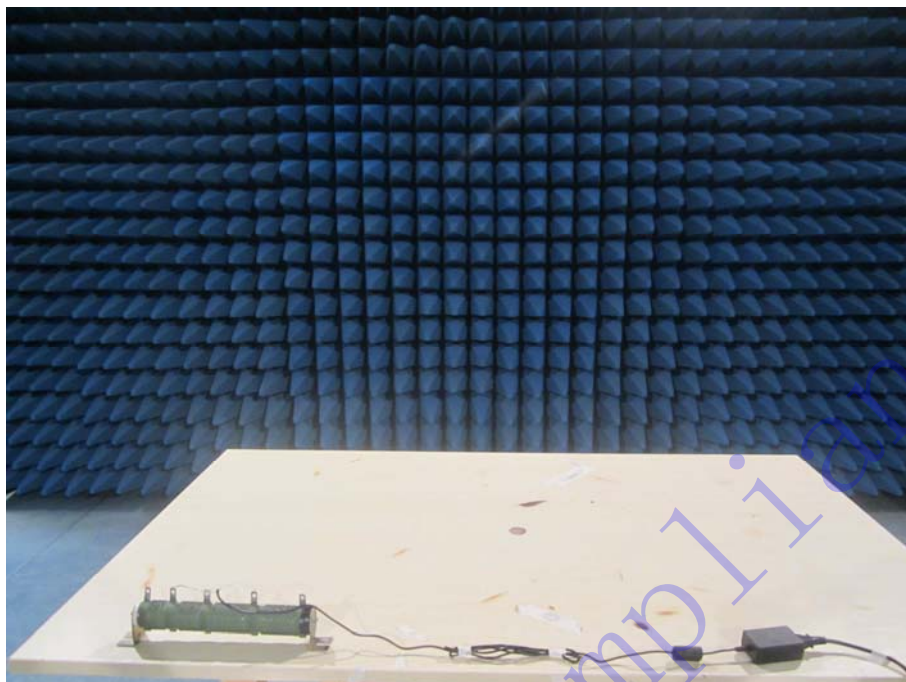

**IEC61000-4-4/5/11 Test View**



**IEC61000-4-6 Test View**



**Tested Model: GT-41062-1824-T3  
Conduction Emission Test View**



**Radiation Emission Test View**




**Flicker Test View**



**IEC61000-4-2 Test View**



**IEC61000-4-3 Test View**

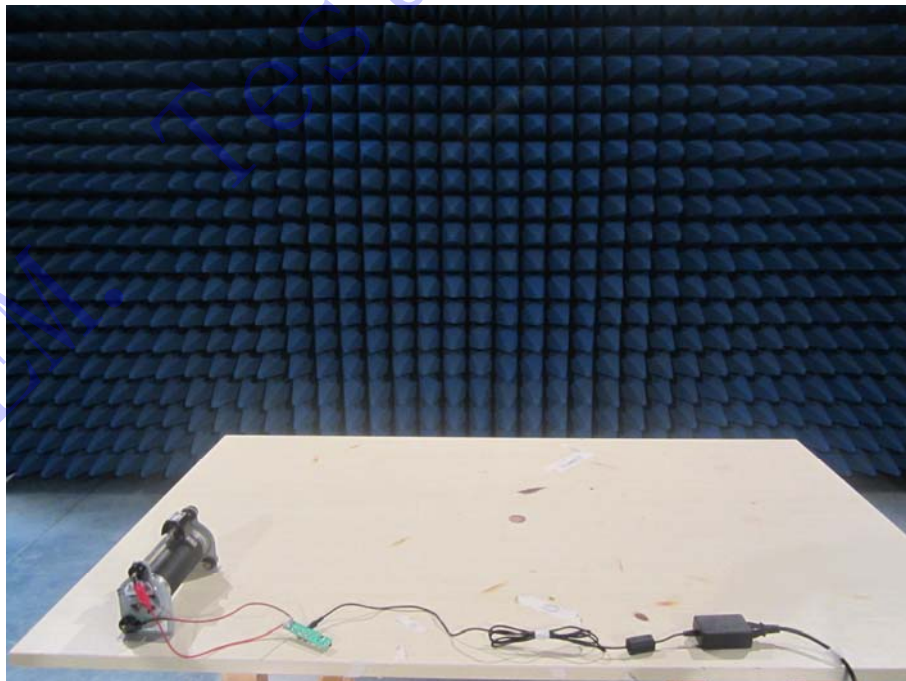



**IEC61000-4-4/5/11 Test View**



**IEC61000-4-6 Test View**



**\*\*\*\*\* END OF REPORT \*\*\*\*\***