



Slovenski institut za
kakovost in meroslovje
Slovenian Institute of
Quality and Metrology

Poročilo o preskusu / Test Report

Št. / No.:

T211-0481/12

Datum / Date:

2012-10-08

Proizvod / Product Power supply Model: GT-41131-WVVV-X.X series, GTM41133-WVVV-X.X series, GT-41060-WVVV-X.X series, GTM41060-WVVV-X.X series, GTM41070-WVVV-X.X series Enclosure: WR9QE2000C9P-N(RVB)	Listov / Pages 4
Naročnik / Applicant GlobTek, Inc 186 Veterans Dr, Northvale, NJ 07647 / USA	Vrsta preskusa / Test procedure IP40, IP41
Proizvajalec / Manufacturer GlobTek, Inc 186 Veterans Dr, Northvale, NJ 07647 / USA	Št. Merjencev / No. of Items tested 1
Blagovna znamka / Trade Mark GlobTek	Mapa predmeta št. / Subject File No. C20121557
Standardi - predpisi / Standards - regulations IEC 60529:2001	Kraj preskusa / Place of test SIQ - Slovenian Institute of Quality and Metrology, Tržaška 2, 1000 Ljubljana, Slovenia
	Opomba / Remark /

Zaključek / Conclusion

Tested product complies with the requirements of stated standards for protection degree IP 40.

The test results relate only to the items tested.

Date of receipt of test items: 2012-07-16

Date of performance of tests: 2012-07-16 to 2012-09-19

(Tested product not complies with the requirements of stated standards for protection degree IP 41)

Testni laboratorij je akreditiran pri Slovenski akreditaciji, reg.št.: LP-009 /
Testing Laboratory is accredited by Slovenian Accreditation, Reg. No. LP-009

Odgovoren za preskušanje / Responsible for the test

Mirko Čoko

Vodja področja / Department Manager

dr. Miha Otrin

Slovenski institut za kakovost in meroslovje • Slovenian Institute of Quality and Metrology
Tržaška cesta 2, SI-1000 Ljubljana, Slovenia • t: +386 1 4778 100 • f: +386 1 4778 444 • e: info@siq.si • http://www.siq.si
Razmnoževanje poročila, razen v celoti, ni dovoljeno / This report shall not be reproduced except in full

1 TEST EQUIPMENT

- Rigid test wire diameter of 1 mm as specified by the standard (2013-01-22),
- Test device for verification of protection against vertically falling water drops-drip box-SIQ,
- High voltage tester ELABO Type 92-1G3 (2013-01-14)

Note: The date of the recommended recalibration is given for each measuring instrument (in brackets).

2 EQUIPMENT UNDER TEST (EUT)

Power supply, model GT-41131-WVVV-X.X series, GTM41133-WVVV-X.X series, GT-41060-WVVV-X.X series, GTM41060-WVVV-X.X series and GTM41070-WVVV-X.X series, enclosure WR9QE2000C9P-N(RVB) was subjected to testing for IP41 degree of protection (Figures 1 and 2).



Figure 1



Figure 2

IP41 numeric description:

The first characteristic numeral **X**: indicates the degree of protection against access to hazardous parts and against solid foreign objects. Test equipment for degree 4 is rigid test wire of 1 mm diameter. The protection is satisfactory if the rigid wire does not fully penetrate and adequate clearance is kept.

The second characteristic numeral **Y** indicates the degree of protection provided by enclosures with respect to harmful effects on the equipment due to the ingress of water (degree 1-protected against dripping water). If any water has entered shall have no harmful effects.

3 TEST CONDITIONS

During the testing the sample was equipped with exchangeable plug and connected to socket outlet, see Figure 3. The exchangeable plug part with the socket outlet was not subject of the test. Test results do not relate to the whole power supply but only to the enclosure (without the exchangeable plug part).

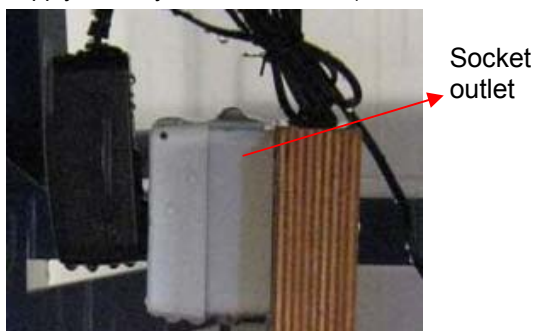


Figure 3: sample unit

3.1 Test for protection against solid foreign objects-IP4X (IEC 60529, tables 2 and 7, sub-cl. 13.2)

Procedure:

- Environmental temperature 23⁰C,
- Rigid test wire diameter of 1 mm (as specified by the standard) is pushed against any openings of the enclosure with the force of 1 N,
- Non-operating condition

Conclusion: The rigid test wire was not penetrated into the enclosure.

3.2 Tests for protection against ingress of water-IPX1 (IEC 60529, table 8, sub-cl. 14.2.1)

Procedure:

- Test device, drip box-as specified in standard,
- Water flow rate: 1 mm/min,
- The test sample was placed on the turntable under the drip box in most unfavourable normal position (Figures 4 and 5),
- Duration of the exposure: 10 minutes,



Figure 4: Test position

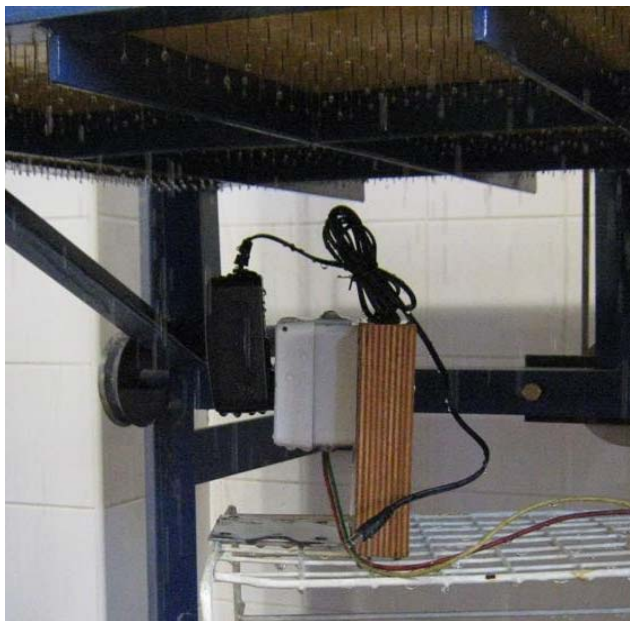


Figure 5: Test position

Conclusion: After the water test there was water on the appliance pins (Figure 6).



Figure 6

4 CONCLUSIONS

After the exposure was concluded, the visual examination of the sample was performed. Results were obtained as follows:

- The rigid test wire was not penetrated into the enclosure
- After the IPX1 test there was water on appliance pins.

Result: Following the acceptance conditions, the equipment under test sustained the test conditions for IP40 degree of protection.