


1.0 Reference and Address			
Report Number	160800341SHA-001	Original Issued:	24-Oct-2016
		Revised:	17-Jun-2019
Standard(s)	<p>Information Technology Equipment Safety Part 1: General Requirements >Valid without technical revision: 20Dec2020< [UL 60950-1:2007 Ed.2+R:14Oct2014]</p> <p>Information Technology Equipment Safety Part 1: General Requirements (R2016) >Valid without technical revision: 20Dec2020< [CSA C22.2#60950-1:2007 Ed.2+A1;A2]</p>		
Applicant	GlobTek, Inc.	Manufacturer	GlobTek (Suzhou) Co., Ltd.
Address	186 Veterans Dr. Northvale, NJ 07647	Address	Building 4. No 76 JinLing East Road, Suzhou Industrial Park, Suzhou, JiangSu, 215021
Country	USA	Country	China
Contact	Mike Krakovyak	Contact	Demon Zhou
Phone	(201)784-1000 Ext.106	Phone	86 512 6279 0301 Ext.189
FAX	(201)784-0111	FAX	86 512 6279 0355
Email	Krakovyakm@globtek.com	Email	demon.zhou@globtek.cn

2.0 Product Description	
Product	ITE Power Supply
Brand name	
Description	Product covered by this report is power supply module. The power supplies which have an output current rating of 6A or less are all rated for Limited Power Source (LPS) application. Desktop power supply is provided with suitable external enclosure, which is Class I or Class II apparatus. Two pieces of outer enclosure are enclosed with ultrasonic welding without screw. The product is not intended to use in the environment which altitude exceed 5000m.
Models	GT followed by M, - or H; followed by 96600-; followed by 01 to 65; followed by 05 to 54; followed by -T2, -T2A, -T2AL, -T2L, -T3, -T3A, -T3AL, -T3L, -R2 or -R3A; may be followed six characters. GT followed by M, - or H; followed by 96600-; followed by 01 to 65; followed by 5 to 54; followed by .0 to .9; followed by -T2, -T2A, -T2AL, -T2L, -T3, -T3A, -T3AL, -T3L, -R2 or -R3A; may be followed six characters. GT followed by M, - or H; followed by 96600-; followed by 01 to 70; followed by 56; followed by -T2, -T2A, -T3 or -T3A; followed by -AP, -PP or -SP; may be followed six characters.
Model Similarity	<p>GT*96600-****</p> <p>The 1st “*” part can be ‘M’ or ‘-’ or ‘H’ for market identification and not related to safety.</p> <p>The 2nd “*” denotes the rated output wattage designation, which can be “01” to “65”, with interval of 1W.</p> <p>The 3rd “*” denotes the standard rated output voltage designation, which can be “05” to “54” or “5.0” to “54.0” in 0.1V increments.</p> <p>The 4th “*” =-T2 means desktop class II with C8 AC inlet =-T2A means desktop class II with C18 AC inlet =-T3 means desktop class I with C14 AC inlet =-T3A means desktop class I with C6 AC inlet =-T2L means desktop class II with C8 AC inlet and housing with a DC jack =-T2AL means desktop class II with C18 AC inlet and housing with a DC jack =-T3L means desktop class I with C14 AC inlet and housing with a DC jack =-T3AL means desktop class I with C6 AC inlet and housing with a DC jack =-R2 means hybrid desktop housing class II with C8 AC inlet =-R3A means hybrid desktop housing class I with C6 AC inlet</p> <p>The last * denote any six character = 0-9 or A-Z or ()[] or – or blank for marketing purposes.</p> <p>GT*96600-*56***</p> <p>The 1st “*” part can be ‘M’ or ‘-’ or ‘H’ for market identification and not related to safety.</p> <p>The 2nd “*” denotes the rated output wattage designation, which can be “01” to “70”, with interval of 1.</p> <p>The 3rd “*” =-T2 means desktop class II with C8 AC inlet =-T2A means desktop class II with C18 AC inlet =-T3 means desktop class I with C14 AC inlet =-T3A means desktop class I with C6 AC inlet</p> <p>The 4th “*” =-AP or -PP or -SP -AP (with baby board) stands for Active POE -PP(no baby board) stands for Passive POE -SP (no baby board) stands for Simple POE</p> <p>The last * denote any six character = 0-9 or A-Z or ()[] or – or blank for marketing purposes.</p> <p>There are four alternative type of enclosure. Transformers used in models of GT*96600-**** and GT*96600-*56***are with similar construction. The turns of secondary winding may be added or reduced according different output voltage. Some non-critical components may be adjusted according different output voltage. The parameters of these components depend on output voltage.</p>
Ratings	GT*96600-****: Input:100-240V~, 50-60Hz, 1.5A; Output: 5-54VDC, Max. 65W GT*96600-*56***: Input:100-240V~, 50-60Hz, 2.0A; Output: 56VDC, Max. 70W See section 7.0, Illustration 1 for details
Other Ratings	N/A

3.0 Product Photographs

Photo 1 - External view



Photo 2 - External view



3.0 Product Photographs

Photo 3 - External view



Photo 4 - External view



3.0 Product Photographs

Photo 5 - Internal view



Photo 6 - Internal view



12

3.0 Product Photographs

Photo 7 - PCB (Class II)


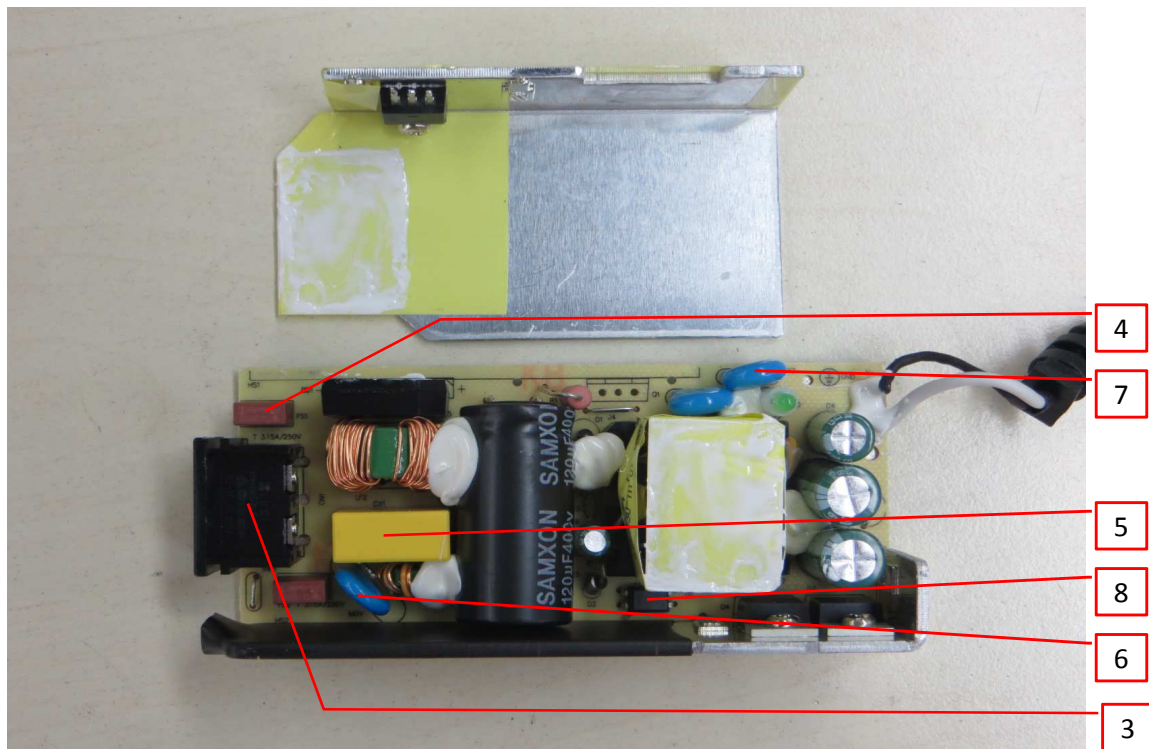


Photo 8 - PCB (Class I)

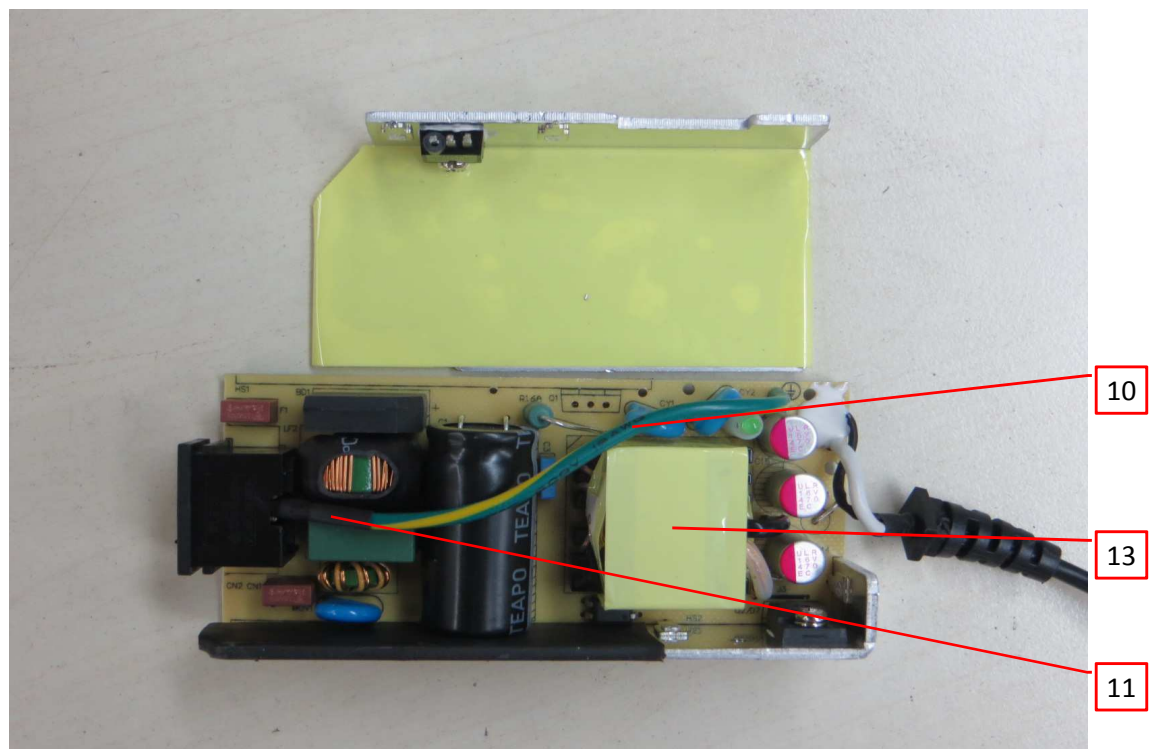

3.0 Product Photographs

Photo 9 - PCB (Class I and Class II)


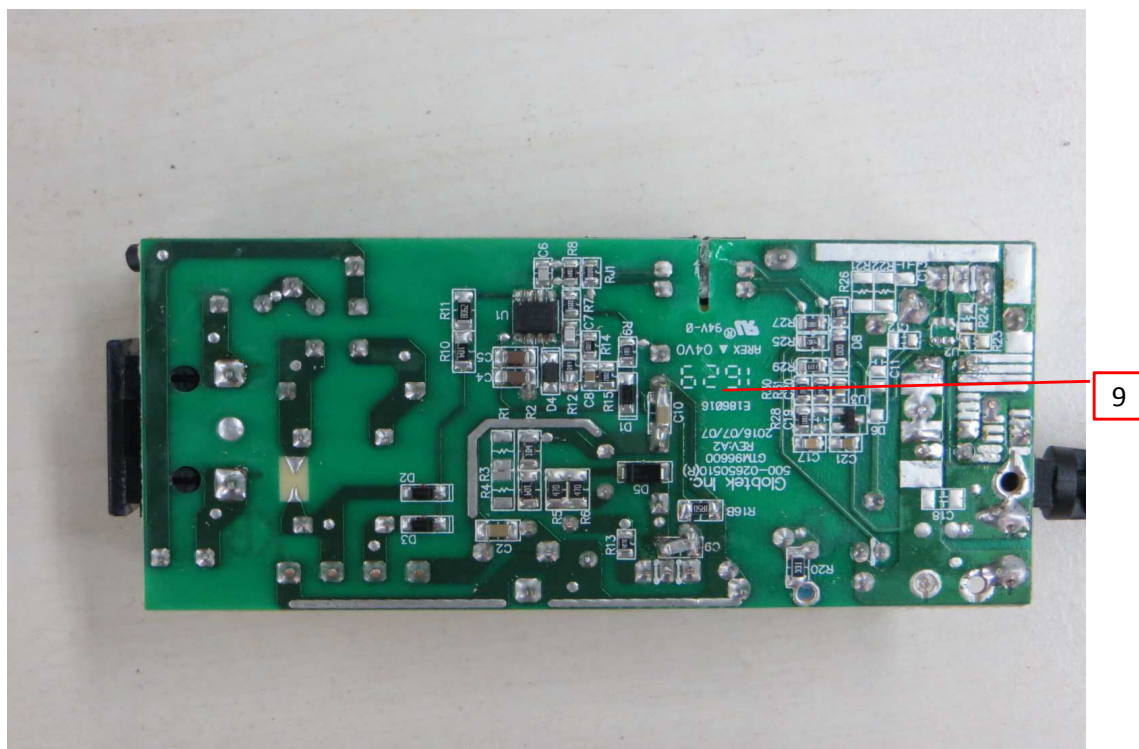


Photo 10 - External view (For GT*96600-*56***)

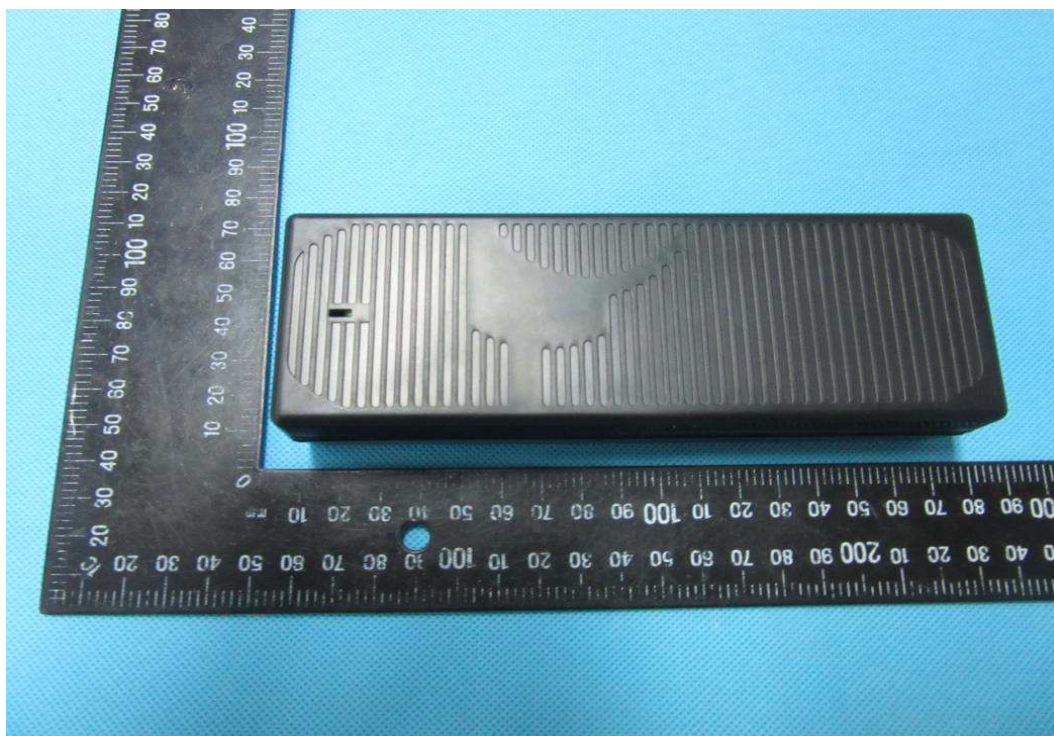

3.0 Product Photographs

Photo 11 - External view (For GT*96600-*56**)



Photo 12 - External view with lug (For GT*96600-*56**)



3.0 Product Photographs

Photo 13 - Internal view (For GT*96600-*56***)


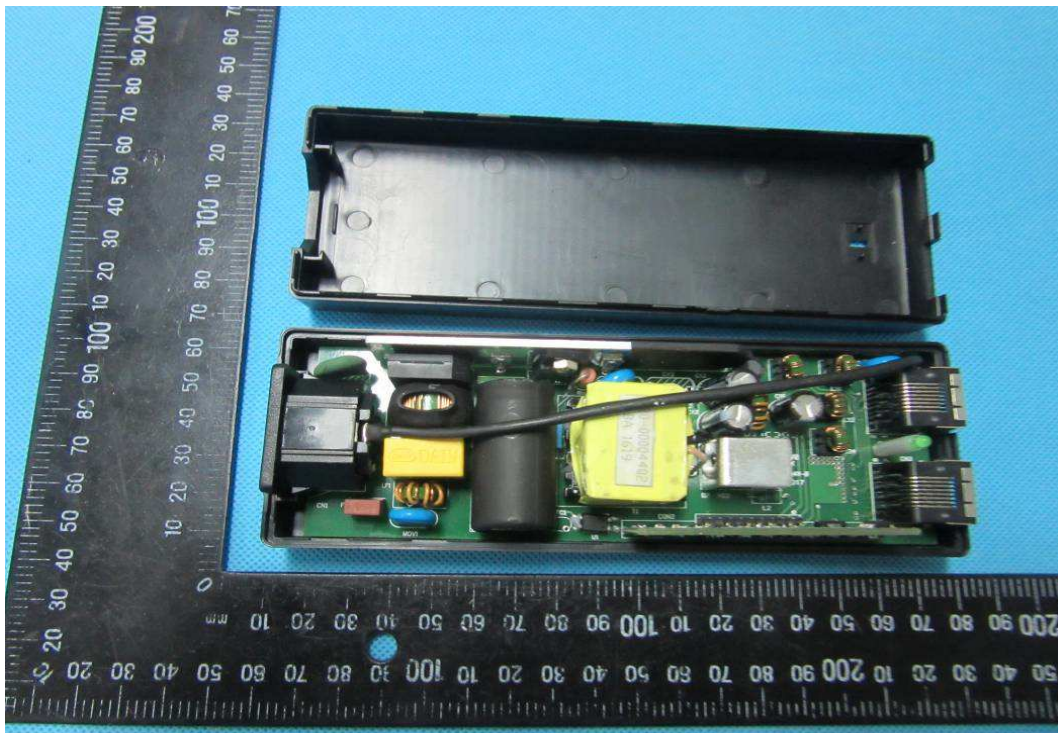


Photo 14 - PCB (For GT*96600-*56***)

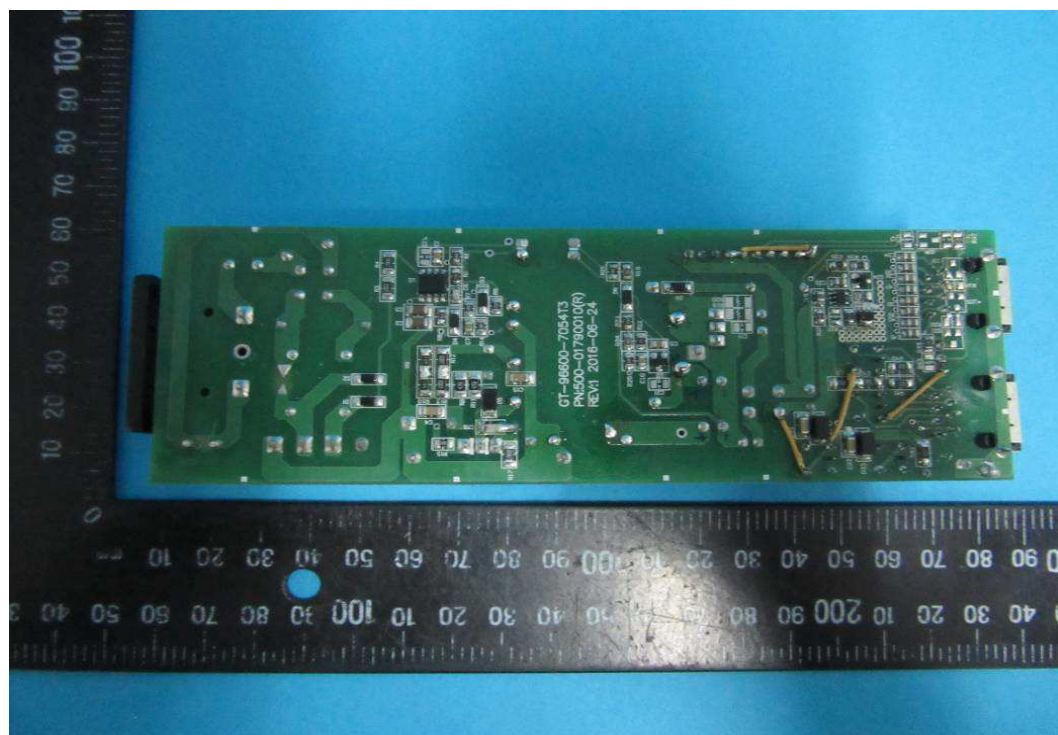

3.0 Product Photographs

Photo 15 - Transformer


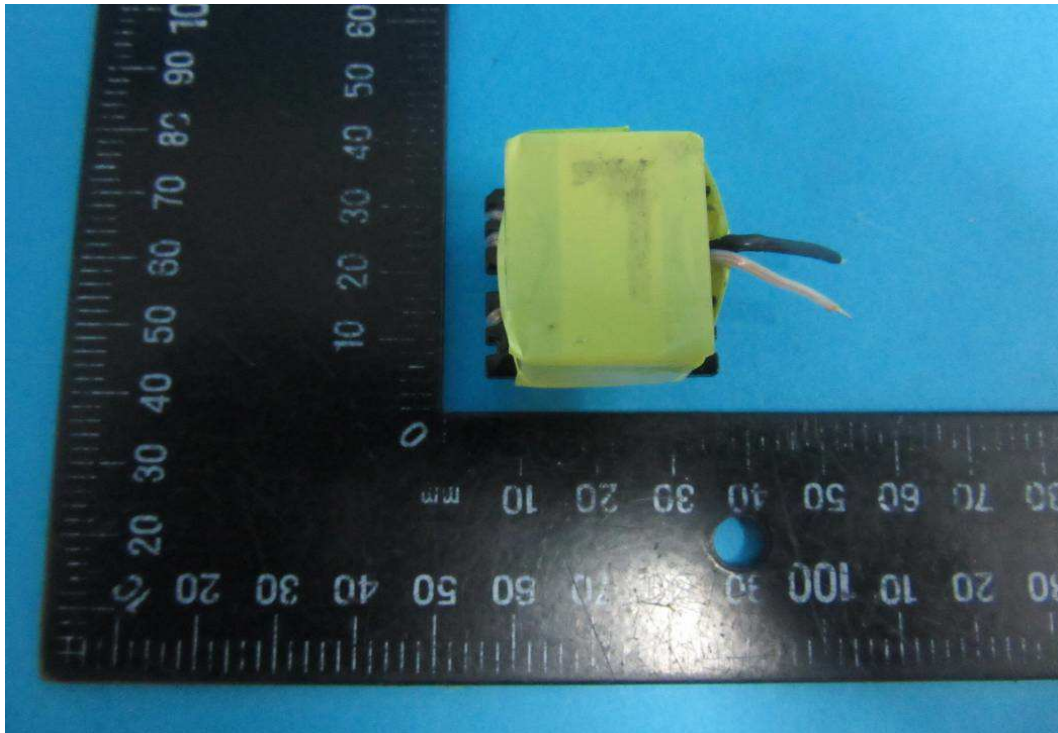


Photo 16 - Transformer

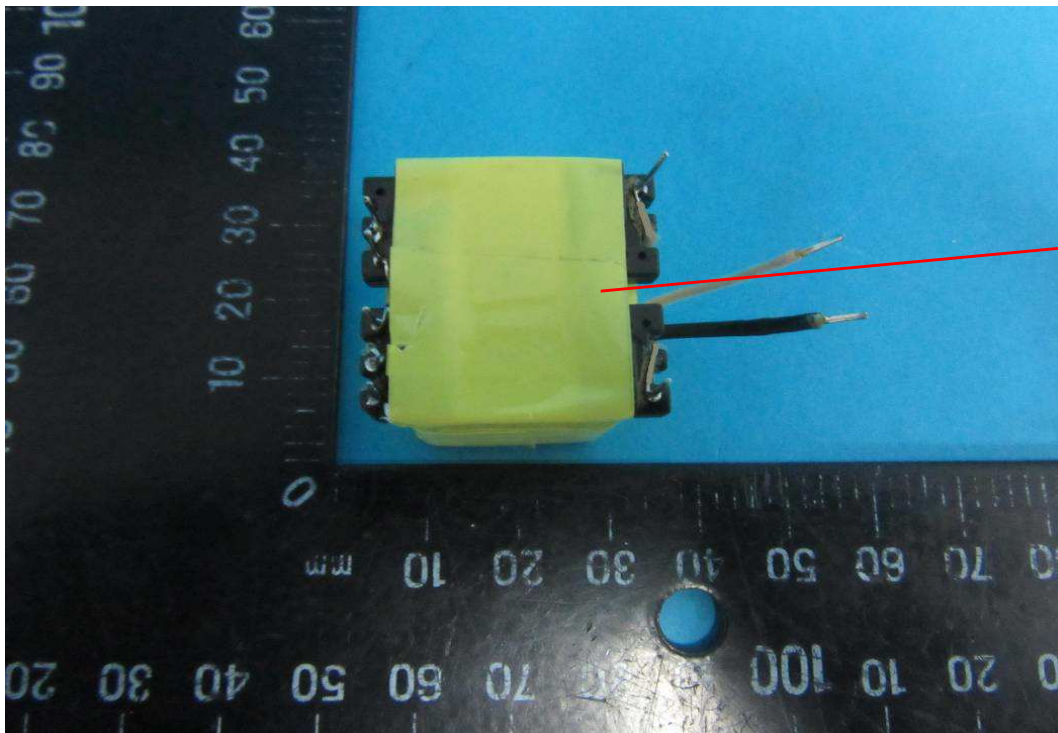

13e

3.0 Product Photographs

Photo 17 - Transformer


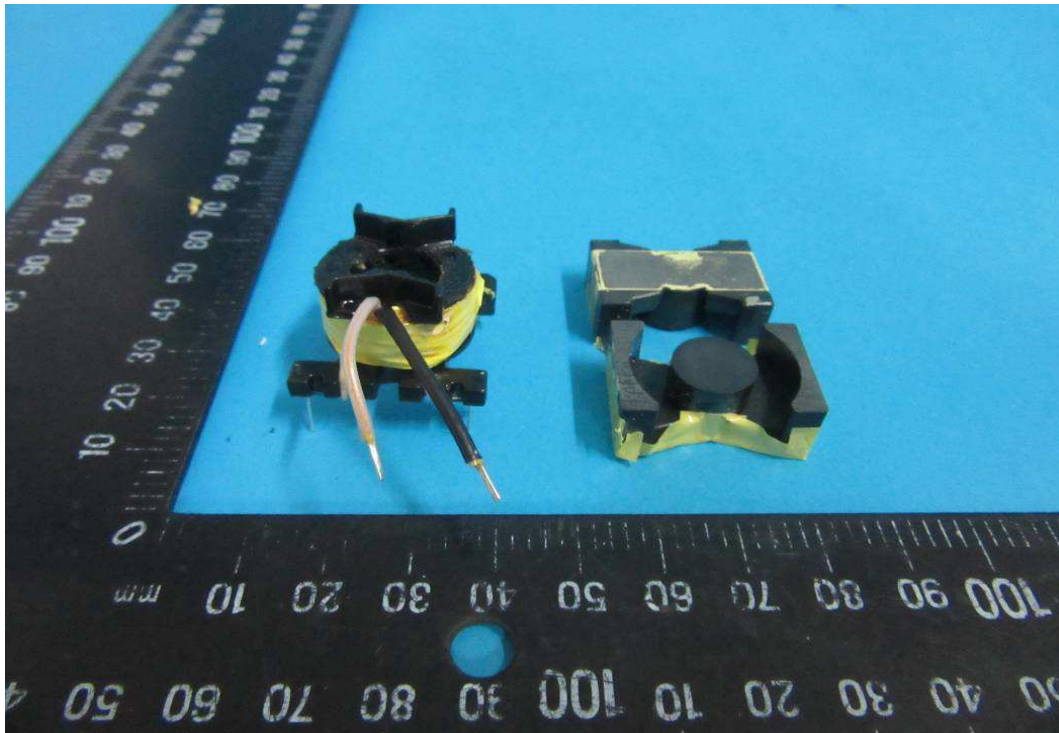


Photo 18 - Transformer

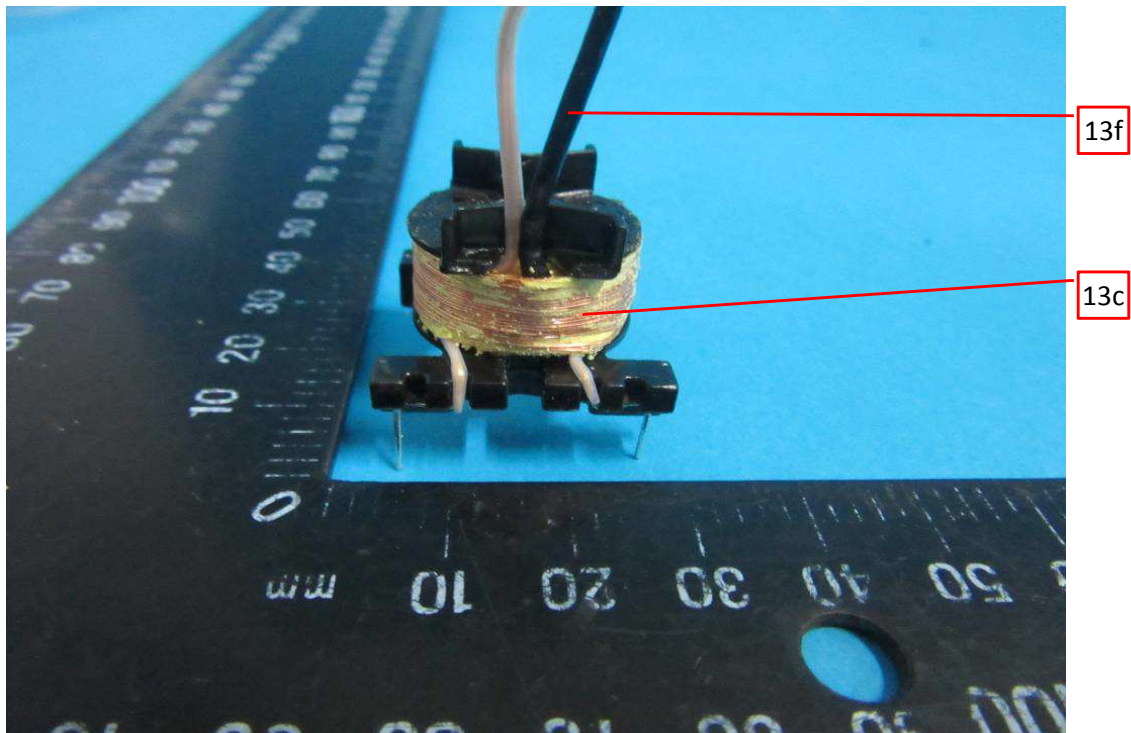

3.0 Product Photographs

Photo 19 - Transformer


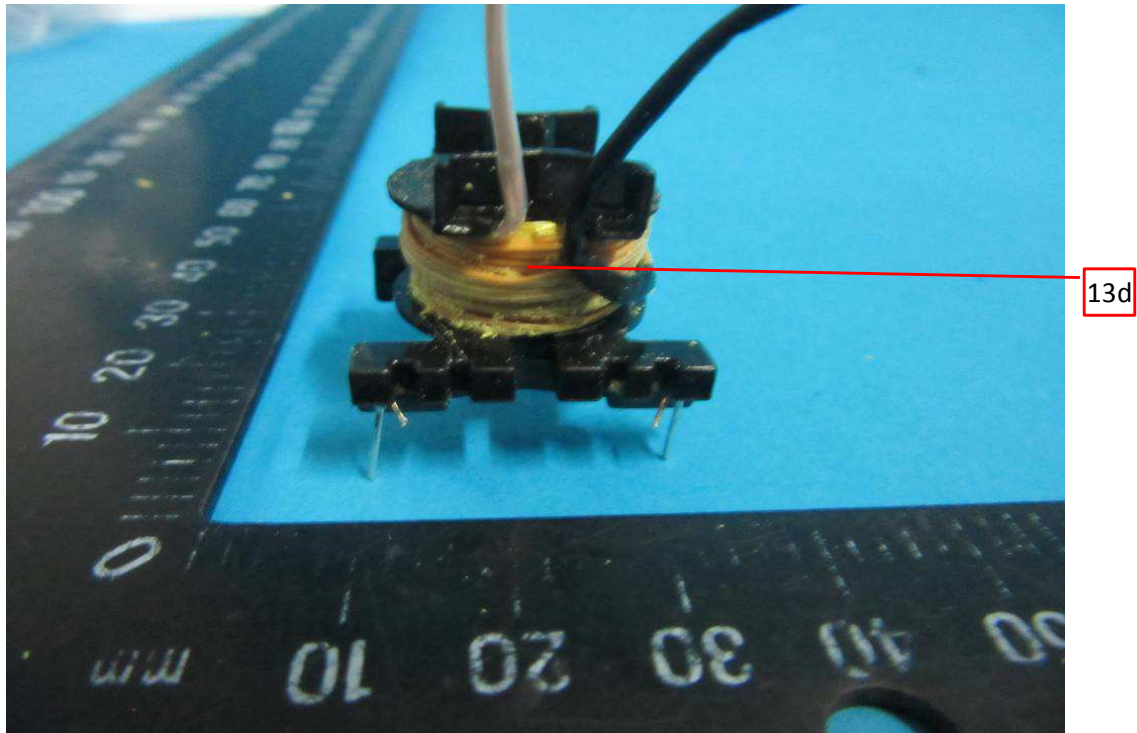


Photo 20 - Transformer

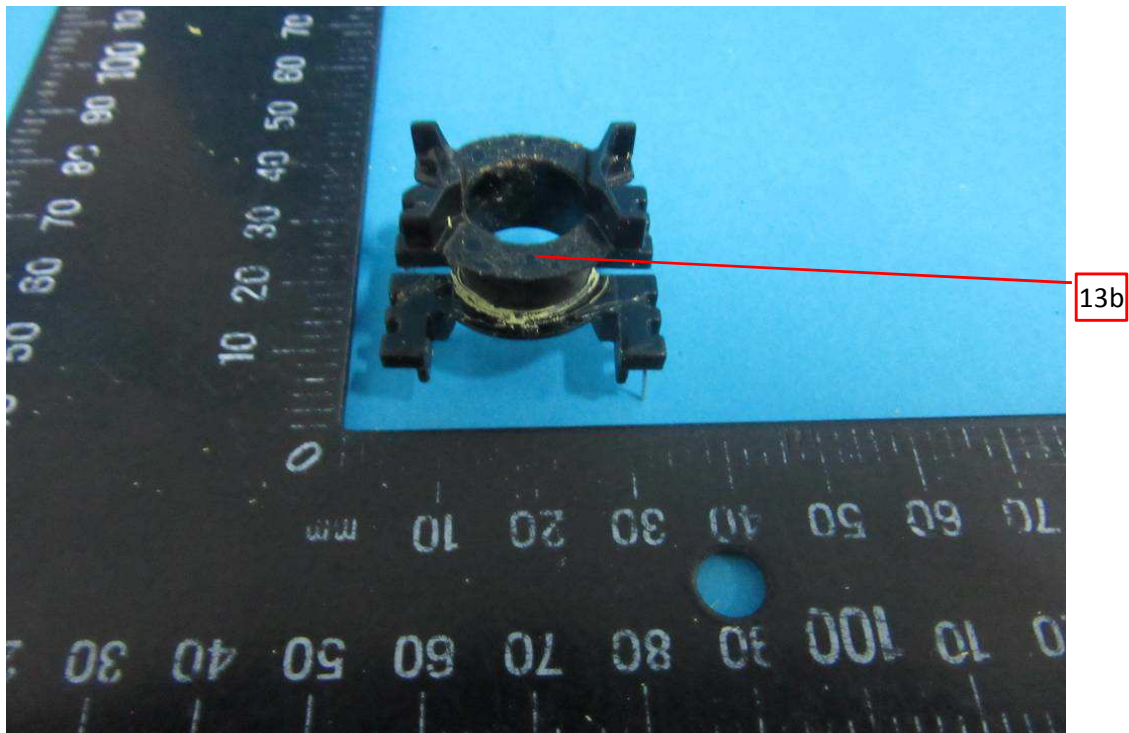

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
2	1	Enclosure (All models)	SABIC INNOVATIVE PLASTICS B V	SE1	PPE+PS, V-1, HWI 1, HAI 2, 105°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
				SE1X	PPE+PS, V-1, HWI 0, HAI 0, 105°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
				SE100	PPE+PS, V-1, HWI 2, HAI 0, 95°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
				C2950	PC/ABS, V-0, HWI 3, HAI 0, 85°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
				EXCY0098	PC/ABS, V-0, 5VB, HWI 2, HAI 0, 90°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
				CX721	Fixed by ultrasonic welding and without opening;	cURus
				940	PC, V-0, HWI 3, HAI 3, 120°C, min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
				945	Fixed by ultrasonic welding and without opening;	cURus
			TEIJIN CHEMICALS LTD	LN-1250P	PC, V-0, HWI 3, HAI 0, 115°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
				LN-1250G	Fixed by ultrasonic welding and without opening;	cURus
			CHI MEI CORPORATION	PA-765A	ABS, V-0, 5VB, HWI 3, HAI 0, 80°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
				PC-540	PC/ABS, V-0, HWI 3, HAI 3, 70°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
2	2	Output cord	Various	1185	Min. 24AWG, min. 300Vac, min. 80°C, Wiring less than 1.8m long may be used if longer wiring introduces a risk of fire, electric shock, or injury to persons; Fully comply with ANSI/UL 758.	cURus
				2464		cURus
				2468		cURus
				SPT-1		cURus
				SPT-2		cURus
			Various	Various	Min. 24AWG, min. 300Vac, min. 80°C, performance parameter shall be equal to 1185, 2464, 2468, SPT-1 or SPT-2.	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
7	3	Appliance inlet	ZHEJIANG LECI ELECTRONICS CO LTD	DB-6	250VAC, 2.5A, standard sheet C6 type	cURus
				DB-8	250VAC, 2.5A, standard sheet C8 type	cURus
				DB-14	250VAC, 10A, standard sheet C14 type	cURus
			RICH BAY CO LTD	R-30790	250VAC, 2.5A, standard sheet C6 type	cURus
				R-201SN90	250VAC, 2.5A, standard sheet C8 type	cURus
				R-301SN	250VAC, 10A, standard sheet C14 type	cURus
			SUN FAIR ELECTRIC WIRE & CABLE (HK) CO LTD	S-02	250VAC, 2.5A, standard sheet C6 type	cURus
				S-01	250VAC, 2.5A, standard sheet C8 type	cURus
				S-03	250VAC, 10A, standard sheet C14 type	cURus
			TECX-UNIONS TECHNOLOGY CORP	TU-333	250VAC, 2.5A, standard sheet C6 type	cURus
				SO-222	250VAC, 2.5A, standard sheet C8 type	cURus
				TU-301-S	250VAC, 10A, standard sheet C14 type	cURus
				TU-301-SP	type	cURus
			RONG FENG INDUSTRIAL CO LTD	RF-190	250VAC, 2.5A, standard sheet C6 type	cURus
				RF-180	250VAC, 2.5A, standard sheet C8 type	cURus
				SS-120	250VAC, 10A, standard sheet C14 type	cURus
				SS-120A	250VAC, 10A, standard sheet C18 type	cURus
			INALWAYS CORP	0724	250VAC, 2.5A, standard sheet C6 type	cURus
				0721	250VAC, 2.5A, standard sheet C8 type	cURus
				0711	250VAC, 10A, standard sheet C14 type	cURus
			ZHE JIANG BEI ER JIA ELECTRONIC CO LTD	ST-A04-002	250VAC, 2.5A, standard sheet C6 type	cURus
				ST-A03-005	250VAC, 2.5A, standard sheet C8 type	cURus
				ST-A01-003J	250VAC, 10A, standard sheet C14 type	cURus
			SHENZHEN DELIKANG ELECTRONICS TECHNOLOGY CO LTD	CDJ-2	250VAC, 2.5A, standard sheet C6 type	cURus
				CDJ-8	250VAC, 2.5A, standard sheet C8 type	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
7	4	Fuse (F1, F2) (F2 is optional) (F1, F2 for GT*96600-**** series, F1 For GT*96600-*56*** series)	CONQUER ELECTRONICS CO LTD	MST series	T3.15A, 250V	cURus
			EVER ISLAND ELECTRIC CO LTD & WALTER ELECTRIC	2010	T3.15A, 250V	cURus
				ICP		cURus
			BEL FUSE INC	RST series	T3.15A, 250V	cURus
			COOPER BUSSMANN LLC	SS-5	T3.15A, 250V	cURus
			SHENZHEN LANSON ELECTRONICS CO LTD	SMT	T3.15A, 250V	cURus
			DAS & SONS INTERNATIONAL LTD	385T series	T3.15A, 250V	cURus
			DONGGUAN BETTER ELECTRONICS TECHNOLOGY CO LTD	932	T3.15A, 250V	cURus
			HOLLYLAND CO LTD	5ET	T3.15A, 250V	cURus
			SUNNY EAST ENTERPRISE CO LTD	CFD series	T3.15A, 250V	cURus
			CONQUER ELECTRONICS CO LTD	MET series	T3.15A, 250V	cURus
			ZHONG SHAN LANBAO ELECTRICAL APPLIANCES CO LTD	RTI-10 series	T3.15A, 250V	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
7	5	X capacitor (Optional)	CHENG TUNG INDUSTRIAL CO LTD	CTX	Min. 300VAC, Max. 0.47μF, -40~+110°C, X1 or X2	cURus
			TENTA ELECTRIC INDUSTRIAL CO LTD	MEX	Min. 250VAC, Max. 0.47μF, -40~+100°C, X1 or X2	cURus
			JOEY ELECTRONICS (DONG GUAN) CO LTD	MPX	Min. 300VAC, Max. 0.47μF, -40~+110°C, X1 or X2	cURus
			ULTRA TECH XIPHI ENTERPRISE CO LTD	HQX	Min. 250VAC, Max. 0.47μF, -40~+110°C, X2	cURus
			YUON YU ELECTRONICS CO LTD	MPX Series	Min. 250VAC, Max. 0.47μF, -40~+100°C, X2	cURus
			SINHUA ELECTRONICS (HUZHOU) CO LTD	MPX	Min. 250VAC, Max. 0.47μF, -40~+110°C, X1 or X2	cURus
			JIANGSU XINGHUA HUAYU ELECTRONICS CO LTD	MPX	Min. 250VAC, Max. 0.47μF, -40~+100°C, X2	cURus
			DAIN ELECTRONICS CO LTD	MPX	Min. 250VAC, Max. 0.47μF, -40~+110°C, X1 or X2	cURus
				MEX		cURus
				NPX		cURus
			FOSHAN SHUNDE CHUANG GE ELECTRONIC INDUSTRIAL CO LTD	MKP-X2	Min. 250VAC, Max. 0.47μF, -40~+105°C, X2	cURus
			OKAYA ELECTRIC INDUSTRIES CO LTD	RE Series	Min. 275VAC, Max. 0.47μF, -40~+100°C, X2	cURus
			VISHAY CAPACITORS BELGIUM N V	F1772	Min. 310VAC, Max. 0.47μF, -40~+110°C, X2	cURus
			WINDAY ELECTRONIC INDUSTRIAL CO LTD	MPX	Min. 250VAC, Max. 0.47μF, -40~+100°C, X2	cURus
			SHENZHEN JINGHAO CAPACITOR CO LTD	CBB62B	Min. 250VAC, Max. 0.47μF, -40~+110°C, X2	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
7	6	Varistor (Optional)	THINKING ELECTRONIC INDUSTRIAL CO LTD	TVR10471K	Max. Continuous voltage: min 300Vac(rms), 85°C	cURus
				TVR14471K		cURus
			CENTRA SCIENCE CORP	CNR-10D471K	Max. Continuous voltage: min 300Vac(rms), 105°C	cURus
				CNR-14D471K		cURus
			SUCCESS ELECTRONICS CO LTD	SVR10D471K	Max. Continuous voltage: min 300Vac(rms), 105°C	cURus
				SVR14D471K		cURus
			WALSIN TECHNOLOGY CORP	VZ14D471K	Max. Continuous voltage: min 300Vac(rms), 85°C	cURus
			LIEN SHUN ELECTRONICS CO LTD	14D471K	Max. Continuous voltage: min 300Vac(rms), 105°C	cURus
			CERAMATE TECHNICAL CO LTD	10D471K	Max. Continuous voltage: min 300Vac(rms), 105°C	cURus
				14D471K		cURus
			BRIGHTKING (SHENZHEN) CO LTD	14D471K	Max. Continuous voltage: min 300Vac(rms), 105°C	cURus
				10D471K		cURus
7	7	Y capacitor (CY1, CY2) (Optional) (CY1 For GT*96600-*56*** series)	JOYIN CO LTD	10N471K	Max. Continuous voltage: min 300Vac(rms), 85°C	cURus
				14N471K		cURus
			TDK CORPORATION	CD	Y1, AC250V, max 2200pF, -25~+85°C	cURus
			SUCCESS ELECTRONICS CO LTD	SE	Y1, AC250V, max 2200pF, -40~+125°C	cURus
				SB		cURus
			MURATA MFG CO LTD	KX	Y1, AC250V, max 2200pF, -40~+125°C	cURus
			WALSIN TECHNOLOGY CORP	AH series	Y1, AC250V, max 2200pF, -40~+125°C	cURus
			JYA-NAY CO LTD	JN	Y1, AC250V, max 2200pF, -25~+125°C	cURus
			HAOHUA ELECTRONIC CO	CT7	Y1, AC250V, max 2200pF, -30~+125°C	cURus
			JERRO ELECTRONICS CORP	JX	Y1, AC250V, max 2200pF, -40~+125°C	cURus
			WELSON INDUSTRIAL CO LTD	WD	Y1, AC250V, max 2200pF, -55~+125°C	cURus
			JYH CHUNG ELECTRONICS CO LTD	JD	Y1, AC400V, max 2200pF, -40~+85°C	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
7	8	Photo coupler (U1 or U4) (U4 for GT*96600-**** series, U1 For GT*96600-*56*** series)	EVERLIGHT ELECTRONICS CO LTD	EL817	Double protection optical isolators, providing 5000 vac isolation	cURus
			COSMO ELECTRONICS CORP	K1010	Double protection optical isolators, providing 5000 vac isolation	cURus
				KP1010		cURus
			LITE-ON TECHNOLOGY CORP	LTV-817	Double protection optical isolators having an isolation voltage of 5300 Vrms	cURus
			FAIRCHILD SEMICONDUCTOR CORP	H11A817B	Double Protection Optical isolators, providing 5000 vac isolation	cURus
				FOD817B		cURus
			SHARP CORP ELECTRONIC COMPONENTS AND DEVICES BU	PC817	Double protection optical isolated switches, providing 5000 Vac isolation	cURus
			BRIGHT LED ELECTRONICS CORP	BPC-817	Optical isolators, double protection isolation	cURus
				A/B/C/D/L		cURus
				BPC-817M		cURus
				BPC-817S		cURus
			TOSHIBA CORP, SEMICONDUCTOR CO DISCRETE SEMICONDUCTOR DIV	TLP817F	Optical isolators, double protection type, rated 5000 Vac	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
9	9	PCB	WALEX ELECTRONIC (WUXI) CO LTD	T2	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				T2A		cURus
				T2B		cURus
				T4		cURus
			DONGGUAN HE TONG ELECTRONICS CO LTD	CEM1	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				2V0		cURus
				FR4		cURus
			CHEERFUL ELECTRONIC (HK) LTD	02	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				03		cURus
				03A		cURus
			DONGGUAN DAYSUN ELECTRONIC CO LTD	DS2	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			SUZHOU CITY YILIHUA ELECTRONICS CO LTD	YLH-1	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			SHANGHAI AREX PRECISION ELECTRONIC CO LTD	04V0	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				03V0		cURus
				02V0		cURus
			BRITE PLUS ELECTRONICS (SUZHOU) CO LTD	DKV0-3A	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				DGV0-3A		cURus
			KUOTIANG ENT LTD	C-2	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				C-2A		cURus
			PACIFIC WIN INDUSTRIAL LTD	PW-02	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				PW-03		cURus
			SHENZHEN TONGCHUANGXI N ELECTRONICS CO LTD	TCX	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			YUANMAN PRINTED CIRCUIT CO LTD	1V0	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			SUZHOU XINKE ELECTRONICS CO LTD	XK-2	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				XK-3		cURus
			KUNSHAN CITY HUA SHENG CIRCUIT BOARD CO LTD	HS-S	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			JIANGSU DIFEIDA ELECTRONICS CO LTD	DFD-1	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			HUIZHOU SHUNJIA ELECTRONICS CO LTD	SJ-B	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			Various	Various	Min. 1.6 mm thickness, min. V-0, 130°C, Fully comply with UL 796	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
8	10	Earthing wire for Class I models	KUNSHAN NEW ZHICHENG ELECTRONICS TECHNOLOGIES CO LTD	1015	Min. 20 AWG, Min. 300V, Min. 80°C	cURus
				1007		cURus
				1185		cURus
			ZHUANG SHAN CHUAN ELECTRICAL PRODUCTS (KUNSHAN) CO LTD	1015	Min. 20 AWG, Min. 300V, Min. 80°C	cURus
				1007		cURus
				1185		cURus
			DONGGUAN CHUANTAI WIRE PRODUCTS CO LTD	1015	Min. 20 AWG, Min. 300V, Min. 80°C	cURus
				1007		cURus
				1185		cURus
			YONG HAO ELECTRICAL INDUSTRY CO LTD	1015	Min. 20 AWG, Min. 300V, Min. 80°C	cURus
				1007		cURus
				1185		cURus
			DONGGUAN GUNEETAL WIRE & CABLE CO LTD	1015	Min. 20 AWG, Min. 300V, Min. 80°C	cURus
				1007		cURus
				1185		cURus
			SHENG YU ENTERPRISE CO LTD	1015	Min. 20 AWG, Min. 300V, Min. 80°C	cURus
				1007		cURus
				1185		cURus
			KUNSHAN XINGHONGMEN G ELECTRONIC CO LTD	1015	Min. 20 AWG, Min. 300V, Min. 80°C	cURus
				1007		cURus
				1185		cURus
			SUZHOU YEMAO ELECTRONIC CO LTD	1015	Min. 20 AWG, Min. 300V, Min. 80°C	cURus
				1007		cURus
				1185		cURus
			Various	Various	Min. 20 AWG, Min. 300V, Min. 80°C	cURus
8	11	Heat-shrinkable tubing (Optional)	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR	600V, 125°C	cURus
				RSFR-H		cURus
				RSFR-HPF		cURus
			QIFURUI ELECTRONICS CO	QFR-h	600V, 125°C	cURus
			DONGGUAN SALIPT CO LTD	SALIPT S-901-300	Min. 300V, 125°C	cURus
				SALIPT S-901-600		cURus
			GUANGZHOU KAIHENG ENTERPRISE GROUP	K-2 (+)	Min. 300V, 125°C	cURus
				K-2 (CB)		cURus
			CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-HFT	Min. 300V, 125°C	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
6	12	Insulating sheet (Optional)	FORMEX,DIV OF IL TOOL WORKS INC, FRMRLY FASTEX, DIV OF IL TOOL WORKS INC	FORMEX GK series	V-0, min. 0.4 mm thickness, 115°C	cURus
			MIANYANG LONGHUA FILM CO LTD	PP-WT-20	VTM-0, min. 0.4 mm thickness, 65°C	cURus
			SKC CO LTD	SH71S	VTM-2, min. 0.4 mm thickness, 105°C	cURus
			TORAY INDUSTRIES INC	Lumirror H10	VTM-2, min. 0.4 mm thickness, 105°C	cURus
			SABIC INNOVATIVE PLASTICS US L L C	FR60 series	V-0, min. 0.4 mm thickness, 130°C	cURus
				FR63 series		cURus
				FR65 series		cURus
				FR7 series		cURus
				FR700 series		cURus
			MIANYANG LONGHUA FILM CO LTD	PP-BK series	V-0, min. 0.4 mm thickness, 80°C	cURus
				PP-WT series		cURus
			ITW ELECTRONICS COMPONENTS/ PRODUCTS (SHANGHAI) CO LTD	FORMEX-18	V-0, min. 0.4 mm thickness, 100°C	cURus
				FORMEX-17		cURus
			GLOBTEK INC	TF058	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:5.0V-8.9V;	NR
				TF059	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:9.0V-15.0V;	NR
				TF063	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:15.1V-20.0V;	NR
				TF060	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:20.1V-28.0V;	NR
				TF064	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:28.1V-40.0V;	NR

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
				TF061	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:40.1V-54.0V;	NR
				TF072	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:56.0V;	NR
			ENG ELECTRIC CO LTD	TF058	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:5.0V-8.9V;	NR
				TF059	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:9.0V-15.0V;	NR
				TF063	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:15.1V-20.0V;	NR
				TF060	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:20.1V-28.0V;	NR
				TF064	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:28.1V-40.0V;	NR
				TF061	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:40.1V-54.0V;	NR
				TF072	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:56.0V;	NR
				TF058	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:5.0V-8.9V;	NR
				TF059	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:9.0V-15.0V;	NR

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
			SHAN DONG BOAM ELECTRIC CO LTD	TF063	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:15.1V-20.0V;	NR
				TF060	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:20.1V-28.0V;	NR
				TF064	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:28.1V-40.0V;	NR
				TF061	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:40.1V-54.0V;	NR
				TF072	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:56.0V;	NR
			WUXI HAOPUWEI ELECTRONICS CO LTD	TF058	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:5.0V-8.9V;	NR
				TF059	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:9.0V-15.0V;	NR
				TF063	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:15.1V-20.0V;	NR
				TF060	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:20.1V-28.0V;	NR
				TF064	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:28.1V-40.0V;	NR

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
				TF061	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:40.1V-54.0V;	NR
				TF072	Class B, with insulation system and critical component shown as below items (13a - 13f), For output voltage range:56.0V;	NR
7	13a	Insulation system (Not shown)	ENG ELECTRIC CO LTD	ENG130-1	Class B	cURus
			GLOBTEK INC	GTX-130-TM	Class B	cURus
			SHAN DONG BOAM ELECTRIC CO LTD	BOAM-01	Class B	cURus
			WUXI HAOPUWEI ELECTRONICS CO LTD	ZT-130	Class B	cURus
20	13b	Bobbin	CHANG CHUN PLASTICS CO LTD	T375J	V-0, 150°C, thickness 0,45 mm min.	cURus
				T375HF		cURus
				4130	V-0, 140°C, thickness 0,74 mm min.	cURus
			SUMITOMO BAKELITE CO LTD	PM-9820	V-0, 150°C, thickness 0,45 mm min.	cURus
			HITACHI CHEMICAL CO LTD	CP-J-8800	V-0, 150°C, thickness 0,45 mm min.	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
18	13c	Magnet wire	PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD	UEWN/U	MW28-C, 130°C	cURus
				UEWS/U	MW75-C, 130°C	cURus
			JUNG SHING WIRE CO LTD	UEW-4	MW75-C, 130°C	cURus
				UEY-2	MW28-C, 130°C	cURus
			JIANGSU HONGLIU MAGNET WIRE TECHNOLOGY CO LTD	2UEW/130	MW75-C, 130°C	cURus
			CHANGZHOU DAYANG WIRE & CABLE CO LTD	2UEW/130	MW75-C, 130°C	cURus
			WUXI JUFENG COMPOUND LINE CO LTD	2UEWB	MW75#, 130°C	cURus
			JIANGSU DARTONG M & E CO LTD	UEW	MW75-C, 130°C	cURus
			SHANDONG SAINT ELECTRIC CO LTD	UEW/130	MW75#, 130°C	cURus
19	13d	Triple-insulated wire	ZHEJIANG LANGLI ELECTRIC EQUIPMENTS CO LTD	UEW	MW79#, 130°C	cURus
			GREAT LEOFLON INDUSTRIAL CO LTD	TRW(B)	Reinforced Insulation, rated 130°C (Class B), 1.41 kVolts peak for Information Technology;	cURus
			COSMOLINK CO LTD	TIW-M(B)	Reinforced Insulation, rated 130°C (Class B), 1.41 kVolts peak for Information Technology;	cURus
			FURUKAWA ELECTRIC CO LTD	TEX-E	Reinforced Insulation, rated 130°C (Class B), 1.41 kVolts peak for Information Technology;	cURus
			TOTOKU ELECTRIC CO LTD	TIW-2	Reinforced Insulation, rated 130°C (Class B), 1.40 kVolts peak for Information Technology;	cURus
			E&B TECHNOLOGY CO LTD	E&B-XXXB	Reinforced Insulation, rated 130°C (Class B), 1.40 kVolts peak for Information Technology;	cURus
				E&B-XXXB-1		cURus
			CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-TIW	Reinforced Insulation, rated 130°C (Class B), 1.41 kVolts peak for Information Technology;	cURus
			SHENZHEN JIUDING NEW MATERIAL CO LTD	DTIW-B	Reinforced Insulation, rated 130°C (Class B), 1.40 kVolts peak for Information Technology;	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
16	13e	Insulating tape	3M COMPANY ELECTRICAL MARKETS DIV (EMD)	1350F-1	130°C	cURus
				1350T-1		cURus
				44		cURus
			BONDTEC PACIFIC CO LTD	370S	130°C	cURus
			JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	PZ	130°C	cURus
				CT		cURus
				WF		cURus
			JINGJIANG JINGYI ADHESIVE PRODUCT CO LTD	JY25-A	130°C	cURus
			CHANG SHU LIANG YI TAPE INDUSTRY CO LTD	LY-XX	130°C	cURus
18	13f	PTFE tubing	GREAT HOLDING INDUSTRIAL CO LTD	TFT	300V, 200°C	cURus
				TFS	600V, 200°C	cURus
			SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	WF	600V, 200°C	cURus
			CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-TT-T	300V, 200°C	cURus
				CB-TT-S	600V, 200°C	cURus

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
1	14	Adhesive-Type Label (Not shown)	DONGGUAN XIANGQUAN PRINTING CO LTD	XQ03	Temperature range: -40~+80°C;	cURus
			FAN JA PAPER PRINTING CO LTD	FJ-03-3	Temperature range: -40~+80°C;	cURus
				FJ07		cURus
			E-LIN ADHESIVE LABEL CO LTD	EL-15	Temperature range: -40~+80°C;	cURus
			SHENZHEN CORWIN PRINTING CO LTD	CW-01	Temperature range: -40~+80°C;	cURus
			YUEN CHANG SPECIAL PRINTING (SHENZHEN) CO LTD	JL-08	Temperature range: 0~+80°C;	cURus
			GlobTek	Various	Permanently secured Engraving or Silkscreen or Laser printing	NR
			Various	Various	Temperature range: min. -40 ~+80°C; Certified according UL 969.	cURus

NOTES:

- 1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.
- 2) "Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.
- 3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.

5.0 Critical Unlisted CEC Components
No Unlisted CEC components are used in this report.

6.0 Critical Features

Recognized Component - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

Listed Component - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

Unlisted Component - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

Critical Features/Components - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.

Construction Details - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

1. Spacing - In primary circuits, 2.5 mm minimum spacing are maintained through air and 2.5 mm minimum spacing are maintained over surfaces of insulating material between current-carrying parts of opposite polarity and 6.1 mm minimum spacing are maintained through air and 6.1 mm minimum spacing are maintained over surfaces between such current-carrying parts and dead-metal parts or low voltage isolated circuits.
2. Mechanical Assembly - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
3. Corrosion Protection - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
4. Accessibility of Live Parts - For adapter models, all uninsulated live parts in primary circuitry are housed within a non-metallic enclosure constructed with no openings and metal enclosure earthed with ventilation holes other than those specifically described in Sections 4 and 5.
5. Grounding - All exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord and the equipment grounding terminal.
6. Polarized Connection - This product is provided with a polarized power supply connection.
7. Internal Wiring - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At points where internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets. UL approved wiring is used as secondary output lead wire of SELV circuits.
8. Schematics - Refer to Illustration No(s). 2 to 2c for schematics & 3 and 3a for PCB layout requiring verification during Field Representative Inspection Audits.
9. Markings - The product is marked on a labeling system as described in item No. 14 of Section 4.0 or by molding into polymeric enclosure as follows: brand name, model number, electrical ratings, manufacturer. Refer to Illustration No. 4 for details.
10. Cautionary Markings - Cautionary marking is not required.
11. Transformer - Supplier records must be provided that indicate the received shipment of transformers (section 4.0, item 13) was constructed as indicated in Illustrations 5a to 5c. These records must be available at the factory for inspection on every received shipment.
12. Safety Instructions - Instructions for installation and use of this product are provided by the manufacturer. They are kept in file and need not be repeated here.

7.0 Illustrations

Illustration 1 - Model list

GT*96600-**-T2/T2A/T3/T3A/T2L/T2AL/T3L/T3AL* Desktop models

Model	Output Voltage	Max. output current	Max. output power
GT*96600-**-T2/T2A/T3/T3A/T2L/T2AL/T3L/T3AL*	5-6.7V	8A	40W
GT*96600-**-T2/T2A/T3/T3A/T2L/T2AL/T3L/T3AL*	6.8-11V	6A	60W
GT*96600-**-T2/T2A/T3/T3A/T2L/T2AL/T3L/T3AL*	11.1-54V	5.42A	65W

GT*96600-***-R2/R3A* External/Hybrid models

Model	Output Voltage	Max. output current	Max. output power
GT*96600-***-R2/R3A*	5-6.7V	8A	40W
GT*96600-***-R2/R3A*	6.8-11V	6A	60W
GT*96600-***-R2/R3A*	11.1-54V	5.42A	65W



GT*96600-*56-T2/T2A/T3/T3A-AP/PP/SP* Desktop models

Model	Output Voltage	Max. output current	Max. output power
GT*96600-*56-T2/T2A/T3/T3A-AP/PP/SP*	56V	1.25A	70W

For models GTM96600-2005-R2 / GTM96600-2005-R3A: output 5VDC, 4.0A at Tma=70 Deg.C;
 For models GTM96600-2412-R2 / GTM96600-2412-R3A: output 12VDC, 2.0A at Tma=70 Deg.C;
 For models GTM96600-2436-R2 / GTM96600-2436-R3A: output 36VDC, 0.66A at Tma=70 Deg.C;
 For models GTM96600-2448-R2 / GTM96600-2448-R3A: output 48VDC, 0.5A at Tma=70 Deg.C;
 For models GTM96600-2454-R2 / GTM96600-2454-R3A: output 54VDC, 0.44A at Tma=70 Deg.C;
 For models GT-96600-7056-T3-AP/ GT-96600-7056-T2-AP: output 56VDC, 1.25A at Tma=40 Deg.C;

7.0 Illustrations

Illustration 4 - Marking




Note:

1. The marking plates of the other models listed in this report are identical with below except model name and output parameter.
2. The date code of manufacturing is presented as WWYY, YY = manufacturing year, WW = the week of the manufacturing year, e.g. 0216 = The second week of 2016.

7.0 Illustrations

Illustration 5a - Transformer specification

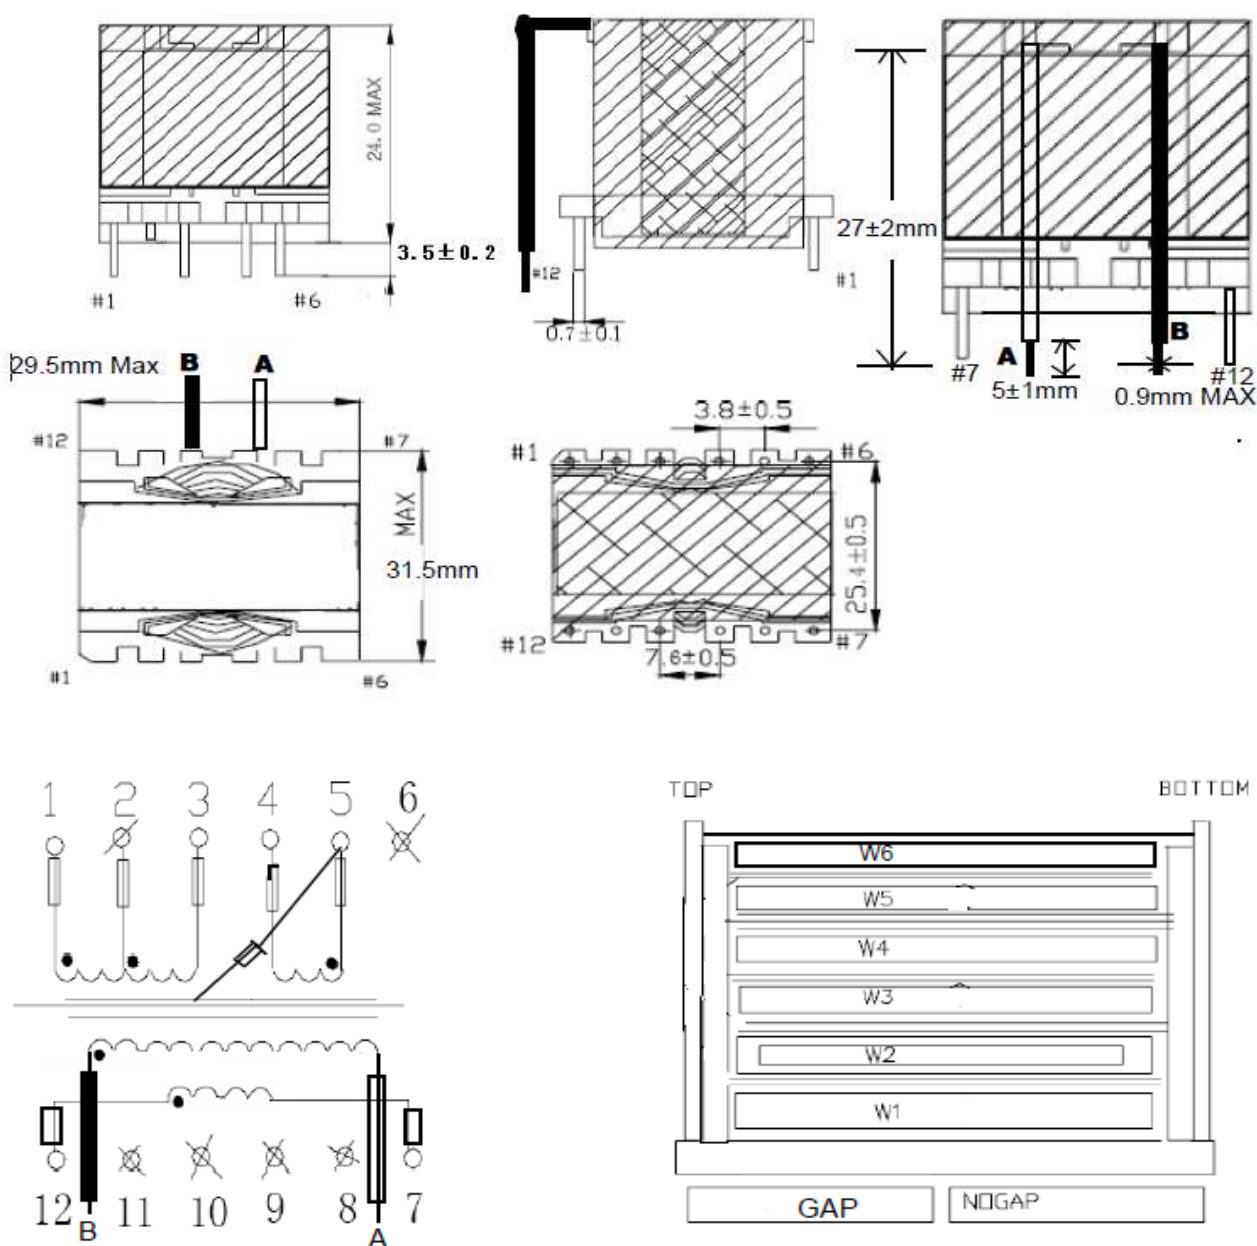

For transformer model TF058

顺序 Order	PIN 脚 PIN No.	铜线 发行章 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	1---2	2UEW0.30*2mm Class B	25T			2LAYEAR
		2turns W=9.5mm,T=0.025mm insulation tape				
W2	4	Coper foil 8mm*0.05(非自粘)	1.1T			Center
		2turns W=9.5mm,T=0.025mm insulation tape				
W3	A---B	TRWB0.55*4mm	3T			1LAYEAR
		2turns W=9.5mm,T=0.025mm insulation tape				
W4	12---7	TRWB0.20mm	7T		EVEN SPACING	
		2turns W=9.5mm,T=0.025mm insulation tape				
W5	5---4	2UEW0.25*2mm Class B	9T		EVEN SPACING	
		2turns W=9.5mm,T=0.025mm insulation tape				
W6	2---3	2UEW0.30*2 Class B	11T			1LAYEAR

7.0 Illustrations

Illustration 5b - Transformer specification

For transformer model TF059

顺序 Order	PIN 脚 PIN No.	铜线 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	1---2	2UEW0.30*2mm Class B	25T			2LAYEAR
2turns W=9.5mm,T=0.025mm insulation tape						
W2	4	Coper foil 8mm*0.05(非自粘)	1.1T			Center
2turns W=9.5mm,T=0.025mm insulation tape						
W3	A---B	TRWB0.55*4mm	4T			1LAYEAR
2turns W=9.5mm,T=0.025mm insulation tape						
W4	12---7	TRWB0.20mm	4T		EVEN SPACING	
2turns W=9.5mm,T=0.025mm insulation tape						
W5	5---4	2UEW0.25*2mm Class B	5T		EVEN SPACING	
2turns W=9.5mm,T=0.025mm insulation tape						
W6	2---3	2UEW0.30*2 Class B	11T			1LAYEAR

For transformer model TF060

顺序 Order	PIN 脚 PIN No.	铜线 发行章 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	1---2	2UEW0.30*2mm Class B	25T			2LAYEAR
2turns W=9.5mm,T=0.025mm insulation tape						
W2	4	Coper foil 8mm*0.05(非自粘)	0.8T			Center
2turns W=9.5mm,T=0.025mm insulation tape						
W3	A---B	TRWB0.45*3mm	7T			2LAYEAR
2turns W=9.5mm,T=0.025mm insulation tape						
W4	5---4	2UEW0.25*2mm Class B	5T		EVEN SPACING	
2turns W=9.5mm,T=0.025mm insulation tape						
W5	2---3	2UEW0.30*2 Class B	11T			1LAYEAR

For transformer model TF061

顺序 Order	PIN 脚 PIN No.	铜线 发行章 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	1---2	2UEW0.30*2mm Class B	25T			2LAYEAR
2turns W=9.5mm,T=0.025mm insulation tape						
W2	5	Coper foil 8mm*0.05(非自粘)	0.7T			Center
2turns W=9.5mm,T=0.025mm insulation tape						
W3	A---B	TRWB0.40*2mm	13T			2LAYEAR
2turns W=9.5mm,T=0.025mm insulation tape						
W4	5---4	2UEW0.25*2mm Class B	5T		EVEN SPACING	
2turns W=9.5mm,T=0.025mm insulation tape						
W5	2---3	2UEW0.30*2 Class B	11T			1LAYEAR

7.0 Illustrations

Illustration 5c - Transformer specification

For transformer model TF063

顺序 Order	PIN 脚 PIN No.	铜线 发行章 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	1---2	2UEW0.30*2mm Class B	25T			2LAYEAR
2turns W=9.5mm, T=0.025mm insulation tape						
W2	4	Coper foil 8mm*0.05(非自粘)	1.1T			Center
2turns W=9.5mm, T=0.025mm insulation tape						
W3	A---B	TRWB0.45*4mm	5T			2LAYEAR
2turns W=9.5mm, T=0.025mm insulation tape						
W4	12---7	TRWB0.20mm	4T		EVEN SPACING	
2turns W=9.5mm, T=0.025mm insulation tape						
W5	5---4	2UEW0.25*2mm Class B	5T		EVEN SPACING	
2turns W=9.5mm, T=0.025mm insulation tape						
W6	2---3	2UEW0.30*2 Class B	11T			1LAYEAR

For transformer model TF064

顺序 Order	PIN 脚 PIN No.	铜线 发行章 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	1---2	2UEW0.30*2mm Class B	25T			2LAYEAR
2turns W=9.5mm, T=0.025mm insulation tape						
W2	5	Coper foil 8mm*0.05(非自粘)	0.9T			Center
2turns W=9.5mm, T=0.025mm insulation tape						
W3	A---B	TRWB0.55*2mm	10T			2LAYEAR
2turns W=9.5mm, T=0.025mm insulation tape						
W4	5---4	2UEW0.25*2mm Class B	5T		EVEN SPACING	
2turns W=9.5mm, T=0.025mm insulation tape						
W5	2---3	2UEW0.30*2 Class B	11T			1LAYEAR

For transformer model TF072

顺序 Order	PIN 脚 PIN No.	铜线 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	1-2	2UEW 0.3*2mm Class B	25			2LAYERS
2turns W=9.5mm, T=0.025mm Insulation tape						
W2	5	Copper foil 8mmX0.05mm 非自粘	0.7±0.05#			Center
2urns W=9.5mm, T=0.025mm Insulation tape						
W3	A-B	TRWB 0.40*2	15			2.3LAYERS
W4	7-12	TRWB 0.40	2			
3turns W=9.5mm, T=0.025mm Insulation tape						
W5	5-4	2UEW 0.25*2mm Class B	5		EVEN SPACING	
2turns W=9.5mm, T=0.025mm Insulation tape						
W6	2-3	2UEW 0.3*2mm Class B	11			1LAYER

8.0 Test Summary					
Evaluation Period	29-Jul-2016 to 25-Aug-2016			Project No.	160800341SHA
Sample Rec. Date	29-Jul-2016	Condition	Prototype	Sample ID.	0160729-41-001~025
Test Location	Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China				
Test Procedure	Testing Lab				
Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria.					
The following tests were performed:					
Test Description			Standard for Safety for Information Technology Equipment Safety Part 1: General Requirements: UL 60950-1 Issued: 2007/03/27 Ed: 2 Rev: 2014/10/14 & CSA C22.2 No. 60950-1 Issued: 2007/03/27 Ed: 2 (R2012) Amd. 1: 2011, Amd. 2: 2014		
			Clause		
Input test			1.6.2		
Marking test			1.7.11		
Finger test			2.1.1.1 b)		
Pin test			2.1.1.1 c)		
Energy hazards test			2.1.1.5		
Capacitor discharging test			2.1.1.7		
Voltage under normal conditions test			2.2.2		
Voltage under fault conditions test			2.2.3		
Limited current circuits test			2.4		
Limited power sources test			2.5		
Humidity condition test			2.9.2		
Determination of working voltage test			2.10.2		
Clearances measurement			2.10.3		
Creepage distances measurement			2.10.4		
Solid insulation measurement			2.10.5		
Steady force test, 10N			4.2.2		
Steady force test, 250N			4.2.4		
Drop test			4.2.6		
Stress relief test			4.2.7		
Strain on socket-outlet test			4.3.6		
Temperature tests			4.5.2		
Resistance to abnormal heat			4.5.5		
Touch current test			5.1		
Electric strength test			5.2		
Abnormal operating and fault conditions test			5.3		

Evaluation Period	12-Dec-2016 to 29-Dec-2016			Project No.	161200879SHA
Sample Rec. Date	12-Dec-2016	Condition	Prototype	Sample ID.	0161212-33-001~009
Test Location	Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China				
Test Procedure	Testing Lab				
Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria.					
Some tests have been evaluated in 160800341SHA-001 and some critical tests performed again in below standard for new added model:					
Test Description			Information Technology Equipment Safety Part 1: General Requirements >Valid without technical revision: 01Jan2022< [UL 60950-1:2007 Ed.2 +R:14Oct2014]		
			Information Technology Equipment Safety Part 1: General Requirements (R2012) >Valid without technical revision: 01Jan2022< [CSA C22.2#60950-1:2007 Ed.2 +A1;A2]		
			Clause		
Capacitor discharging test			2.1.1.7		



8.0 Test Summary	
Voltage under normal conditions test	2.2.2
Voltage under fault conditions test	2.2.3
Limited current circuits test	2.4
Limited power sources test	2.5
Determination of working voltage test	2.10.2
Clearances measurement	2.10.3
Creepage distances measurement	2.10.4
Temperature tests	4.5.2
Resistance to abnormal heat	4.5.5
Touch current test	5.1
Electric strength test	5.2
Abnormal operating and fault conditions test	5.3

Evaluation Period	28-May-2019 to 17-Jun-2019			Project No.	190502656SHA
Sample Rec. Date	28-May-2019	Condition	Prototype	Sample ID.	0190528-23-001~006
Test Location	Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China				
Test Procedure	Testing Lab				

Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria.

Some tests have been evaluated in 160800341SHA-001 and some critical tests performed again in below standard for new added model:

Test Description	Information Technology Equipment Safety Part 1: General Requirements >Valid without technical revision: 20Dec2020< [UL 60950-1:2007 Ed.2 +R:14Oct2014]
	Information Technology Equipment Safety Part 1: General Requirements (R2016) >Valid without technical revision: 20Dec2020< [CSA C22.2#60950- 1:2007 Ed.2 +A1;A2]
	Clause
Input test	1.6.2
Energy hazards test	2.1.1.5
Voltage under normal conditions test	2.2.2
Voltage under fault conditions test	2.2.3
Stress relief test	4.2.7
Temperature tests	4.5.2
Electric strength test	5.2
Abnormal operating and fault conditions test	5.3

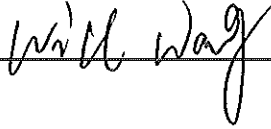8.1 Signatures			
A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0.			
Completed by:	Albert Zhou	Reviewed by:	Will Wang
Title:	Engineer	Title:	Assistant Manager
Signature:		Signature:	

9.0 Correlation Page For Multiple Listings

The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program.

BASIC LISTEE	GlobTek, Inc.
Address	186 Veterans Dr. Northvale, NJ 07647
Country	USA
Product	ITE Power Supply

MULTIPLE LISTEE 1	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	
MULTIPLE LISTEE 1 MODELS	BASIC LISTEE MODELS

MULTIPLE LISTEE 2	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	
MULTIPLE LISTEE 2 MODELS	BASIC LISTEE MODELS

MULTIPLE LISTEE 3	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	
MULTIPLE LISTEE 3 MODELS	BASIC LISTEE MODELS

10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments and/or revisions.

LISTING MARK

The ETL Listing mark applied to the products shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

- 1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
- 2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
- 3) a control number issued by Intertek
- 4) a product descriptor that identifies the standards used for certification. Example:

For US standards, the words, "Conforms to" shall appear with the standard number along with the word, "Standard" or "Std." Example: "Conforms to ANSI/UL Std. XX."

For Canadian standards, the words "Certified to CAN/CSA Standard CXX No. XX." shall be used, or abbreviated, "Cert. to CAN/CSA Std. CXX No. XX."

Can be used together when both standards are used.

Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use.

The facsimile need not have a control number. A control number will be issued **after signed Certification Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory assessment in your facility.

MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

Note to Intertek Follow Up Inspector: The Component Evaluation Center, CEC, will notify you in writing when these components must be selected and sent to the CEC for re-evaluation

Ship the samples to:
Intertek Testing Services Shanghai Limited
ETL Component Evaluation Center
Building No. 86, 1198 Qinzhou Road (North)
Shanghai 200233, China
Attn: Ms. Angela Han

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

11.0 Manufacturing and Production Tests

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

Required Tests

Dielectric Voltage Withstand Test

11.1 Dielectric Voltage Withstand Test

Method

One hundred percent of production of the products covered by this Report shall be subjected to a routine production line dielectric withstand test.

The test shall be conducted on products, which are fully assembled. Prior to applying the test potential, all switches, contactors, relays, etc., should be closed so that all primary circuits are energized by the test potential. If all primary circuits cannot be tested at one time, then separate applications of the test potential shall be made.

The test voltage specified below shall be applied between primary circuits and accessible dead-metal parts. The test voltage may be gradually increased to the specified value but must be maintained at the specified value for one second or one minute as required.

Test Equipment

The test equipment shall incorporate a transformer with an essentially sinusoidal output, a means to indicate the applied test potential, and an audible and/or visual indicator of dielectric breakdown.

The test equipment shall incorporate a voltmeter in the output circuit to indicate directly the applied test potential if the rated output of the test equipment is less than 500VA.

If the rated output of the test equipment is 500VA or more, the applied test potential may be indicated by either:

- 1 - a voltmeter in the primary circuit;
- 2 - a selector switch marked to indicate the test potential; or
- 3 - a marking in a readily visible location to indicate the test potential for test equipment having a single test potential output.

In cases 2 and 3, the test equipment shall include a lamp or other visual means to indicate that the test potential is present at the test equipment output. All test equipment shall be maintained in current calibration.

Products Requiring Dielectric Voltage Withstand Test:

<u>Product</u>	<u>Test Voltage</u>	<u>Test Time</u>
Product - One sample from each shipment of Section 4.0 item 13:		
Between primary circuit and secondary output	3000Vac	1 minute
Between secondary circuit and core	3000Vac	1 minute
<u>Product</u>	<u>Test Voltage</u>	<u>Test Time</u>
Between L/N and secondary output	3000Vac	1 s

12.0 Revision Summary

The following changes are in compliance with the declaration of Section 8.1:

Date/ Proj # Site ID	Project Handler/ Reviewer	Section	Item	Description of Change
3-Jan-2017	Albert Zhou	2	-	Added new model series GT*-96600-*56***; Updated the Model Similarity.
161200879SHA	Will Wang	3	10-14	Added new photos for model GT*-96600-*56***
		4	2	Added new output wire type "SPT-1" and "SPT-2"
		4	3	Added appliance inlet type C18 supplied by "RONG FENG INDUSTRIAL CO LTD"
		4	13	Added new transformer model "TF072".
		7	1, 2a-2c, 3a	Updated the model list; Added new schematics for model series GT*-96600-*56***; Added new PCB layout for model series GT*-96600-*56***
		8	-	Added new test block in section 8
		8.1	-	Revised with new signatures
17-Jun-2019	Albert Zhou <i>Albert Zhou</i>	1	-	Updated the UL 60950-1 standard format from "Information Technology Equipment Safety Part 1: General Requirements >Valid without technical revision: 01Jan2022< [UL 60950-1:2007 Ed.2 +R:14Oct2014]" to "Information Technology Equipment Safety Part 1: General Requirements >Valid without technical revision: 20Dec2020< [UL 60950-1:2007 Ed.2+R:14Oct2014]". Updated the CSA C22.2 No. 60950-1 standard format from "Information Technology Equipment Safety Part 1: General Requirements (R2012) >Valid without technical revision: 01Jan2022< [CSA C22.2#60950-1:2007 Ed.2 +A1;A2]" to "Information Technology Equipment Safety Part 1: General Requirements (R2016) >Valid without technical revision: 20Dec2020< [CSA C22.2#60950-1:2007 Ed.2+A1;A2]". Updated the contact, phone and email of applicant from "Hans Moritz" to "Michael Krakovyak", "(201)784-1000 Ext.253" to "(201)784-1000 Ext.106" and "Moritzh@globtek.com" to "Krakovyakm@globtek.us". No evaluation to the standards needed.
190502656SHA	Will Wang <i>Will Wang</i>	2	-	Changed the max. output power from "60W" to "65W".
		3	15 - 20	Added new photos of transformer. No evaluation to the standards needed.
		4	13	Separated multiple component Manufacturers were listed insamecell into different rows. No evaluation to the standards needed.
		7	1	Updated the model list. No evaluation to the standards needed.
		7	5a - 5c	Added information of transformer specification. No evaluation to the standards needed.
		8	-	Added new test block in section 8
		8.1	-	Revised with new signatures
		11	-	Added the dielectric voltage withstand test of transformer to section 11.