

# CE EMC TEST REPORT

**REPORT NO.:** CE960319A18A

**MODEL NO.:** GTA41077P120YY-X.X  
GTA41077P10012-X.X

**RECEIVED:** March 19, 2007

**TESTED:** March 20 ~ April 14, 2007

**ISSUED:** April 28, 2008

**APPLICANT:** GlobTek, Inc

**ADDRESS:** 186 Veterans Dr. Northvale, N. J. 07647 U. S. A.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou  
Hsiang 244, Taipei Hsien, Taiwan, R. O. C.

This test report consists of 104 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



# Table of Contents

1	CERTIFICATION .....	5
2	SUMMARY OF TEST RESULTS .....	7
2.1	MEASUREMENT UNCERTAINTY .....	8
3	GENERAL INFORMATION .....	9
3.1	GENERAL DESCRIPTION OF EUT .....	9
3.2	DESCRIPTION OF TEST MODES .....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	11
3.4	DESCRIPTION OF SUPPORT UNITS .....	12
3.4.1	FOR EMISSION TEST .....	12
3.4.2	FOR HARMONICS / FLICKER / IMMUNITY TEST .....	13
4	EMISSION TEST .....	14
4.1	CONDUCTED EMISSION MEASUREMENT .....	14
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	14
4.1.2	TEST INSTRUMENTS .....	14
4.1.3	TEST PROCEDURE .....	15
4.1.4	DEVIATION FROM TEST STANDARD .....	15
4.1.5	TEST SETUP .....	15
4.1.6	EUT OPERATING CONDITIONS .....	15
4.1.7	TEST RESULTS (1) .....	16
4.1.8	TEST RESULTS (2) .....	18
4.1.9	TEST RESULTS (3) .....	20
4.1.10	TEST RESULTS (4) .....	22
4.1.11	TEST RESULTS (5) .....	24
4.2	RADIATED EMISSION MEASUREMENT .....	26
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	26
4.2.2	TEST INSTRUMENTS .....	26
4.2.3	TEST PROCEDURE .....	27
4.2.4	DEVIATION FROM TEST STANDARD .....	27
4.2.5	TEST SETUP .....	28
4.2.6	EUT OPERATING CONDITIONS .....	28
4.2.7	TEST RESULTS (1) .....	29
4.2.8	TEST RESULTS (2) .....	31
4.2.9	TEST RESULTS (3) .....	33
4.2.10	TEST RESULTS (4) .....	35
4.2.11	TEST RESULTS (5) .....	37
4.3	HARMONICS CURRENT MEASUREMENT .....	39
4.3.1	LIMITS OF HARMONICS CURRENT MEASUREMENT .....	39
4.3.2	TEST INSTRUMENTS .....	39
4.3.3	TEST PROCEDURE .....	40
4.3.4	DEVIATION FROM TEST STANDARD .....	40
4.3.5	TEST SETUP .....	41
4.3.6	EUT OPERATING CONDITIONS .....	41

4.3.7	TEST RESULTS (1)	42
4.3.8	TEST RESULTS (2)	43
4.3.9	TEST RESULTS (3)	44
4.3.10	TEST RESULTS (4)	45
4.3.11	TEST RESULTS (5)	46
4.4	VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT	47
4.4.1	LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT	47
4.4.2	TEST INSTRUMENTS	47
4.4.3	TEST PROCEDURE	47
4.4.4	DEVIATION FROM TEST STANDARD	48
4.4.5	TEST SETUP	48
4.4.6	EUT OPERATING CONDITIONS	48
4.4.7	TEST RESULTS (1)	49
4.4.8	TEST RESULTS (2)	50
4.4.9	TEST RESULTS (3)	51
4.4.10	TEST RESULTS (4)	52
4.4.11	TEST RESULTS (5)	53
5	IMMUNITY TEST	54
5.1	GENERAL DESCRIPTION	54
5.2	GENERAL PERFORMANCE CRITERIA DESCRIPTION	55
5.3	EUT OPERATING CONDITION	55
5.4	ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	56
5.4.1	TEST SPECIFICATION	56
5.4.2	TEST INSTRUMENTS	56
5.4.3	TEST PROCEDURE	56
5.4.4	DEVIATION FROM TEST STANDARD	57
5.4.5	TEST SETUP	58
5.4.6	TEST RESULTS	59
5.5	RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	60
5.5.1	TEST SPECIFICATION	60
5.5.2	TEST INSTRUMENTS	60
5.5.3	TEST PROCEDURE	61
5.5.4	DEVIATION FROM TEST STANDARD	61
5.5.5	TEST SETUP	62
5.5.6	TEST RESULTS	63
5.6	ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)	64
5.6.1	TEST SPECIFICATION	64
5.6.2	TEST INSTRUMENTS	64
5.6.3	TEST PROCEDURE	64
5.6.4	DEVIATION FROM TEST STANDARD	64
5.6.5	TEST SETUP	65
5.6.6	TEST RESULTS	66
5.7	SURGE IMMUNITY TEST	67
5.7.1	TEST SPECIFICATION	67
5.7.2	TEST INSTRUMENTS	67
5.7.3	TEST PROCEDURE	68

5.7.4	DEVIATION FROM TEST STANDARD .....	68
5.7.5	TEST SETUP .....	68
5.7.6	TEST RESULTS (1) .....	69
5.7.7	TEST RESULTS (2) .....	69
5.7.8	TEST RESULTS (3) .....	70
5.7.9	TEST RESULTS (4) .....	70
5.8	IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS (CS) .....	71
5.8.1	TEST SPECIFICATION .....	71
5.8.2	TEST INSTRUMENTS .....	71
5.8.3	TEST PROCEDURE .....	72
5.8.4	DEVIATION FROM TEST STANDARD .....	72
5.8.5	TEST SETUP .....	73
5.8.6	TEST RESULTS (1) .....	74
5.8.7	TEST RESULTS (2) .....	74
5.9	POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST .....	75
5.9.1	TEST SPECIFICATION .....	75
5.9.2	TEST INSTRUMENTS .....	75
5.9.3	TEST PROCEDURE .....	75
5.9.4	DEVIATION FROM TEST STANDARD .....	75
5.9.5	TEST SETUP .....	76
5.9.6	TEST RESULTS .....	77
5.10	VOLTAGE DIP/SHORT INTERRUPTIONS/VOLTAGE VARIATIONS (DIP) IMMUNITY TEST .....	78
5.10.1	TEST SPECIFICATION .....	78
5.10.2	TEST INSTRUMENTS .....	78
5.10.3	TEST PROCEDURE .....	78
5.10.4	DEVIATION FROM TEST STANDARD .....	78
5.10.5	TEST SETUP .....	79
5.10.6	TEST RESULTS .....	80
6	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	81
7	APPENDIX - INFORMATION ON THE TESTING LABORATORIES .....	104

# 1 CERTIFICATION

**PRODUCT:** Switching Power Supply

**BRAND NAME:** GlobTek, Inc

**MODEL NO. :** GTA41077P120YY-X.X, GTA41077P10012-X.X  
 (The "Y" in the model could be defined as "0~9" for DC output, voltage transformer and marketing differences. The "X" in the model could be defined as "0~9". X.X is optional for specifying output voltage deviation in 0.1volt increments, and X.X is to be subtracted from rated voltage)

**TEST ITEM:** ENGINEERING SAMPLE

**APPLICANT:** GlobTek, Inc

**TESTED:** March 20 ~ April 14, 2007

<b>STANDARDS:</b>	<b>EN 55022: 1998+A1: 2000</b>	<b>EN 55024: 1998+A1: 2001</b>
	<b>+A2: 2003, Class B</b>	<b>+A2: 2003</b>
	<b>EN 61000-3-2: 2006, Class D</b>	IEC 61000-4-2: 2001 ED.1.2
	<b>EN 61000-3-3: 1995</b>	IEC 61000-4-3: 2006 ED.3.0
	<b>+A1: 2001+A2: 2005</b>	IEC 61000-4-4: 2004 ED.2.0
		IEC 61000-4-5: 2005 ED.2.0
	<b>CISPR 22: 2003, Class B</b>	IEC 61000-4-6: 2006 ED.2.2
	<b>AS/NZS CISPR 22: 2004,</b>	IEC 61000-4-8: 2001 ED.1.1
	<b>Class B</b>	IEC 61000-4-11: 2004 ED.2.0

The above equipment (Model No.: GTA41077P10012-X.X, GTA41077P12015, GTA41077P12019, GTA41077P12024, GTA41077P12048) have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards.

Approval signature – on next page

**CERTIFICATION – Continued**

The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : Megan Yu , **DATE:** April 28, 2008  
(Megan Yu / Specialist)

**TECHNICAL  
ACCEPTANCE** : Arthur Lin , **DATE:** April 28, 2008  
Responsible for EMI (Arthur Lin / Supervisor)

**TECHNICAL  
ACCEPTANCE** : Andy Cheng , **DATE:** April 28, 2008  
Responsible for EMS (Andy Cheng / Senior Engineer)

**APPROVED BY** : Kenny Meng , **DATE:** April 28, 2008  
(Kenny Meng / Deputy Manager)

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

EMISSION			
Standard	Test Type	Result	Remarks
EN 55022:1998 +A1: 2000 +A2: 2003, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is –11.87 dB at 0.150 MHz
CISPR 22: 2003, Class B  AS/NZS CISPR 22: 2004, Class B	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is –4.64 dB at 84.69 MHz
EN 61000-3-2: 2006, Class D	Harmonic current emissions	PASS	Meets Class D Limit
EN 61000-3-3: 1995 +A1: 2001+A2: 2005	Voltage fluctuations & flicker	PASS	Meets the requirements.

IMMUNITY (EN55024: 1998+A1: 2001+A2: 2003)			
Standard	Test Type	Result	Remarks
IEC 61000-4-2 : 2001 ED.1.2	Electrostatic discharge immunity test	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-3: 2006 ED.3.0	Radiated, radio-frequency, electromagnetic field immunity test	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-4: 2004 ED.2.0	Electrical fast transient / burst immunity test.	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-5: 2005 ED.2.0	Surge immunity test	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-6: 2006 ED.2.2	Immunity to conducted disturbances, induced by radio-frequency fields	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-8: 2001 ED.1.1	Power frequency magnetic field immunity test.	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-11: 2004 ED.2.0	Voltage dips, short interruptions and voltage variations immunity tests	PASS	Meets the requirements of <b>Voltage Dips:</b> a. >95% reduction - Performance Criterion A b. 30% reduction – Performance Criterion A <b>Voltage Interruptions:</b> i) >95% reduction – Performance Criterion B

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions	3.99 dB



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Switching Power Supply
<b>MODEL NO.</b>	GTA41077P120YY-X.X, GTA41077P10012-X.X
<b>POWER SUPPLY</b>	Switching Power (Rating: refer to Note below) Power cord: Non-shielded DC cable (1.8 m) with one ferrite core
<b>DATA CABLE SUPPLIED</b>	N/A

#### NOTE:

1. The EUT is an AC 3 Pin Switching Power Supply with the rating as below:

Model No.	AC I/P	DC O/P		T1
		Voltage(V)	Current (A)	
GTA41077P10012-X.X	100-240V, 1.8A, 50-60Hz	12V	8.33A	XF00311
GTA41077P120YY-X.X		15V	8A	XF00352
		18V	6.66A	XF00329
		19V	6.31A	
		24V	5A	XF00330
		48V	2.5A	XF00364
<b>Note:</b> The “Y” in the model could be defined as “0~9” for DC output, voltage transformer and marketing differences. The “X” in the model could be defined as “0~9”. X.X is optional for specifying output voltage deviation in 0.1volt increments, and X.X is to be subtracted from rated voltage				

2. And the following models were selected as representative models for the test.

Model No.	Representative Model No.	T1 (Voltage Transformer)
GTA41077P120YY-X.X	GTA41077P10012-X.X	XF00311
	GTA41077P12015	XF00352
	GTA41077P12019	XF00329
	GTA41077P12024	XF00330
	GTA41077P12048	XF00364

3. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

The test modes were as the following:

Test Result	Test Mode	T1 (Voltage Transformer)
1.	DC 12V	XF00311
2.	DC 15V	XF00352
3.	DC 19V	XF00329
4.	DC 24V	XF00330
5.	DC 48V	XF00364

All above test modes were recorded in this report.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of ITE equipment and, according to the specifications of the manufacturers, must comply with the requirements of the following standards:

<b>EN 55022: 1998+A1: 2000</b>	<b>EN 55024: 1998+A1: 2001+A2: 2003</b>
<b>+A2: 2003, Class B</b>	IEC 61000-4-2: 2001 ED.1.2
<b>EN 61000-3-2: 2006, Class D</b>	IEC 61000-4-3: 2006 ED.3.0
<b>EN 61000-3-3: 1995+A1: 2001</b>	IEC 61000-4-4: 2004 ED.2.0
<b>+A2: 2005</b>	IEC 61000-4-5: 2005 ED.2.0
	IEC 61000-4-6: 2006 ED.2.2
<b>CISPR 22: 2003, Class B</b>	IEC 61000-4-8: 2001 ED.1.1
<b>AS/NZS CISPR 22: 2004, Class B</b>	IEC 61000-4-11: 2004 ED.2.0

All tests have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### 3.4.1 FOR EMISSION TEST


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DUMMY LOAD	ADT	L19A	L2-010010	N/A
2	DUMMY LOAD (For DC 12V & 15V only)	ADT	L19A	L2-010007	N/A

**Note:** One non-shielded AC 3 Pin power cord (1.8m) was connected to EUT.

#### TEST CONFIGURATION (For DC 12V & 15V)

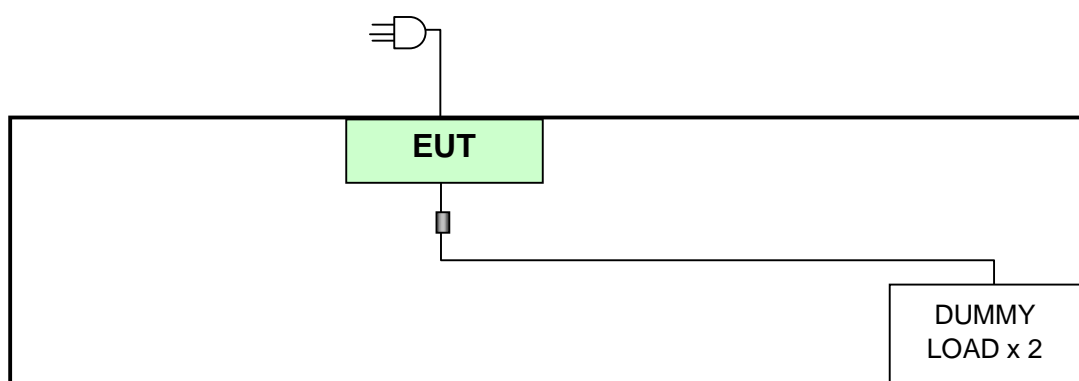

#### TEST CONFIGURATION (For DC 19V, 24V & 48V)

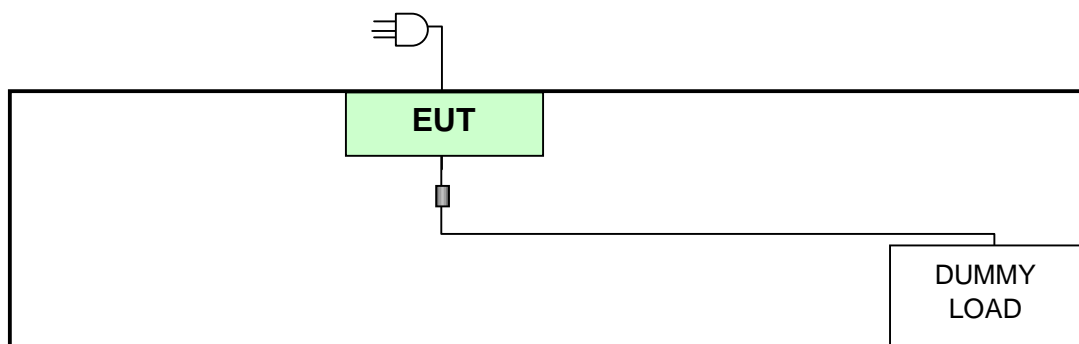


### 3.4.2 FOR HARMONICS / FLICKER / IMMUNITY TEST


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Multimeter	YFE	YF-370A	N/A	N/A
2	DUMMY LOAD	ADT	L19A	L2-010014	N/A
3	DUMMY LOAD (For DC 12V, 15V & 48V only)	ADT	L19A	L2-010005	N/A

**Note:** One non-shielded AC 3 Pin power cord (1.8m) was connected to EUT.

#### TEST CONFIGURATION (For DC 19V & 24V)

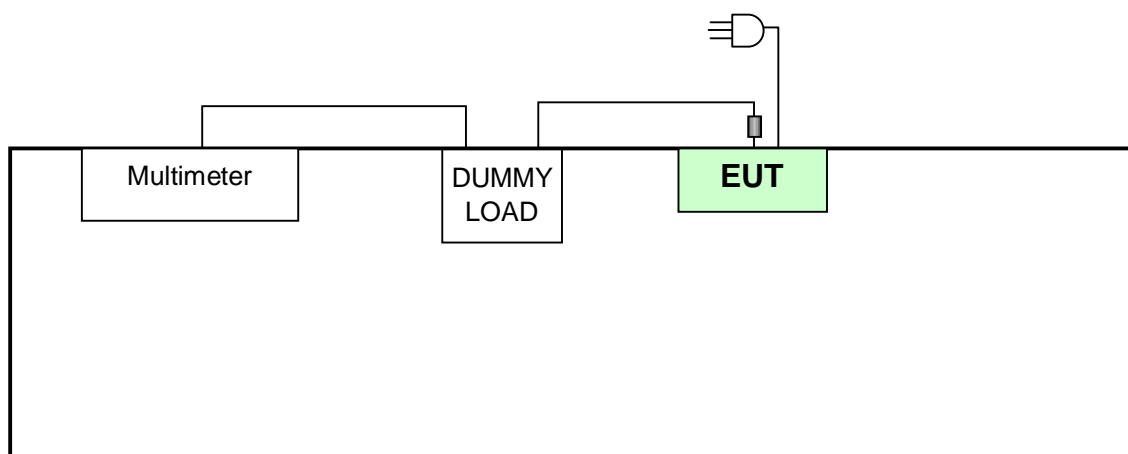

#### TEST CONFIGURATION (For DC 12V, 15V & 48V)

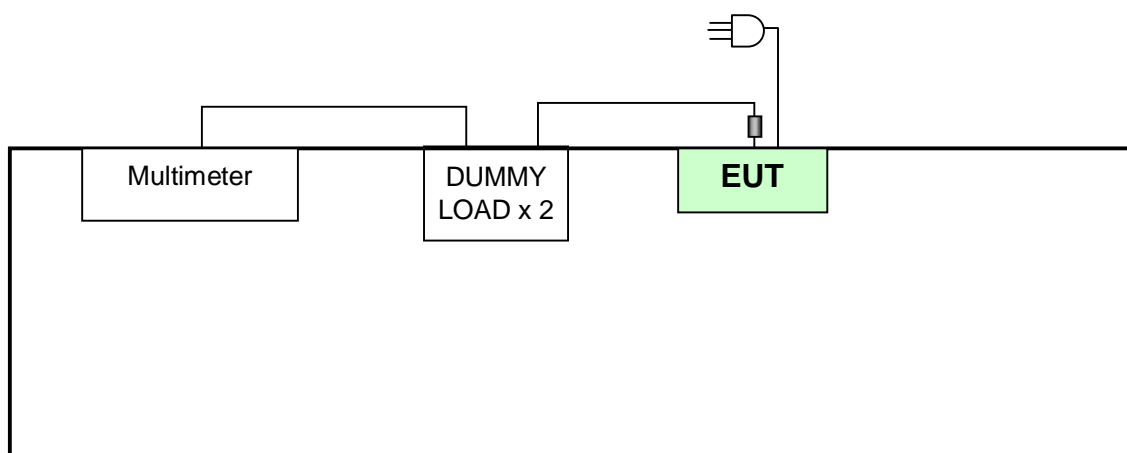

## 4 EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

**TEST STANDARD: EN 55022**

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTE:**
- (1) The lower limit shall apply at the transition frequencies.
  - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS 30	828765/002	Jul. 27, 2007
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	835239/001	Feb. 26, 2008
LISN With Adapter (for EUT)	AD10	C09Ada-001	Feb. 26, 2008
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	835239/002	Mar. 13, 2008
ROHDE & SCHWARZ 4-wire ISN	ENY41	835154/007	Mar. 30, 2008
ROHDE & SCHWARZ 2-wire ISN	ENY22	833823/026	Mar. 30, 2008
Software	ADT_Cond_V7.3.2	NA	NA
Software	ADT_ISN_V7.3.2	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C09.01	Mar. 01, 2008
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010789	May 21, 2007

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in ADT Shielded Room No. 9.
  3. The VCCI Site Registration No. C-1312.


### 4.1.3 TEST PROCEDURE

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

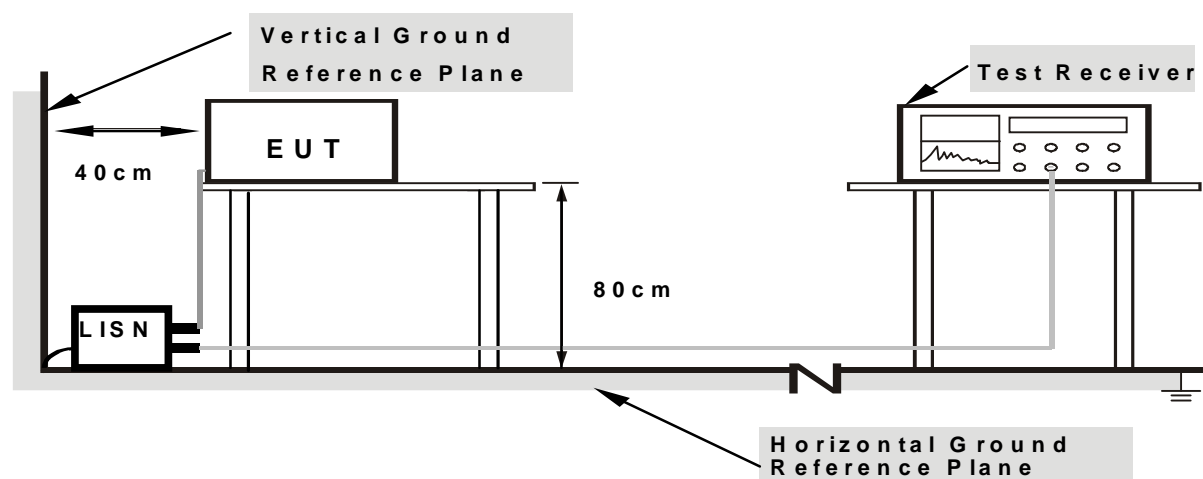

**Note:** 1.Support units were connected to second LISN.  
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 4.1.6 EUT OPERATING CONDITIONS


Set the EUT under full resistor load.

## 4.1.7 TEST RESULTS (1)

<b>TEST MODE</b>	DC 12V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 999 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.30	53.10	-	53.40	-	66.00	56.00	-12.60	-
2	0.185	0.30	50.25	-	50.55	-	64.27	54.27	-13.72	-
3	0.243	0.30	44.79	-	45.09	-	61.99	51.99	-16.90	-
4	0.308	0.30	46.43	-	46.73	-	60.03	50.03	-13.30	-
5	0.366	0.30	42.54	-	42.84	-	58.59	48.59	-15.75	-
6	0.486	0.30	35.03	-	35.33	-	56.24	46.24	-20.91	-
7	1.513	0.30	35.37	-	35.67	-	56.00	46.00	-20.33	-
8	3.001	0.35	34.49	-	34.84	-	56.00	46.00	-21.16	-
9	5.396	0.49	32.05	-	32.54	-	60.00	50.00	-27.46	-
10	23.834	1.61	23.44	-	25.05	-	60.00	50.00	-34.95	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

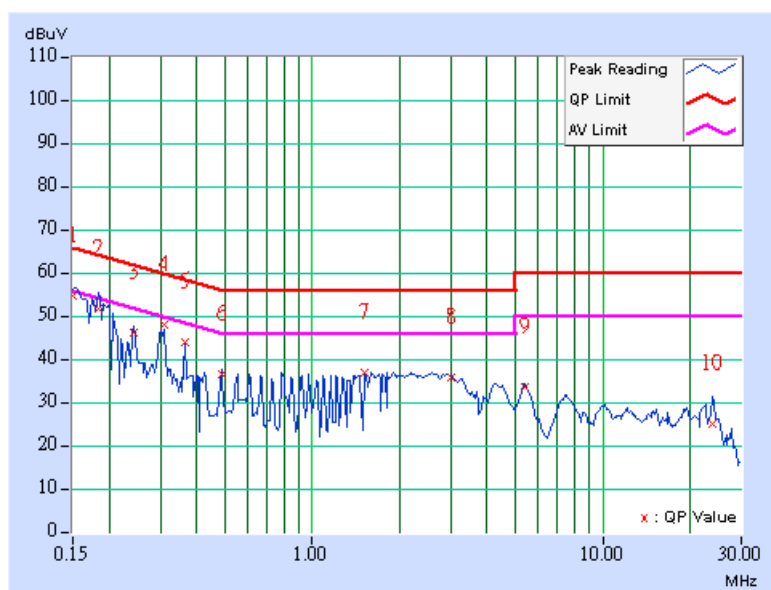




<b>TEST MODE</b>	DC 12V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 999 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	53.65	-	53.85	-	66.00	56.00	-12.15	-
2	0.185	0.20	49.91	-	50.11	-	64.26	54.26	-14.15	-
3	0.246	0.20	47.13	-	47.33	-	61.89	51.89	-14.56	-
4	0.306	0.20	47.87	-	48.07	-	60.08	50.08	-12.01	-
5	0.366	0.20	42.64	-	42.84	-	58.59	48.59	-15.75	-
6	0.486	0.20	34.91	-	35.11	-	56.24	46.24	-21.13	-
7	1.033	0.20	36.43	-	36.63	-	56.00	46.00	-19.37	-
8	2.064	0.30	36.09	-	36.39	-	56.00	46.00	-19.61	-
9	5.327	0.39	31.24	-	31.63	-	60.00	50.00	-28.37	-
10	23.612	1.39	27.25	-	28.64	-	60.00	50.00	-31.36	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

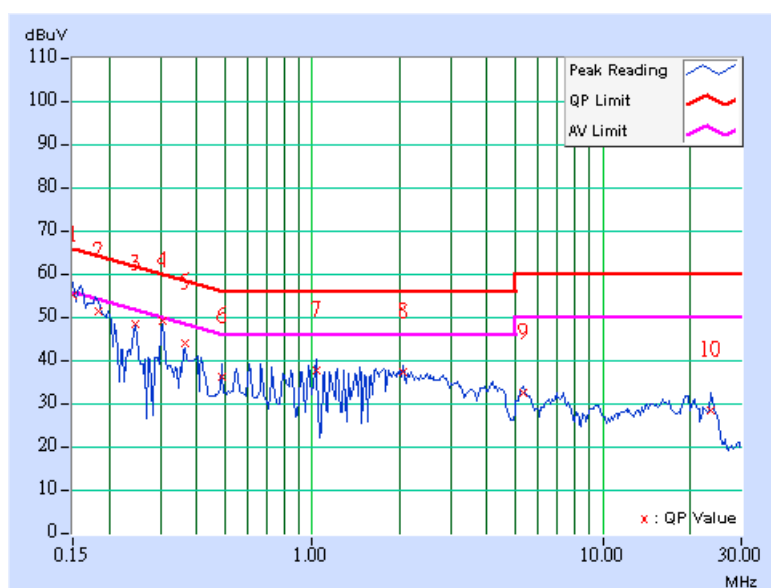


## 4.1.8 TEST RESULTS (2)

<b>TEST MODE</b>	DC 15V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 1006 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.30	53.52	-	53.82	-	66.00	56.00	-12.18	-
2	0.187	0.30	47.94	-	48.24	-	64.18	54.18	-15.94	-
3	0.306	0.30	41.49	-	41.79	-	60.08	50.08	-18.29	-
4	0.369	0.30	36.68	-	36.98	-	58.52	48.52	-21.54	-
5	0.549	0.30	26.27	-	26.57	-	56.00	46.00	-29.43	-
6	0.768	0.30	25.03	-	25.33	-	56.00	46.00	-30.67	-
7	22.946	1.54	30.82	-	32.36	-	60.00	50.00	-27.64	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

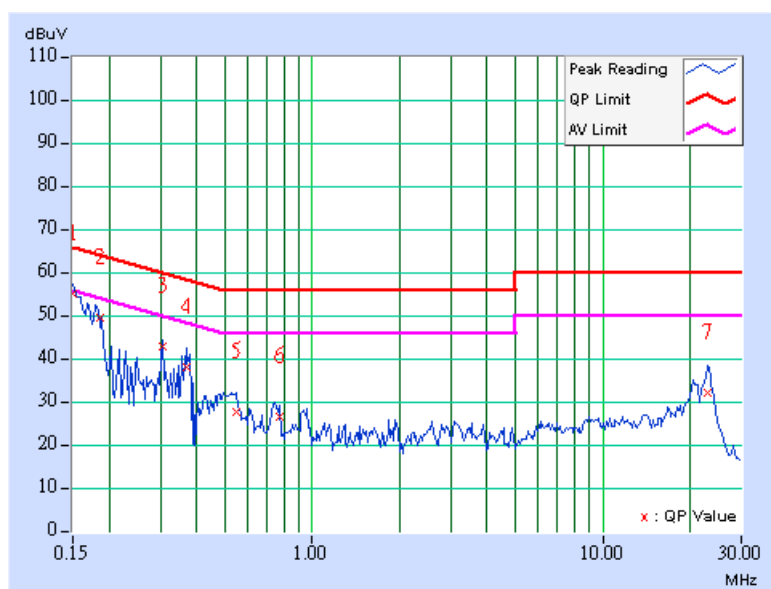

<b>TEST MODE</b>	DC 15V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 1006 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	53.87	-	54.07	-	66.00	56.00	-11.93	-
2	0.183	0.20	50.77	-	50.97	-	64.35	54.35	-13.38	-
3	0.246	0.20	43.14	-	43.34	-	61.89	51.89	-18.55	-
4	0.366	0.20	38.90	-	39.10	-	58.59	48.59	-19.49	-
5	0.489	0.20	30.40	-	30.60	-	56.18	46.18	-25.58	-
6	0.732	0.20	27.74	-	27.94	-	56.00	46.00	-28.06	-
7	22.569	1.31	31.44	-	32.75	-	60.00	50.00	-27.25	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

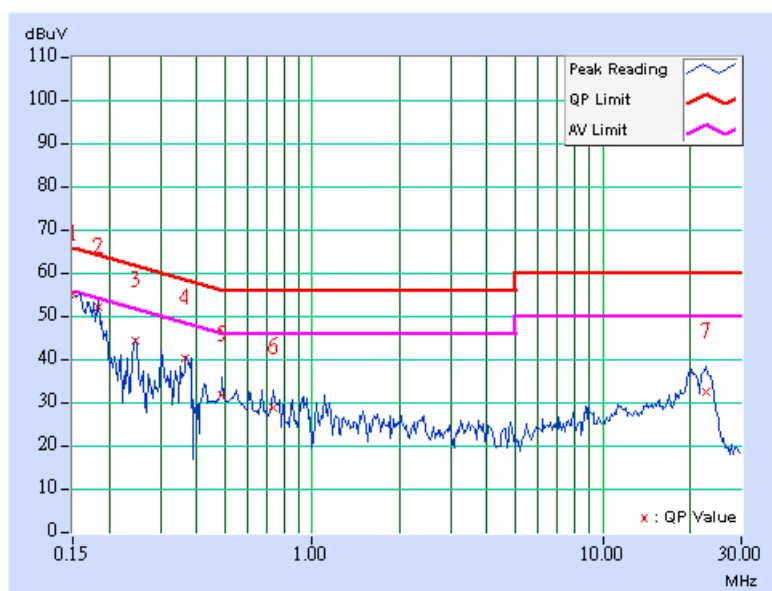


### 4.1.9 TEST RESULTS (3)

<b>TEST MODE</b>	DC 19V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 1006 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.165	0.30	51.93	-	52.23	-	65.21	55.21	-12.98	-
2	0.222	0.30	38.45	-	38.75	-	62.74	52.74	-23.99	-
3	0.354	0.30	44.42	-	44.72	-	58.87	48.87	-14.15	-
4	0.435	0.30	35.21	-	35.51	-	57.16	47.16	-21.65	-
5	0.681	0.30	31.16	-	31.46	-	56.00	46.00	-24.54	-
6	0.900	0.30	31.30	-	31.60	-	56.00	46.00	-24.40	-
7	21.245	1.40	28.11	-	29.51	-	60.00	50.00	-30.49	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

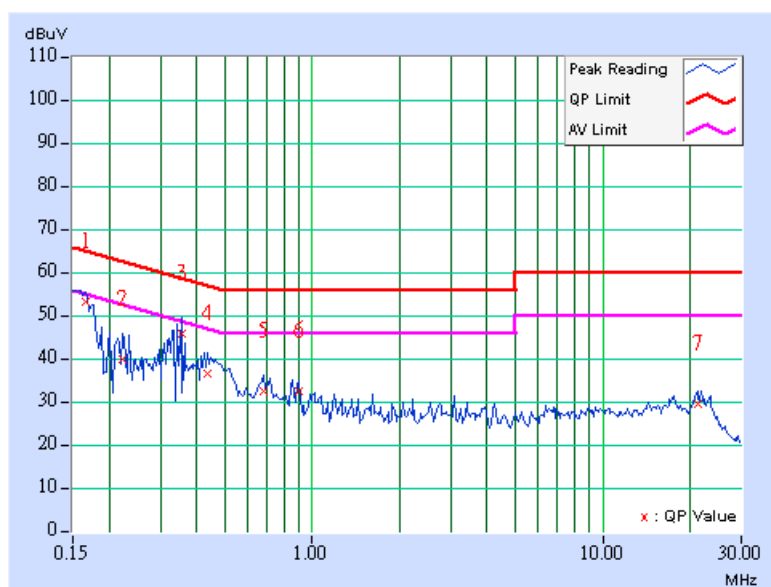

<b>TEST MODE</b>	DC 19V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 1006 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.161	0.20	52.86	-	53.06	-	65.43	55.43	-12.37	-
2	0.222	0.20	38.77	-	38.97	-	62.75	52.75	-23.78	-
3	0.360	0.20	42.21	-	42.41	-	58.73	48.73	-16.32	-
4	0.486	0.20	36.13	-	36.33	-	56.24	46.24	-19.91	-
5	0.699	0.20	34.49	-	34.69	-	56.00	46.00	-21.31	-
6	0.900	0.20	35.33	-	35.53	-	56.00	46.00	-20.47	-
7	22.280	1.28	25.57	-	26.85	-	60.00	50.00	-33.15	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

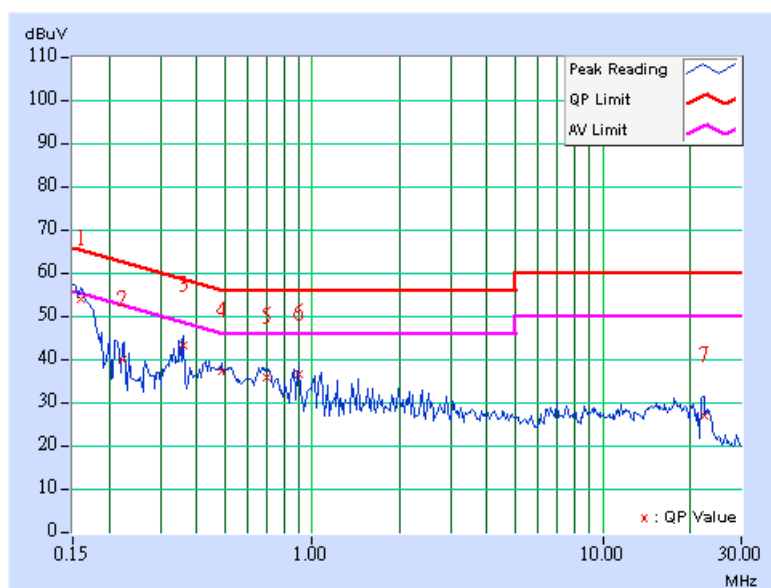


#### 4.1.10 TEST RESULTS (4)

<b>TEST MODE</b>	DC 24V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 1006 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.30	53.83	-	54.13	-	66.00	56.00	-11.87	-
2	0.168	0.30	51.76	-	52.06	-	65.06	55.06	-13.00	-
3	0.234	0.30	38.11	-	38.41	-	62.31	52.31	-23.90	-
4	0.363	0.30	44.86	-	45.16	-	58.66	48.66	-13.50	-
5	0.435	0.30	33.51	-	33.81	-	57.16	47.16	-23.35	-
6	0.732	0.30	31.57	-	31.87	-	56.00	46.00	-24.13	-
7	24.422	1.65	27.49	-	29.14	-	60.00	50.00	-30.86	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

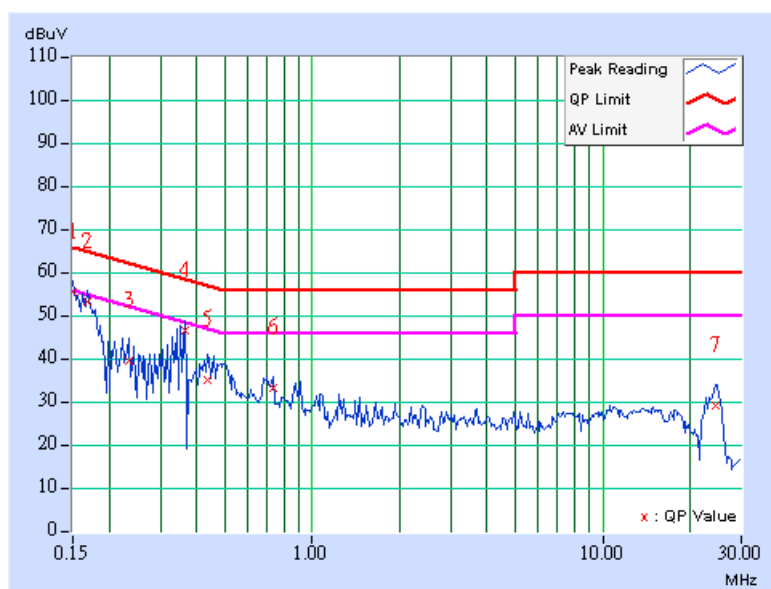

<b>TEST MODE</b>	DC 24V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 1006 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	53.48	-	53.68	-	66.00	56.00	-12.32	-
2	0.174	0.20	49.95	-	50.15	-	64.77	54.77	-14.62	-
3	0.228	0.20	38.23	-	38.43	-	62.52	52.52	-24.09	-
4	0.363	0.20	39.16	-	39.36	-	58.66	48.66	-19.30	-
5	0.453	0.20	33.09	-	33.29	-	56.82	46.82	-23.53	-
6	0.735	0.20	30.84	-	31.04	-	56.00	46.00	-24.96	-
7	23.204	1.36	27.50	-	28.86	-	60.00	50.00	-31.14	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

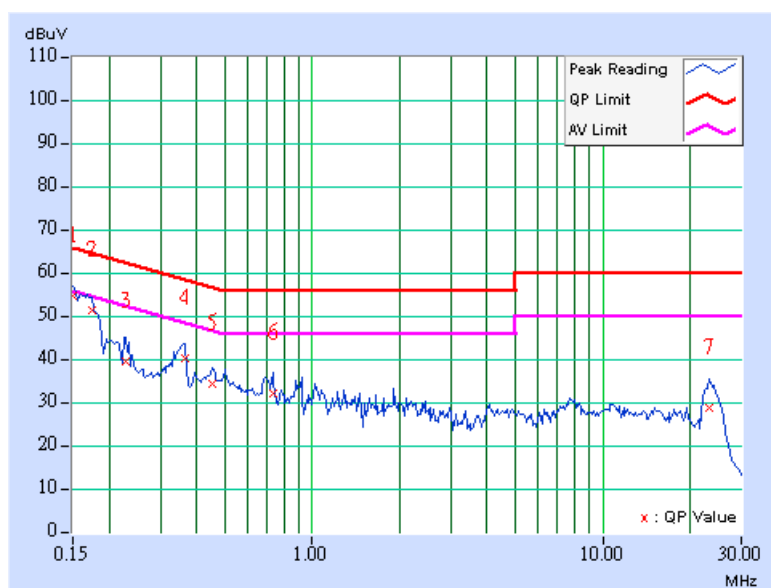


#### 4.1.11 TEST RESULTS (5)

<b>TEST MODE</b>	DC 48V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.30	25.46	-	25.76	-	65.36	55.36	-39.60	-
2	0.210	0.30	25.49	-	25.79	-	63.22	53.22	-37.43	-
3	0.297	0.30	16.90	-	17.20	-	60.33	50.33	-43.13	-
4	2.284	0.31	15.97	-	16.28	-	56.00	46.00	-39.72	-
5	19.386	1.28	17.91	-	19.19	-	60.00	50.00	-40.81	-
6	22.022	1.46	18.81	-	20.27	-	60.00	50.00	-39.73	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

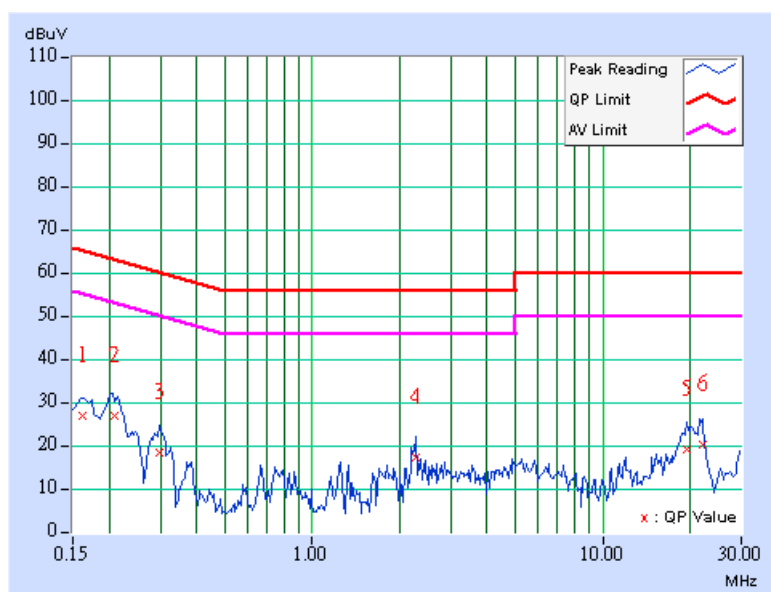




<b>TEST MODE</b>	DC 48V	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.156	0.20	23.99	-	24.19	-	65.67	55.67	-41.48	-
2	0.210	0.20	25.58	-	25.78	-	63.21	53.21	-37.43	-
3	0.303	0.20	16.07	-	16.27	-	60.16	50.16	-43.89	-
4	2.302	0.30	15.71	-	16.01	-	56.00	46.00	-39.99	-
5	4.996	0.37	16.16	-	16.53	-	56.00	46.00	-39.47	-
6	11.459	0.79	17.86	-	18.65	-	60.00	50.00	-41.35	-
7	19.007	1.08	18.84	-	19.92	-	60.00	50.00	-40.08	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

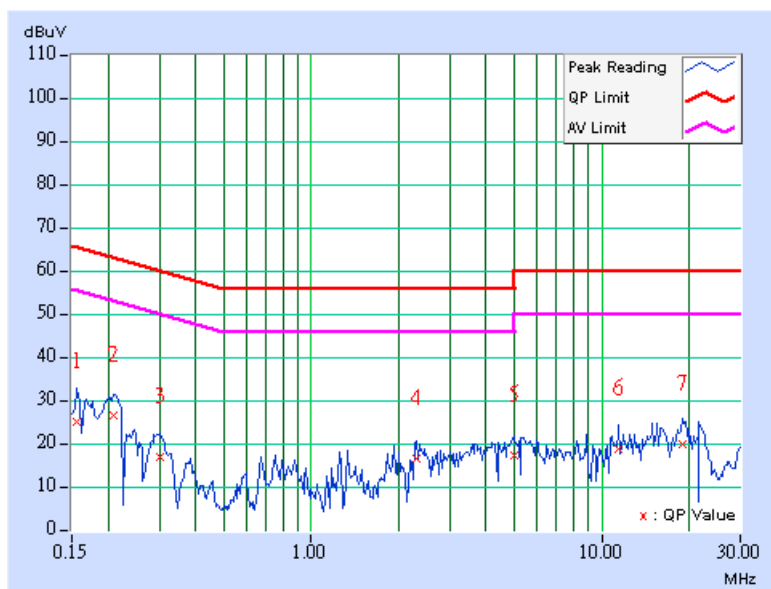

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: EN 55022

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

- NOTE:**
- (1) The lower limit shall apply at the transition frequencies.
  - (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
  - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Preamplifier	8449B	3008A01292	Aug. 06, 2007
HP Preamplifier	8449B	3008A01638	Sep. 17, 2007
ROHDE & SCHWARZ TEST RECEIVER	ESVS10	846285/012	Aug. 03, 2007
CHASE BILOG Antenna	CBL6112A	2331	Oct. 02, 2007
EMCO Horn Antenna	3115	00028257	Sep. 11, 2007
EMCO Horn Antenna	BBHA-9170	BBHA9170190	May 22, 2007
ADT. Turn Table	TT100	0201	NA
ADT. Tower	AT100	0201	NA
Software	ADT_Radiated_V7.6.15	NA	NA
ANRITSU RF Switches	MP59B	M32159	Sep. 11, 2007
TIMES RF cable	LMR-600	CABLE-ST8-01	Sep. 11, 2007
ADT. Ferrite Clamp	FC18	910049	Oct. 08, 2007

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  3. The test was performed in ADT Open Site No. 8.
  4. The VCCI Site Registration No. R-877.

### 4.2.3 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10-meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. All cables leaving the tabletop, the EUT for a connection outside the test site (e.g. mains cables, telephone lines, connections to auxiliary equipment located outside the test area) has been fitted with ferrite clamp.

**NOTE:** The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

## 4.2.5 TEST SETUP

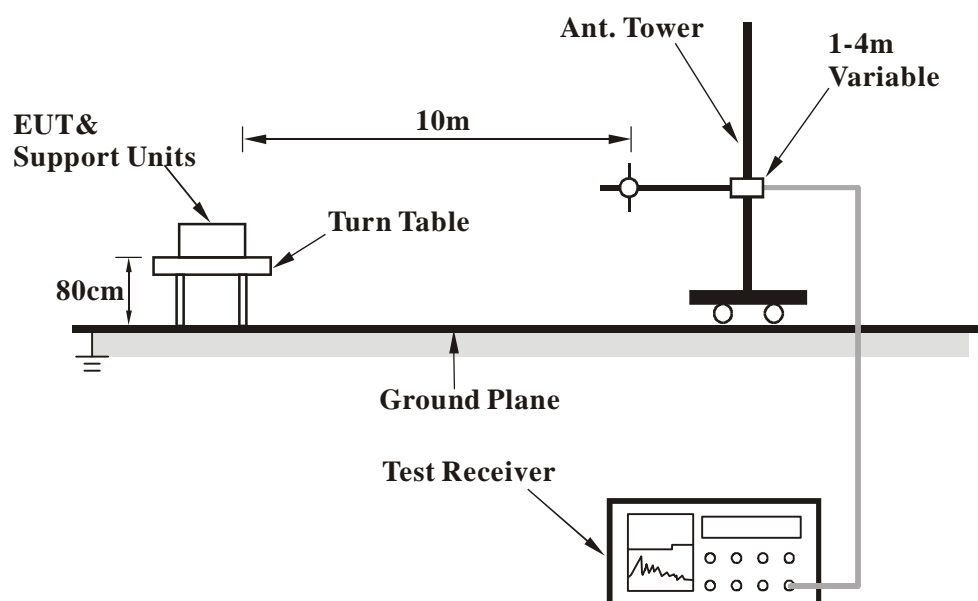

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6


## 4.2.7 TEST RESULTS (1)

<b>TEST MODE</b>	DC 12V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	22 deg. C, 79 % RH, 1001 hPa	<b>TESTED BY:</b> Fox Chang	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.53	20.79 QP	30.00	-9.21	4.00 H	255	8.69	12.10
2	84.20	18.36 QP	30.00	-11.64	4.00 H	117	8.68	9.68
3	108.72	18.84 QP	30.00	-11.16	4.00 H	243	5.26	13.58
4	125.12	19.27 QP	30.00	-10.73	4.00 H	208	5.33	13.94
5	151.75	15.87 QP	30.00	-14.13	4.00 H	74	3.37	12.50
6	191.88	15.70 QP	30.00	-14.30	4.00 H	111	4.26	11.44
7	257.56	19.13 QP	37.00	-17.87	4.00 H	314	3.81	15.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

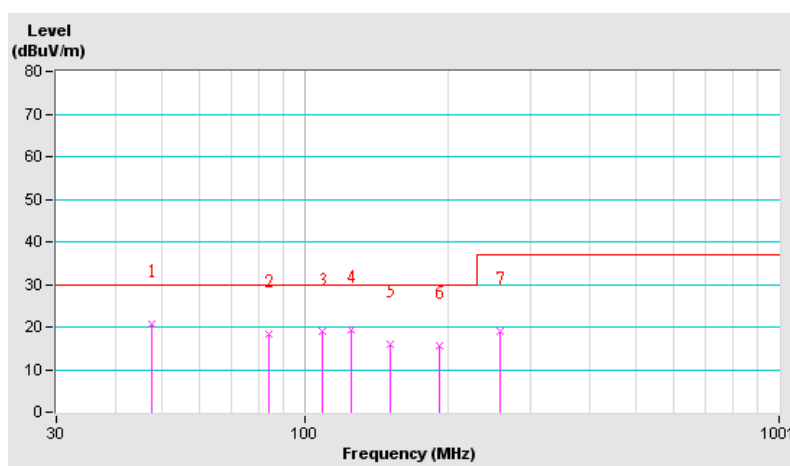


<b>TEST MODE</b>	DC 12V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	22 deg. C, 79 % RH, 1001 hPa	<b>TESTED BY:</b> Fox Chang	

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.65	22.50 QP	30.00	-7.50	1.18 V	177	8.79	13.71
2	68.28	22.81 QP	30.00	-7.19	1.23 V	131	15.40	7.41
3	109.13	21.63 QP	30.00	-8.37	1.00 V	220	8.02	13.61
4	148.32	21.32 QP	30.00	-8.68	1.00 V	142	8.69	12.63
5	161.88	20.58 QP	30.00	-9.42	1.00 V	37	8.45	12.13
6	183.75	18.49 QP	30.00	-11.51	1.00 V	117	7.05	11.44
7	191.75	21.34 QP	30.00	-8.66	1.00 V	339	9.90	11.44
8	242.77	18.77 QP	37.00	-18.23	1.00 V	273	4.36	14.41

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

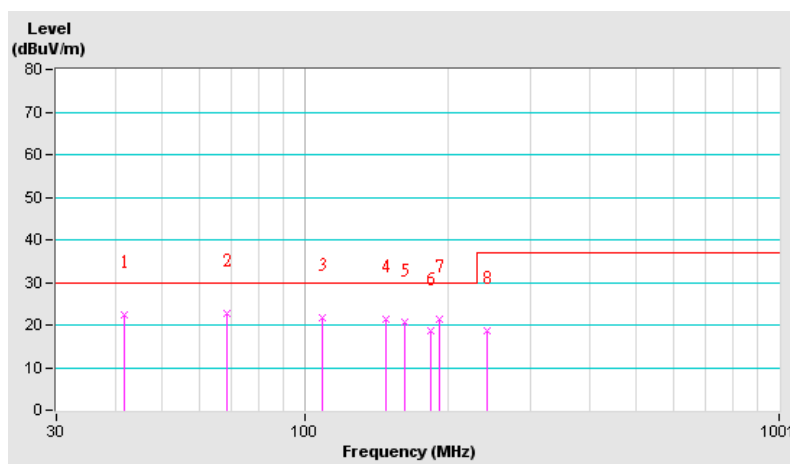


## 4.2.8 TEST RESULTS (2)

<b>TEST MODE</b>	DC 15V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.23	19.97 QP	30.00	-10.03	4.00 H	194	9.82	10.15
2	82.87	24.99 QP	30.00	-5.01	4.00 H	77	15.55	9.44
3	119.50	21.97 QP	30.00	-8.03	4.00 H	109	7.71	14.26
4	136.80	20.24 QP	30.00	-9.76	3.71 H	42	7.09	13.15
5	161.30	16.54 QP	30.00	-13.46	4.00 H	216	4.39	12.15
6	270.70	17.41 QP	37.00	-19.59	4.00 H	2	1.94	15.47

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

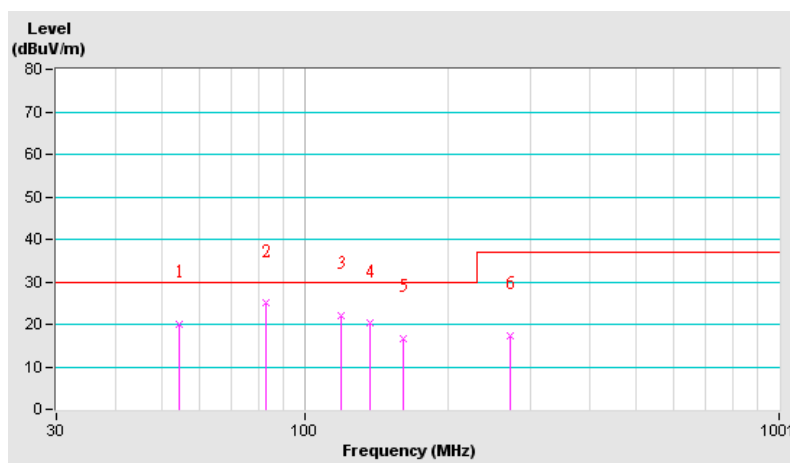


<b>TEST MODE</b>	DC 15V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.44	21.85 QP	30.00	-8.15	1.01 V	2	7.54	14.31
<b>2</b>	<b>84.69</b>	<b>25.36 QP</b>	<b>30.00</b>	<b>-4.64</b>	<b>1.63 V</b>	<b>142</b>	<b>15.59</b>	<b>9.77</b>
3	109.39	25.30 QP	30.00	-4.70	1.01 V	117	11.67	13.63
4	142.10	18.78 QP	30.00	-11.22	1.00 V	335	5.93	12.85
5	163.20	16.16 QP	30.00	-13.84	1.12 V	237	4.08	12.08
6	220.80	18.36 QP	30.00	-11.64	1.00 V	154	5.48	12.88

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

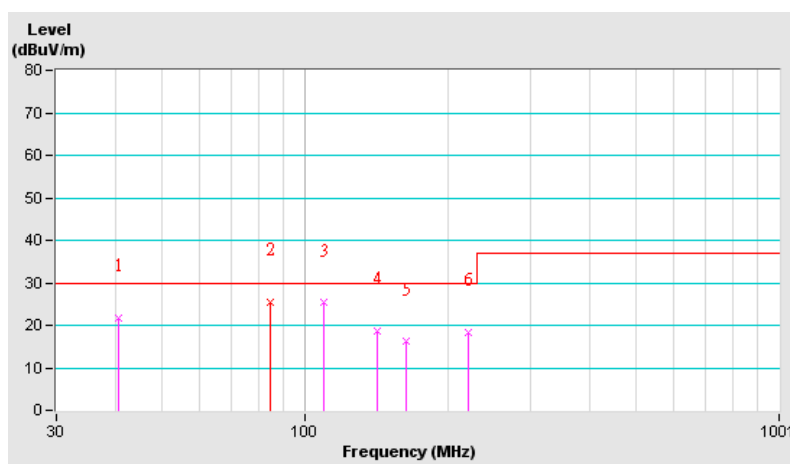




## 4.2.9 TEST RESULTS (3)

<b>TEST MODE</b>	DC 19V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.59	17.50 QP	30.00	-12.50	4.00 H	165	5.64	11.86
2	81.47	17.16 QP	30.00	-12.84	3.69 H	264	7.97	9.19
3	109.90	22.91 QP	30.00	-7.09	4.00 H	139	9.25	13.66
4	145.90	18.60 QP	30.00	-11.40	3.84 H	46	5.89	12.71
5	217.00	17.31 QP	30.00	-12.69	4.00 H	2	4.69	12.62
6	257.80	20.37 QP	37.00	-16.63	4.00 H	55	5.04	15.33

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

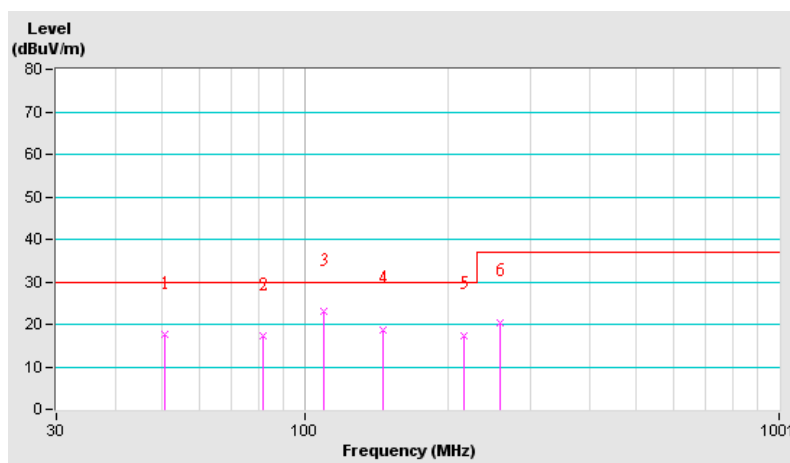


<b>TEST MODE</b>	DC 19V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.01	20.58 QP	30.00	-9.42	1.00 V	0	6.05	14.53
2	86.84	18.82 QP	30.00	-11.18	1.29 V	220	8.66	10.16
3	110.90	20.14 QP	30.00	-9.86	1.00 V	89	6.42	13.72
4	146.18	22.57 QP	30.00	-7.43	1.00 V	0	9.87	12.70
5	213.10	16.42 QP	30.00	-13.58	1.17 V	150	4.07	12.35
6	265.90	17.85 QP	37.00	-19.15	1.00 V	206	2.40	15.45

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

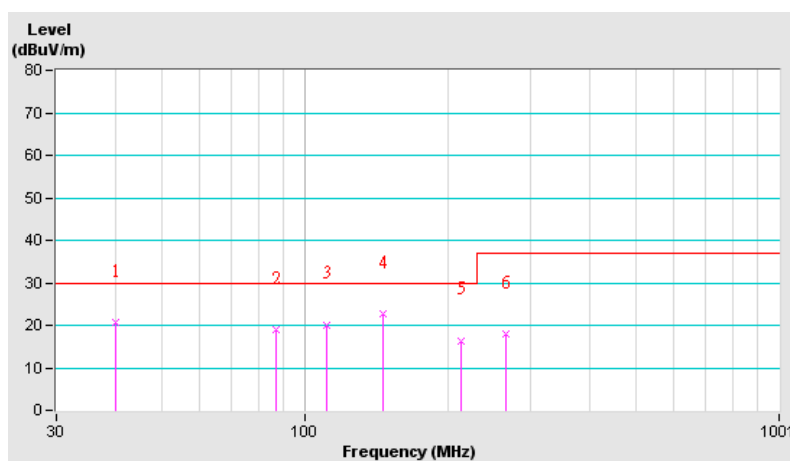


## 4.2.10 TEST RESULTS (4)

<b>TEST MODE</b>	DC 24V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.88	18.84 QP	30.00	-11.16	4.00 H	228	7.11	11.73
2	87.71	17.77 QP	30.00	-12.23	4.00 H	109	7.45	10.32
3	112.80	18.02 QP	30.00	-11.98	4.00 H	23	4.18	13.84
4	142.60	17.55 QP	30.00	-12.45	3.72 H	253	4.71	12.84
5	172.30	17.27 QP	30.00	-12.73	4.00 H	95	5.54	11.73
6	262.60	20.98 QP	37.00	-16.02	3.81 H	183	5.53	15.45

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

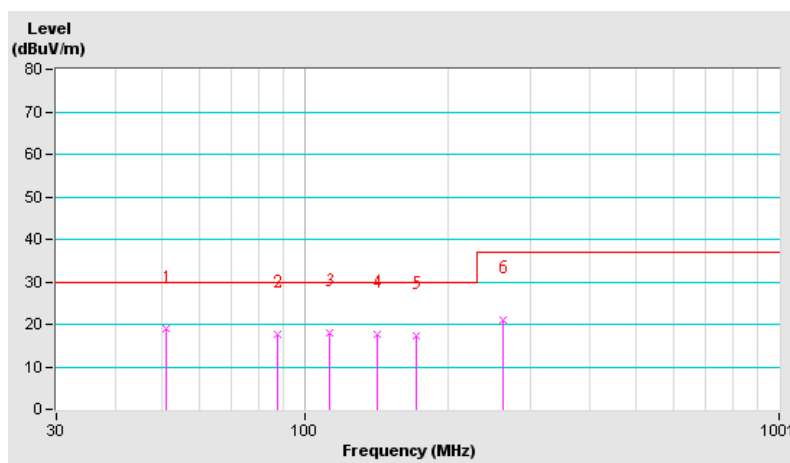


<b>TEST MODE</b>	DC 24V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.52	20.02 QP	30.00	-9.98	1.00 V	311	10.48	9.54
2	84.23	18.73 QP	30.00	-11.27	1.14 V	201	9.04	9.69
3	111.40	19.22 QP	30.00	-10.78	1.00 V	286	5.47	13.75
4	144.50	17.42 QP	30.00	-12.58	1.00 V	26	4.65	12.77
5	163.20	19.43 QP	30.00	-10.57	1.21 V	137	7.35	12.08
6	269.30	17.84 QP	37.00	-19.16	1.00 V	2	2.39	15.45

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

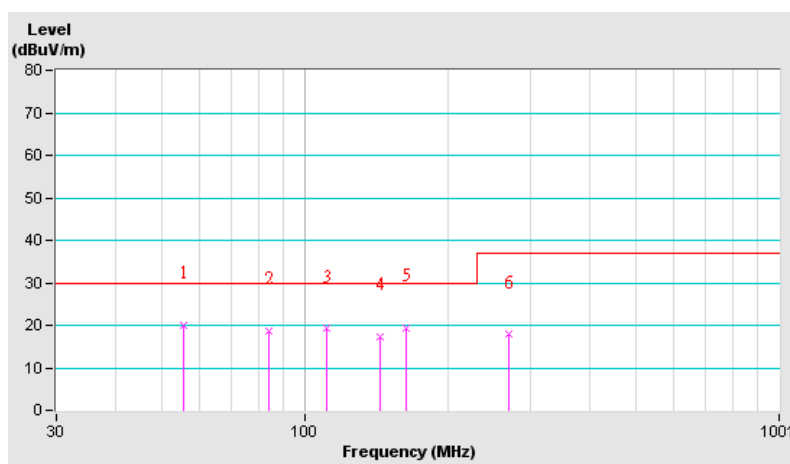


## 4.2.11 TEST RESULTS (5)

<b>TEST MODE</b>	DC 48V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.90	18.08 QP	30.00	-11.92	4.00 H	305	6.83	11.25
2	80.60	19.15 QP	30.00	-10.85	3.83 H	249	10.12	9.03
3	108.40	19.41 QP	30.00	-10.59	4.00 H	23	5.85	13.56
4	141.70	18.73 QP	30.00	-11.27	4.00 H	121	5.86	12.87
5	179.90	16.60 QP	30.00	-13.40	4.00 H	338	5.16	11.44
6	261.40	18.06 QP	37.00	-18.94	3.81 H	209	2.61	15.45

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

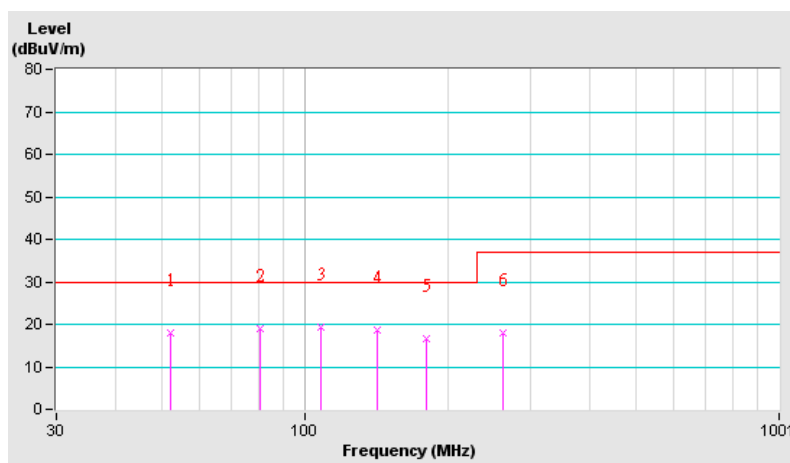


<b>TEST MODE</b>	DC 48V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	230Vac, 50 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 75 % RH, 1007 hPa	<b>TESTED BY:</b> Fox Chang	

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.12	16.81 QP	30.00	-13.19	1.00 V	2	2.83	13.98
2	77.31	20.81 QP	30.00	-9.19	1.00 V	242	12.30	8.51
3	114.06	20.57 QP	30.00	-9.43	1.14 V	348	6.65	13.92
4	143.00	19.65 QP	30.00	-10.35	1.00 V	76	6.83	12.82
5	171.80	16.59 QP	30.00	-13.41	1.00 V	169	4.84	11.75
6	270.70	17.76 QP	37.00	-19.24	1.00 V	266	2.29	15.47

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

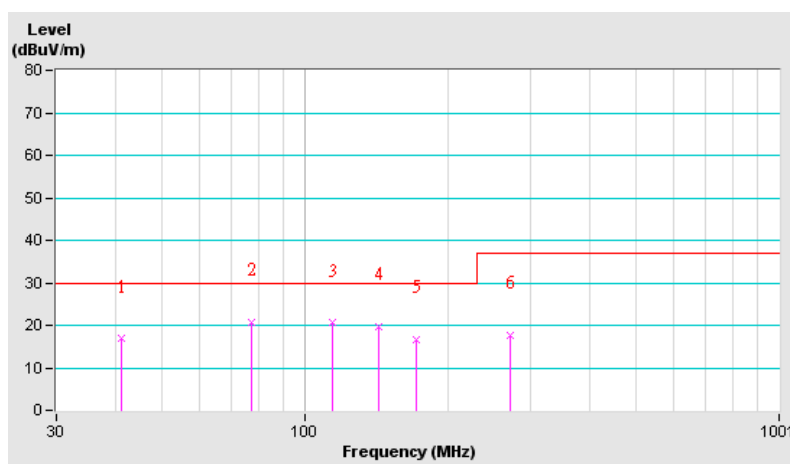

## 4.3 HARMONICS CURRENT MEASUREMENT

### 4.3.1 LIMITS OF HARMONICS CURRENT MEASUREMENT

#### TEST STANDARD: EN 61000-3-2

Limits for Class A equipment		Limits for Class D equipment		
Harmonics Order n	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A
Odd harmonics		Odd Harmonics only		
3	2.30	3	3.4	2.30
5	1.14	5	1.9	1.14
7	0.77	7	1.0	0.77
9	0.40	9	0.5	0.40
11	0.33	11	0.35	0.33
13	0.21	13	0.30	0.21
15≤n≤39	0.15x15/n	15≤n≤39	3.85/n	0.15x15/n
Even harmonics				
2	1.08			
4	0.43			
6	0.30			
8≤n≤40	0.23x8/n			

- NOTE:** 1. Class A and Class D are classified according to section 5 of EN 61000-3-2:2006.
2. According to section 7 of EN 61000-3-2: 2006, the above limits for all equipment except for lighting equipment are for all applications having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.

### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
EMC PARTNER EMC Emission Tester	HAR1000-1P	084	Apr. 27, 2007
Software	HARCS	NA	NA

- NOTE:** 1. The test was performed in EMS Room No. 1.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.3.3 TEST PROCEDURE

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- b. The classification of EUT is according to section 5 of EN 61000-3-2:2006.

The EUT is classified as follows:

Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B: Portable tools; Arc welding equipment which is not professional equipment

Class C: Lighting equipment.

Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.


- c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation



### 4.3.5 TEST SETUP

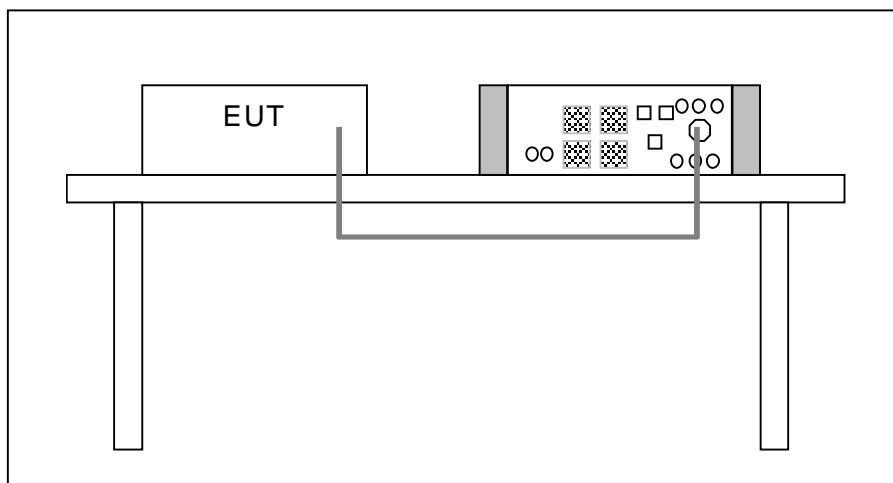

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 4.3.6 EUT OPERATING CONDITIONS

Connected a resistor load to DC output port of EUT to make EUT have maximum power consumption and then a multi-meter was used to monitor voltage of secondary output.

### 4.3.7 TEST RESULTS (1)

<b>TEST MODE</b>	DC 12V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.3Vrms/ 0.538Arms	<b>POWER FREQUENCY</b>	49.857Hz
<b>POWER CONSUMPTION</b>	119.60W	<b>POWER FACTOR</b>	0.959
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

Harm. Order	Reading Data (A)	Limit (A)
1	1.4425	-
3	0.0493	2.3000
5	0.0275	1.1400
7	0.0225	0.7700
9	0.0168	0.4000
11	0.0118	0.3300
13	0.0078	0.2100
15	0.0056	0.1500
17	0.0054	0.1324
19	0.0057	0.1184
21	0.0057	0.1071
23	0.0051	0.0978
25	0.0044	0.0900
27	0.0037	0.0833
29	0.0034	0.0776
31	0.0034	0.0726
33	0.0035	0.0682
35	0.0035	0.0643
37	0.0033	0.0608
39	0.0029	0.0577

Harm. Order	Reading Data (mA/W)	Limit (mA/W)
1	-	-
3	0.4123	3.4000
5	0.2296	1.9000
7	0.1878	1.0000
9	0.1408	0.5000
11	0.0990	0.3500
13	0.0653	0.2962
15	0.0470	0.2567
17	0.0449	0.2265
19	0.0480	0.2026
21	0.0480	0.1833
23	0.0429	0.1674
25	0.0367	0.1540
27	0.0306	0.1426
29	0.0286	0.1328
31	0.0286	0.1242
33	0.0296	0.1167
35	0.0296	0.1100
37	0.0276	0.1041
39	0.0245	0.0987

**NOTE:** Steady state values on AC mains are recorded in the table.

### 4.3.8 TEST RESULTS (2)

<b>TEST MODE</b>	DC 15V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.3Vrms/ 0.626Arms	<b>POWER FREQUENCY</b>	49.870Hz
<b>POWER CONSUMPTION</b>	140.05W	<b>POWER FACTOR</b>	0.969
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

Harm. Order	Reading Data (A)	Limit (A)
1	1.5903	-
3	0.0538	2.3000
5	0.0258	1.1400
7	0.0217	0.7700
9	0.0171	0.4000
11	0.0128	0.3300
13	0.0089	0.2100
15	0.0061	0.1500
17	0.0045	0.1324
19	0.0044	0.1184
21	0.0048	0.1071
23	0.0049	0.0978
25	0.0046	0.0900
27	0.0040	0.0833
29	0.0033	0.0776
31	0.0028	0.0726
33	0.0028	0.0682
35	0.0028	0.0643
37	0.0029	0.0608
39	0.0028	0.0577

Harm. Order	Reading Data (mA/W)	Limit (mA/W)
1	-	-
3	0.3844	3.4000
5	0.1839	1.9000
7	0.1551	1.0000
9	0.1220	0.5000
11	0.0915	0.3500
13	0.0636	0.2962
15	0.0436	0.2567
17	0.0323	0.2265
19	0.0314	0.2026
21	0.0340	0.1833
23	0.0349	0.1674
25	0.0331	0.1540
27	0.0288	0.1426
29	0.0235	0.1328
31	0.0200	0.1242
33	0.0201	0.1167
35	0.0200	0.1100
37	0.0209	0.1041
39	0.0200	0.0987

**NOTE:** Steady state values on AC mains are recorded in the table.

### 4.3.9 TEST RESULTS (3)

<b>TEST MODE</b>	DC 19V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.3Vrms/ 0.624Arms	<b>POWER FREQUENCY</b>	49.818Hz
<b>POWER CONSUMPTION</b>	139.33W	<b>POWER FACTOR</b>	0.969
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

Harm. Order	Reading Data (A)	Limit (A)
1	1.5568	-
3	0.0544	2.3000
5	0.0267	1.1400
7	0.0223	0.7700
9	0.0175	0.4000
11	0.0129	0.3300
13	0.0089	0.2100
15	0.0060	0.1500
17	0.0046	0.1324
19	0.0048	0.1184
21	0.0051	0.1071
23	0.0051	0.0978
25	0.0048	0.0900
27	0.0040	0.0833
29	0.0034	0.0776
31	0.0031	0.0726
33	0.0031	0.0682
35	0.0032	0.0643
37	0.0032	0.0608
39	0.0031	0.0577

Harm. Order	Reading Data (mA/W)	Limit (mA/W)
1	-	-
3	0.3907	3.4000
5	0.1919	1.9000
7	0.1603	1.0000
9	0.1253	0.5000
11	0.0929	0.3500
13	0.0640	0.2962
15	0.0429	0.2567
17	0.0333	0.2265
19	0.0342	0.2026
21	0.0368	0.1833
23	0.0368	0.1674
25	0.0342	0.1540
27	0.0289	0.1426
29	0.0245	0.1328
31	0.0219	0.1242
33	0.0219	0.1167
35	0.0228	0.1100
37	0.0228	0.1041
39	0.0219	0.0987

**NOTE:** Steady state values on AC mains are recorded in the table.

#### 4.3.10 TEST RESULTS (4)

<b>TEST MODE</b>	DC 24V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.3Vrms/ 0.615Arms	<b>POWER FREQUENCY</b>	49.818Hz
<b>POWER CONSUMPTION</b>	137.95W	<b>POWER FACTOR</b>	0.969
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

Harm. Order	Reading Data (A)	Limit (A)
1	1.5813	-
3	0.0511	2.3000
5	0.0255	1.1400
7	0.0215	0.7700
9	0.0171	0.4000
11	0.0128	0.3300
13	0.0090	0.2100
15	0.0062	0.1500
17	0.0045	0.1324
19	0.0044	0.1184
21	0.0048	0.1071
23	0.0049	0.0978
25	0.0046	0.0900
27	0.0040	0.0833
29	0.0034	0.0776
31	0.0029	0.0726
33	0.0028	0.0682
35	0.0028	0.0643
37	0.0029	0.0608
39	0.0028	0.0577

Harm. Order	Reading Data (mA/W)	Limit (mA/W)
1	-	-
3	0.3708	3.4000
5	0.1849	1.9000
7	0.1557	1.0000
9	0.1239	0.5000
11	0.0929	0.3500
13	0.0655	0.2962
15	0.0451	0.2567
17	0.0327	0.2265
19	0.0319	0.2026
21	0.0345	0.1833
23	0.0354	0.1674
25	0.0336	0.1540
27	0.0292	0.1426
29	0.0248	0.1328
31	0.0212	0.1242
33	0.0204	0.1167
35	0.0204	0.1100
37	0.0212	0.1041
39	0.0203	0.0987

**NOTE:** Steady state values on AC mains are recorded in the table.

### 4.3.11 TEST RESULTS (5)

<b>TEST MODE</b>	DC 48V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.3Vrms/ 0.577Arms	<b>POWER FREQUENCY</b>	49.818Hz
<b>POWER CONSUMPTION</b>	130.64W	<b>POWER FACTOR</b>	0.965
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

Harm. Order	Reading Data (A)	Limit (A)
1	1.4259	-
3	0.0535	2.3000
5	0.0269	1.1400
7	0.0221	0.7700
9	0.0170	0.4000
11	0.0121	0.3300
13	0.0081	0.2100
15	0.0055	0.1500
17	0.0048	0.1324
19	0.0051	0.1184
21	0.0054	0.1071
23	0.0051	0.0978
25	0.0045	0.0900
27	0.0037	0.0833
29	0.0032	0.0776
31	0.0031	0.0726
33	0.0032	0.0682
35	0.0033	0.0643
37	0.0032	0.0608
39	0.0029	0.0577

Harm. Order	Reading Data (mA/W)	Limit (mA/W)
1	-	-
3	0.4093	3.4000
5	0.2056	1.9000
7	0.1691	1.0000
9	0.1299	0.5000
11	0.0925	0.3500
13	0.0617	0.2962
15	0.0421	0.2567
17	0.0364	0.2265
19	0.0392	0.2026
21	0.0411	0.1833
23	0.0392	0.1674
25	0.0346	0.1540
27	0.0280	0.1426
29	0.0243	0.1328
31	0.0234	0.1242
33	0.0243	0.1167
35	0.0252	0.1100
37	0.0243	0.1041
39	0.0224	0.0987

**NOTE:** Steady state values on AC mains are recorded in the table.

## 4.4 VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

### 4.4.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

**TEST STANDARD: EN 61000-3-3**

TEST ITEM	LIMIT	NOTE
$P_{st}$	1.0	$P_{st}$ means short-term flicker indicator.
$P_{lt}$	0.65	$P_{lt}$ means long-term flicker indicator.
$d(t)$ (%)	3.3	$d(t)$ means maximum time that not exceeds 500 ms.
$d_{max}$ (%)	4	$d_{max}$ means maximum relative voltage change.
$dc$ (%)	3.3	$dc$ means relative steady-state voltage change

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
EMC PARTNER EMC Emission Tester	HAR1000-1P	084	Apr. 27, 2007
Software	HARCS	NA	NA

**NOTE:** 1. The test was performed in EMS Room No. 1.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.4.3 TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP

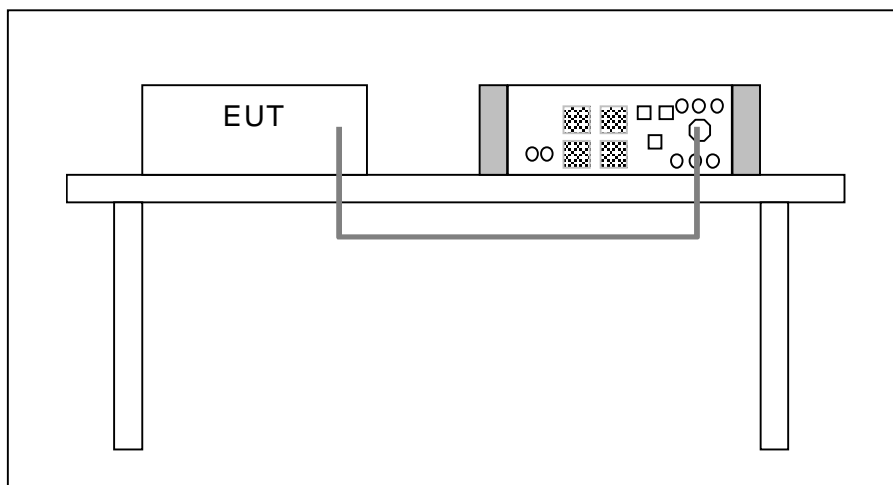

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.4.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



#### 4.4.7 TEST RESULTS (1)

<b>TEST MODE</b>	DC 12V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.3Vrms / 0.534Arms	<b>POWER FREQUENCY</b>	49.844Hz
<b>OBSERVATION PERIOD (Tp)</b>	10 minutes	<b>POWER FACTOR</b>	0.957
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	REMARKS
P <sub>st</sub>	0.183	1.0	Pass
P <sub>lt</sub>	0.183	0.65	Pass
d(t) (%)	0	3.3	Pass
d <sub>max</sub> (%)	0	4	Pass
dc (%)	0	3.3	Pass

**NOTE:**

- (1) P<sub>st</sub> means short-term flicker indicator.
- (2) P<sub>lt</sub> means long-term flicker indicator.
- (3) d(t) means maximum time that not exceeds 500 ms.
- (4) d<sub>max</sub> means maximum relative voltage change.
- (5) dc means relative steady-state voltage change.

#### 4.4.8 TEST RESULTS (2)

<b>TEST MODE</b>	DC 15V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.3Vrms / 0.627Arms	<b>POWER FREQUENCY</b>	49.857Hz
<b>OBSERVATION PERIOD (Tp)</b>	10 minutes	<b>POWER FACTOR</b>	0.970
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	REMARKS
P <sub>st</sub>	0.162	1.0	Pass
P <sub>lt</sub>	0.162	0.65	Pass
d(t) (%)	0	3.3	Pass
d <sub>max</sub> (%)	0	4	Pass
dc (%)	0	3.3	Pass

**NOTE:**

- (1) P<sub>st</sub> means short-term flicker indicator.
- (2) P<sub>lt</sub> means long-term flicker indicator.
- (3) d(t) means maximum time that not exceeds 500 ms.
- (4) d<sub>max</sub> means maximum relative voltage change.
- (5) dc means relative steady-state voltage change.

#### 4.4.9 TEST RESULTS (3)

<b>TEST MODE</b>	DC 19V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.1Vrms / 0.635Arms	<b>POWER FREQUENCY</b>	49.831Hz
<b>OBSERVATION PERIOD (Tp)</b>	10 minutes	<b>POWER FACTOR</b>	0.975
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	REMARKS
P <sub>st</sub>	0.206	1.0	Pass
P <sub>lt</sub>	0.206	0.65	Pass
d(t) (%)	0	3.3	Pass
d <sub>max</sub> (%)	0.280	4	Pass
dc (%)	0.010	3.3	Pass

**NOTE:**

- (1) P<sub>st</sub> means short-term flicker indicator.
- (2) P<sub>lt</sub> means long-term flicker indicator.
- (3) d(t) means maximum time that not exceeds 500 ms.
- (4) d<sub>max</sub> means maximum relative voltage change.
- (5) dc means relative steady-state voltage change.

#### 4.4.10 TEST RESULTS (4)

<b>TEST MODE</b>	DC 24V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.3Vrms / 0.614Arms	<b>POWER FREQUENCY</b>	49.831Hz
<b>OBSERVATION PERIOD (Tp)</b>	10 minutes	<b>POWER FACTOR</b>	0.968
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	REMARKS
P <sub>st</sub>	0.205	1.0	Pass
P <sub>lt</sub>	0.205	0.65	Pass
d(t) (%)	0	3.3	Pass
d <sub>max</sub> (%)	0	4	Pass
dc (%)	0	3.3	Pass

**NOTE:**

- (1) P<sub>st</sub> means short-term flicker indicator.
- (2) P<sub>lt</sub> means long-term flicker indicator.
- (3) d(t) means maximum time that not exceeds 500 ms.
- (4) d<sub>max</sub> means maximum relative voltage change.
- (5) dc means relative steady-state voltage change.

#### 4.4.11 TEST RESULTS (5)

<b>TEST MODE</b>	DC 48V		
<b>FUNDAMENTAL VOLTAGE/AMPERE</b>	230.3Vrms / 0.574Arms	<b>POWER FREQUENCY</b>	49.831Hz
<b>OBSERVATION PERIOD (Tp)</b>	10 minutes	<b>POWER FACTOR</b>	0.964
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 70% RH, 1002hPa	<b>TESTED BY:</b> Andy Cheng	

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	REMARKS
P <sub>st</sub>	0.200	1.0	Pass
P <sub>lt</sub>	0.200	0.65	Pass
d(t) (%)	0	3.3	Pass
d <sub>max</sub> (%)	0	4	Pass
dc (%)	0	3.3	Pass

**NOTE:**

- (1) P<sub>st</sub> means short-term flicker indicator.
- (2) P<sub>lt</sub> means long-term flicker indicator.
- (3) d(t) means maximum time that not exceeds 500 ms.
- (4) d<sub>max</sub> means maximum relative voltage change.
- (5) dc means relative steady-state voltage change.

## 5 IMMUNITY TEST

### 5.1 GENERAL DESCRIPTION

<b>Product Standard:</b>	<b>EN 55024: 1998+A1: 2001+A2: 2003</b>	
<b>Basic Standard, specification requirement, and Performance Criteria:</b>	IEC 61000-4-2	Electrostatic Discharge – ESD: 8kV air discharge, 4kV Contact discharge, Performance Criterion B
	IEC 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80-1000 MHz, 3V/m, 80% AM (1kHz), Performance Criterion A
	IEC 61000-4-4	Electrical Fast Transient/Burst - EFT AC Power line: 1kV, DC Power line: 0.5kV Signal line: 0.5kV Performance Criterion B
	IEC 61000-4-5	Surge Immunity Test: 1.2/50 us Open Circuit Voltage, 8 /20 us Short Circuit Current AC Power Line: line to line 1 kV, line to earth 2kV DC Power Line: line to earth 0.5kV Signal line: 1kV Performance Criterion B
	IEC 61000-4-6	Conducted Radio Frequency Disturbances Test – CS: 0.15-80 MHz, 3Vrms, 80% AM, 1kHz, Performance Criterion A
	IEC 61000-4-8	Power Frequency Magnetic Field Test, 50 Hz, 1A/m, Performance Criterion A
	IEC 61000-4-11	Voltage Dips: i) >95% reduction -0.5 period, Performance Criterion B ii) 30% reduction – 25 period, Performance Criterion C Voltage Interruptions: i) >95% reduction – 250 period, Performance Criterion C

## 5.2 GENERAL PERFORMANCE CRITERIA DESCRIPTION

According to Clause 7.1 of EN 55024: 1998+A1: 2001+A2: 2003 standard, the following describes the general performance criteria.

<b>CRITERION A</b>	The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
<b>CRITERION B</b>	After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomenon below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state if stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
<b>CRITERION C</b>	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

## 5.3 EUT OPERATING CONDITION

Same as item 4.3.6.

## 5.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 5.4.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-2
<b>Discharge Impedance:</b>	330 ohm / 150 pF
<b>Discharge Voltage:</b>	Air Discharge: 2, 4, 8 kV (Direct) Contact Discharge: 2, 4 kV (Indirect)
<b>Polarity:</b>	Positive & Negative
<b>Number of Discharge:</b>	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
<b>Discharge Mode:</b>	Single Discharge
<b>Discharge Period:</b>	1 second minimum

### 5.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
KeyTek, ESD Simulator	MZ-15/EC	9902287	Mar. 06, 2008

- NOTE:** 1. The test was performed in ESD Room No. 1.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.4.3 TEST PROCEDURE

The discharges shall be applied in two ways:

- a. Contact discharges to the conductive surfaces and coupling planes:

The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges. If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

- b. Air discharges at slots and apertures and insulating surfaces:

On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.




The basic test procedure was in accordance with IEC 61000-4-2:

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

#### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation

## 5.4.5 TEST SETUP

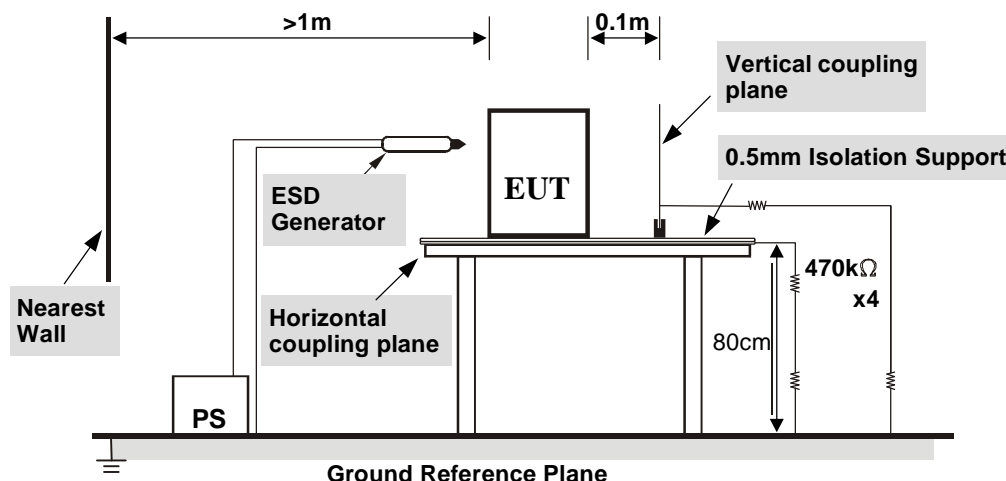

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### NOTE:

#### TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

#### FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

## 5.4.6 TEST RESULTS

<b>TEST MODE</b>	DC 12V/ 15V/ 19V/ 24V/ 48V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 48% RH, 1008hPa	<b>TESTED BY:</b> Andy Cheng	

TEST RESULTS OF DIRECT APPLICATION					
Discharge Level (kV)	Polarity	Test Point	Contact Discharge	Air Discharge	Performance Criterion
2, 4, 8	+/-	1 ~ 5	N/A	Note	A

**Description of test point:** Please refers to ESD test photo for representative mark only.

TEST RESULTS OF INDIRECT APPLICATION					
Discharge Level (kV)	Polarity	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criterion
2, 4	+/-	1 ~ 4	Note	Note	A

**Description of test point:**

1. Left side
2. Right side
3. Front side
4. Rear side

**NOTE:** There was no change compared with initial operation during the test.

## 5.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

### 5.5.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-3
<b>Frequency Range:</b>	80 MHz - 1000 MHz
<b>Field Strength:</b>	3 V/m
<b>Modulation:</b>	1kHz Sine Wave, 80%, AM Modulation
<b>Frequency Step:</b>	1 % of fundamental
<b>Polarity of Antenna:</b>	Horizontal and Vertical
<b>Test Distance:</b>	3 m
<b>Antenna Height:</b>	1.5m
<b>Dwell Time:</b>	at least 3 seconds

### 5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S Signal Generator	SML03	101074	Nov. 05, 2007
AR RF Amplifier	60S1G3	304334	NA
W&G E-Field Sensor 3GHz	TYP-8	AD-0034	Aug. 17, 2007
R&S Power Sensor	NRV-Z5	837878/038	Oct. 16, 2007
R&S Power Sensor	NRV-Z5	837878/039	Oct. 16, 2007
R&S Power Meter	NRVD	837794/040	Oct. 16, 2007
FRANKONIA Power Amplifier	FLH 100	0042	NA
Log-Periodic Antenna	AT 5080	312115	NA
HP-IB Extender	37204	3212U26684	NA
Field Probe	EMR-20	AB-0039	Aug. 17, 2007
EMCO BiconiLog Antenna	3141	1001	NA
COMTEST Compact Full Anechoic Chamber (7x3x3 m)	CFAC	ADT-S01	Oct. 26, 2007
Software	ADT_RS_V450	NA	NA

- NOTE:** 1. The test was performed in RS Room No.1.  
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.5.3 TEST PROCEDURE


The test procedure was in accordance with IEC 61000-4-3

- a. The testing was performed in a fully-anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- b. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1kHz sinewave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. The field strength level was 3V/m.
- e. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation

## 5.5.5 TEST SETUP

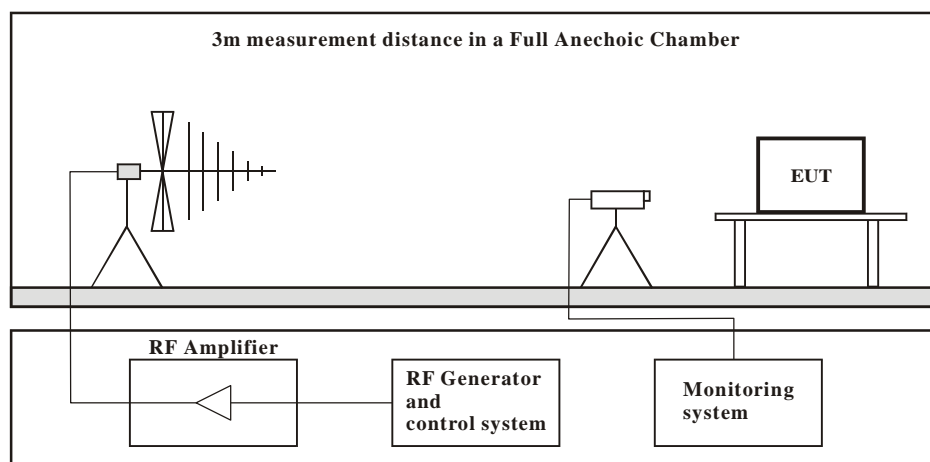

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### NOTE:

#### TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

#### FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

## 5.5.6 TEST RESULTS

<b>TEST MODE</b>	DC 12V/ 15V/ 19V/ 24V/ 48V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	24deg. C, 69% RH, 1002hPa	<b>TESTED BY:</b> Josh Lin	

Frequency (MHz)	Polarity	Azimuth	Field Strength (V/m)	Observation	Performance Criterion
80 - 1000	V&H	0	3	Note	A
80 - 1000	V&H	90	3		
80 - 1000	V&H	180	3		
80 - 1000	V&H	270	3		

**NOTE:** There was no change compared with initial operation during the test.

## 5.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

### 5.6.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-4
<b>Test Voltage:</b>	Power Line : 1kV Signal/Control Line : N/A
<b>Polarity:</b>	Positive & Negative
<b>Impulse Frequency:</b>	5 kHz
<b>Impulse Waveshape :</b>	5/50 ns
<b>Burst Duration:</b>	15 ms
<b>Burst Period:</b>	300 ms
<b>Test Duration:</b>	Not less than 1 min.

### 5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
KeyTek, EFT Generator	EMC Pro	9902207	Feb. 11, 2008
KeyTek, Capacitive Clamp	CE-40-CCL	9508259	NA
EFT Cable	WE-4	EF1Cab-001	NA
EFT Adapter WONPRO	WA-9	EF1ADA-002	NA
Software	CEWAVE32	NA	NA

**NOTE:** 1. The test was performed in EMS Room No. 1.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.6.3 TEST PROCEDURE

- Both positive and negative polarity discharges were applied.
- The length of the "hot wire" from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 0.5 meter  $\pm$  0.05 meter.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with IEC 61000-4-4, 5/50ns.

### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation





## 5.6.6 TEST RESULTS

<b>TEST MODE</b>	DC 12V/ 15V/ 19V/ 24V/ 48V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 68% RH, 1001hPa	<b>TESTED BY:</b> Andy Cheng	

Test Point	Polarity	Test Level (kV)	Observation	Performance Criterion
L1	+/-	1	Note	A
L2	+/-	1	Note	A
PE	+/-	1	Note	A
L1-L2-PE	+/-	1	Note	A

**NOTE:** There was no change compared with initial operation during the test.

## 5.7 SURGE IMMUNITY TEST

### 5.7.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-5
<b>Wave-Shape:</b>	Combination Wave
	1.2/50 us Open Circuit Voltage
	8 /20 us Short Circuit Current
<b>Test Voltage:</b>	Power Line: 0.5kV/ 1kV/ 2kV
<b>Surge Input/ Output:</b>	L1-L2 / L1-PE / L2-PE
<b>Generator Source</b>	2 ohm between networks
<b>Impedance:</b>	12 ohm between network and ground
<b>Polarity:</b>	Positive/Negative
<b>Phase Angle:</b>	0° /90°/180°/270°
<b>Pulse Repetition Rate:</b>	1 time / min. (maximum)
<b>Number of Tests:</b>	5 positive and 5 negative at selected points

### 5.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
KeyTek, Surge Combination Wave	E501A	9508349	Sep. 11, 2007
KeyTek, Surge Coupler/Decoupler	E551	9508350	Sep. 11, 2007
KeyTek External Coupler/Decoupler for Telecom Lines	CM-TELCD	9906194	NA
KeyTek I/O Signal Line Coupler/Decoupler	CM-I/OCD	9907177	NA
Surge Cable	WE-4	SU1Cab-001	NA
Surge Adapter WONPRO	WA-9	SU1ADA-002	NA
Software	E500	NA	NA

- NOTE:** 1. The test was performed in EMS Room No. 1.  
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.7.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT:

The surge is applied to the lines via the capacitive coupling. The coupling / decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

### 5.7.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.7.5 TEST SETUP

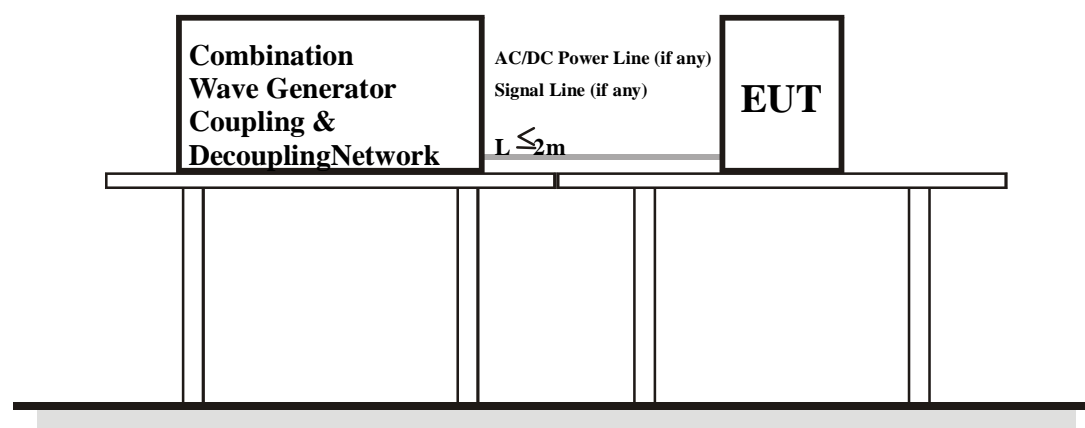

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 5.7.6 TEST RESULTS (1)

<b>TEST MODE</b>	DC 12V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 77% RH, 1004hPa	<b>TESTED BY:</b> Andy Cheng	

VOLTAGE (kV)	TEST POINT	POLARITY	OBSERVATION	PERFORMANCE CRITERION
0.5, 1	L1-L2	+/-	Note	A
0.5, 1, 2	L1-PE	+/-	Note	A
0.5, 1, 2	L2-PE	+/-	Note	A

**NOTE:** There was no change compared with initial operation during the test.

### 5.7.7 TEST RESULTS (2)

<b>TEST MODE</b>	DC 15V/ 19V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 75% RH, 1005hPa	<b>TESTED BY:</b> Bin Cheng	

VOLTAGE (kV)	TEST POINT	POLARITY	OBSERVATION	PERFORMANCE CRITERION
0.5, 1	L1-L2	+/-	Note	A
0.5, 1, 2	L1-PE	+/-	Note	A
0.5, 1, 2	L2-PE	+/-	Note	A

**NOTE:** There was no change compared with initial operation during the test.

### 5.7.8 TEST RESULTS (3)

<b>TEST MODE</b>	DC 24V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 66% RH, 1005hPa	<b>TESTED BY:</b> Bin Cheng	

VOLTAGE (kV)	TEST POINT	POLARITY	OBSERVATION	PERFORMANCE CRITERION
0.5, 1	L1-L2	+/-	Note	A
0.5, 1, 2	L1-PE	+/-	Note	A
0.5, 1, 2	L2-PE	+/-	Note	A

**NOTE:** There was no change compared with initial operation during the test.

### 5.7.9 TEST RESULTS (4)

<b>TEST MODE</b>	DC 48V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 75% RH, 1001hPa	<b>TESTED BY:</b> Andy Cheng	

VOLTAGE (kV)	TEST POINT	POLARITY	OBSERVATION	PERFORMANCE CRITERION
0.5, 1	L1-L2	+/-	Note	A
0.5, 1, 2	L1-PE	+/-	Note	A
0.5, 1, 2	L2-PE	+/-	Note	A

**NOTE:** There was no change compared with initial operation during the test.

## 5.8 IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS (CS)

### 5.8.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-6
<b>Frequency Range:</b>	0.15 MHz - 80 MHz
<b>Field Strength:</b>	3 V <sub>r.m.s.</sub>
<b>Modulation:</b>	1kHz Sine Wave, 80%, AM Modulation
<b>Frequency Step:</b>	1 % of fundamental
<b>Coupled Cable:</b>	Power Mains
<b>Coupling Device:</b>	CDN-M3 (3 wires)

### 5.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Signal Generator	SMY01	841104/033	Nov. 23, 2007
Digital Sweep Function Generator	8120	984801	NA
AR Power Amplifier	75A250AM1	306331	NA
FCC Coupling Decoupling Network	FCC-801-M3-25A	48	Jul. 27, 2007
FCC Coupling Decoupling Network	FCC-801-M3-25A	01022	Mar. 02, 2008
FCC Coupling Decoupling Network	FCC-801-M2-16A	01047	Jul. 20, 2007
FISCHER CUSTOM COMMUNICATIONS EM Injection Clamp	FCC-203I	50	NA
FCC Coupling Decoupling Network	FCC-801-T8	02038	May 26, 2007
FCC Coupling Decoupling Network	FCC-801-T2	02020	May 26, 2007
FCC Coupling Decoupling Network	FCC-801-T4	02031	Jun. 16, 2007
BOONTON RF Voltage Meter	4232A	10180	Jun. 07, 2007
Software	ADT_CS_V7.3.8	NA	NA

**NOTE:** 1. The test was performed in CS Room No. 1.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.8.3 TEST PROCEDURE

- a. The EUT shall be tested within its intended operating and climatic conditions.
- b. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.
- c. The frequency range is swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal is modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate shall not exceed  $1.5 \times 10^{-3}$  decades/s. The step size shall not exceed 1 % of the start and thereafter 1 % of the preceding frequency value where the frequency is swept incrementally.
- d. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency(ies) and harmonics or frequencies of dominant interest, shall be analyzed separately.
- e. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

### 5.8.4 DEVIATION FOR TEST STANDARD

No deviation





## 5.8.6 TEST RESULTS (1)

<b>TEST MODE</b>	DC 12V/ 15V/ 48V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 76% RH, 1001hPa	<b>TESTED BY:</b> Andy Cheng	

Frequency (MHz)	Field Strength (V <sub>r.m.s.</sub> )	Cable	Injection Method	Observation	Performance Criterion
0.15 – 80	3	AC power line	CDN-M3	Note	A

**NOTE:** There is no change compared with the initial operation during the test.

## 5.8.7 TEST RESULTS (2)

<b>TEST MODE</b>	DC 19V/ 24V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 76% RH, 1001hPa	<b>TESTED BY:</b> Bin Cheng	

Frequency (MHz)	Field Strength (V <sub>r.m.s.</sub> )	Cable	Injection Method	Observation	Performance Criterion
0.15 – 80	3	AC power line	CDN-M3	Note	A

**NOTE:** There is no change compared with the initial operation during the test.

## 5.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST

### 5.9.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-8
<b>Frequency Range:</b>	50Hz
<b>Field Strength:</b>	1 A/m
<b>Observation Time:</b>	1 minute
<b>Inductance Coil:</b>	Rectangular type, 1mx1m

### 5.9.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HAEFELY Magnetic Field Tester	MAG 100.1	083794-06	NA
COMBINOVA Magnetic Field Meter	MFM10	224	Aug. 24, 2007

**NOTE:** 1. The test was performed in EMS Room No. 1.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 5.9.3 TEST PROCEDURE

- The equipment is configured and connected to satisfy its functional requirements.
- The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 5.9.4 DEVIATION FROM TEST STANDARD

No deviation

## 5.9.5 TEST SETUP

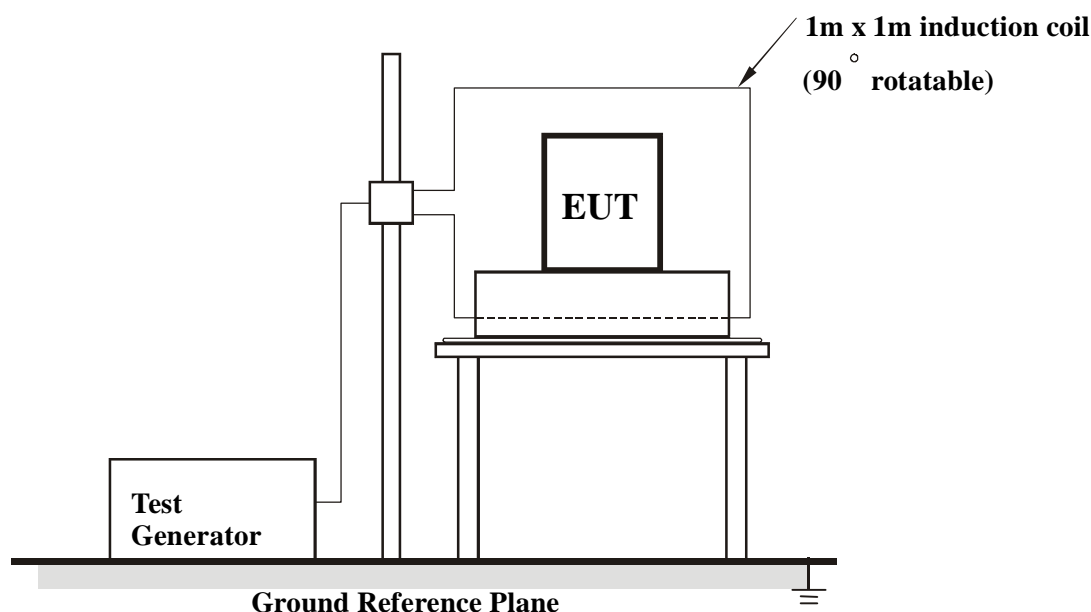

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### NOTE:

#### TABLETOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

#### FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

## 5.9.6 TEST RESULTS

<b>TEST MODE</b>	DC 12V/ 15V/ 19V/ 24V/ 48V	<b>INPUT POWER</b>	230Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 72% RH, 1001hPa	<b>TESTED BY:</b> Andy Cheng	

<b>Direction</b>	<b>Field Strength (A/m)</b>	<b>Observation</b>	<b>Performance Criterion</b>
X - Axis	1	Note	A
Y - Axis	1	Note	A
Z - Axis	1	Note	A

**NOTE:** There was no change compared with the initial operation during the test.

## 5.10 VOLTAGE DIP/SHORT INTERRUPTIONS/VOLTAGE VARIATIONS (DIP) IMMUNITY TEST

### 5.10.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-11
<b>Test Duration Time:</b>	Minimum three test events in sequence
<b>Interval between Event:</b>	Minimum ten seconds
<b>Phase Angle:</b>	0° & 180°
<b>Test Cycle:</b>	3 times

### 5.10.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HAEFELY Mains Interference Simulator	PLINE1610	083690-17	May 21, 2007

- NOTE:** 1. The test was performed in EMS Room No. 1.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 5.10.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

### 5.10.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.10.5 TEST SETUP

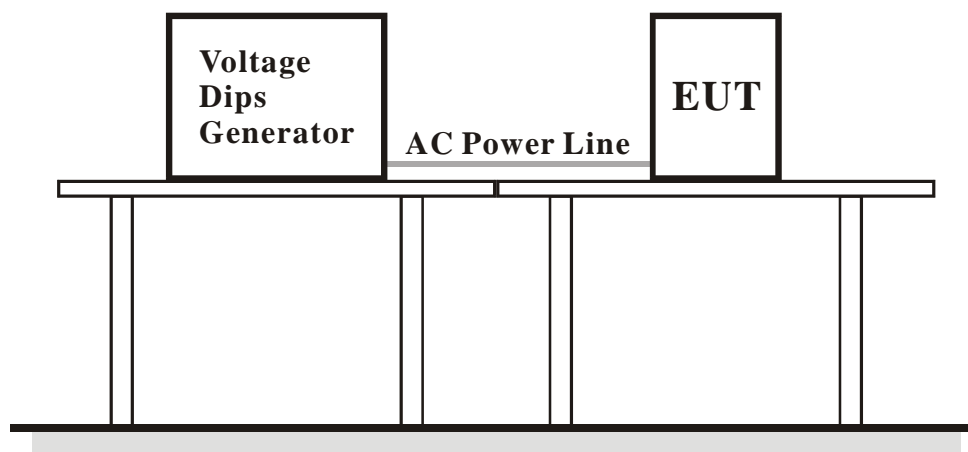

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 5.10.6 TEST RESULTS

<b>TEST MODE</b>	DC 12V/ 15V/ 19V/ 24V/ 48V	<b>INPUT POWER</b>	230Vac, 50Hz/ 100Vac, 50Hz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 72% RH, 1001hPa	<b>TESTED BY:</b> Andy Cheng	

Input Power for testing: 230Vac, 50 Hz			
VOLTAGE % REDUCTION	PERIODS	OBSERVATION	PERFORMANCE CRITERION
>95	0.5	Note (1)	A
30	25	Note (1)	A
>95	250	Note (2)	B

Input Power for testing: 100Vac, 50 Hz			
VOLTAGE % REDUCTION	PERIODS	OBSERVATION	PERFORMANCE CRITERION
>95	0.5	Note (1)	A
30	25	Note (1)	A
>95	250	Note (2)	B

**NOTE:** (1) There was no change compared with the initial operation during the test.  
(2) The EUT reset during the test.



## 6 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST (DC 12V/ 15V)



## CONDUCTED EMISSION TEST (DC 19V/ 24V/ 48V)



## RADIATED EMISSION TEST (DC 12V/ 15V)



## RADIATED EMISSION TEST (DC 19V/ 24V/ 48V)





## HARMONICS EMISSION TEST & VOLTAGE FLUCTUATIONS AND FLICKER TEST (DC 12V/ 15V/ 48V)



## HARMONICS EMISSION TEST & VOLTAGE FLUCTUATIONS AND FLICKER TEST (DC 19V/ 24V)



**ESD TEST**  
(DC 12V/ 15V/ 48V)



**ESD TEST**  
(DC 19V/ 24V)




## ESD TEST POINT (For DC 12V)








## ESD TEST POINT (For DC 15V)

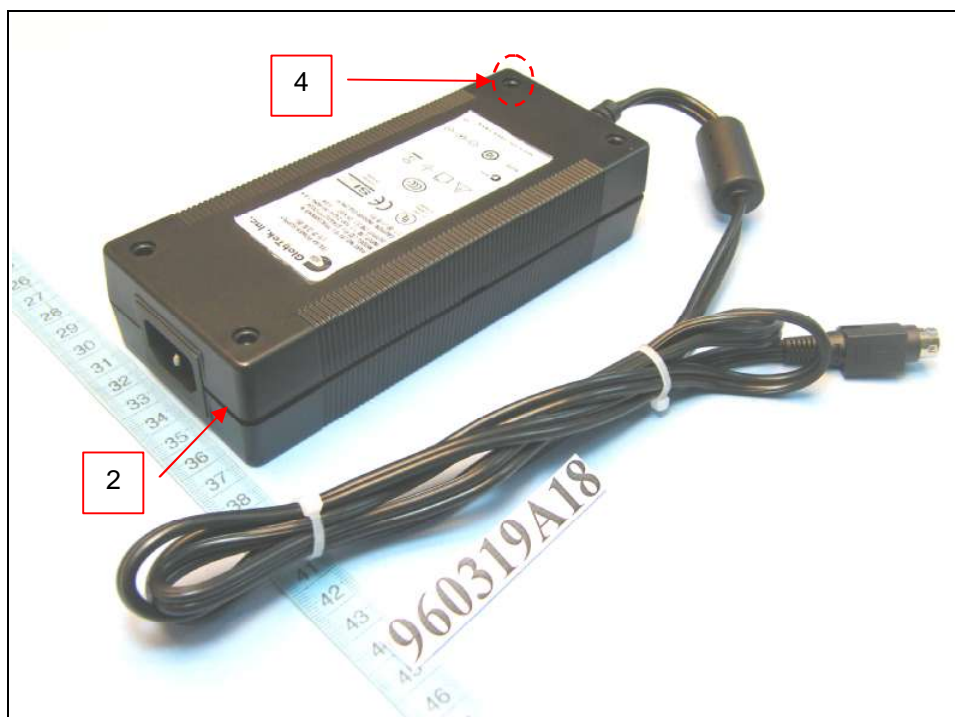



# ESD TEST POINT (For DC 19V)

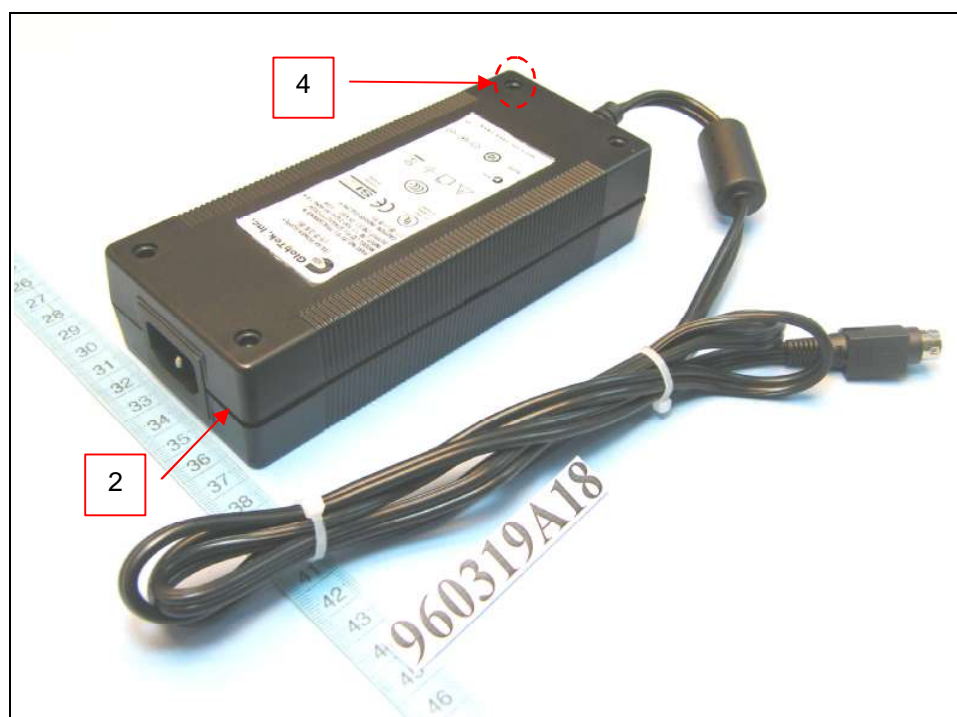




## ESD TEST POINT (For DC 24V)








## ESD TEST POINT (For DC 48V)

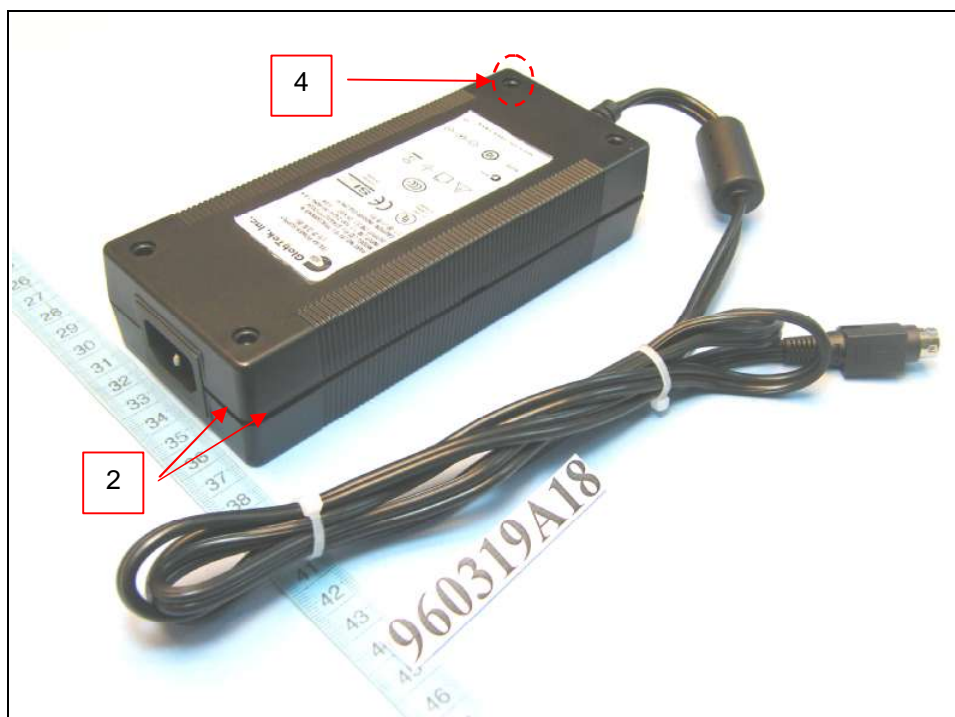






## RS TEST (DC 12V/ 15V/ 48V)

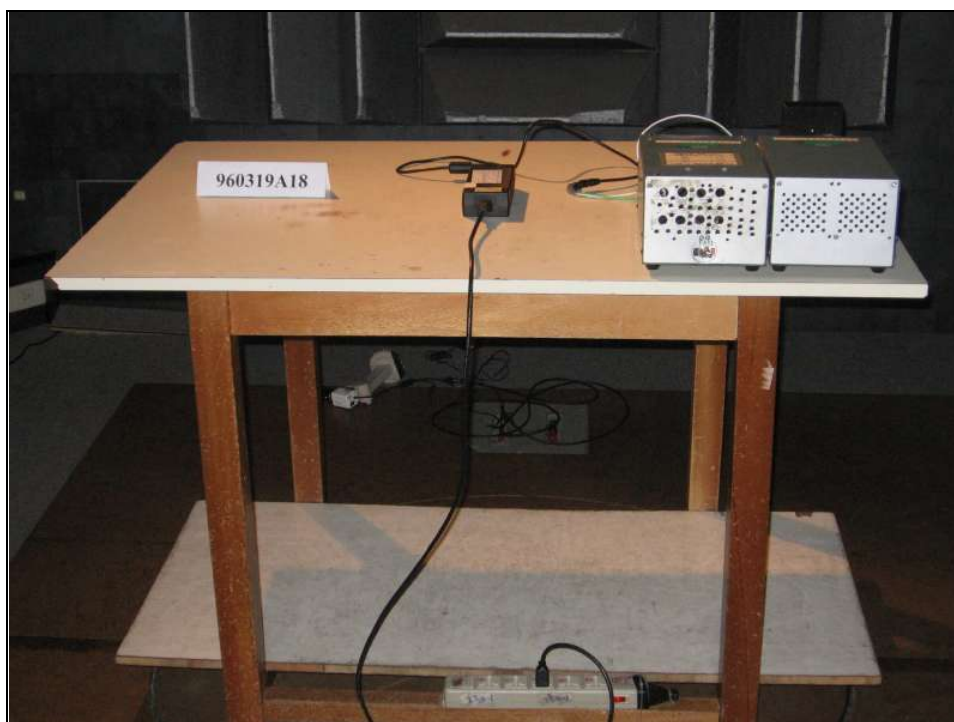

## RS TEST (DC 19V/ 24V)



EFT TEST  
(DC 12V/ 15V/ 48V)

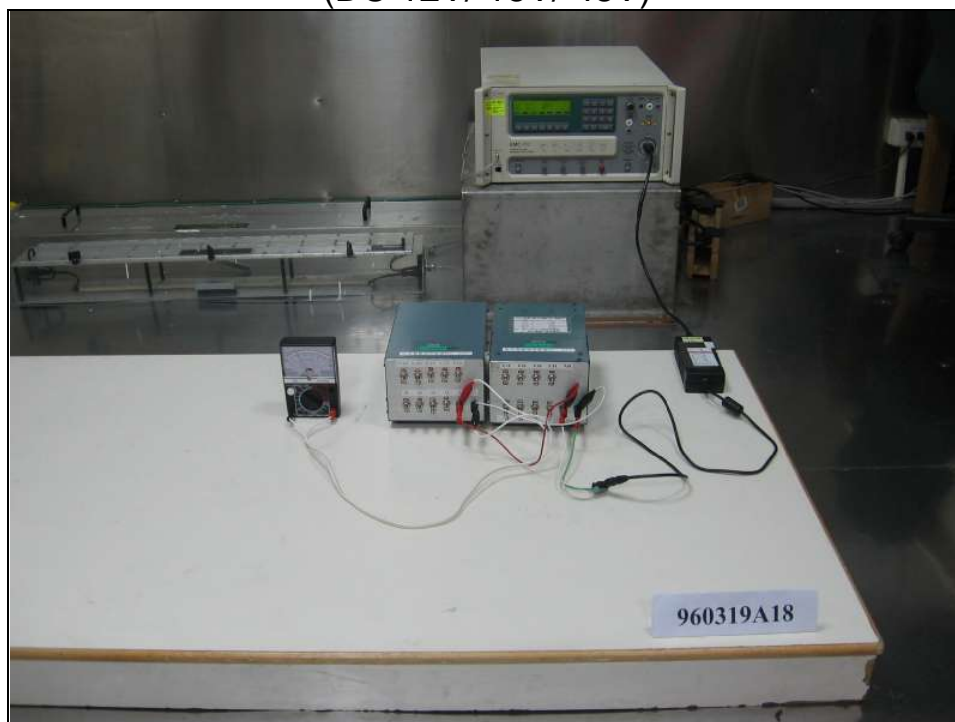

EFT TEST  
(DC 19V/ 24V)



# SURGE TEST (DC 12V/ 15V/ 48V)



# SURGE TEST (DC 19V/ 24V)





## CONDUCTED SUSCEPTIBILITY TEST (DC 12V/ 15V/ 48V)



## CONDUCTED SUSCEPTIBILITY TEST (DC 19V/ 24V)



## POWER-FREQUENCY MAGNETIC FIELDS TEST (DC 12V/ 15V/ 48V)



## POWER-FREQUENCY MAGNETIC FIELDS TEST (DC 19V/ 24V)



## VOLTAGE DIPS AND INTERRUPTIONS TEST (DC 12V/ 15V/ 48V)



## VOLTAGE DIPS AND INTERRUPTIONS TEST (DC 19V/ 24V)



## 7 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

<b>USA</b>	FCC, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA, CSA
<b>R. O. C.</b>	TAF, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	GOST-ASIA (MOU)
<b>Russia</b>	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.