TEST REPORT

Reference No.	:	WTX24X08193179E
Applicant	:	GlobTek, Inc.
Address	:	186 Veterans Dr. Northvale, NJ 07647 USA
Manufacturer	:	GlobTek, Inc.
Address	:	186 Veterans Dr. Northvale, NJ 07647 USA
Product Name	:	DC/DC CONVERTER
Model No.	:	GTD93035L6013.2-F, GTD93035H6013.2-F
Standards	:	**EN 55032:2015+A1:2020** **EN 55035:2017+A11:2020**
Date of Receipt sample	:	2024-12-30
Date of Test	:	2024-12-30 to 2025-01-03
Date of Issue	:	2025-01-03
Test Report Form No.	:	WTX_EN 55032_2015_B
Test Result	:	**Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Toby Zhang

Approved by:

Evan Cai

TABLE OF CONTENTS

1. GENERAL INFORMATION 4
   - 1.1 Product Description for Equipment Under Test (EUT) 4
   - 1.2 Test Standards 5
   - 1.3 Test Location 5
   - 1.4 EUT Setup and Operation Mode 6
   - 1.5 Measurement Uncertainty 6
   - 1.6 Test Equipment List and Details 7
2. SUMMARY OF TEST RESULTS 9
3. EMISSION TEST RESULTS (EMI) 10
   - 3.1 Radiated emissions (30MHz-1GHz) 10
4. IMMUNITY TEST RESULTS (EMS) 19
   - 4.1 Electrostatic discharges 20
   - 4.2 RF electromagnetic field disturbances 22
   - 4.3 Electrical fast transients / burst for DC network power ports 24
   - 4.4 Surges for DC network power ports 25
   - 4.5 Continuous induced RF disturbances for DC network power ports (150kHz-80MHz) 26
   - 4.6 Power frequency magnetic field 27
5. EXHIBIT 1 - PRODUCT LABELING 28
   - 5.1 Proposed Label Format 28
   - 5.2 Proposed Label Location of EUT 28
6. EXHIBIT 2 - EUT PHOTOGRAPHS 30
7. EXHIBIT 3 - TEST SETUP PHOTOGRAPHS 36

Report version

Version No.	Date of issue	Description
Rev.00	2025-01-03	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory name1: 1. GlobTek, Inc.

Factory address1: 186 Veterans Dr. Northvale, NJ 07647 USA

Factory name2: 2. GlobTek (Suzhou) Co., Ltd

Factory address2: Building 4, No. 76, Jin Ling East Rd., Suzhou Industrial Park, Suzhou, JiangSu 215021, China

General Description of EUT	
Product Name:	DC/DC CONVERTER
Trade Name:	GlobTek, Inc.
Model No.:	GTD93035L6013.2-F, GTD93035H6013.2-F
Adding Model(s):	/
Note: The test data is gathered from production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Power Supply:	GTD93035L6013.2-F Input: 9-60V⎓9A Output: 13.2V⎓4.54A,60.0W
	GTD93035H6013.2-F Input: 55-150V⎓2A Output: 13.2V⎓4.54A,60.0W
Power Adaptor:	/
Cable:	/
Rated Power:	60W
Rated Current:	/
Highest Internal Frequency:	Below 108MHz
Classification of Equipment:	Class A

1.2 Test Standards

The tests were performed according to following standards:

EN 55032:2015+A1:2020: Electromagnetic compatibility of multimedia equipment - Emission requirements
EN 55035:2017+A11:2020: Electromagnetic compatibility of multimedia equipment - Immunity requirements.
Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

1.3 Test Location

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address:
1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70
Bao'an District, Shenzhen, Guangdong, China

1.4 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission/immunity level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

No	Title	Description
TM1	TM1.Adapter Model:GTD93035L6013.2-F	DC 9V
TM2	TM2.Adapter Model:GTD93035L6013.2-F	DC 60V
TM3	TM3.Adapter Model:GTD93035H6013.2-F	DC 55V
TM4	TM4.Adapter Model:GTD93035H6013.2-F	DC 150V

1.5 Measurement Uncertainty

Test Item	Measurement Uncertainty
Radiated Emissions (30M - 1000MHz)	30-200MHz：±4.52dB 200-1000MHz：±5.56dB

1.6 Test Equipment List and Details

Radiated emissions (30MHz-1GHz)					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
Amplifier	Agilent	8447D	2944A10457	2024-02-24	2025-02-23
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
EMI Test Software (Radiated Emission B)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)	/	/

Electrostatic discharges					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
ESD Generator	LIONCEL	ESD-203B	0170901	2024-02-26	2025-02-25

RF electromagnetic field disturbances					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
Power Meter	Agilent	E4419B	GB42420578	2024-02-27	2025-02-26
Antenna	SCHWARZBECK	STLP 9129	9129 114	/	/
RF Power Amplifier	MicoTop	MPA-1000-6000-100	MPA1906238	2024-02-27	2025-02-26
RF Power Amplifier	MicoTop	MPA-80-1000-250	MPA1906239	2024-02-27	2025-02-26
Power Sensor	Agilent	E9304A	MY55081055	2024-02-27	2025-02-26
Power Sensor	Agilent	E9301A	MY52450001	2024-02-27	2025-02-26
Signal Generator	HP	8665B	3438A00604	2024-02-27	2025-02-26
Test Software (Radio frequency electromagnetic Field)	EMtrace	EM3	V1.2.6.2	/	/

Electrical fast transients / burst for DC network power ports Surges for DC network power ports					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
Couple Clamp	EMC PARTNER	CN-EFT1000	513	2024-03-19	2025-03-18
Transient 2000	EMC PARTNER	TRA2000	836	2024-03-19	2025-03-18

Continuous induced RF disturbances for DC network power ports (150kHz-80MHz)					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
EM Clamp	TESEQ	KEMZ801A	45028	2024-02-26	2025-02-25
CDN	LIONCEL	CDN-T8	0210401	2024-02-24	2025-02-23
CDN	Luthi	L-801M2/M3	2665	2024-02-27	2025-02-26
Attenuator	EMTEST	MA-5100/6BF2	1009	2024-02-27	2025-02-26
CONDUCTED IMMUNITY TEST SYSTEM	FRANKONIA	CIT-10/75	126B1247/2013	2024-02-27	2025-02-26
Test Software (Radio frequency, Continuous conducted)	SKET	EMC-S	V1.4.0.16	/	/

Power frequency magnetic field					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
Instantaneous PMF Generator Module	LIONCEL	PMF-801C-T	0171001	2024-02-24	2025-02-23
PMF Antenna	LIONCEL	PMF-801C-A	0180302	2024-02-24	2025-02-23
PMF Generator	LIONCEL	PMF-801C-C	0171101	2024-02-24	2025-02-23

2. SUMMARY OF TEST RESULTS

Item	Standard	Method	Result
Radiated emissions (30MHz-1GHz)	EN 55032:2015+A1:2020	Clause 7.3 of CISPR 16-2-3:2016	Compliant
Electrostatic discharges	EN 55035:2017+A11:2020	EN 61000-4-2: 2009	Compliant
RF electromagnetic field disturbances	EN 55035:2017+A11:2020	EN IEC 61000-4-3: 2020	Compliant
Electrical fast transients / burst for DC network power ports	EN 55035:2017+A11:2020	EN 61000-4-4: 2012	Compliant
Surges for DC network power ports	EN 55035:2017+A11:2020	EN 61000-4-5: 2014 +A1: 2017	Compliant
Continuous induced RF disturbances for DC network power ports (150kHz-80MHz)	EN 55035:2017+A11:2020	EN 61000-4-6: 2014	Compliant
Power frequency magnetic field	EN 55035:2017+A11:2020	EN 61000-4-8: 2010	Compliant

3. Emission Test Results (EMI)


3.1 Radiated emissions (30MHz-1GHz)

Test Requirement:	Class A
Test Limit:	**Frequency (MHz)** / **Limit [dB(uV/m) at 10m]** / **Limit [dB(uV/m) at 3m]** 30 to 230 / 40 / 50 230 to 1000 / 47 / 57 Detector: / Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz
Test Method:	Clause 7.3 of CISPR 16-2-3:2016
Procedure:	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

3.1.1 E.U.T. Operation


Environmental Conditions	
Temperature:	23.5 °C
Relative Humidity:	54 %
Atmospheric Pressure:	99.8 kPa
Test mode:	TM1, TM2, TM3, TM4

3.1.2 Basic Test Setup Block Diagram

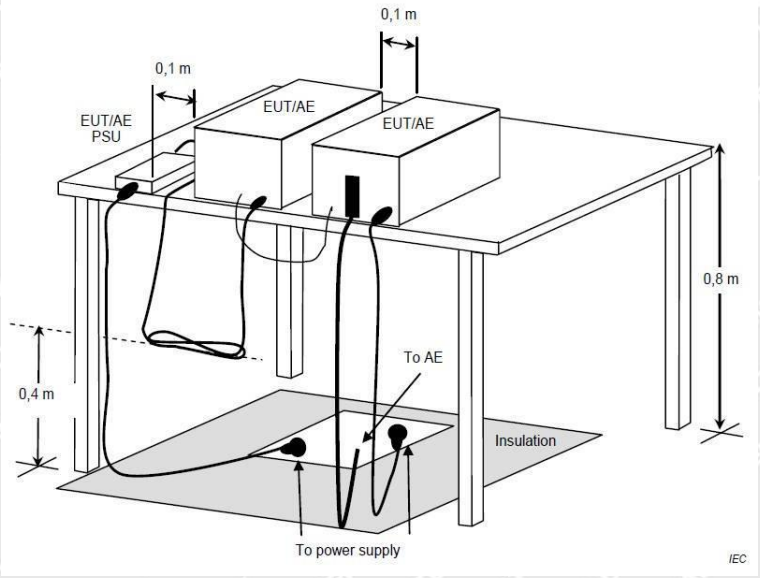


3.1.3 Summary of Test Results

TM1 / Polarization: Horizontal

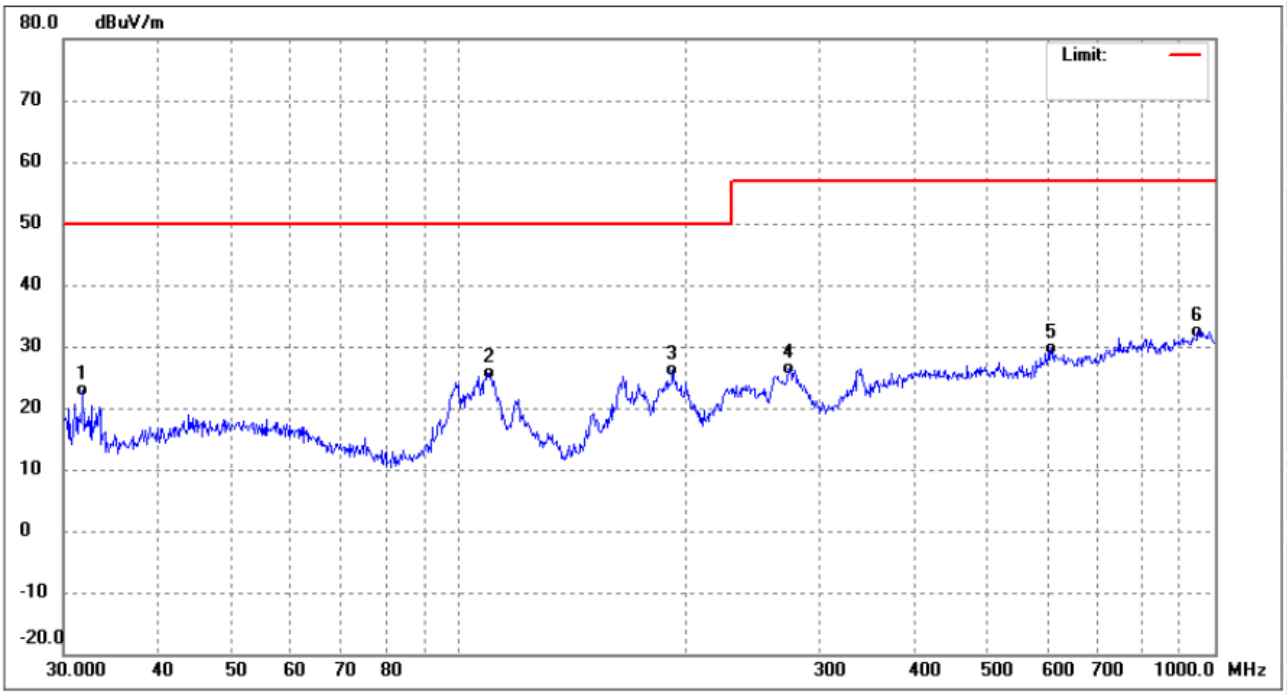


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	31.8427	36.74	-13.80	22.94	50.00	-27.06	QP
2	109.4116	37.66	-12.15	25.51	50.00	-24.49	QP
3	191.7450	36.59	-10.47	26.12	50.00	-23.88	QP
4	273.2341	34.29	-7.79	26.50	57.00	-30.50	QP
5	607.7867	29.15	0.55	29.70	57.00	-27.30	QP
6	948.7610	28.21	4.26	32.47	57.00	-24.53	QP

TM1 / Polarization: Vertical

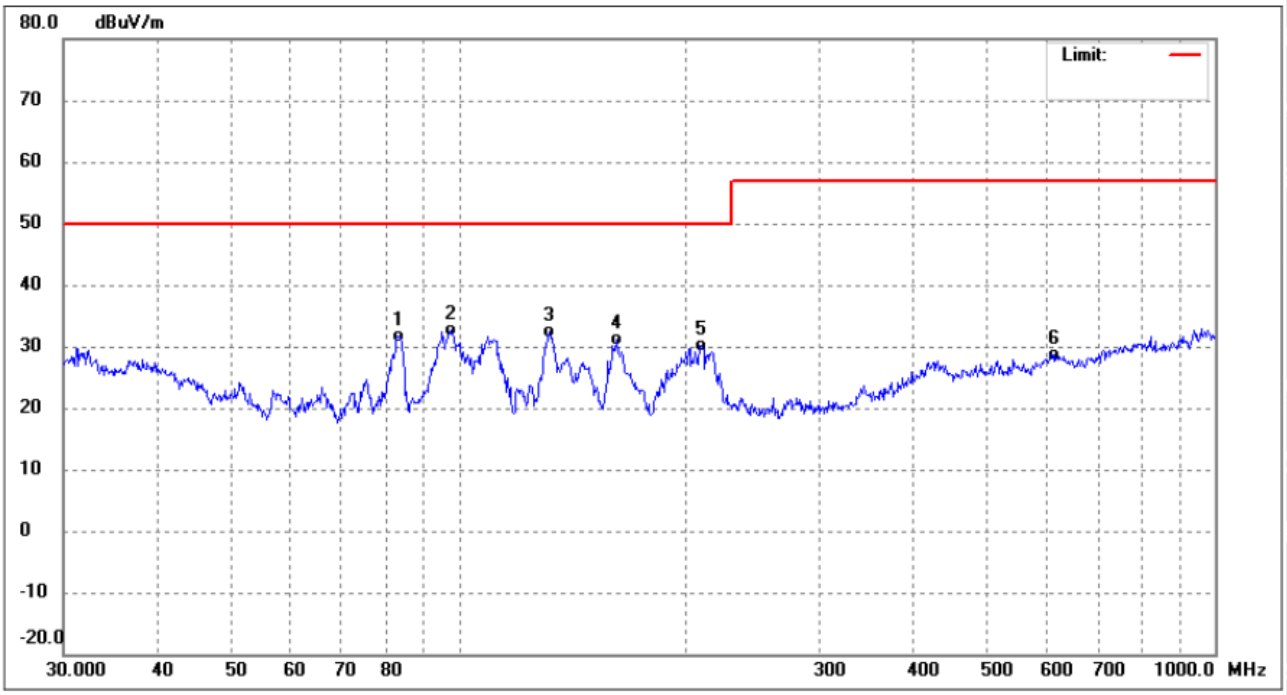


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	83.2298	47.53	-15.78	31.75	50.00	-18.25	QP
2	97.4560	44.73	-12.09	32.64	50.00	-17.36	QP
3	131.7577	47.00	-14.55	32.45	50.00	-17.55	QP
4	161.4742	44.81	-13.68	31.13	50.00	-18.87	QP
5	209.3129	40.79	-10.77	30.02	50.00	-19.98	QP
6	614.2142	28.08	0.65	28.73	57.00	-28.27	QP

TM2 / Polarization: Horizontal

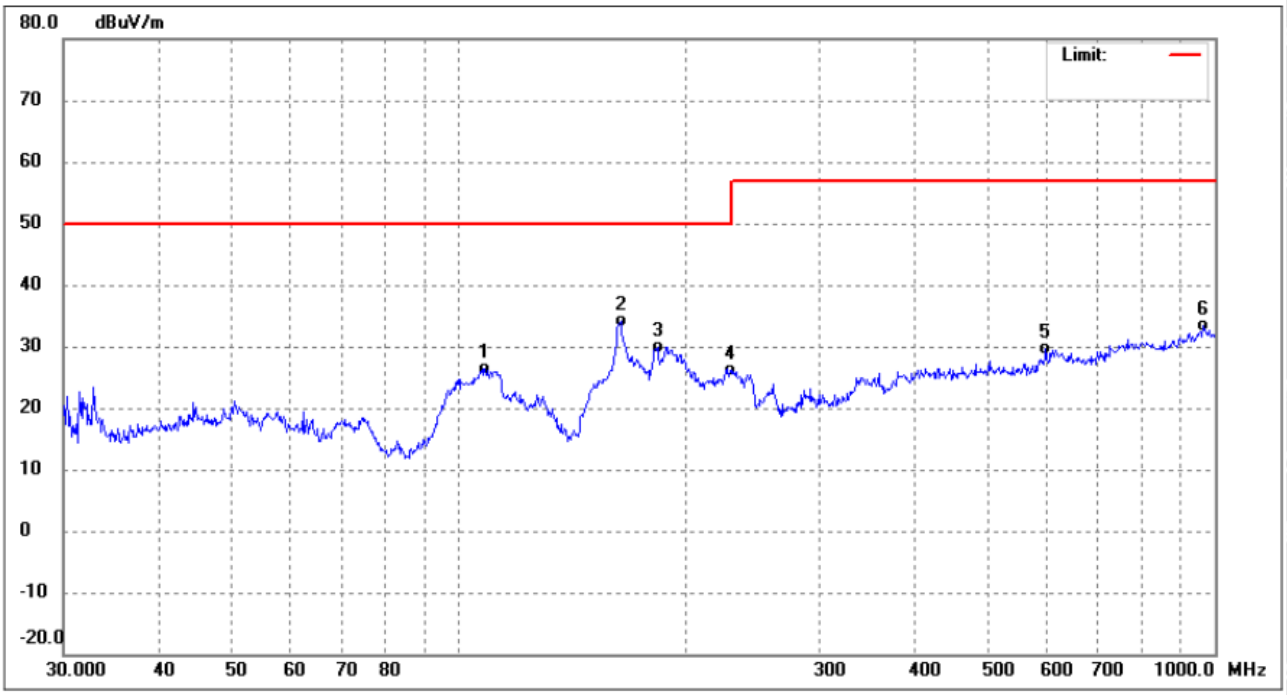


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	108.2667	38.43	-12.05	26.38	50.00	-23.62	QP
2	163.7550	47.62	-13.53	34.09	50.00	-15.91	QP
3	183.2005	41.82	-12.00	29.82	50.00	-20.18	QP
4	228.4904	35.63	-9.40	26.23	50.00	-23.77	QP
5	597.2234	29.84	-0.10	29.74	57.00	-27.26	QP
6	965.5421	28.59	4.80	33.39	57.00	-23.61	QP

TM2 / Polarization: Vertical

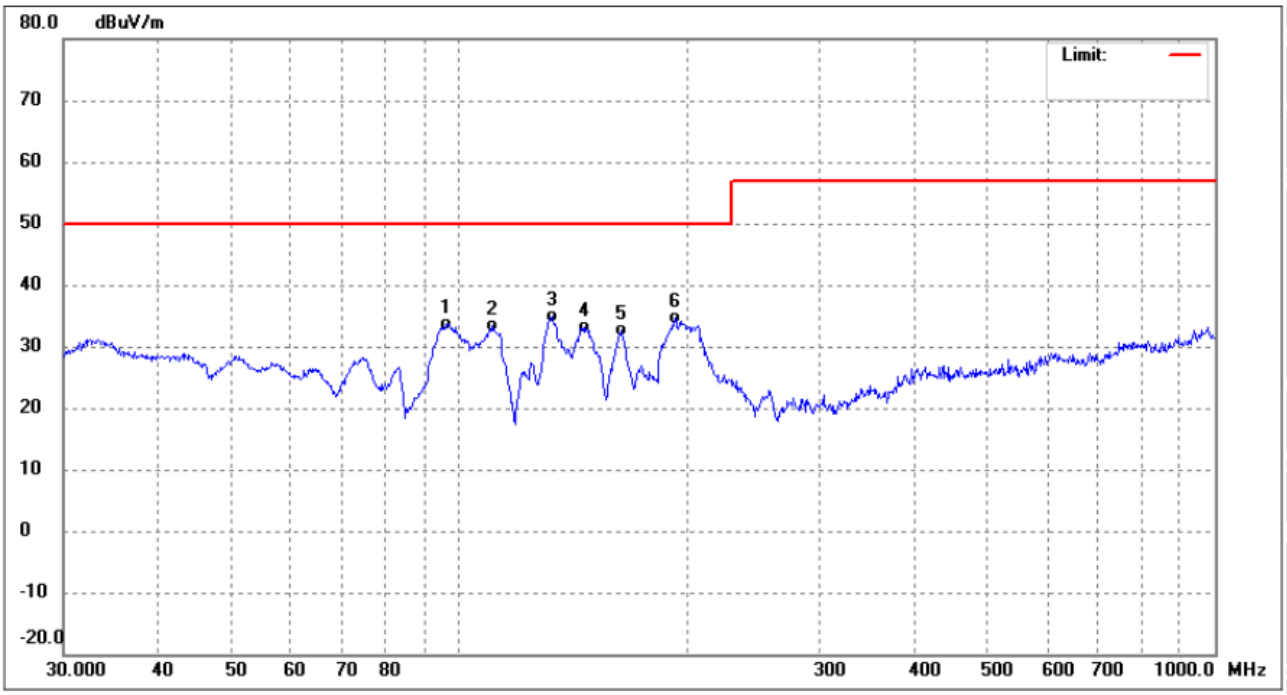


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	96.0986	46.01	-12.32	33.69	50.00	-16.31	QP
2	110.5687	45.59	-12.26	33.33	50.00	-16.67	QP
3	132.6850	49.44	-14.60	34.84	50.00	-15.16	QP
4	146.3735	47.83	-14.62	33.21	50.00	-16.79	QP
5	163.7550	46.21	-13.53	32.68	50.00	-17.32	QP
6	193.0945	45.03	-10.30	34.73	50.00	-15.27	QP

TM3 / Polarization: Horizontal

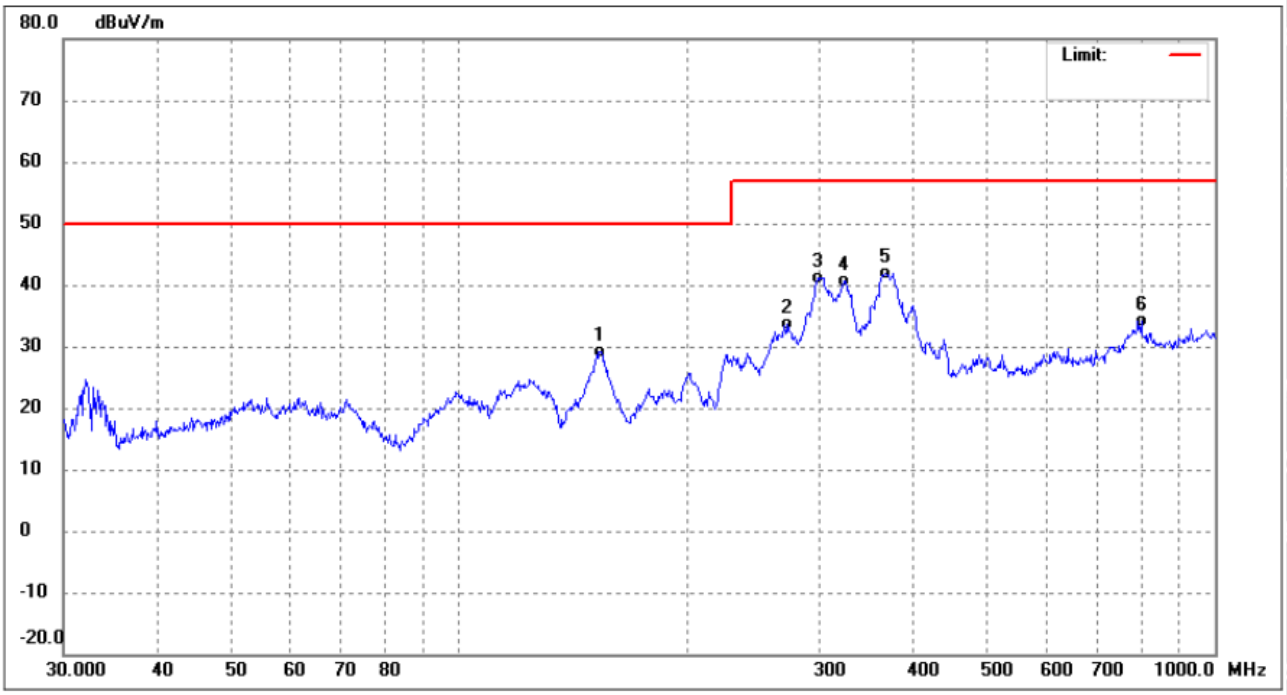


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	153.7385	43.51	-14.26	29.25	50.00	-20.75	QP
2	272.2776	41.42	-7.86	33.56	57.00	-23.44	QP
3	298.2681	48.08	-6.85	41.23	57.00	-15.77	QP
4	323.3204	47.01	-6.32	40.69	57.00	-16.31	QP
5	366.8231	46.71	-4.77	41.94	57.00	-15.06	QP
6	798.9797	31.78	2.43	34.21	57.00	-22.79	QP

TM3 / Polarization: Vertical

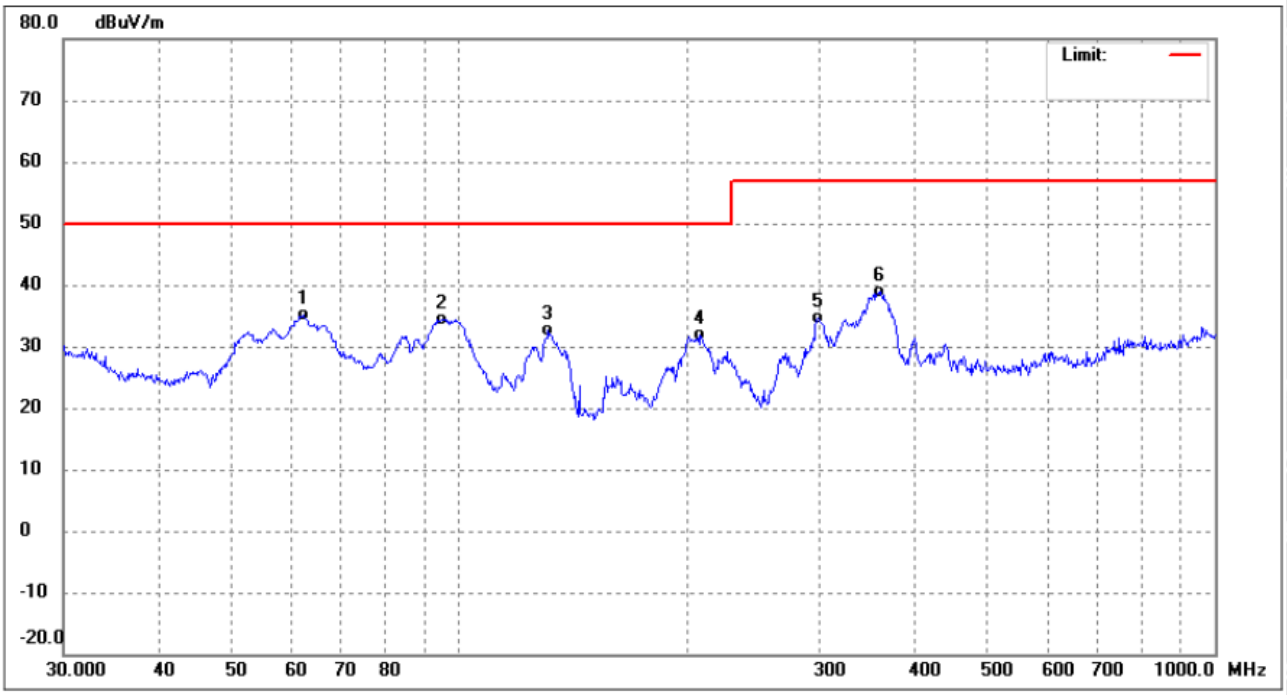


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	62.2128	46.76	-11.73	35.03	50.00	-14.97	QP
2	95.0930	47.00	-12.54	34.46	50.00	-15.54	QP
3	131.2965	47.07	-14.52	32.55	50.00	-17.45	QP
4	208.5803	42.59	-10.78	31.81	50.00	-18.19	QP
5	298.2681	41.52	-6.85	34.67	57.00	-22.33	QP
6	360.4476	44.08	-5.10	38.98	57.00	-18.02	QP

TM4 / Polarization: Horizontal

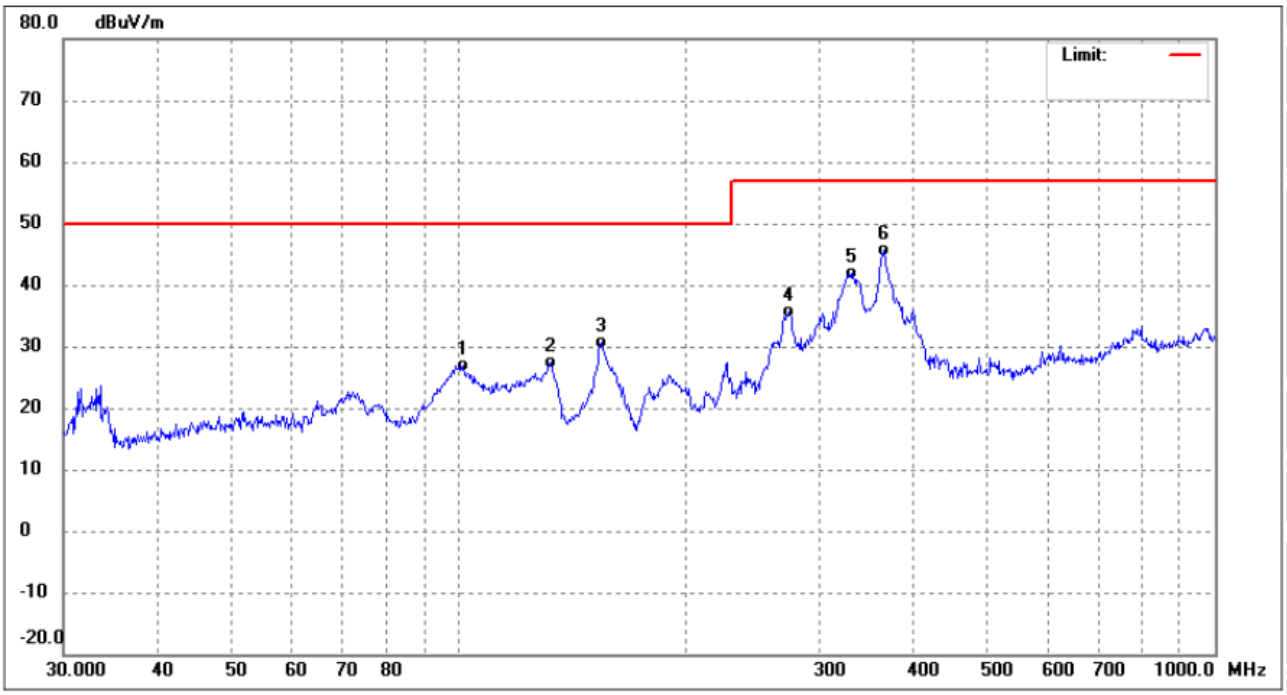

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	101.2885	38.67	-11.75	26.92	50.00	-23.08	QP
2	132.2206	41.86	-14.58	27.28	50.00	-22.72	QP
3	154.2786	44.88	-14.20	30.68	50.00	-19.32	QP
4	273.2341	43.34	-7.79	35.55	57.00	-21.45	QP
5	330.1949	47.80	-5.93	41.87	57.00	-15.13	QP
6	365.5391	50.41	-4.84	45.57	57.00	-11.43	QP

TM4 / Polarization: Vertical

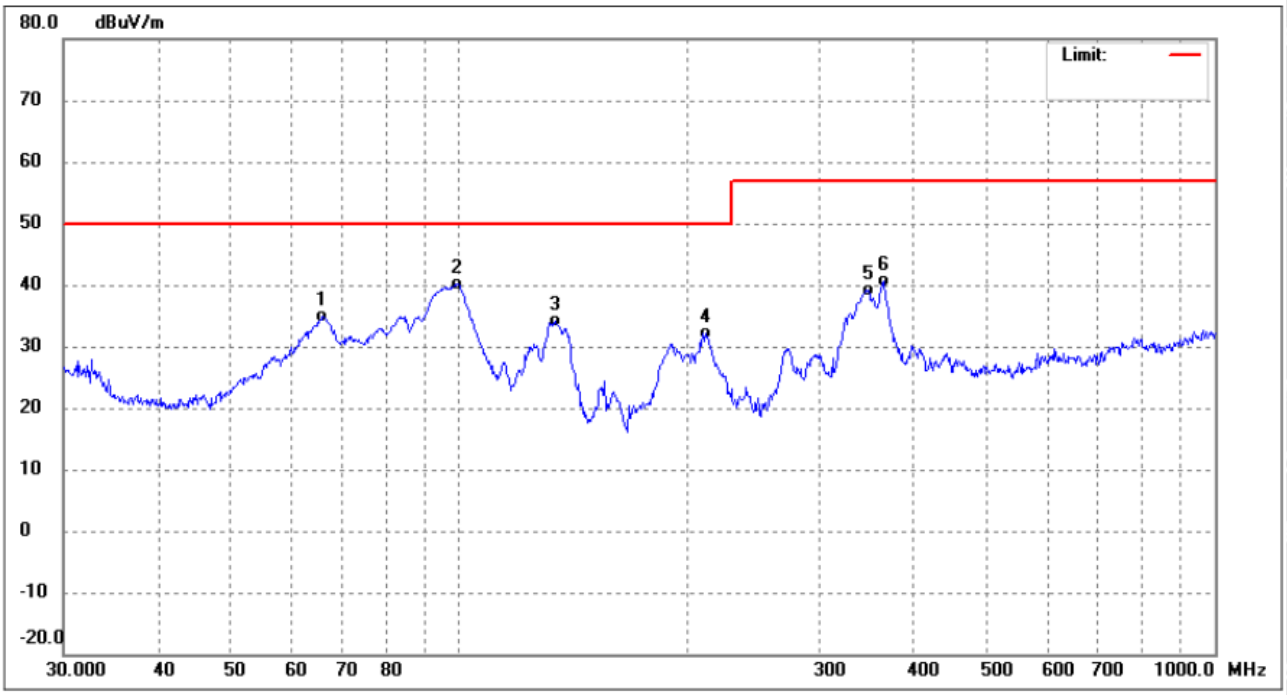

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	66.0342	47.86	-12.87	34.99	50.00	-15.01	QP
2	99.5281	52.07	-11.83	40.24	50.00	-9.76	QP
3	134.0882	48.81	-14.64	34.17	50.00	-15.83	QP
4	212.2695	42.86	-10.67	32.19	50.00	-17.81	QP
5	348.0274	44.19	-4.96	39.23	57.00	-17.77	QP
6	364.2595	45.63	-4.91	40.72	57.00	-16.28	QP

4. Immunity Test Results (EMS)

General Performance Criteria

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended.
The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.
After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended.
The performance level may be replaced by a permissible loss of performance.
If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer’s instructions. A reboot or re-start operation is allowed.
Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.


4.1 Electrostatic discharges

Test Requirement:	Contact Discharge: +/- 4kV Air Discharge: +/- 8kV
Test Method:	EN 61000-4-2: 2009
Procedure:	Discharge Impedance: 330Ω/150pF Number of Discharge: Minimum 10 times at each test point Discharge Mode: Single Discharge Discharge Period: 1 second minimum
Performance Criteria:	B

4.1.1 E.U.T. Operation

Environmental Conditions	
Temperature:	23.5 °C
Relative Humidity:	53 %
Atmospheric Pressure:	99.8 kPa
Test mode:	TM1, TM2, TM3, TM4

4.1.2 Basic Test Setup Block Diagram

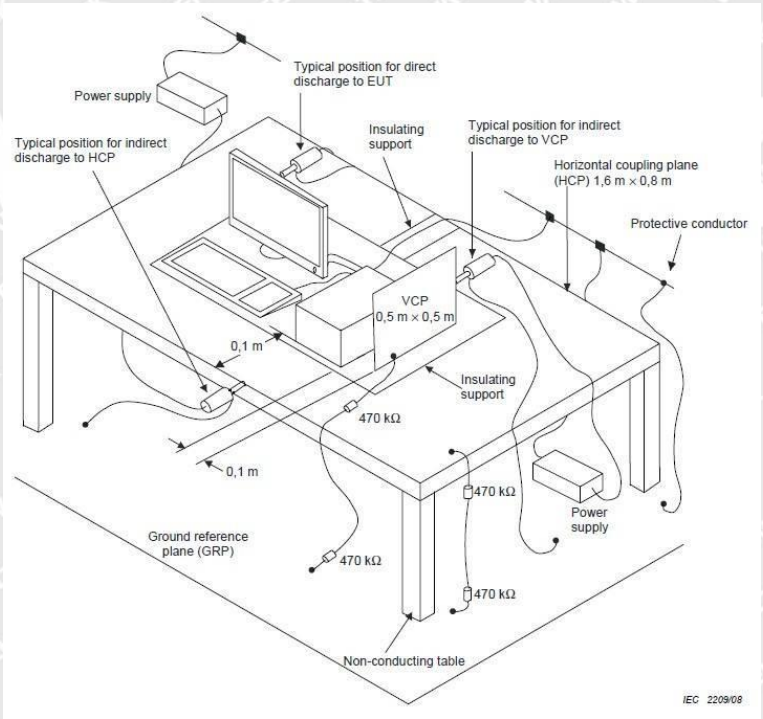

4.1.3 Summary of Test Results

Discharge type	Volt (kV)	Polarity	Test Point	Result/ Observations
Air discharge	2,4,8	+	1	A
Air discharge	2,4,8	-	1	A
Contact discharge	4	+	2	A
Contact discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A

Test Point: 1. All insulated enclosure and seams.

2. All accessible metal parts of the enclosure.

3. All side.

A: No degradation in the performance of the EUT was observed.


4.2 RF electromagnetic field disturbances

Test Requirement:	3V/m, 80%, 1kHz Amp. Mod.
Test Method:	EN IEC 61000-4-3: 2020
Procedure:	Frequency Range: 80MHz to 1GHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz Antenna Polarisation: Vertical and Horizontal Modulation: 1kHz,80% Amp. Mod,1% increment
Performance Criteria:	A

4.2.1 E.U.T. Operation

Environmental Conditions	
Temperature:	23.5 °C
Relative Humidity:	53 %
Atmospheric Pressure:	99.8 kPa
Test mode:	TM1, TM2, TM3, TM4

4.2.2 Basic Test Setup Block Diagram

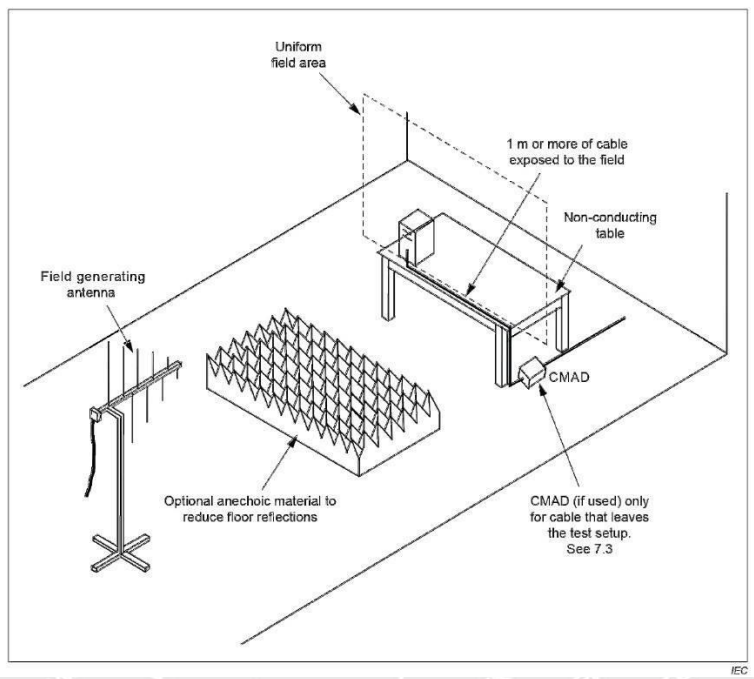

4.2.3 Summary of Test Results

Frequency	Field Strength (V/m)	EUT face	Dwell time	Result/ Observations
80MHz-1GHz	3	Front	1s	A
80MHz-1GHz	3	Back	1s	A
80MHz-1GHz	3	Left	1s	A
80MHz-1GHz	3	Right	1s	A
80MHz-1GHz	3	Top	1s	A
80MHz-1GHz	3	Bottom	1s	A
1800MHz	3	Front	1s	A
1800MHz	3	Back	1s	A
1800MHz	3	Left	1s	A
1800MHz	3	Right	1s	A
1800MHz	3	Top	1s	A
1800MHz	3	Bottom	1s	A
2600MHz	3	Front	1s	A
2600MHz	3	Back	1s	A
2600MHz	3	Left	1s	A
2600MHz	3	Right	1s	A
2600MHz	3	Top	1s	A
2600MHz	3	Bottom	1s	A
3500MHz	3	Front	1s	A
3500MHz	3	Back	1s	A
3500MHz	3	Left	1s	A
3500MHz	3	Right	1s	A
3500MHz	3	Top	1s	A
3500MHz	3	Bottom	1s	A
5000MHz	3	Front	1s	A
5000MHz	3	Back	1s	A
5000MHz	3	Left	1s	A
5000MHz	3	Right	1s	A
5000MHz	3	Top	1s	A
5000MHz	3	Bottom	1s	A

A: No degradation in the performance of the EUT was observed.


4.3 Electrical fast transients / burst for DC network power ports

Test Requirement:	0.5kV; 5/50ns Tr/Th; 5kHz Repetition Frequency
Test Method:	EN 61000-4-4: 2012
Procedure:	Repetition Frequency: 5kHz Burst Period: 300ms Test Duration: 2 minute per level & polarity
Performance Criteria:	B

4.3.1 E.U.T. Operation

Environmental Conditions	
Temperature:	23.5 °C
Relative Humidity:	53 %
Atmospheric Pressure:	99.8 kPa
Test mode:	TM1, TM2, TM3, TM4

4.3.2 Basic Test Setup Block Diagram

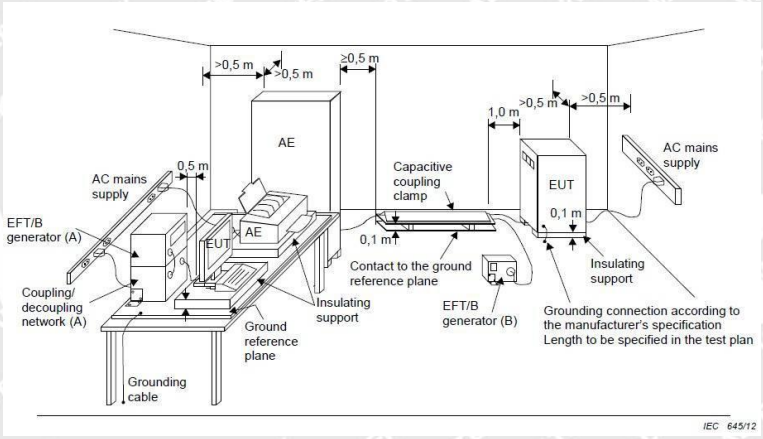

4.3.3 Summary of Test Results

Port	Volt (kV)	Polarity	CDN/ Clamp	Result/ Observations
DC network power port	0.5	+	CDN	A
DC network power port	0.5	-	CDN	A

A: No degradation in the performance of the EUT was observed.


4.4 Surges for DC network power ports

Test Requirement:	1.2/50μs Tr/Td; 0,5kV Each Line to Ground
Test Method:	EN 61000-4-5: 2014 +A1: 2017
Procedure:	Interval: 60s between each surge No. of surges: 5 positive, 5 negative
Performance Criteria:	B

4.4.1 E.U.T. Operation

Environmental Conditions	
Temperature:	23.5 °C
Relative Humidity:	53 %
Atmospheric Pressure:	99.8 kPa
Test mode:	TM1, TM2, TM3, TM4

4.4.2 Basic Test Setup Block Diagram

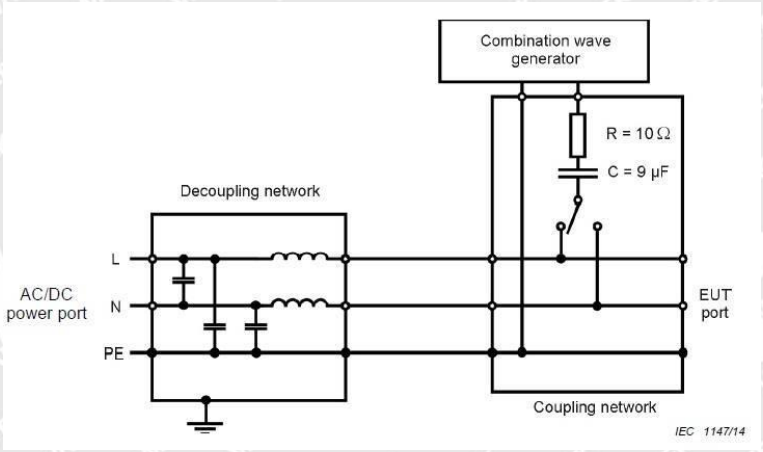

4.4.3 Summary of Test Results

Port	Volt (kV)	Polarity	Result/ Observations
Line to reference ground	0.5	+	A
Line to reference ground	0.5	-	A

A: No degradation in the performance of the EUT was observed.


4.5 Continuous induced RF disturbances for DC network power ports (150kHz-80MHz)

Test Requirement:	0,15 to 10MHz 3Vrms (emf), 10 to 30MHz 3Vrms(emf), 30 to 80MHz 1Vrms(emf), 80%,1kHz Amp. Mod.
Test Method:	EN 61000-4-6: 2014
Procedure:	Frequency Range: 0.15MHz to 80MHz Modulation: 80%, 1kHz Amplitude Modulation Step Size: 1% Test Setup: 3 Vrms,0.15MHz- 10MHz 3 to 1 (Lines) Vrms: 10MHz - 30MHz 1 Vrms,30MHz - 80MHz
Performance Criteria:	A

4.5.1 E.U.T. Operation

Environmental Conditions	
Temperature:	23.5 °C
Relative Humidity:	53 %
Atmospheric Pressure:	99.8 kPa
Test mode:	TM1, TM2, TM3, TM4

4.5.2 Basic Test Setup Block Diagram

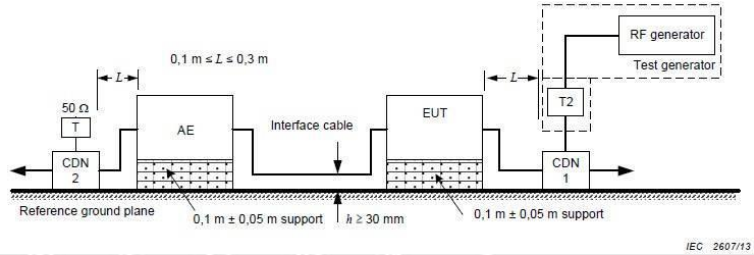

4.5.3 Summary of Test Results

Port	Strength (Vrms)	CDN/ Clamp	Dwell time	Result/ Observations
DC network power port	3(0.15MHz-10MHz)	CDN	1s	A
DC network power port	3 to 1(10MHz-30MHz, Lines)	CDN	1s	A
DC network power port	1(30MHz-80MHz)	CDN	1s	A

A: No degradation in the performance of the EUT was observed.


4.6 Power frequency magnetic field

Test Requirement:	50 or 60Hz, 1 A/m
Test Method:	EN 61000-4-8: 2010
Procedure:	50 or 60Hz, 1 A/m
Performance Criteria:	A

4.6.1 E.U.T. Operation

Environmental Conditions	
Temperature:	23.5 °C
Relative Humidity:	53 %
Atmospheric Pressure:	99.8 kPa
Test mode:	TM1, TM2, TM3, TM4

4.6.2 Basic Test Setup Block Diagram

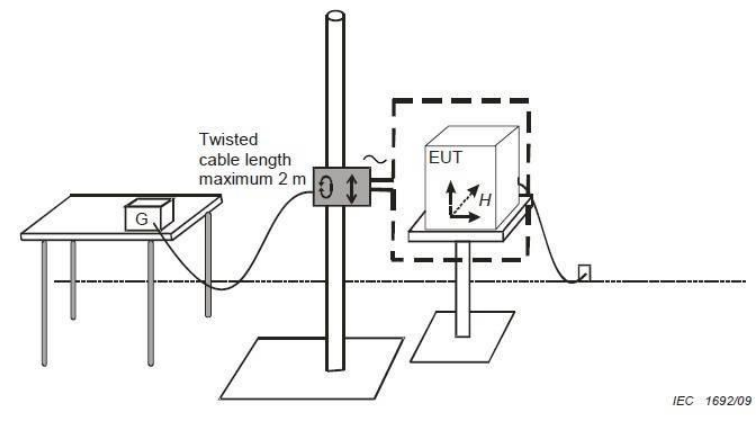

4.6.3 Summary of Test Results

Frequency	Strength (A/m)	Axial	Magnetic Field Type	Result/ Observations
50Hz/ 60Hz	1	X	Continuous filed	A
50Hz/ 60Hz	1	Y	Continuous filed	A
50Hz/ 60Hz	1	Z	Continuous filed	A

A: No degradation in the performance of the EUT was observed.

5. EXHIBIT 1 - PRODUCT LABELING


5.1 Proposed Label Format

DC/DC CONVERTER
Model: GTD93035L6013.2-F, GTD93035H6013.2-F
Brand: GlobTek, Inc.
Importer Name: XXX
Importer Address: XXX
GlobTek, Inc.
186 Veterans Dr. Northvale, NJ 07647 USA

Specifications: Text is Black in color and is justified. Labels are printed in indelible ink on permanent adhesive backing or silk-screened onto the EUT or shall be affixed at a conspicuous location on the EUT. The 'CE' marking must be affixed to the EUT or to its data plate. Where this is not possible or not warranted on account of the nature of the apparatus, it must be affixed to the packaging, if any, and to the accompanying documents. The 'CE' marking must have a height of at least 5 mm. If the 'CE' marking is reduced or enlarged the proportions given in the above graduated drawing must be respected. The Importer name, address and Manufacturer name and address should indicate on marking label or packaging or in a document accompanying.

5.2 Proposed Label Location of EUT


Label Location (GTD93035L6013.2-F)	Label Location 

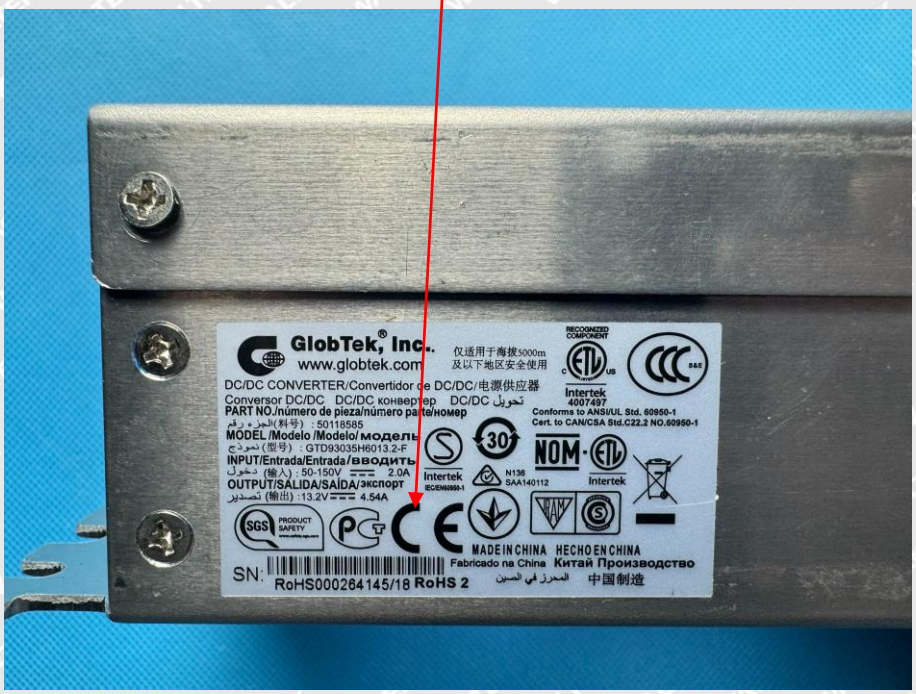Label Location (GTD93035H6013.2-F)	


6. EXHIBIT 2 - EUT PHOTOGRAPHS


External


GTD93035L6013.2-F

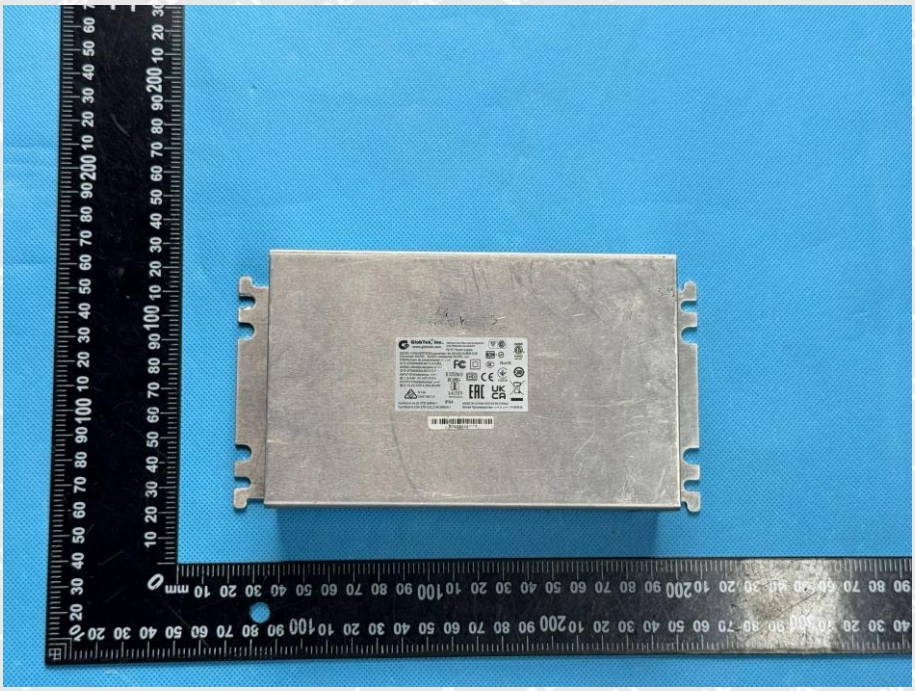




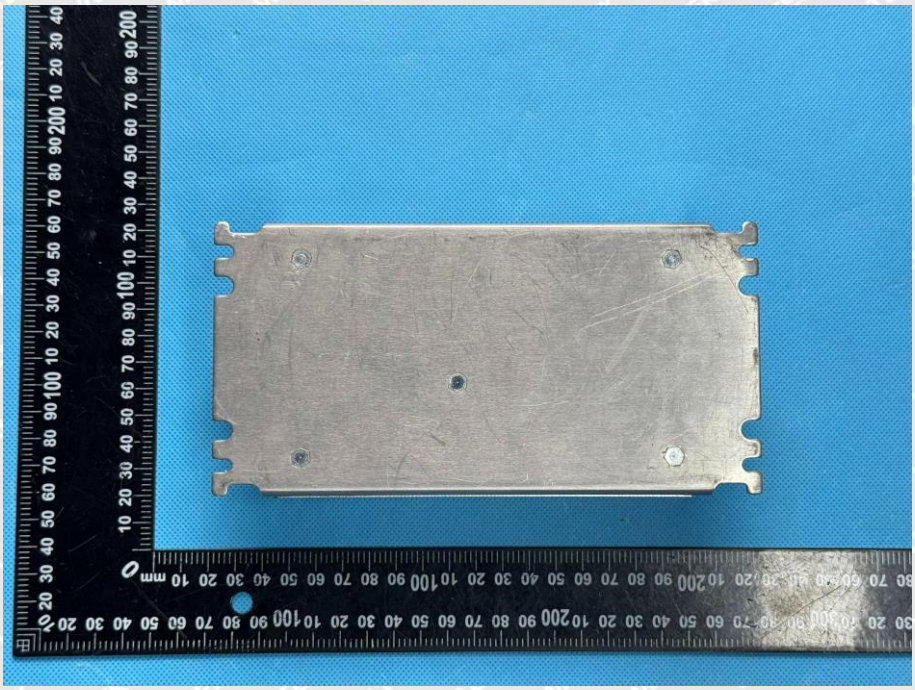


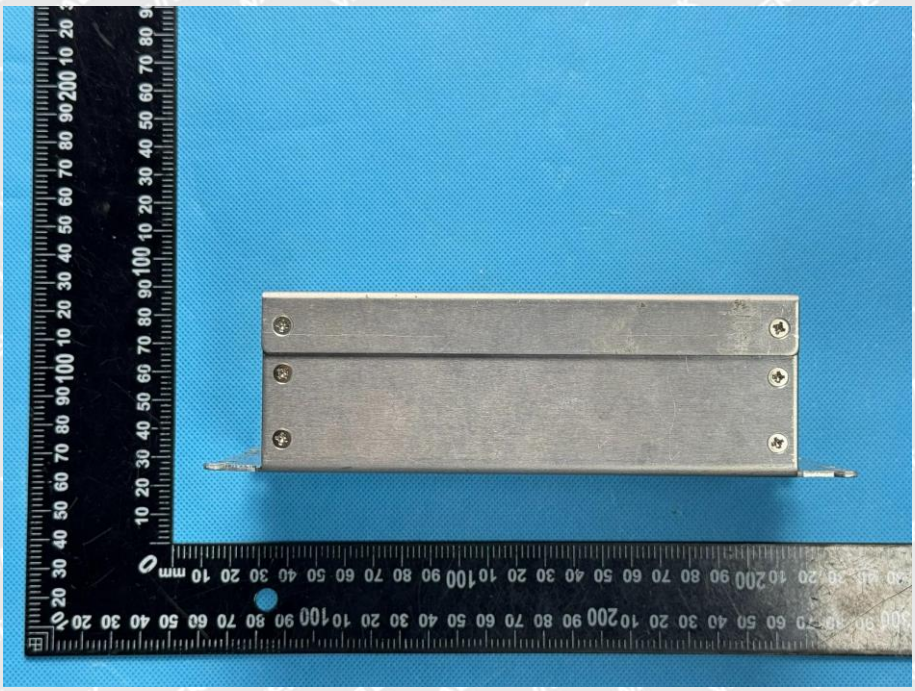


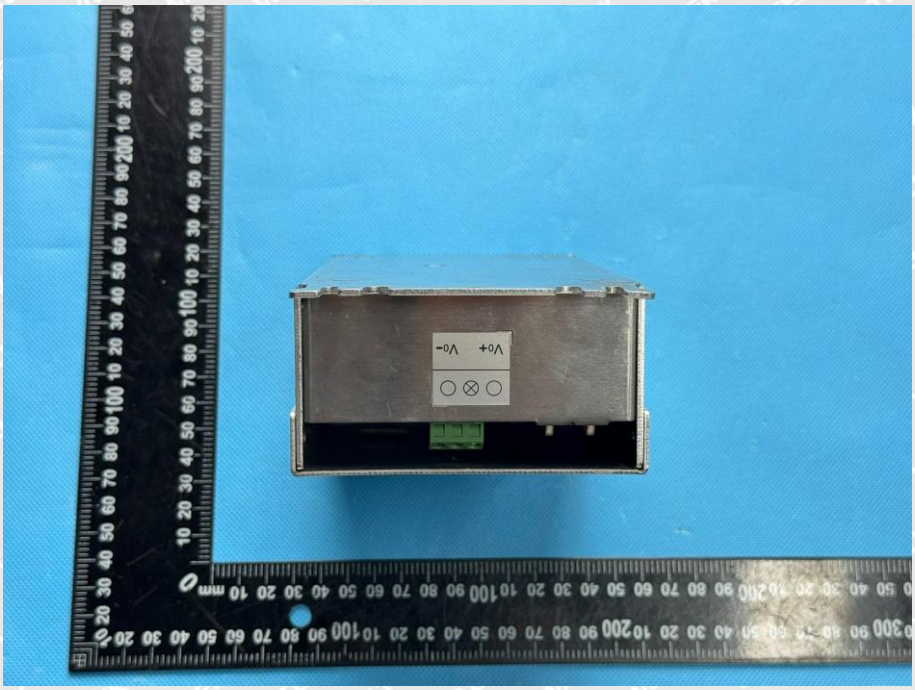

Vo+ Vo-

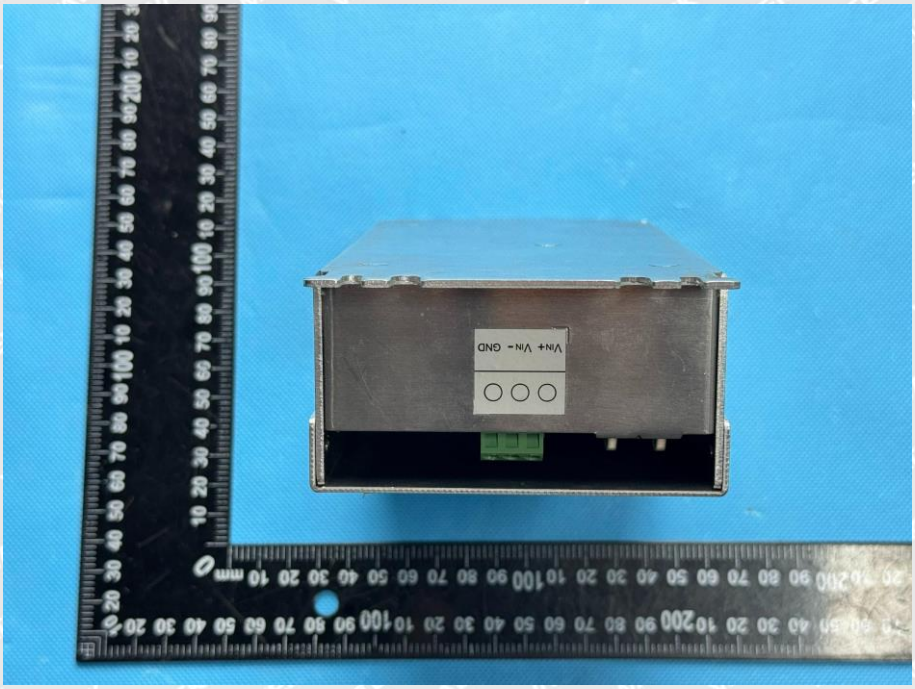

Vin+ Vin- GND


GTD93035H6013.2-F

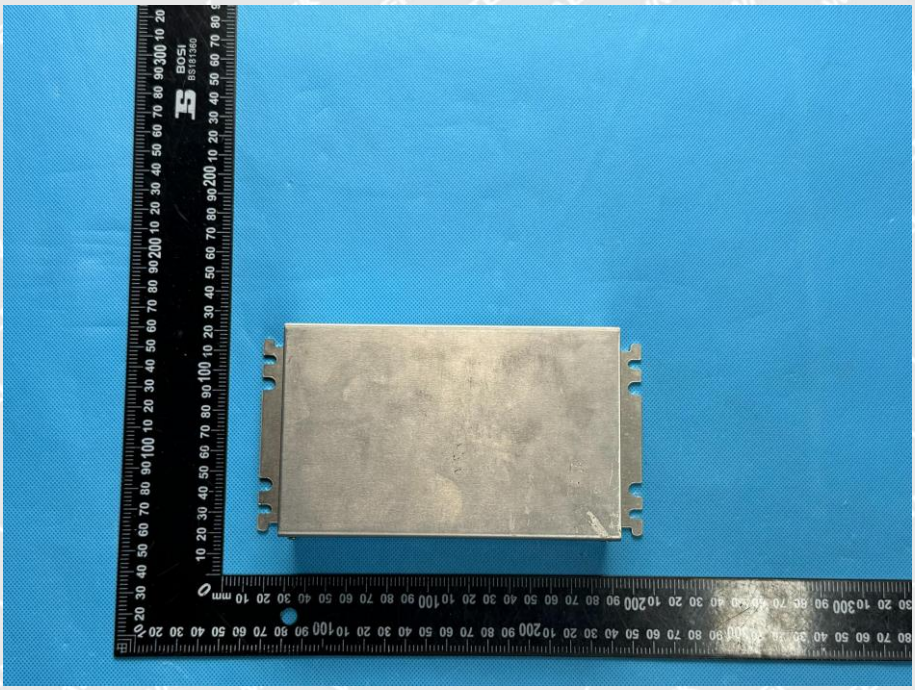


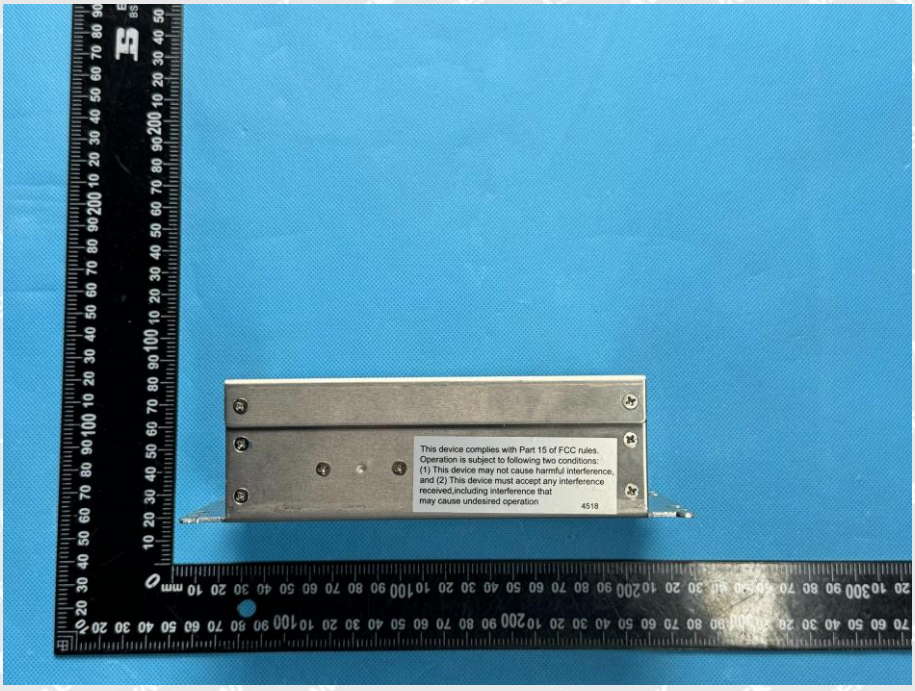

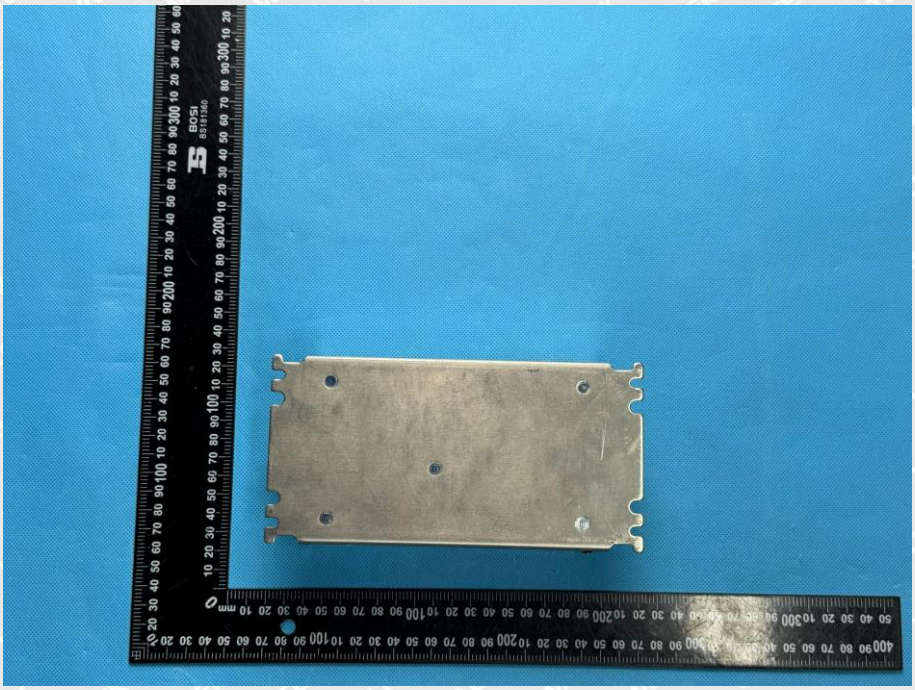

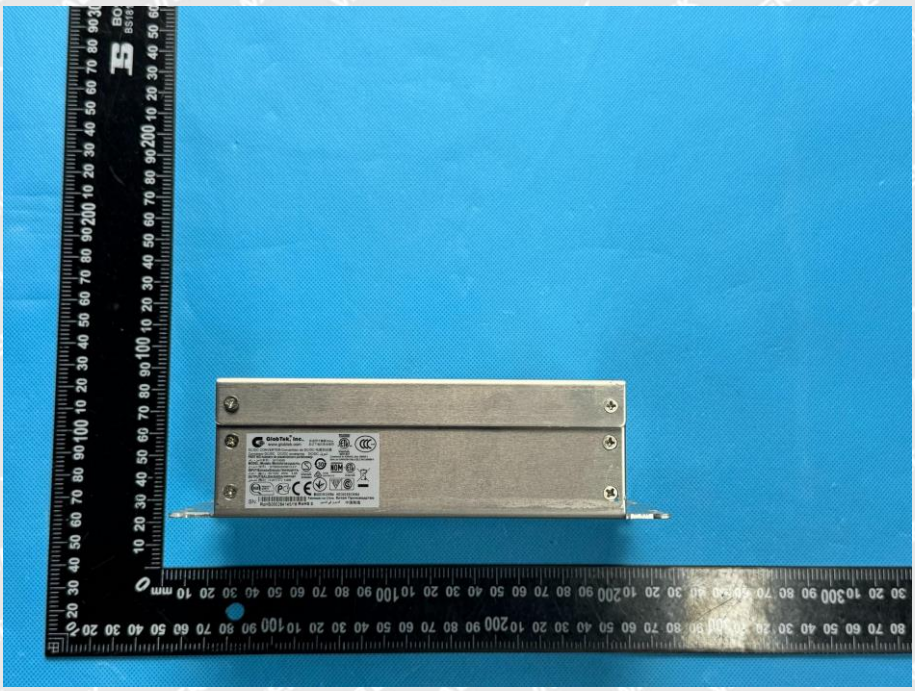


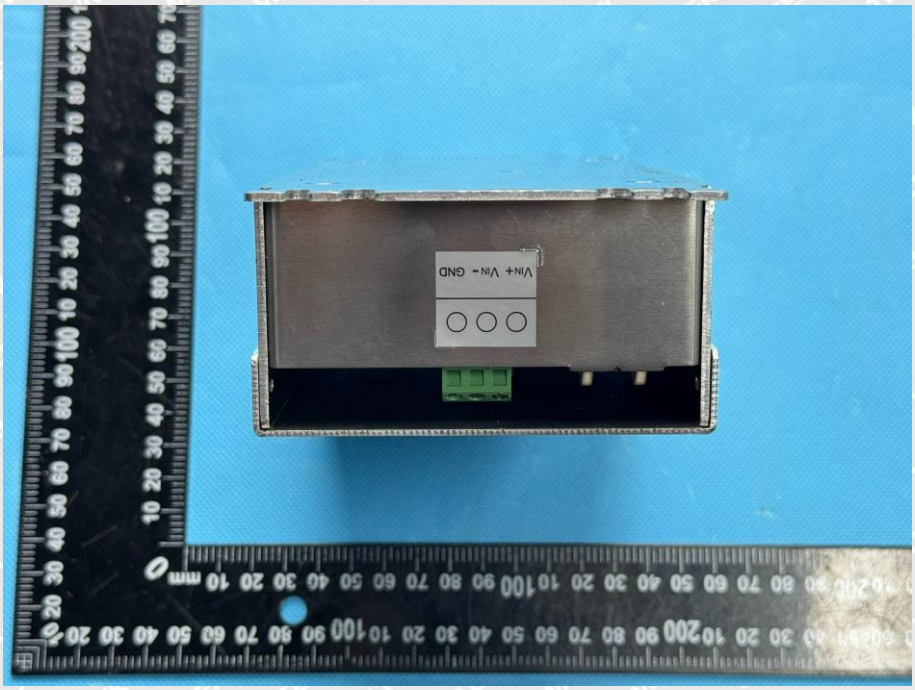
GND
VIN-
VIN+

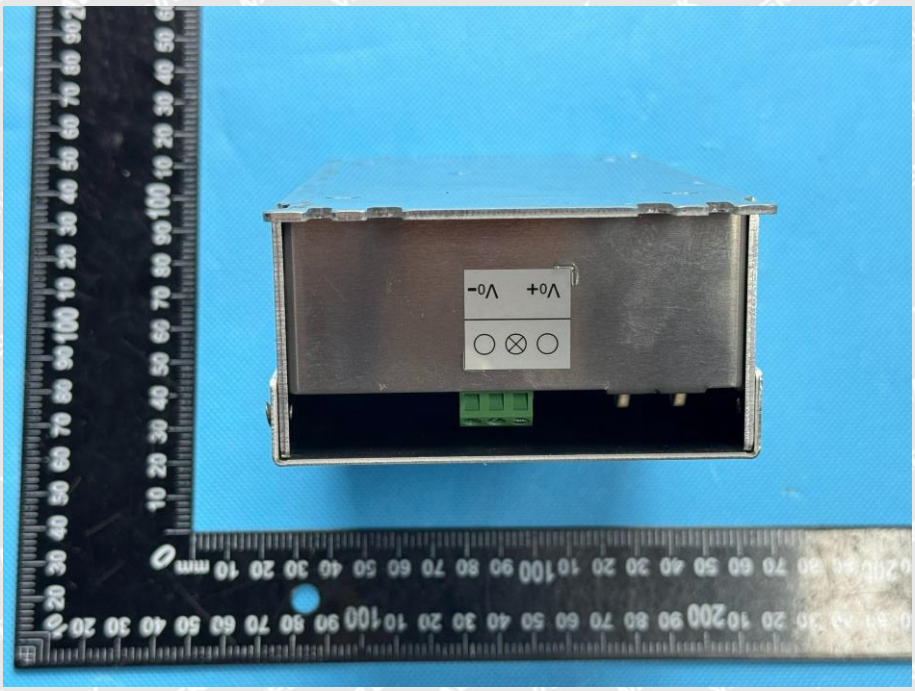

Vo-
Vo+

7. EXHIBIT 3 - TEST SETUP PHOTOGRAPHS


Radiated emissions (30MHz-1GHz)

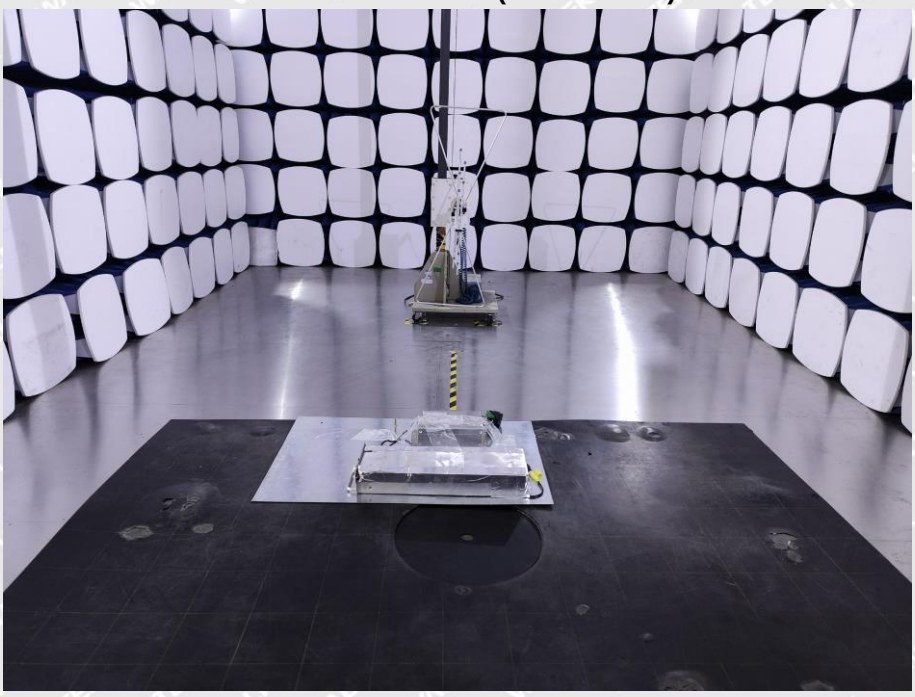

Electrostatic discharges

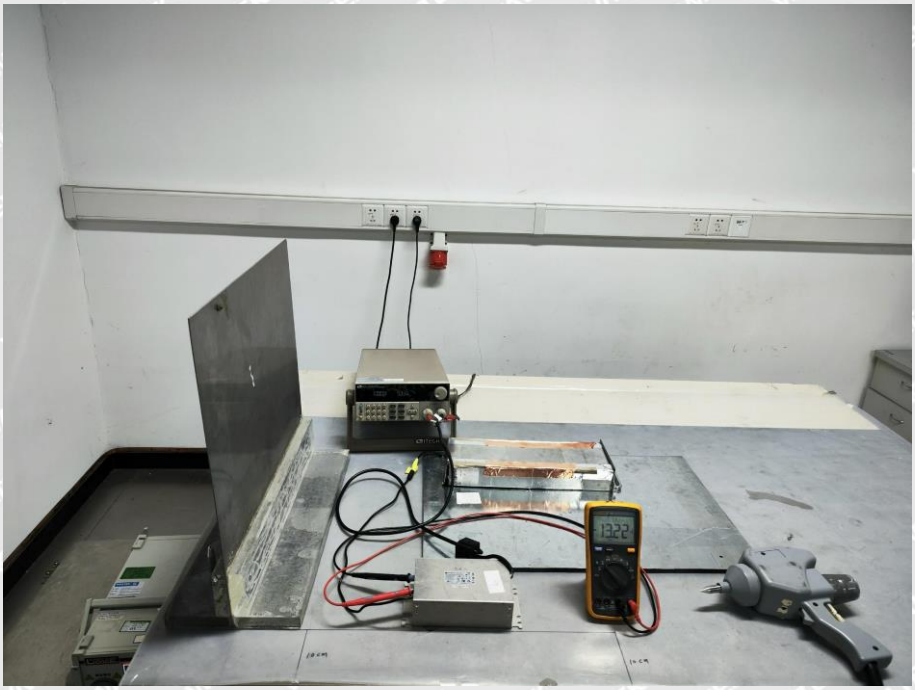


RF electromagnetic field disturbances

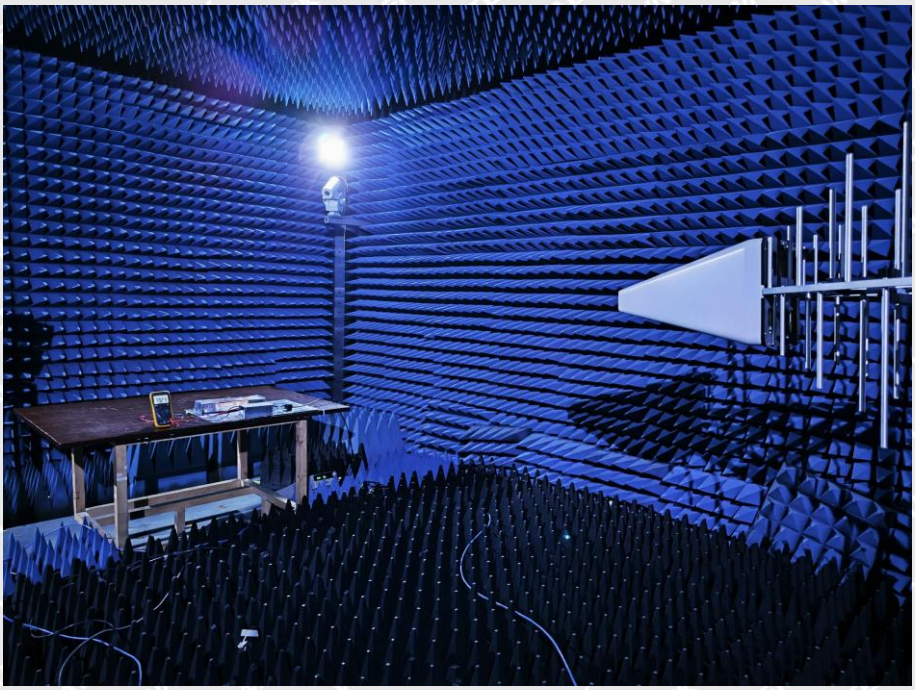


Electrical fast transients / burst for DC network power ports
Surges for DC network power ports



Continuous induced RF disturbances for DC network power ports (150kHz-80MHz)

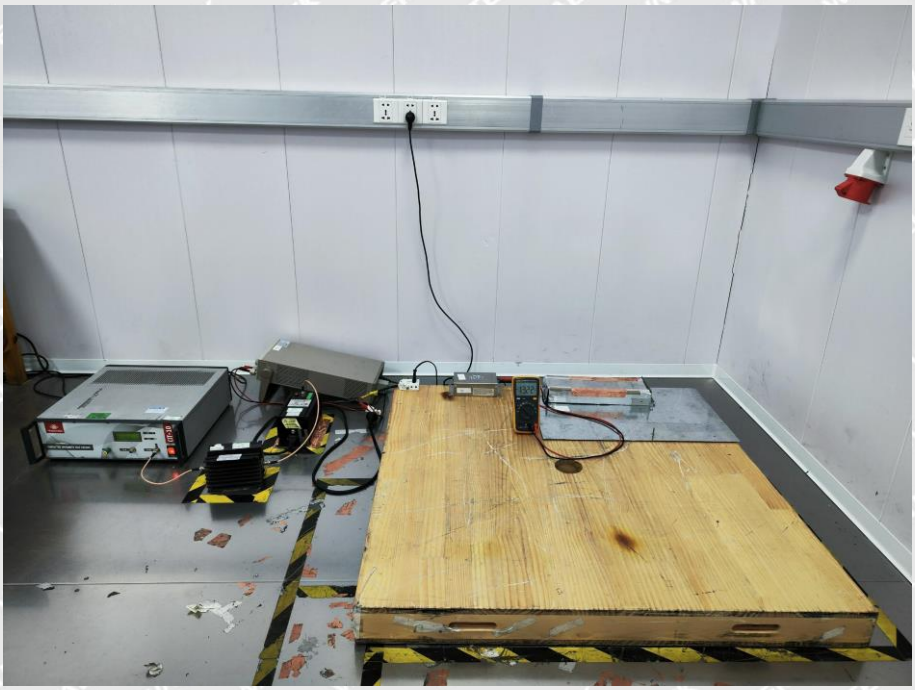

Power frequency magnetic field

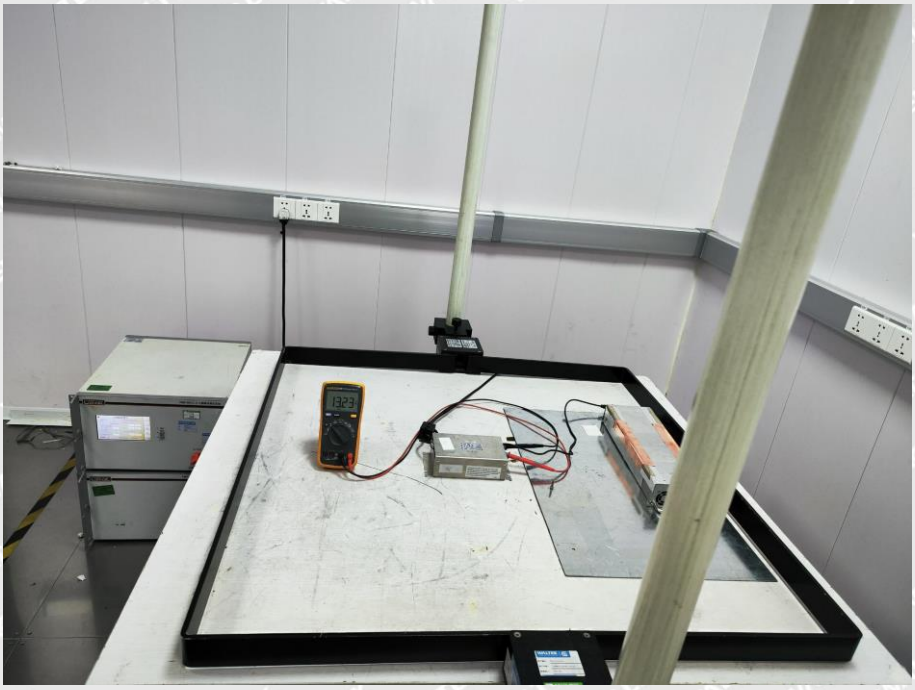

******* END OF REPORT *******