

TEST REPORT

Product Name : ICT/ITE POWER SUPPLY

**Model Number : GTM41133-9016-1.0-T3A,
GTM41133-9016-4.0-T3A,
GTM41133-9024-5.0-T3A,
GTM41133-9048-T3A**

Prepared for : GlobTek, Inc.
Address : 186 Veterans Dr. Northvale, NJ 07647 USA

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2410140085E00201R
Date(s) of Tests : October 29, 2024 to November 21, 2024
Date of issue : November 22, 2024



TABLE OF CONTENT

Description	Page
1. DESCRIPTION OF STANDARDS AND RESULTS (EUT)	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT)	7
2.2. Independent Operation Modes	7
2.3. Test Manner	7
2.4. Description of Support Device	8
2.5. Description of Test Facility	8
2.6. Measurement Uncertainty	8
3. MEASURING DEVICE AND TEST EQUIPMENT	9
3.1. For Conducted Emissions at the AC Mains Power Ports	9
3.2. For Radiated Emission Measurement (3m)	9
3.3. For Harmonic Current / Flicker Measurement	9
3.4. For Electrostatic Discharge Immunity Test	9
3.5. For Continuous RF Electromagnetic Field Disturbances Immunity	10
3.6. For Electrical Fast Transient / Burst Immunity Test	10
3.7. For Surge Immunity Test	10
3.8. For Continuous Induced RF Disturbances Immunity Test	11
3.9. For Power Frequency Magnetic Field Immunity Test	11
3.10. For Voltage Dips and Interruptions Immunity Test	11
4. CONDUCTED EMISSIONS FROM THE AC MAINS POWER PORTS	12
4.1. Block Diagram of Test Setup	12
4.2. Limits	12
4.3. Test Procedure	12
4.4. Measuring Results	13
5. RADIATED EMISSION MEASUREMENT (UP TO 1GHZ)	22
5.1. Block Diagram of Test Setup	22
5.2. Measuring Standard	22
5.3. Test Procedure	23
5.4. Measuring Results	23
6. HARMONIC CURRENT EMISSION MEASUREMENT	32
6.1. Block Diagram of Test Setup	32
6.2. Standard Limits	32
6.3. Test Procedure	33
6.4. Test Results	33
7. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT	46
7.1. Block Diagram of Test Setup	46
7.2. Standard Limits	46
7.3. Test Procedure	46
7.4. Test Results	46
8. IMMUNITY PERFORMANCE CRITERIA DESCRIPTION	51
9. ELECTROSTATIC DISCHARGE	52
9.1. Test Specification	52
9.2. Block Diagram of Test Setup	52
9.3. Test Procedure	52
9.4. Test Results	53
10. CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES	54
10.1. Test Specification	54
10.2. Block Diagram of Test Setup	54

10.3. Test procedure	54
10.4. Test results.....	55
11. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST.....	56
11.1. Test Specification.....	56
11.2. Block Diagram of Test Setup	56
11.3. Test Procedure	57
11.4. Test Results	57
12. SURGE IMMUNITY TEST	58
12.1. Test Specification.....	58
12.2. Block Diagram of Test Setup	58
12.3. Test Procedure	58
12.4. Test results.....	59
13. CONTINUOUS INDUCED RF DISTURBANCES	60
13.1. Test Specification.....	60
13.2. Block Diagram of Test Setup	60
13.3. Test Procedure	60
13.4. Test results.....	61
14. POWER FREQUENCY MAGNETIC FIELD.....	62
14.1. Test Specification.....	62
14.2. Block Diagram of Test Setup	62
14.3. Test Procedure	62
14.4. Test Results	63
15. VOLTAGE DIPS AND INTERRUPTIONS TEST	64
15.1. Test Specification.....	64
15.2. Block Diagram of Test Setup	64
15.3. Test Procedure	64
15.4. Test results.....	65
16. PHOTOGRAPHS	66
16.1. Photos of Conducted Emissions from the AC Mains Power Ports	66
16.2. Photos of Radiation Emission Measurement	67
16.3. Photo of Harmonic / Flicker Measurement	68
16.4. Photo of Electrostatic Discharge Test	68
16.5. Photo of Continuous RF Electromagnetic Field Disturbances	69
16.6. Photos of Electrical Fast Transient / Burst Test	69
16.7. Photos of Surge Test	70
16.8. Photos of Continuous Induced RF Disturbances Test	70
16.9. Photo of Power Frequency Magnetic Field Test	71
16.10. Photo of Voltage Dips and Interruption Immunity Test	71

APPENDIX A: Photos of EUT (6 Pages)

APPENDIX B: Critical Component List(10 Pages)

Unique Number: 005388

TEST REPORT DESCRIPTION

Applicant : GlobTek, Inc.
 Manufacturer : GlobTek, Inc.
 Trade Mark : G GlobTek, Inc.
 EUT : ICT/ITE POWER SUPPLY
 Model Number : GTM41133-9016-1.0-T3A, GTM41133-9016-4.0-T3A,
 GTM41133-9024-5.0-T3A, GTM41133-9048-T3A
 Unique Number : 005388
 Rating : Input: 100-240V~, 50-60Hz, 1.5A
 GTM41133-9016-1.0-T3A Output: 15V--- 6A
 GTM41133-9016-4.0-T3A Output: 12V--- 7.5A
 GTM41133-9024-5.0-T3A Output: 19V--- 4.73A
 GTM41133-9048-T3A Output: 48V--- 1.875A, 90W

Measurement Procedure Used:

SANS 2332:2017/CISPR 32:2015

SANS 61000-3-2:2009/IEC 61000-3-2:2014, SANS 61000-3-3:2009/IEC 61000-3-3:2013

SANS 2335:2018/CISPR35:2016

(SANS 61000-4-2:2009/IEC 61000-4-2:2008,

SANS 61000-4-3:2008/IEC 61000-4-3:2006+A1:2007+A2:2010,

SANS 61000-4-4:2011/IEC 61000-4-4:2012, SANS 61000-4-5: 2006/IEC 61000-4-5:2014+A1:2017,

SANS 61000-4-6:2017/IEC 61000-4-6:2013, SANS 61000-4-8: 2009/IEC 61000-4-8:2009,

SANS 61000-4-11:2005/IEC 61000-4-11:2004+A1:2017)

The device described above is tested by EMTEK (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and EMTEK (SHENZHEN) CO., LTD. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the SANS 2332/CISPR 32, SANS 61000-3-2/IEC 61000-3-2, SANS 61000-3-3/IEC 61000-3-3 and SANS 2335/CISPR 35 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK (SHENZHEN) CO., LTD.

Date of Test : October 29, 2024 to November 21, 2024

Prepared by : Jessie Hu
 Jessie Hu/Editor

Reviewer : Kaimin Guo
 Kaimin Guo/Supervisor

Approved & Authorized Signer : Lisa Wang
 Lisa Wang/Manager

Modified Information

Version	Report No.	Revision Date	Summary
/	ENS2410140085E00201R	/	Original Report



1. DESCRIPTION OF STANDARDS AND RESULTS (EUT)

EMISSION				
Description of Test Item		Standard	Limits	Results
Conducted Emissions From the AC Mains Power Ports		SANS 2332:2017/CISPR 32:2015	Class B	Pass
Asymmetric mode conducted emissions at Wired network ports		SANS 2332:2017/CISPR 32:2015	Class B	N/A
Radiated emissions at frequencies up to 1 GHz		SANS 2332:2017/CISPR 32:2015	Class B	Pass
Radiated emissions at frequencies above 1 GHz		SANS 2332:2017/CISPR 32:2015	Class B	N/A
Harmonic Current Emissions		SANS 61000-3-2:2009/IEC 61000-3-2:2014	Class A	Pass
Voltage Fluctuation and Flicker		SANS 61000-3-3:2009/IEC 61000-3-3:2013	Section 5	Pass
IMMUNITY				
Description of Test Item		Basic Standard	Performance Criteria	Results
Electrostatic Discharge	Enclosure ports	SANS 61000-4-2:2009/IEC 61000-4-2:2008	B	Pass
Continuous RF electromagnetic field disturbances	Enclosure ports	SANS 61000-4-3:2008/IEC 61000-4-3:2006+A1:2007+A2:2010	A	Pass
Electrical fast transients/burst	AC mains power ports	SANS 61000-4-4:2011/IEC 61000-4-4:2012	B	Pass
	Analogue/digital data ports		N/A	N/A
	DC network power ports		N/A	N/A
Surges	AC mains power ports	SANS 61000-4-5:2006/IEC 61000-4-5:2014+A1:2017	B	Pass
	Analogue/digital data ports		N/A	N/A
	DC network power ports		N/A	N/A
Continuous induced RF disturbances	AC mains power ports	SANS 61000-4-6:2017/IEC 61000-4-6:2013	A	Pass
	Analogue/digital data ports		N/A	N/A
	DC network power ports		N/A	N/A
Power frequency magnetic field	Enclosure ports	SANS 61000-4-8:2009/IEC 61000-4-8:2009	A	Pass
Voltage dips and interruptions	AC mains power ports	SANS 61000-4-11:2005/IEC 61000-4-11:2004+A1:2017	B,C	Pass
Note: N/A is an abbreviation for Not Applicable.				

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : ICT/ITE POWER SUPPLY

Model Number : GTM41133-9016-1.0-T3A, GTM41133-9016-4.0-T3A, GTM41133-9024-5.0-T3A, GTM41133-9048-T3A

Applicant : GlobTek, Inc.

Address : 186 Veterans Dr. Northvale, NJ 07647 USA

Manufacturer : GlobTek, Inc.

Address : 186 Veterans Dr. Northvale, NJ 07647 USA

Factory : GlobTek (Suzhou) Co., Ltd

Address : Building 4, No. 76 JinLing East Road, Suzhou Industrial Park, Suzhou, JiangSu, 215021, China

Date of Received : October 29, 2024

Date of Test : October 29, 2024 to November 21, 2024

2.2. Independent Operation Modes

- A. ON
1. Full Load

2.3. Test Manner

Details of EUT Test Modes:

Test Items	Test Voltage	Function Type	Worst case
Conducted disturbance at mains Terminals	AC 220V/50Hz	Mode A	Mode A
Radiated emissions at frequencies up to 1 GHz	AC 220V/50Hz	Mode A	Mode A
Harmonic Current Emissions	AC 220V/50Hz	Mode A	\
Voltage Fluctuation and Flicker	AC 220V/50Hz	Mode A	\
Electrostatic Discharge	AC 220V/50Hz	Mode A	\
Continuous RF electromagnetic field disturbances	AC 220V/50Hz	Mode A	\
Electrical fast transients/burst	AC 220V/50Hz	Mode A	\
Surges	AC 220V/50Hz	Mode A	\
Continuous induced RF disturbances	AC 220V/50Hz	Mode A	\
Power frequency magnetic field	AC 220V/50Hz	Mode A	\
Voltage dips and interruptions	AC 220V/50Hz	Mode A	\

Unique Number: 005388

2.4. Description of Support Device

N/A

2.5. Description of Test Facility

Site Description
EMC Lab.

: Accredited by CNAS

The Certificate Registration Number is L2291.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01.

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

2.6. Measurement Uncertainty

Test Item	Uncertainty
Conducted Emission Uncertainty (Conduction 1#)	: 1.56dB(9k~150kHz Conduction) : 1.42dB(150k-30MHz Conduction)
Radiated Emission Uncertainty (3m 3# Chamber)	: 4.28dB (30M~1GHz Polarize: H) : 4.86dB (30M~1GHz Polarize: V)
Uncertainty for Flicker test	: 0.514%
Uncertainty for Harmonic test	: 4.04%
Uncertainty for C/S Test	: 0.94dB(Using CDN Test) 2.37dB(Using EM Clamp Test)
Uncertainty for R/S Test	: 1.53dB(80MHz-3000MHz)
Uncertainty for ESD Test	: 6%
Uncertainty for test site temperature and humidity	: 0.6°C 4%

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For Conducted Emissions at the AC Mains Power Ports

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	EMI Test Receiver	Rohde & Schwarz	ESCI	101384	May 11, 2024	1 Year
☒	AMN	Rohde & Schwarz	ENV216	101161	May 10, 2024	1 Year
☒	AMN	Kyoritsu	KNW-407	8-1492-9	May 11, 2024	1 Year

3.2. For Radiated Emission Measurement (3m)

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	May 10, 2024	1 Year
☒	Pre-Amplifier	Lunar EM	LNA30M3G-25	J10100000070	May 10, 2024	1 Year
☒	Bilog Antenna	Schwarzbeck	VULB9163	661	June 02, 2023	2 Year

3.3. For Harmonic Current / Flicker Measurement

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	45KVA AC Power source	Teseq	NSG 1007-45/45KVA	1305A02873	May 11, 2024	1 Year
☒	Signal conditioning Unit	Teseq	CCN 1000-3	1305A02873	May 11, 2024	1 Year
☒	Impedance network	Teseq	INA2197/37A	1305A02873	May 11, 2024	1 Year
☒	Impedance network	Teseq	INA 2196/75A	1305A02874	May 11, 2024	1 Year
☐	Proflin 2100 AC Switching Unit	Teseq	NSG 2200-3	A22714	May 11, 2024	1 Year

3.4. For Electrostatic Discharge Immunity Test

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	ESD Tester	TESEQ	NSG 438A	1881	April 28, 2024	1 Year

3.5. For Continuous RF Electromagnetic Field Disturbances Immunity

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	Power Amplifier	MILMEGA	AS0102-55	1018770	May 11, 2024	1 Year
☒	RF Power Meter. Dual Channel	BOONTON	4232A	10539	May 11, 2024	1 Year
☒	Log.-Per. Antenna	SCHWARZBECK	STLP 9129-7/16	3050	N/A	N/A
☒	Signal Generator	Agilent	N5181A	MY50145187	May 11, 2024	1 Year
☒	50ohm Diode Power Sensor	BOONTON	51011EMC	36164	May 11, 2024	1 Year
☒	Field Strength Meter	DARE	RSS1006A	10I00037SNO 22	May 20, 2024	1 Year
☒	Multi-function interface system	DARE	CTR1009B	12I00250SNO 72	N/A	N/A
☒	Automatic switch group	DARE	RSW1004A	N/A	N/A	N/A
☒	Power Amplifier	MILMEGA	AS1860-50	1059346	May 11, 2024	1 Year
☒	Power Amplifier	Vectawave	VBA 1000-600C	133627	Oct. 18, 2024	1 Year
☒	Directional Coupler	BONN	BDC 0810-50/1500	2229689	Oct. 18, 2024	1 Year
☒	Audio Analyzer	R&S	UPV	101473	May 11, 2024	1 Year

3.6. For Electrical Fast Transient / Burst Immunity Test

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	Burst Tester	HAEFELY	PEFT4010	080981-16	May 12, 2024	1 Year
☐	Coupling Clamp	HAEFELY	IP-4A	147147	May 12, 2024	1 Year

3.7. For Surge Immunity Test

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	Controller	HAEFELY	Psurge 8000	174031	May 11, 2024	1 Year
☒	Impulse Module	HAEFELY	PIM 100	174124	May 11, 2024	1 Year
☒	Coupling Decoupling	HAEFELY	PCD 130	172181	May 11, 2024	1 Year
☐	Coupling Module	HAEFELY	PCD122	174354	May 11, 2024	1 Year
☐	Impulse Module	HAEFELY	PIM 120	174435	May 11, 2024	1 Year
☐	Coupling Module	HAEFELY	PCD 126A	174387	May 11, 2024	1 Year
☐	Impulse Module	HAEFELY	PIM 110	174391	May 11, 2024	1 Year
☐	Impulse Module	HAEFELY	PIM 150	178707	May 12, 2024	1 Year
☐	Impulse Module	PMI	PCDN8	190422	May 12, 2024	1 Year

3.8. For Continuous Induced RF Disturbances Immunity Test

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	Continuous Wave Simulator	EMTEST	CWS500C	0900-12	May 10, 2024	1 Year
☐	CDN	EMTEST	CDN-M2	510010010010	May 11, 2024	1 Year
☒	CDN	EMTEST	CDN-M3	0900-11	May 11, 2024	1 Year
☐	EM Injection Clamp	EMTEST	F-2031-23MM	368	May 12, 2024	1 Year
☒	Attenuator	EMTEST	100W 6dB DC-3G	/	May 10, 2024	1 Year
☒	Signal Generator	ifn	2023B	1702128	May 10, 2024	1 Year
☒	Power meter	AGILENT	E4418B	MY45102886	May 10, 2024	1 Year
☒	Directional coupler	SKET	DC_0110000M-100W	SK2018080301	May 10, 2024	1 Year

3.9. For Power Frequency Magnetic Field Immunity Test

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	s	HAEFELY	MAG100	250040.1	May 10, 2024	1 Year

3.10. For Voltage Dips and Interruptions Immunity Test

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	45KVA AC Power source	Teseq	NSG 1007-45/45KVA	1305A02873	May 11, 2024	1 Year
☐	Signal conditioning Unit	Teseq	CCN 1000-3	1305A02873	May 11, 2024	1 Year
☐	Impedance network	Teseq	INA2197/37A	1305A02873	May 11, 2024	1 Year
☐	Impedance network	Teseq	INA 2196/75A	1305A02874	May 11, 2024	1 Year
☒	Proflin 2100 AC Switching Unit	Teseq	NSG 2200-3	A22714	May 11, 2024	1 Year

Unique Number: 005388

no longer than 0.4 m, so that its length is shortened to 1 m.

All the support units are connecting to the other AMN.

The AMN provides 50 ohm coupling impedance for the measuring instrument.

The CISPR states that the AMN with 50 ohm and 50 microhenry should be used.

Both sides of AC line were checked for maximum conducted interference.

The frequency range from 150 kHz to 30 MHz was sweep.

Set the test-receiver system to quasi peak detect function and average detect function, and to measure the conducted emissions values.

Test results were obtained from the following equation:

Emission Level (dB μ V) = AMN Factor (dB) + Cable Loss (dB) + Reading (dB μ V)

Margin (dB) = Emission Level (dB μ V) - Limit (dB μ V)


4.4. Measuring Results

PASS.

All the modes were tested and the data of the worst modes are attached the following pages.

Unique Number: 005388

GTM41133-9016-1.0-T3A

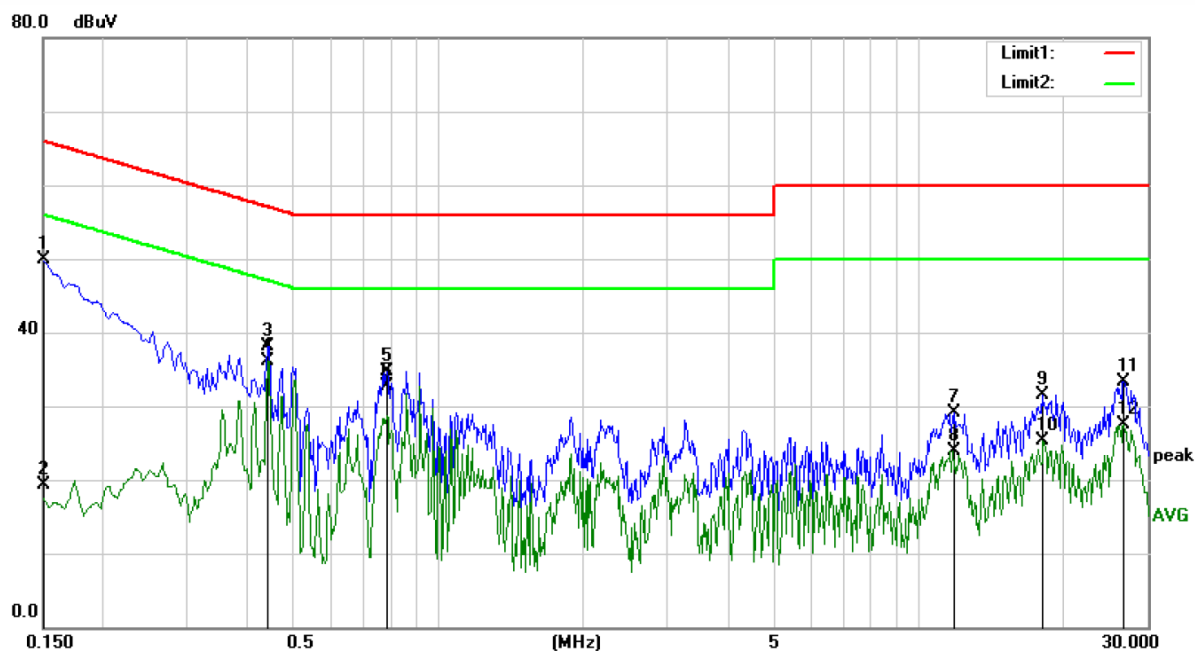

Site Conduction #1

Phase: L1

Temperature: 22.8

Limit: (CE)CISPR 32 class B_QP

Power: AC 220V/50Hz


Humidity: 48 %

Mode: full load

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	40.36	9.58	49.94	66.00	-16.06	QP	
2		0.1500	9.78	9.58	19.36	56.00	-36.64	AVG	
3		0.4420	28.90	9.30	38.20	57.02	-18.82	QP	
4	*	0.4420	26.79	9.30	36.09	47.02	-10.93	AVG	
5		0.7820	25.21	9.45	34.66	56.00	-21.34	QP	
6		0.7820	23.28	9.45	32.73	46.00	-13.27	AVG	
7		11.8940	18.87	10.15	29.02	60.00	-30.98	QP	
8		11.8940	13.82	10.15	23.97	50.00	-26.03	AVG	
9		18.0940	21.31	10.17	31.48	60.00	-28.52	QP	
10		18.0940	15.04	10.17	25.21	50.00	-24.79	AVG	
11		26.7420	23.08	10.24	33.32	60.00	-26.68	QP	
12		26.7420	17.17	10.24	27.41	50.00	-22.59	AVG	

Unique Number: 005388

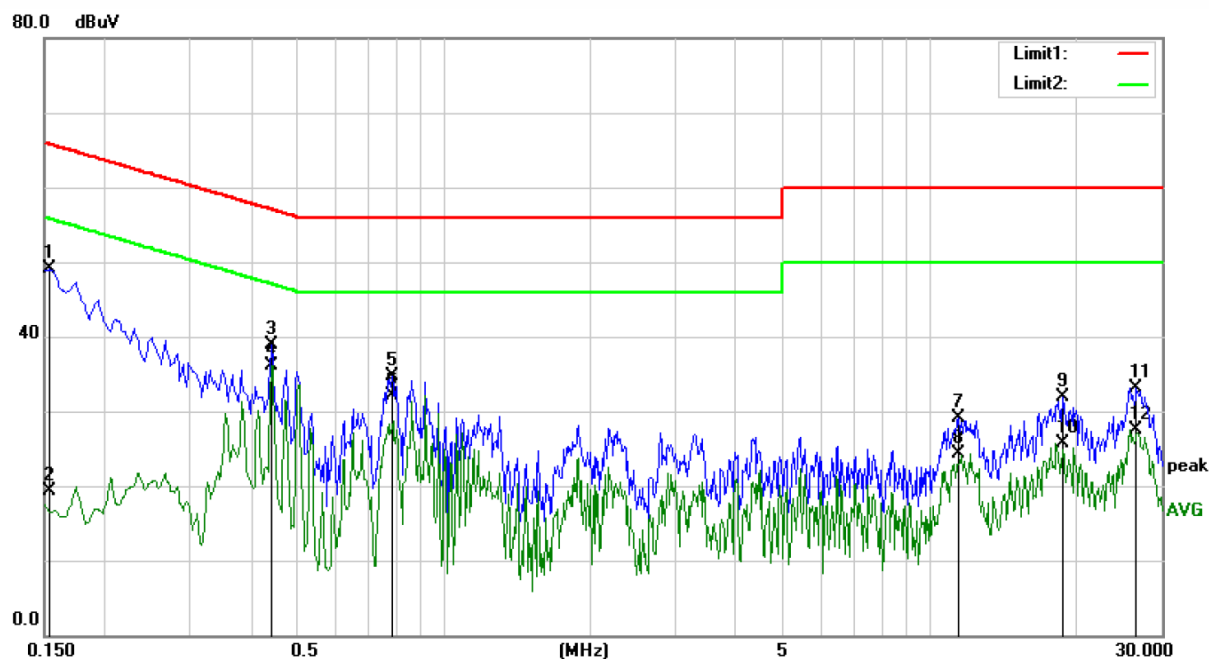

Site Conduction #1

Phase: **N**

Temperature: 22.8

Limit: (CE)CISPR 32 class B_QP

Power: AC 220V/50Hz

Humidity: 48 %

Mode: full load


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	39.44	9.57	49.01	65.78	-16.77	QP	
2		0.1540	9.73	9.57	19.30	55.78	-36.48	AVG	
3		0.4420	29.69	9.30	38.99	57.02	-18.03	QP	
4	*	0.4420	26.86	9.30	36.16	47.02	-10.86	AVG	
5		0.7820	25.31	9.45	34.76	56.00	-21.24	QP	
6		0.7820	22.72	9.45	32.17	46.00	-13.83	AVG	
7		11.4620	19.01	10.15	29.16	60.00	-30.84	QP	
8		11.4620	14.10	10.15	24.25	50.00	-25.75	AVG	
9		18.7940	21.69	10.17	31.86	60.00	-28.14	QP	
10		18.7940	15.48	10.17	25.65	50.00	-24.35	AVG	
11		26.6940	22.93	10.24	33.17	60.00	-26.83	QP	
12		26.6940	17.23	10.24	27.47	50.00	-22.53	AVG	

Unique Number: 005388

GTM41133-9016-4.0-T3A

80.0 dBuV

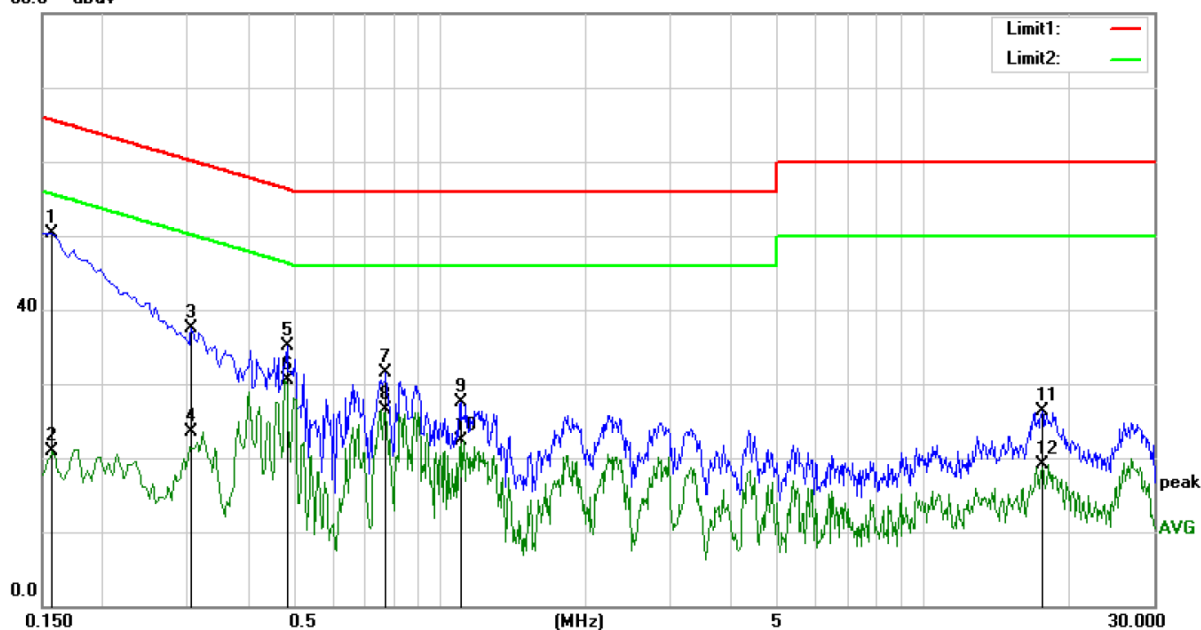

Site Conduction #1

Phase: L1

Temperature: 22.8

Limit: (CE)CISPR 32 class B_QP

Power: AC 220V/50Hz


Humidity: 48 %

Mode: full load

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1580	40.76	9.55	50.31	65.57	-15.26	QP	
2		0.1580	11.36	9.55	20.91	55.57	-34.66	AVG	
3		0.3060	28.26	9.29	37.55	60.08	-22.53	QP	
4		0.3060	14.19	9.29	23.48	50.08	-26.60	AVG	
5		0.4820	25.77	9.26	35.03	56.30	-21.27	QP	
6		0.4820	21.15	9.26	30.41	46.30	-15.89	AVG	
7		0.7740	22.07	9.43	31.50	56.00	-24.50	QP	
8		0.7740	17.05	9.43	26.48	46.00	-19.52	AVG	
9		1.1020	17.63	9.90	27.53	56.00	-28.47	QP	
10		1.1020	12.39	9.90	22.29	46.00	-23.71	AVG	
11		17.6420	16.22	10.17	26.39	60.00	-33.61	QP	
12		17.6420	8.85	10.17	19.02	50.00	-30.98	AVG	

Unique Number: 005388

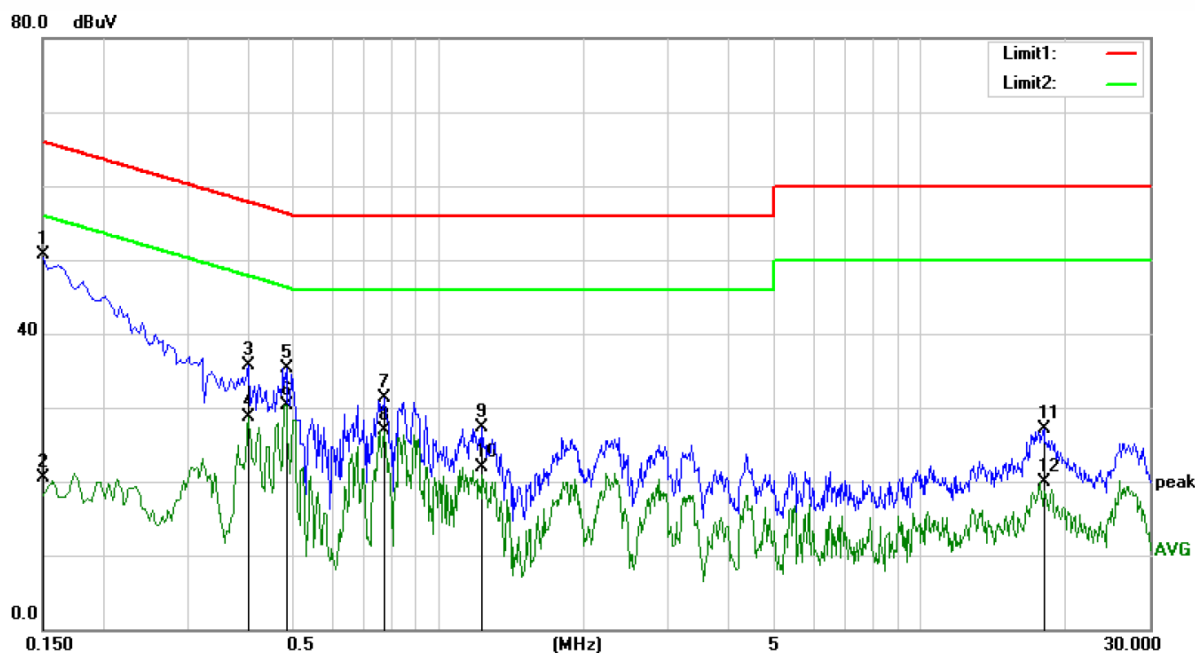

Site Conduction #1

Phase: N

Temperature: 22.8

Limit: (CE)CISPR 32 class B_QP

Power: AC 220V/50Hz

Humidity: 48 %

Mode: full load


Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	41.13	9.58	50.71	66.00	-15.29	QP	
2		0.1500	10.91	9.58	20.49	56.00	-35.51	AVG	
3		0.4020	26.39	9.33	35.72	57.81	-22.09	QP	
4		0.4020	19.34	9.33	28.67	47.81	-19.14	AVG	
5		0.4820	26.05	9.26	35.31	56.30	-20.99	QP	
6		0.4820	21.12	9.26	30.38	46.30	-15.92	AVG	
7		0.7740	21.85	9.43	31.28	56.00	-24.72	QP	
8		0.7740	17.54	9.43	26.97	46.00	-19.03	AVG	
9		1.2300	17.49	9.91	27.40	56.00	-28.60	QP	
10		1.2300	11.94	9.91	21.85	46.00	-24.15	AVG	
11		18.1340	16.85	10.17	27.02	60.00	-32.98	QP	
12		18.1340	9.66	10.17	19.83	50.00	-30.17	AVG	

Unique Number: 005388

GTM41133-9024-5.0-T3A

80.0 dBuV

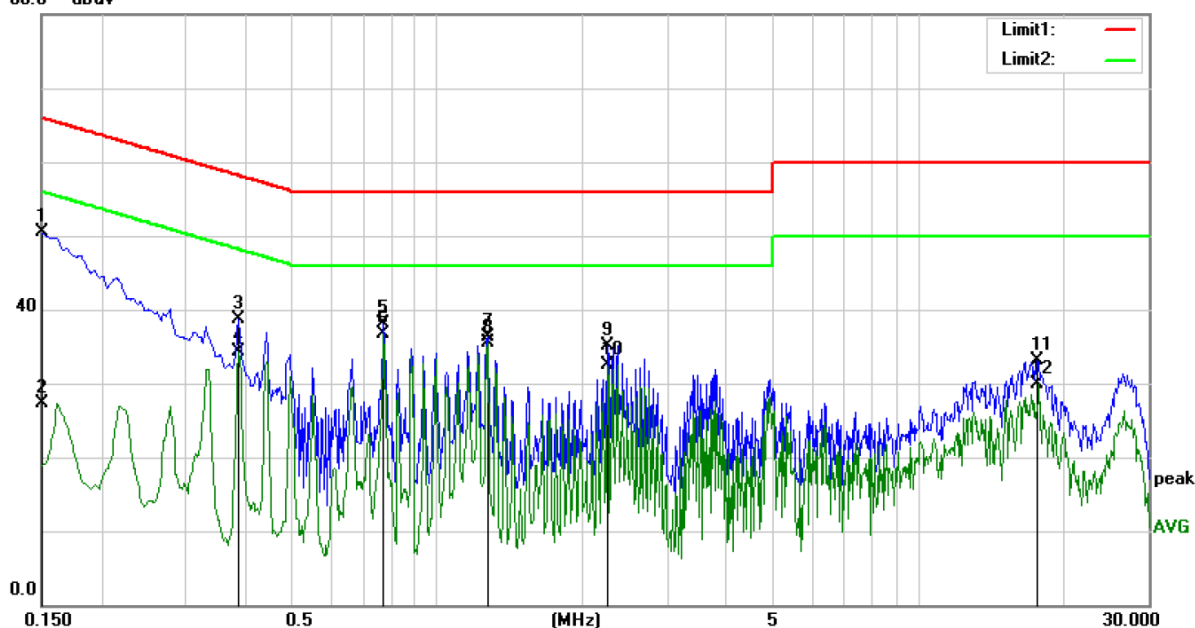

Site Conduction #1

Phase: L1

Temperature: 22.8

Limit: (CE)CISPR 32 class B_QP

Power: AC 220V/50Hz


Humidity: 48 %

Mode: full load

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	40.93	9.58	50.51	66.00	-15.49	QP	
2		0.1500	17.70	9.58	27.28	56.00	-28.72	AVG	
3		0.3860	29.47	9.32	38.79	58.15	-19.36	QP	
4		0.3860	25.02	9.32	34.34	48.15	-13.81	AVG	
5		0.7740	28.58	9.43	38.01	56.00	-17.99	QP	
6	*	0.7740	27.35	9.43	36.78	46.00	-9.22	AVG	
7		1.2700	26.31	9.91	36.22	56.00	-19.78	QP	
8		1.2700	25.51	9.91	35.42	46.00	-10.58	AVG	
9		2.2580	25.19	9.94	35.13	56.00	-20.87	QP	
10		2.2580	22.53	9.94	32.47	46.00	-13.53	AVG	
11		17.6180	22.98	10.17	33.15	60.00	-26.85	QP	
12		17.6180	19.65	10.17	29.82	50.00	-20.18	AVG	

Unique Number: 005388

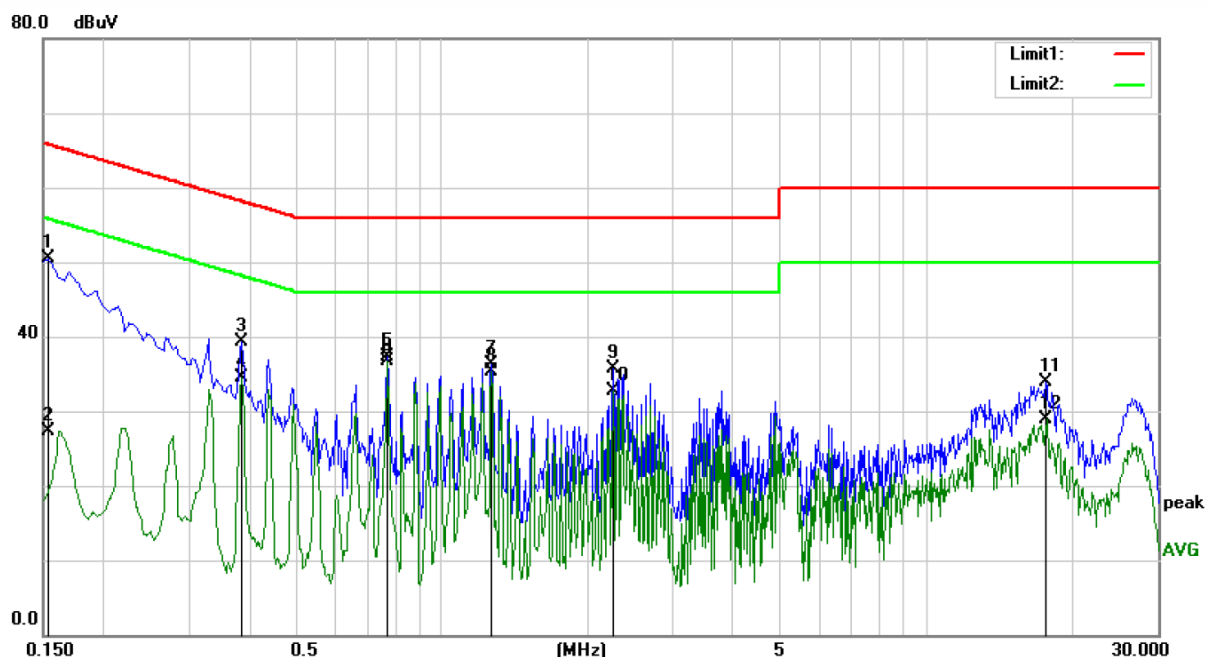

Site Conduction #1

Phase: **N**

Temperature: 22.8

Limit: (CE)CISPR 32 class B_QP

Power: AC 220V/50Hz

Humidity: 48 %


Mode: full load

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	40.91	9.57	50.48	65.78	-15.30	QP	
2		0.1540	17.78	9.57	27.35	55.78	-28.43	AVG	
3		0.3860	29.99	9.32	39.31	58.15	-18.84	QP	
4		0.3860	25.17	9.32	34.49	48.15	-13.66	AVG	
5		0.7740	27.95	9.43	37.38	56.00	-18.62	QP	
6	*	0.7740	27.30	9.43	36.73	46.00	-9.27	AVG	
7		1.2660	26.39	9.91	36.30	56.00	-19.70	QP	
8		1.2660	25.35	9.91	35.26	46.00	-10.74	AVG	
9		2.2540	25.69	9.94	35.63	56.00	-20.37	QP	
10		2.2540	22.80	9.94	32.74	46.00	-13.26	AVG	
11		17.5900	23.69	10.17	33.86	60.00	-26.14	QP	
12		17.5900	18.70	10.17	28.87	50.00	-21.13	AVG	

Unique Number: 005388

GTM41133-9048-T3A
80.0 dBuV

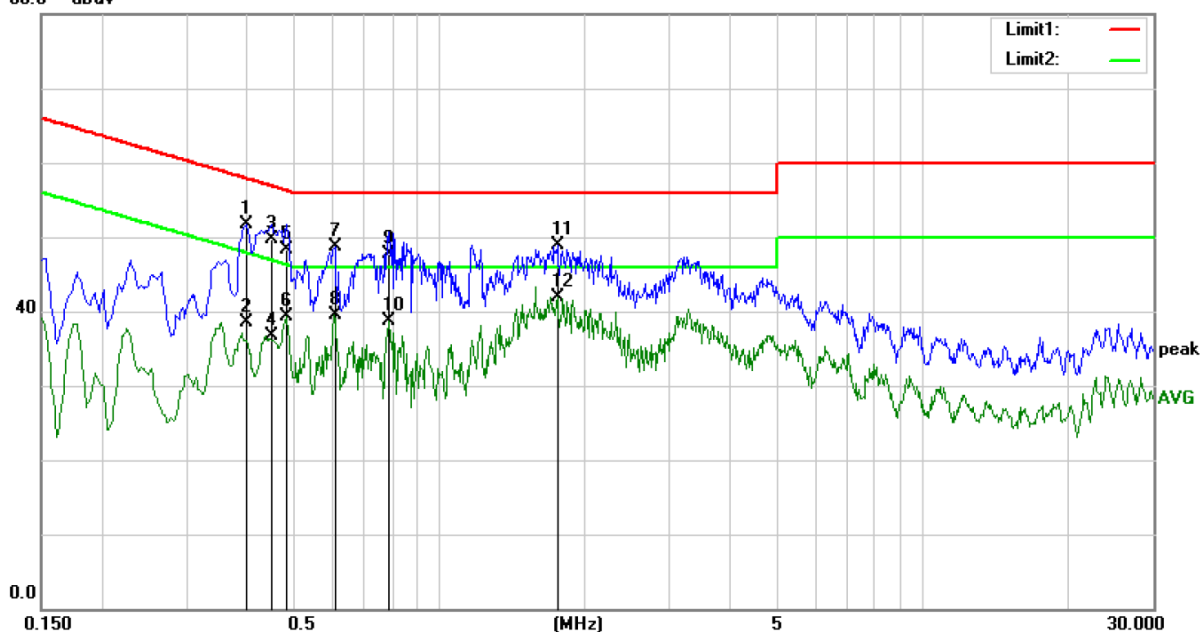

Site Conduction #1

Phase: L1

Temperature: 22.8

Limit: (CE)CISPR 32 class B_QP

Power: AC 220V/50Hz


Humidity: 48 %

Mode: full load

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3980	42.32	9.33	51.65	57.90	-6.25	QP	
2		0.3980	29.10	9.33	38.43	47.90	-9.47	AVG	
3		0.4500	40.51	9.29	49.80	56.88	-7.08	QP	
4		0.4500	27.46	9.29	36.75	46.88	-10.13	AVG	
5		0.4820	39.04	9.26	48.30	56.30	-8.00	QP	
6		0.4820	30.03	9.26	39.29	46.30	-7.01	AVG	
7		0.6100	39.38	9.27	48.65	56.00	-7.35	QP	
8		0.6100	30.16	9.27	39.43	46.00	-6.57	AVG	
9		0.7860	38.35	9.45	47.80	56.00	-8.20	QP	
10		0.7860	29.29	9.45	38.74	46.00	-7.26	AVG	
11		1.7540	38.96	9.93	48.89	56.00	-7.11	QP	
12	*	1.7540	32.04	9.93	41.97	46.00	-4.03	AVG	

Unique Number: 005388

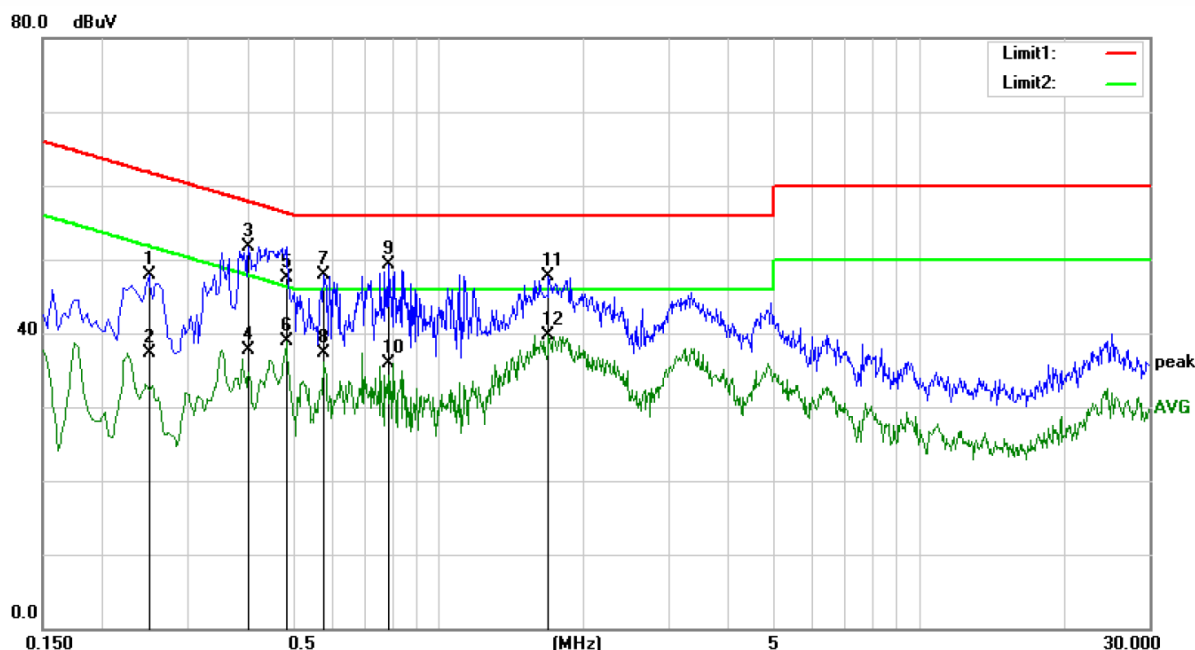

Site Conduction #1

Phase: N

Temperature: 22.8

Limit: (CE)CISPR 32 class B_QP

Power: AC 220V/50Hz

Humidity: 48 %

Mode: full load


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2500	38.57	9.36	47.93	61.76	-13.83	QP	
2		0.2500	27.85	9.36	37.21	51.76	-14.55	AVG	
3	*	0.4020	42.46	9.33	51.79	57.81	-6.02	QP	
4		0.4020	28.31	9.33	37.64	47.81	-10.17	AVG	
5		0.4820	38.34	9.26	47.60	56.30	-8.70	QP	
6		0.4820	29.60	9.26	38.86	46.30	-7.44	AVG	
7		0.5780	38.61	9.26	47.87	56.00	-8.13	QP	
8		0.5780	27.96	9.26	37.22	46.00	-8.78	AVG	
9		0.7860	39.79	9.45	49.24	56.00	-6.76	QP	
10		0.7860	26.51	9.45	35.96	46.00	-10.04	AVG	
11		1.6900	37.86	9.93	47.79	56.00	-8.21	QP	
12		1.6900	29.85	9.93	39.78	46.00	-6.22	AVG	

5. RADIATED EMISSION MEASUREMENT (UP TO 1GHz)

5.1. Block Diagram of Test Setup

UP TO 1GHz:

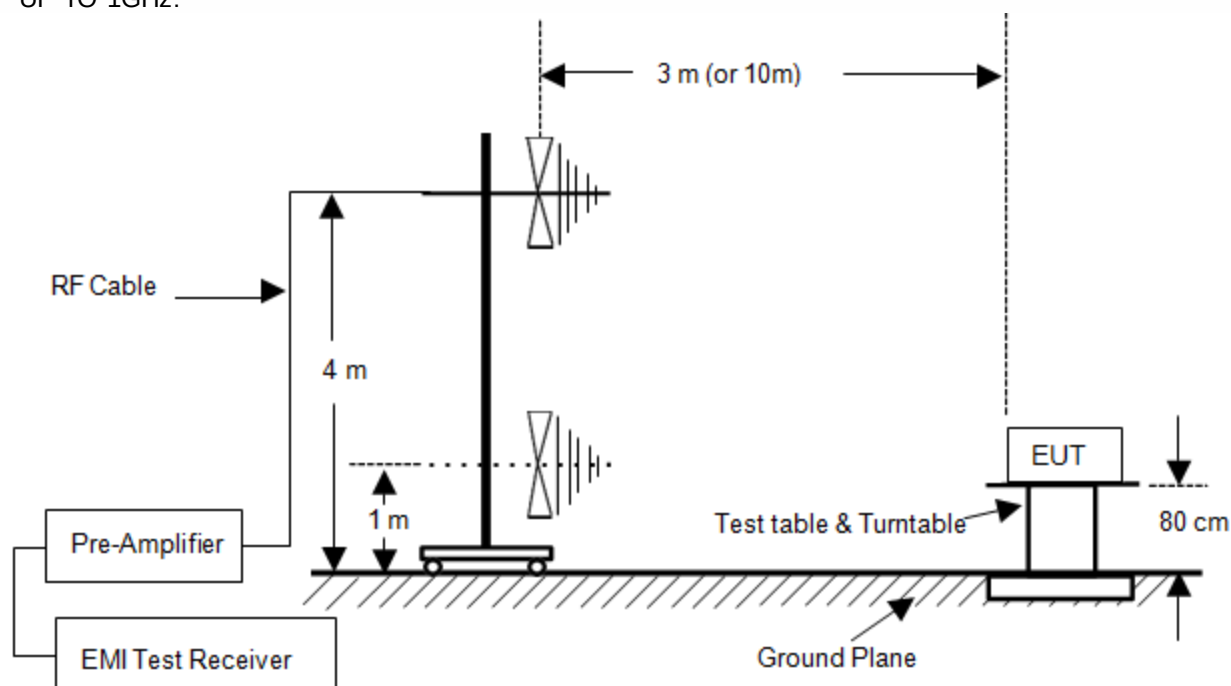

5.2. Measuring Standard

SANS 2332/CISPR 32

Frequency range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance (m)	Detector type / bandwidth	
30 to 230	OATS/SAC	10	Quasi Peak / 120 kHz	30
230 to 1 000				37
30 to 230	OATS/SAC	3		40
230 to 1 000				47

5.3. Test Procedure

The EUT was placed on a non-conductive table whose total height equaled 80cm. All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units. Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

The EUT was set 3 meters (or 10 meters) away from the receiving antenna that was mounted on a non-conductive mast. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level.

The turntable can rotate 360 degree to determine the position of the maximum emission level.

The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.

The identification of the frequency of highest emission with respect to the limit was found by investigating emissions at a number of significant frequencies. The probable frequency of maximum emission had been found and that the associated cable and EUT configuration and mode of operation had been identified.

The bandwidth of the Receiver is set at 120 kHz.

Test results were obtained from the following equation:

Emission level (dB μ V/m) = Antenna Factor - Amp Factor + Cable Loss + Reading

Margin (dB) = Emission Level (dB μ V/m) - Limit (dB μ V/m)


5.4. Measuring Results

PASS.

All the modes were tested and the data of the worst modes are attached the following pages.

Unique Number: 005388

GTM41133-9016-1.0-T3A

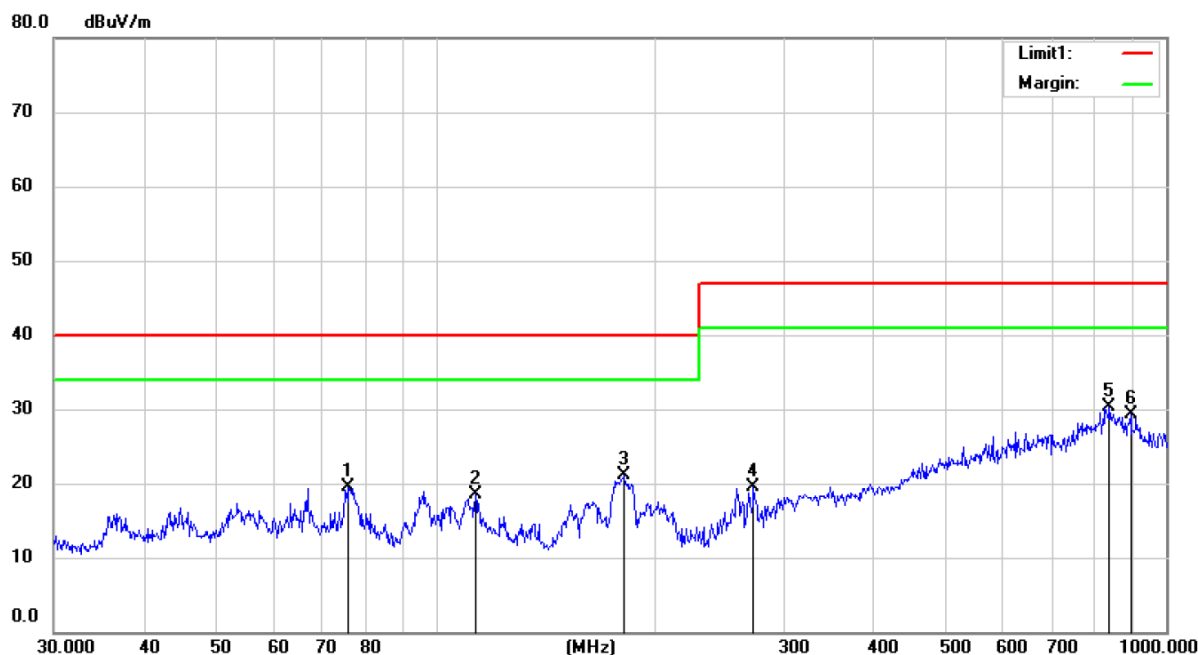

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 21.6 C

Limit: (RE)CISPR32 ClassB

Power: AC 220V/50Hz


Humidity: 61 %

Mode:Full Load

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		76.2442	36.60	-17.19	19.41	40.00	-20.59	QP		
2		113.4355	35.85	-17.40	18.45	40.00	-21.55	QP		
3		181.3470	38.43	-17.36	21.07	40.00	-18.93	QP		
4		273.1383	33.33	-13.85	19.48	47.00	-27.52	QP		
5	*	836.5376	29.28	0.93	30.21	47.00	-16.79	QP		
6		896.0534	29.71	-0.48	29.23	47.00	-17.77	QP		

Unique Number: 005388

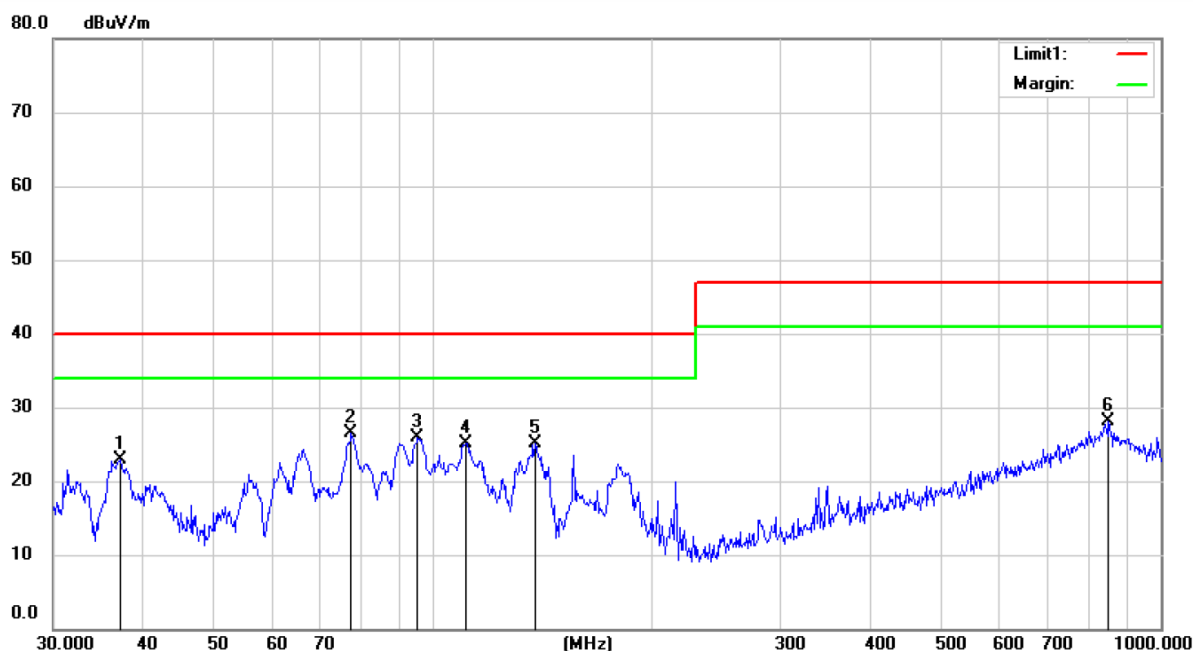

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 21.6 C

Limit: (RE)CISPR32 ClassB

Power: AC 220V/50Hz

Humidity: 61 %


Mode:Full Load

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		37.1680	39.04	-16.11	22.93	40.00	-17.07	QP		
2	*	77.1045	43.83	-17.33	26.50	40.00	-13.50	QP		
3		95.3935	43.38	-17.54	25.84	40.00	-14.16	QP		
4		110.9570	42.58	-17.52	25.06	40.00	-14.94	QP		
5		138.2418	42.66	-17.61	25.05	40.00	-14.95	QP		
6		849.2465	27.12	1.08	28.20	47.00	-18.80	QP		

Unique Number: 005388

GTM41133-9016-4.0-T3A

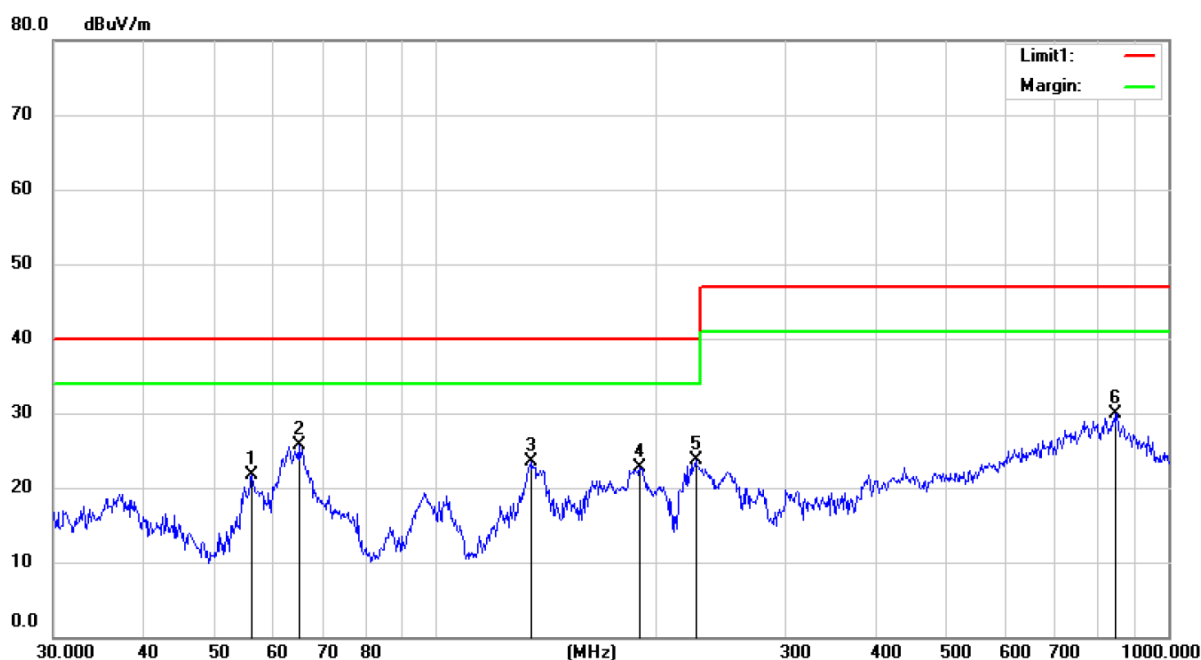

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 21.6 C

Limit: (RE)CISPR32 ClassB

Power: AC 220V/50Hz


Humidity: 61 %

Mode:Full Load

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		56.1384	36.44	-14.71	21.73	40.00	-18.27	QP		
2	*	65.0232	40.49	-14.86	25.63	40.00	-14.37	QP		
3		135.2688	40.89	-17.45	23.44	40.00	-16.56	QP		
4		190.3382	39.96	-17.26	22.70	40.00	-17.30	QP		
5		226.7346	40.02	-16.24	23.78	40.00	-16.22	QP		
6		849.5445	28.80	1.08	29.88	47.00	-17.12	QP		

Unique Number: 005388

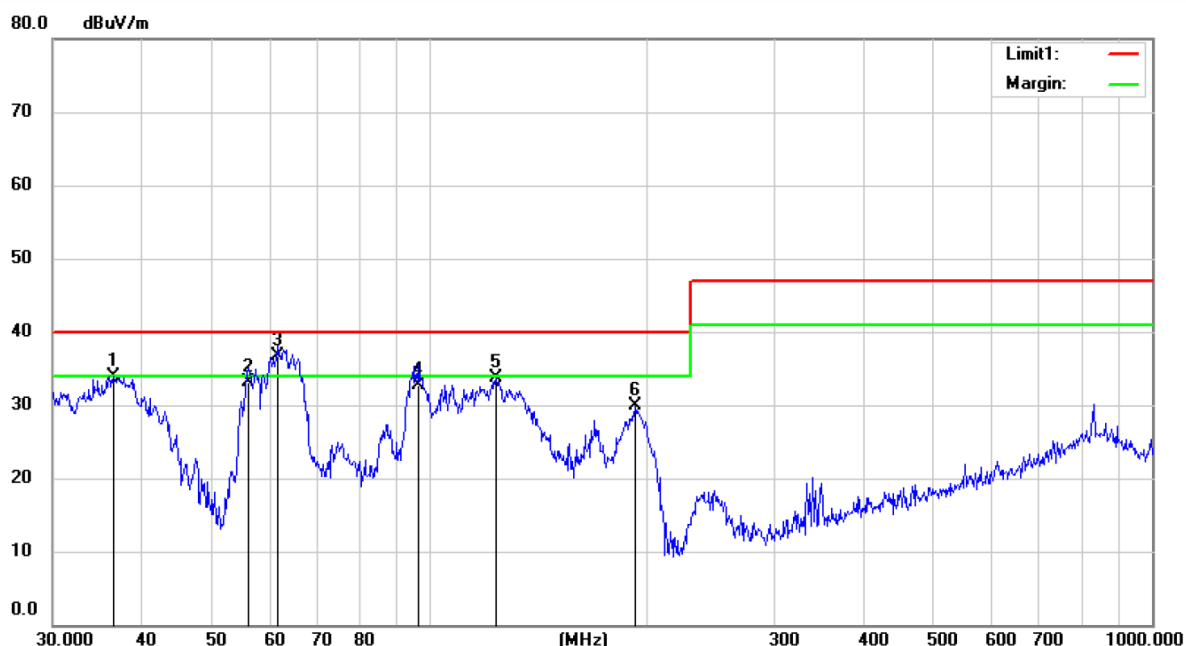

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 21.6 C

Limit: (RE)CISPR32 ClassB

Power: AC 220V/50Hz

Humidity: 61 %


Mode:Full Load

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		36.4325	50.16	-16.19	33.97	40.00	-6.03	QP		
2		56.0990	47.80	-14.70	33.10	40.00	-6.90	QP		
3	*	61.4540	51.43	-14.73	36.70	40.00	-3.30	QP		
4		96.6732	50.27	-17.57	32.70	40.00	-7.30	QP		
5		123.6117	51.23	-17.53	33.70	40.00	-6.30	QP		
6		193.0268	47.02	-17.04	29.98	40.00	-10.02	QP		

Unique Number: 005388

GTM41133-9024-5.0-T3A

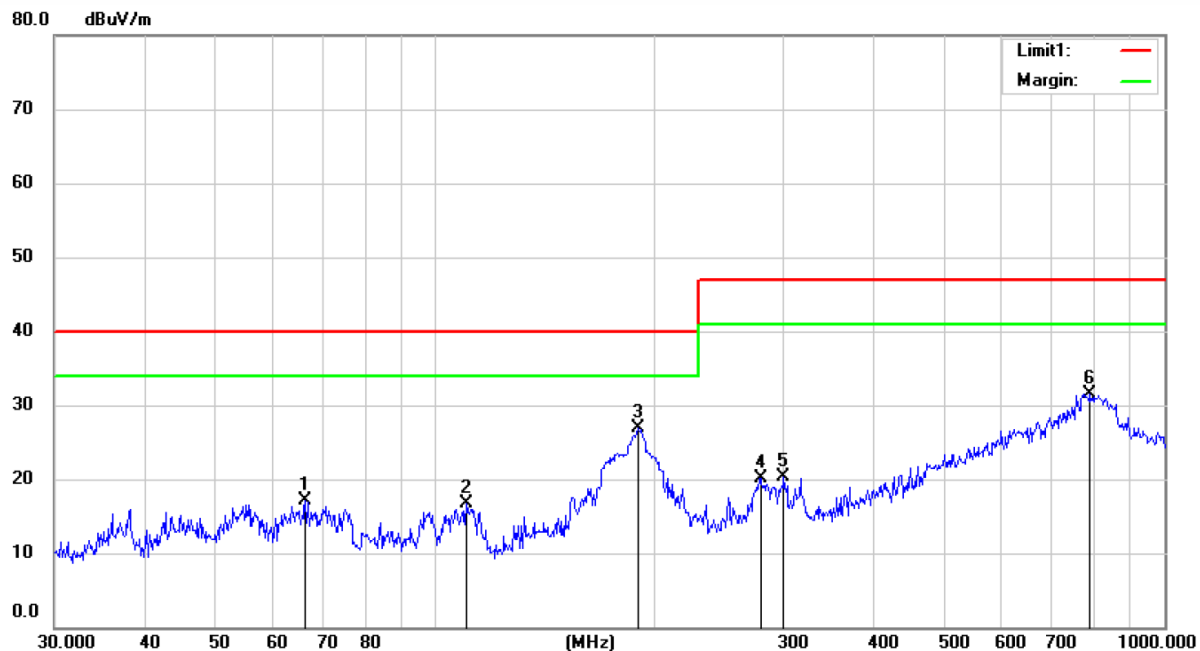

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 21.6 C

Limit: (RE)CISPR32 ClassB

Power: AC 220V/50Hz


Humidity: 61 %

Mode:Full Load

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		66.3127	32.26	-15.13	17.13	40.00	-22.87	QP		
2		110.2203	34.16	-17.55	16.61	40.00	-23.39	QP		
3	*	190.2715	44.09	-17.27	26.82	40.00	-13.18	QP		
4		279.8275	33.72	-13.63	20.09	47.00	-26.91	QP		
5		301.2110	33.11	-12.83	20.28	47.00	-26.72	QP		
6		791.7285	31.40	0.15	31.55	47.00	-15.45	QP		

Unique Number: 005388

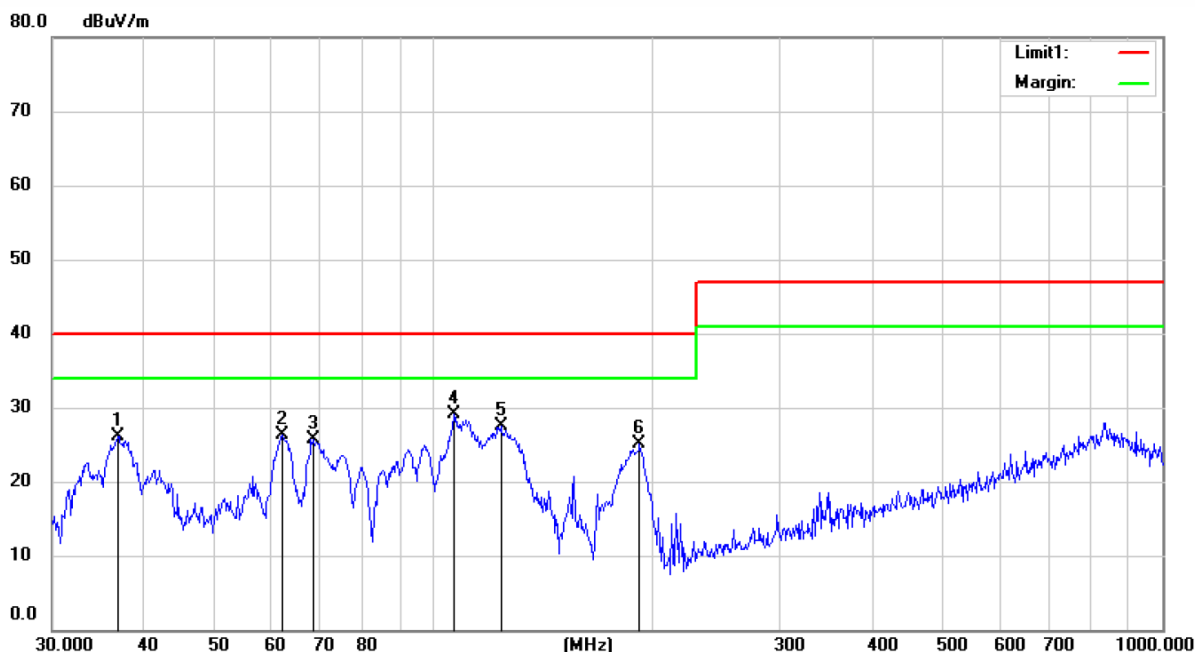

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 21.6 C

Limit: (RE)CISPR32 ClassB

Power: AC 220V/50Hz

Humidity: 61 %


Mode:Full Load

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		36.9082	42.18	-16.14	26.04	40.00	-13.96	QP		
2		62.1256	40.98	-14.76	26.22	40.00	-13.78	QP		
3		68.5107	41.28	-15.60	25.68	40.00	-14.32	QP		
4	*	107.0962	46.52	-17.37	29.15	40.00	-10.85	QP		
5		123.8286	44.96	-17.54	27.42	40.00	-12.58	QP		
6		192.0142	42.24	-17.12	25.12	40.00	-14.88	QP		

Unique Number: 005388

GTM41133-9048-T3A

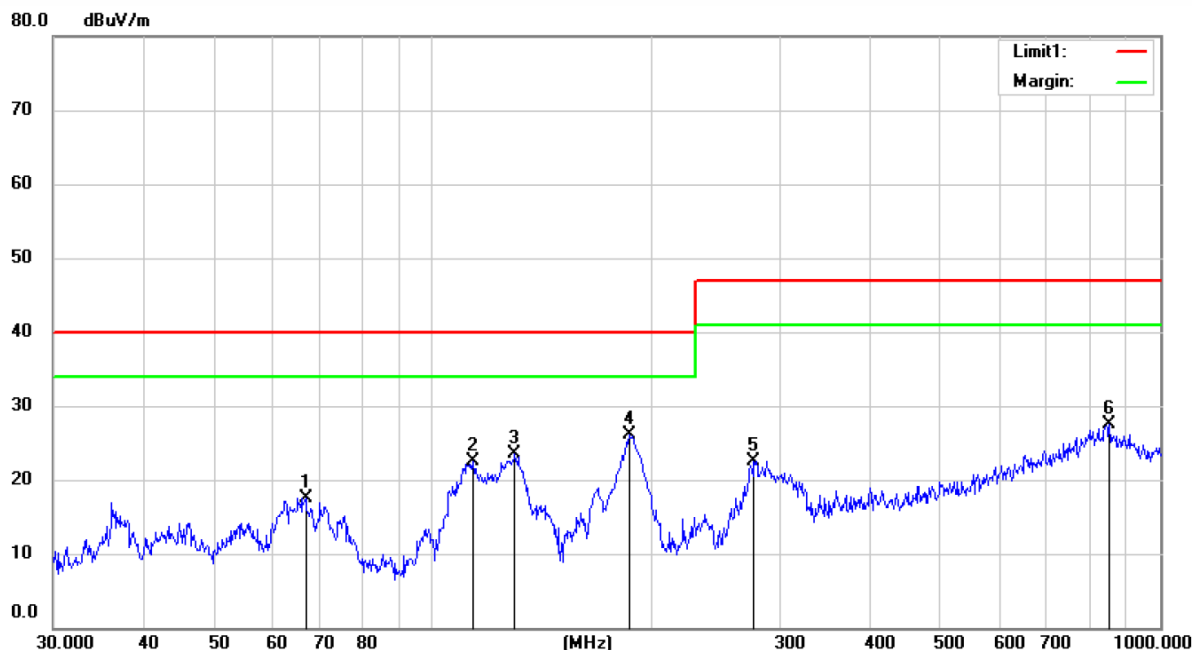

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 21.6 C

Limit: (RE)CISPR32 ClassB

Power: AC 220V/50Hz


Humidity: 61 %

Mode: Full Load

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		66.9434	32.86	-15.27	17.59	40.00	-22.41	QP		
2		113.5151	39.90	-17.40	22.50	40.00	-17.50	QP		
3		129.5131	40.96	-17.46	23.50	40.00	-16.50	QP		
4	*	186.3101	43.24	-17.11	26.13	40.00	-13.87	QP		
5		277.0935	36.18	-13.69	22.49	47.00	-24.51	QP		
6		851.6323	26.58	0.94	27.52	47.00	-19.48	QP		

Unique Number: 005388

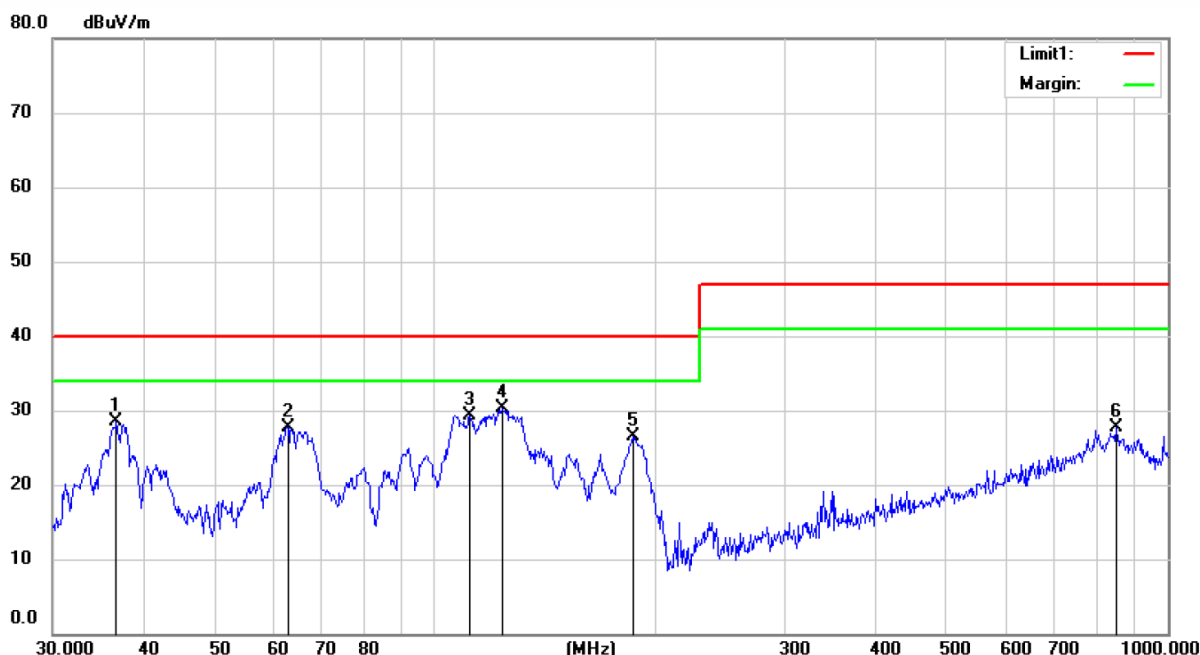

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 21.6 C

Limit: (RE)CISPR32 ClassB

Power: AC 220V/50Hz

Humidity: 61 %


Mode:Full Load

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		36.6760	44.75	-16.16	28.59	40.00	-11.41	QP		
2		62.9370	42.46	-14.78	27.68	40.00	-12.32	QP		
3		111.4640	46.80	-17.49	29.31	40.00	-10.69	QP		
4	*	123.3087	47.90	-17.54	30.36	40.00	-9.64	QP		
5		186.2448	43.53	-17.10	26.43	40.00	-13.57	QP		
6		852.2298	26.77	0.89	27.66	47.00	-19.34	QP		

6. HARMONIC CURRENT EMISSION MEASUREMENT

6.1. Block Diagram of Test Setup

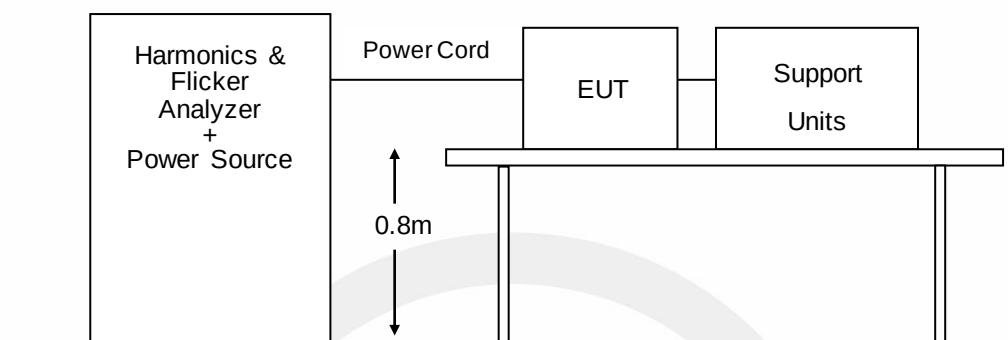

6.2. Standard Limits

SANS 61000-3-2/IEC 61000-3-2, CLASS A

Harmonic current emissions evaluate the potential for the EUT to cause distortion on the AC power lines. It is applicable to electrical and electronic equipment having an input current ≤ 16 A per phase, and intended to be connected to public low-voltage distribution systems

Table 1 - Limits for Class A equipment

Harmonic order n	Maximum permissible harmonic current (A)
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
$15 \leq n \leq 39$	$0.15 \frac{0.15}{n}$
Even harmonics	
2	1.08
4	0.43
6	0.30
$8 \leq n \leq 40$	$0.23 \frac{8}{n}$

6.3. Test Procedure

The measurement of harmonic currents shall be performed as follows: i. For each harmonic order, measure the 1.5 s smoothed r.m.s. harmonic current in each DFT time window as defined in EN / IEC 61000-4-7:2009. ii. Calculate the arithmetic average of the measured values from the DFT time windows, over the entire observation period Short cyclic ($T_{\text{cycle}} \leq 2.5 \text{ min}$). Because of synchronisation to meet the requirements for repeatability in 5%.

6.4. Test Results

PASS.

Please see the attached pages.



Unique Number: 005388

GTM41133-9016-1.0-T3A

Harmonics – Class-A (Run time) incl. inter-harmonics

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100


End time: 21:38:00

Data file name: WIN2105_H-000609.cts_data

Test Result: Pass


Source qualification: Normal

Current & voltage waveforms

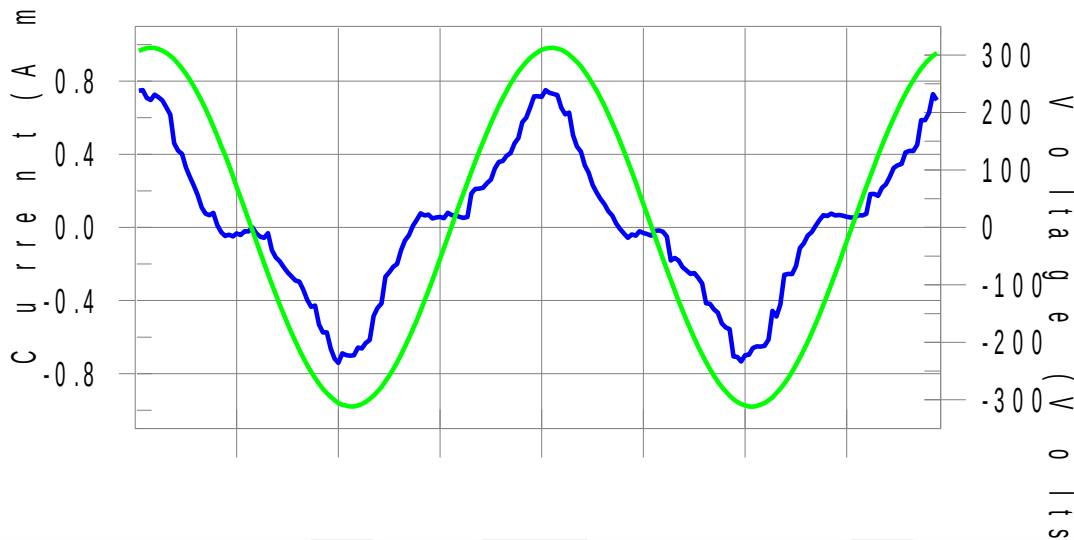

Harmonics and Class A limit line

European Limits

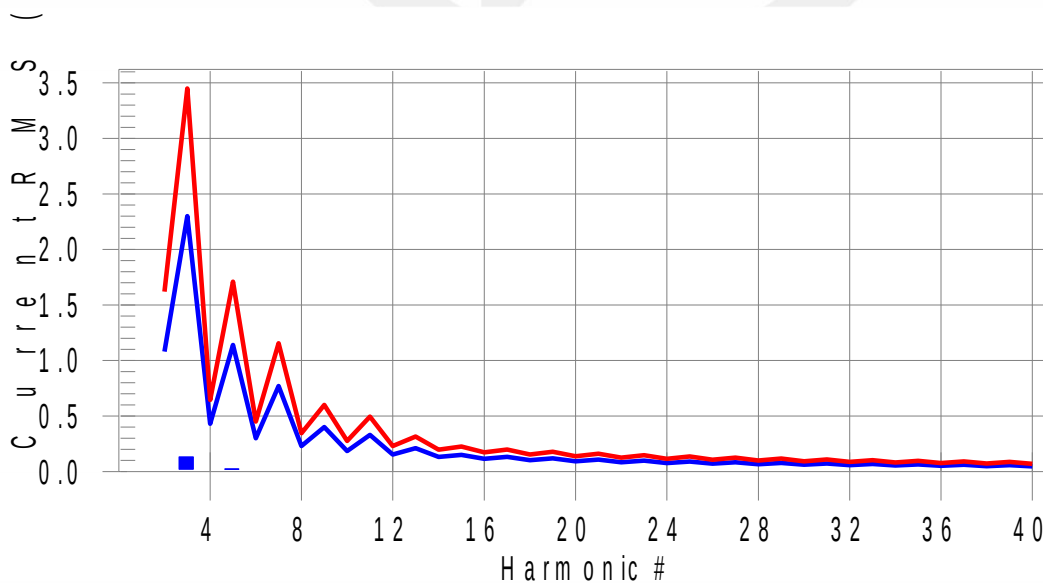

Test result: Pass Worst harmonics H33-7.1% of 150% limit, H33-10.3% of 100% limit.

Unique Number: 005388

Current Test Result Summary (Run time)

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 21:38:00

Start time: 21:35:17

Data file name: WIN2105_H-000609.cts_data

Test Result: Pass

THC(A): 0.135

Source qualification: Normal

I-THD(%): 35.6

POHC(A): 0.014

POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 220.690

I_Peak (Amps): 0.813

I_Fund (Amps): 0.380

Power (Watts): 82.0

Frequency(Hz): 50.00

I_RMS (Amps): 0.404

Crest Factor: 2.023

Power Factor: 0.922

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.132	2.300	5.7	0.134	3.450	3.9	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.023	1.140	2.0	0.023	1.710	1.3	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.009	0.770	1.2	0.010	1.155	0.8	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.007	0.400	1.7	0.007	0.600	1.2	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.005	0.330	N/A	0.005	0.495	N/A	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.008	0.210	3.8	0.008	0.315	2.6	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.005	0.150	N/A	0.006	0.225	N/A	Pass
16	0.004	0.115	N/A	0.005	0.173	N/A	Pass
17	0.003	0.132	N/A	0.004	0.198	N/A	Pass
18	0.002	0.102	N/A	0.002	0.153	N/A	Pass
19	0.002	0.118	N/A	0.002	0.178	N/A	Pass
20	0.002	0.092	N/A	0.002	0.138	N/A	Pass
21	0.003	0.107	N/A	0.004	0.161	N/A	Pass
22	0.004	0.084	N/A	0.005	0.125	N/A	Pass
23	0.003	0.098	N/A	0.004	0.147	N/A	Pass
24	0.002	0.077	N/A	0.003	0.115	N/A	Pass
25	0.005	0.090	N/A	0.005	0.135	N/A	Pass
26	0.003	0.071	N/A	0.003	0.107	N/A	Pass
27	0.007	0.083	8.9	0.008	0.125	6.3	Pass
28	0.003	0.066	N/A	0.003	0.099	N/A	Pass
29	0.004	0.078	N/A	0.005	0.116	N/A	Pass
30	0.002	0.061	N/A	0.002	0.092	N/A	Pass
31	0.002	0.073	N/A	0.002	0.109	N/A	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.007	0.068	10.3	0.007	0.102	7.1	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.004	0.064	N/A	0.004	0.096	N/A	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.002	0.061	N/A	0.003	0.091	N/A	Pass
38	0.001	0.048	N/A	0.001	0.073	N/A	Pass
39	0.002	0.058	N/A	0.002	0.087	N/A	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass

Unique Number: 005388

Voltage Source Verification Data (Run time)

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 21:38:00

Start time: 21:35:17

Data file name: WIN2105_H-000609.cts_data

Test Result: Pass

Source qualification: Normal

Measured source distortion is within the requirements of the standards

Measurements are compliant with IEC/EN61000-3-2 Ed. 5 & IEC/EN61000-4-7 Ed. 2.1

Highest parameter values during test:

Voltage (Vrms): 220.690

I_Peak (Amps): 0.813

I_Fund (Amps): 0.380

Power (Watts): 82.0

Frequency(Hz): 50.00

I_RMS (Amps): 0.404

Crest Factor: 2.023

Power Factor: 0.922

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.086	0.441	19.53	OK
3	0.108	1.986	5.44	OK
4	0.033	0.441	7.47	OK
5	0.038	0.883	4.33	OK
6	0.012	0.441	2.78	OK
7	0.041	0.662	6.17	OK
8	0.017	0.441	3.92	OK
9	0.036	0.441	8.23	OK
10	0.019	0.441	4.21	OK
11	0.038	0.221	17.11	OK
12	0.014	0.221	6.48	OK
13	0.022	0.221	10.19	OK
14	0.015	0.221	6.71	OK
15	0.033	0.221	15.01	OK
16	0.012	0.221	5.36	OK
17	0.018	0.221	8.33	OK
18	0.011	0.221	5.09	OK
19	0.013	0.221	6.07	OK
20	0.017	0.221	7.86	OK
21	0.017	0.221	7.48	OK
22	0.010	0.221	4.40	OK
23	0.020	0.221	8.88	OK
24	0.010	0.221	4.39	OK
25	0.020	0.221	9.23	OK
26	0.012	0.221	5.53	OK
27	0.023	0.221	10.51	OK
28	0.011	0.221	5.09	OK
29	0.013	0.221	6.01	OK
30	0.010	0.221	4.34	OK
31	0.013	0.221	6.04	OK
32	0.009	0.221	4.14	OK
33	0.023	0.221	10.53	OK
34	0.008	0.221	3.85	OK
35	0.014	0.221	6.21	OK
36	0.009	0.221	4.08	OK
37	0.012	0.221	5.51	OK
38	0.011	0.221	4.98	OK
39	0.009	0.221	4.14	OK
40	0.014	0.221	6.32	OK

Unique Number: 005388

GTM41133-9016-4.0-T3A

Harmonics – Class-A (Run time) incl. inter-harmonics

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 21:30:48


Start time: 21:28:06

Data file name: WIN2105_H-000608.cts_data

Test Result: Pass


Source qualification: Normal

Current & voltage waveforms

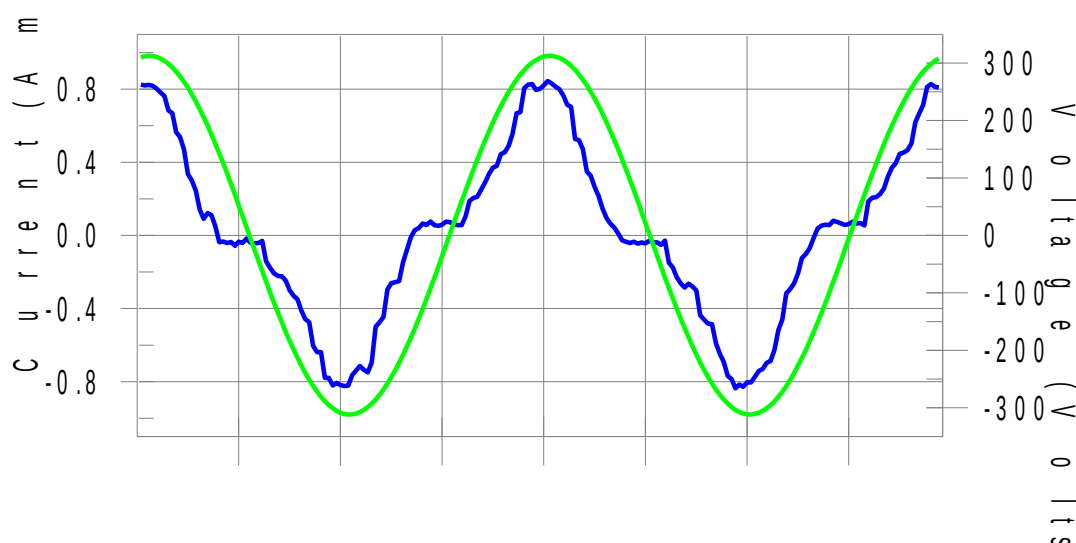

Harmonics and Class A limit line

European Limits

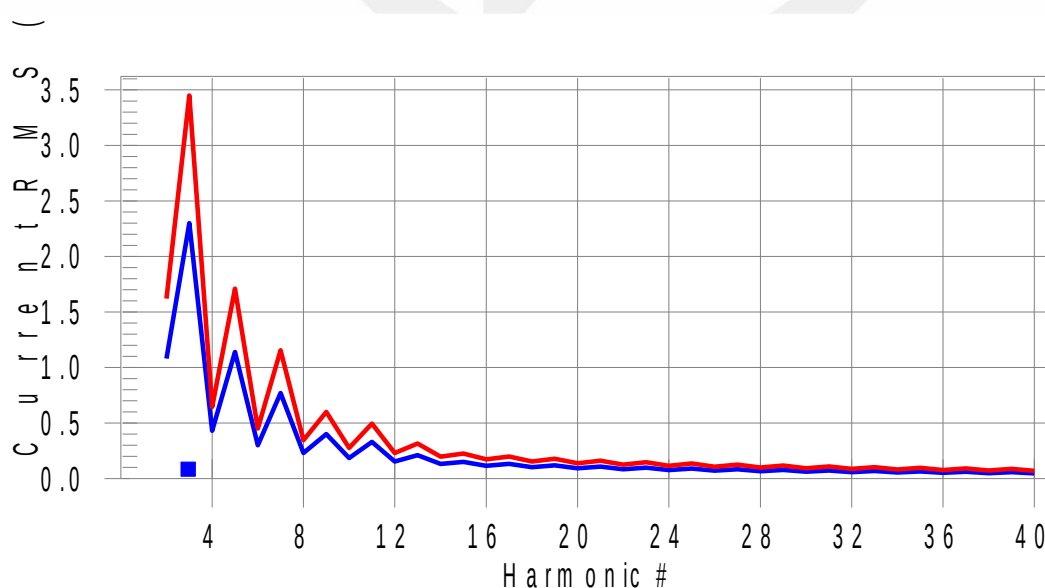

Test result: Pass Worst harmonics H35-7.7% of 150% limit, H35-11.4% of 100% limit.

Unique Number: 005388

Current Test Result Summary (Run time)

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 21:30:48

Start time: 21:28:06

Data file name: WIN2105_H-000608.cts_data

Test Result: Pass

THC(A): 0.151

Source qualification: Normal

I-THD(%): 33.4

POHC(A): 0.013

POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 220.689

I_Peak (Amps): 0.922

I_Fund (Amps): 0.453

Power (Watts): 98.3

Frequency(Hz): 50.00

I_RMS (Amps): 0.479

Crest Factor: 1.927

Power Factor: 0.933

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.148	2.300	6.4	0.150	3.450	4.3	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.016	1.140	1.4	0.016	1.710	1.0	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.009	0.770	1.2	0.009	1.155	0.8	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.013	0.400	3.2	0.013	0.600	2.2	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.007	0.330	2.2	0.008	0.495	1.5	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.007	0.210	3.3	0.007	0.315	2.3	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.005	0.150	N/A	0.005	0.225	N/A	Pass
16	0.004	0.115	N/A	0.005	0.173	N/A	Pass
17	0.005	0.132	N/A	0.005	0.198	N/A	Pass
18	0.002	0.102	N/A	0.002	0.153	N/A	Pass
19	0.003	0.118	N/A	0.003	0.178	N/A	Pass
20	0.002	0.092	N/A	0.002	0.138	N/A	Pass
21	0.003	0.107	N/A	0.003	0.161	N/A	Pass
22	0.004	0.084	N/A	0.005	0.125	N/A	Pass
23	0.001	0.098	N/A	0.002	0.147	N/A	Pass
24	0.002	0.077	N/A	0.002	0.115	N/A	Pass
25	0.005	0.090	N/A	0.005	0.135	N/A	Pass
26	0.002	0.071	N/A	0.003	0.107	N/A	Pass
27	0.004	0.083	N/A	0.005	0.125	N/A	Pass
28	0.002	0.066	N/A	0.002	0.099	N/A	Pass
29	0.007	0.078	9.4	0.008	0.116	6.6	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.003	0.073	N/A	0.004	0.109	N/A	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.002	0.068	N/A	0.003	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.007	0.064	11.4	0.007	0.096	7.7	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.002	0.061	N/A	0.002	0.091	N/A	Pass
38	0.001	0.048	N/A	0.001	0.073	N/A	Pass
39	0.001	0.058	N/A	0.001	0.087	N/A	Pass
40	0.000	0.046	N/A	0.001	0.069	N/A	Pass

Unique Number: 005388

Voltage Source Verification Data (Run time)

EUT: ICT/ITE POWER SUPPLY

Tested by: ZKT

Test category: Class-A (European limits)

Test Margin: 100

Test date: 2024/11/7

Start time: 21:28:06

End time: 21:30:48

Test duration (min): 2.5

Data file name: WIN2105_H-000608.cts_data

Comment: FULL LOAD

Customer: GlobTek, Inc.

Test Result: Pass

Source qualification: Normal

Measured source distortion is within the requirements of the standards

Measurements are compliant with IEC/EN61000-3-2 Ed. 5 & IEC/EN61000-4-7 Ed. 2.1

Highest parameter values during test:

Voltage (Vrms): 220.689

Frequency(Hz): 50.00

I_Peak (Amps): 0.922

I_RMS (Amps): 0.479

I_Fund (Amps): 0.453

Crest Factor: 1.927

Power (Watts): 98.3

Power Factor: 0.933

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.087	0.441	19.62	OK
3	0.101	1.986	5.09	OK
4	0.030	0.441	6.84	OK
5	0.040	0.883	4.53	OK
6	0.013	0.441	2.85	OK
7	0.043	0.662	6.56	OK
8	0.017	0.441	3.95	OK
9	0.039	0.441	8.89	OK
10	0.017	0.441	3.95	OK
11	0.038	0.221	17.25	OK
12	0.015	0.221	6.96	OK
13	0.023	0.221	10.55	OK
14	0.014	0.221	6.47	OK
15	0.033	0.221	14.95	OK
16	0.012	0.221	5.29	OK
17	0.022	0.221	10.02	OK
18	0.011	0.221	4.95	OK
19	0.017	0.221	7.63	OK
20	0.017	0.221	7.79	OK
21	0.016	0.221	7.39	OK
22	0.010	0.221	4.62	OK
23	0.016	0.221	7.14	OK
24	0.011	0.221	4.82	OK
25	0.021	0.221	9.30	OK
26	0.012	0.221	5.63	OK
27	0.018	0.221	8.38	OK
28	0.012	0.221	5.28	OK
29	0.023	0.221	10.57	OK
30	0.012	0.221	5.56	OK
31	0.020	0.221	9.06	OK
32	0.010	0.221	4.63	OK
33	0.012	0.221	5.45	OK
34	0.009	0.221	3.90	OK
35	0.024	0.221	11.05	OK
36	0.010	0.221	4.34	OK
37	0.014	0.221	6.51	OK
38	0.009	0.221	4.18	OK
39	0.010	0.221	4.42	OK
40	0.013	0.221	5.90	OK

Unique Number: 005388

GTM41133-9024-5.0-T3A

Harmonics – Class-A (Run time) incl. inter-harmonics

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 21:47:13


Start time: 21:44:30

Data file name: WIN2105_H-000610.cts_data

Test Result: Pass


Source qualification: Normal

Current & voltage waveforms

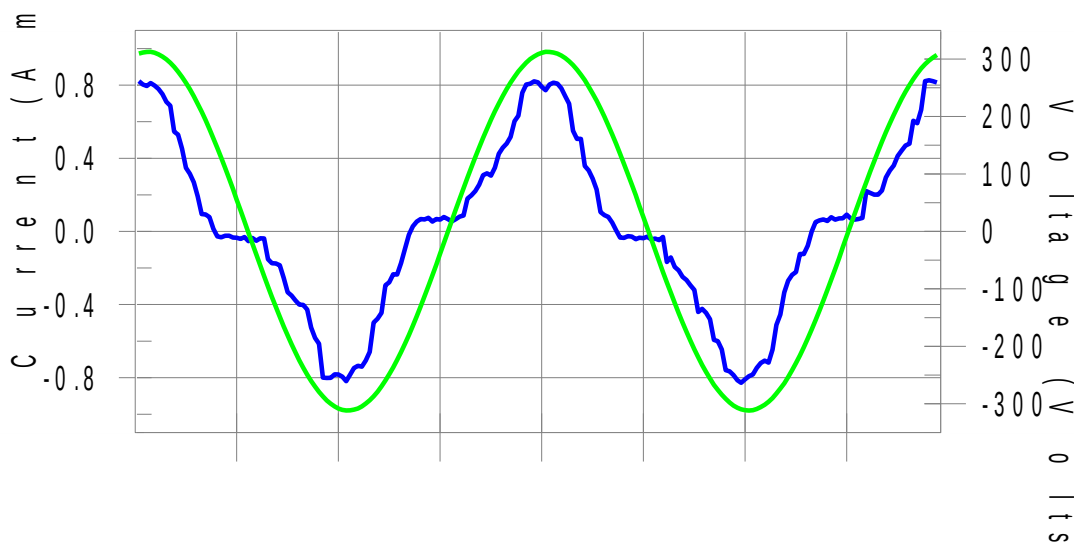

Harmonics and Class A limit line

European Limits

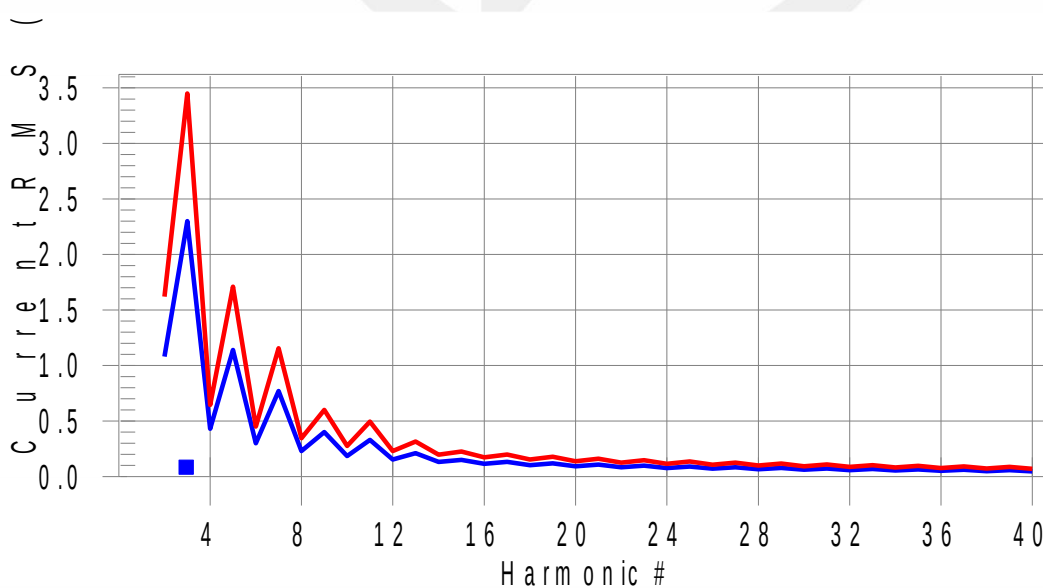

Test result: Pass Worst harmonics H35-7.6% of 150% limit, H35-11.2% of 100% limit.

Unique Number: 005388

Current Test Result Summary (Run time)

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 21:47:13

Start time: 21:44:30

Data file name: WIN2105_H-000610.cts_data

Test Result: Pass

THC(A): 0.151

Source qualification: Normal

I-THD(%): 33.5

POHC(A): 0.014

POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 220.696

I_Peak (Amps): 0.922

I_Fund (Amps): 0.450

Power (Watts): 97.6

Frequency(Hz): 50.00

I_RMS (Amps): 0.475

Crest Factor: 1.960

Power Factor: 0.932

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.148	2.300	6.4	0.149	3.450	4.3	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.016	1.140	1.4	0.017	1.710	1.0	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.009	0.770	1.1	0.009	1.155	0.8	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.013	0.400	3.2	0.013	0.600	2.2	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.007	0.330	2.2	0.008	0.495	1.6	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.007	0.210	3.4	0.007	0.315	2.3	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.005	0.150	N/A	0.005	0.225	N/A	Pass
16	0.004	0.115	N/A	0.005	0.173	N/A	Pass
17	0.005	0.132	N/A	0.005	0.198	N/A	Pass
18	0.002	0.102	N/A	0.003	0.153	N/A	Pass
19	0.003	0.118	N/A	0.004	0.178	N/A	Pass
20	0.002	0.092	N/A	0.003	0.138	N/A	Pass
21	0.003	0.107	N/A	0.003	0.161	N/A	Pass
22	0.005	0.084	N/A	0.005	0.125	N/A	Pass
23	0.002	0.098	N/A	0.002	0.147	N/A	Pass
24	0.002	0.077	N/A	0.002	0.115	N/A	Pass
25	0.005	0.090	N/A	0.005	0.135	N/A	Pass
26	0.002	0.071	N/A	0.002	0.107	N/A	Pass
27	0.004	0.083	N/A	0.004	0.125	N/A	Pass
28	0.002	0.066	N/A	0.002	0.099	N/A	Pass
29	0.007	0.078	9.6	0.008	0.116	6.7	Pass
30	0.002	0.061	N/A	0.002	0.092	N/A	Pass
31	0.003	0.073	N/A	0.004	0.109	N/A	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.002	0.068	N/A	0.003	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.007	0.064	11.2	0.007	0.096	7.6	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.003	0.061	N/A	0.003	0.091	N/A	Pass
38	0.001	0.048	N/A	0.001	0.073	N/A	Pass
39	0.002	0.058	N/A	0.002	0.087	N/A	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass

Unique Number: 005388

Voltage Source Verification Data (Run time)

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 21:47:13

Start time: 21:44:30

Data file name: WIN2105_H-000610.cts_data

Test Result: Pass

Source qualification: Normal

Measured source distortion is within the requirements of the standards

Measurements are compliant with IEC/EN61000-3-2 Ed. 5 & IEC/EN61000-4-7 Ed. 2.1

Highest parameter values during test:

Voltage (Vrms): 220.696

I_Peak (Amps): 0.922

I_Fund (Amps): 0.450

Power (Watts): 97.6

Frequency(Hz): 50.00

I_RMS (Amps): 0.475

Crest Factor: 1.960

Power Factor: 0.932

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.088	0.441	20.05	OK
3	0.110	1.986	5.53	OK
4	0.033	0.441	7.52	OK
5	0.039	0.883	4.47	OK
6	0.013	0.441	3.04	OK
7	0.042	0.662	6.30	OK
8	0.017	0.441	3.93	OK
9	0.038	0.441	8.59	OK
10	0.017	0.441	3.75	OK
11	0.039	0.221	17.71	OK
12	0.014	0.221	6.31	OK
13	0.024	0.221	11.06	OK
14	0.013	0.221	5.92	OK
15	0.030	0.221	13.38	OK
16	0.014	0.221	6.51	OK
17	0.023	0.221	10.52	OK
18	0.012	0.221	5.24	OK
19	0.016	0.221	7.07	OK
20	0.016	0.221	7.26	OK
21	0.017	0.221	7.56	OK
22	0.010	0.221	4.54	OK
23	0.016	0.221	7.09	OK
24	0.011	0.221	4.90	OK
25	0.022	0.221	9.85	OK
26	0.012	0.221	5.42	OK
27	0.016	0.221	7.23	OK
28	0.012	0.221	5.60	OK
29	0.023	0.221	10.26	OK
30	0.010	0.221	4.71	OK
31	0.019	0.221	8.49	OK
32	0.010	0.221	4.73	OK
33	0.012	0.221	5.35	OK
34	0.010	0.221	4.71	OK
35	0.022	0.221	10.03	OK
36	0.012	0.221	5.25	OK
37	0.014	0.221	6.39	OK
38	0.009	0.221	4.27	OK
39	0.011	0.221	4.83	OK
40	0.013	0.221	6.01	OK

Unique Number: 005388

GTM41133-9048-T3A

Harmonics – Class-A (Run time) incl. inter-harmonics

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 21:24:02


Start time: 21:21:20

Data file name: WIN2105_H-000607.cts_data

Test Result: Pass


Source qualification: Normal

Current & voltage waveforms

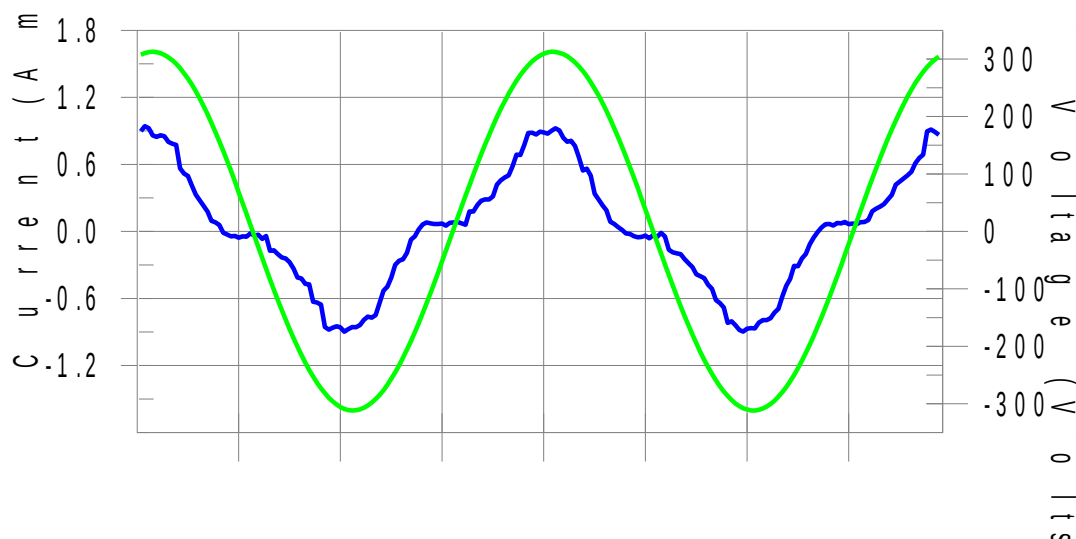

Harmonics and Class A limit line

European Limits

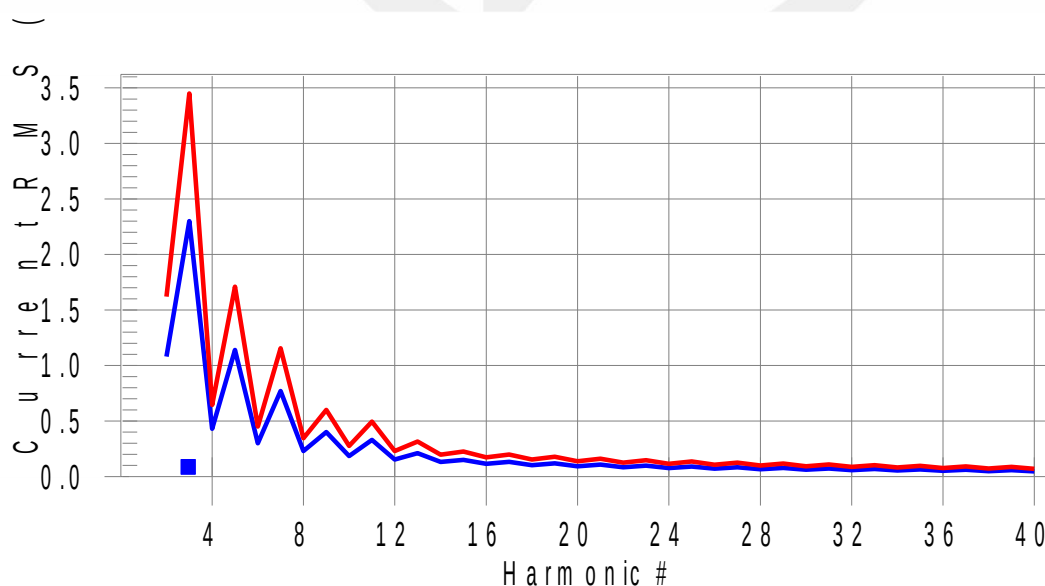

Test result: Pass Worst harmonics H27-8.5% of 150% limit, H27-12% of 100% limit.

Unique Number: 005388

Current Test Result Summary (Run time)

EUT: ICT/ITE POWER SUPPLY

Test category: Class-A (European limits)

Test date: 2024/11/7

Test duration (min): 2.5

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 21:24:02

Start time: 21:21:20

Data file name: WIN2105_H-000607.cts_data

Test Result: Pass

THC(A): 0.157

Source qualification: Normal

I-THD(%): 31.4

POHC(A): 0.016

POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 220.689

I_Peak (Amps): 0.984

I_Fund (Amps): 0.499

Power (Watts): 108.4

Frequency(Hz): 50.00

I_RMS (Amps): 0.524

Crest Factor: 1.881

Power Factor: 0.940

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	N/A	0.002	1.620	N/A	Pass
3	0.154	2.300	6.7	0.155	3.450	4.5	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.013	1.140	1.2	0.014	1.710	0.8	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.010	0.770	1.4	0.011	1.155	0.9	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.013	0.400	3.3	0.014	0.600	2.3	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.008	0.330	2.4	0.008	0.495	1.6	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.005	0.210	N/A	0.005	0.315	N/A	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.008	0.150	5.0	0.008	0.225	3.6	Pass
16	0.004	0.115	N/A	0.005	0.173	N/A	Pass
17	0.004	0.132	N/A	0.005	0.198	N/A	Pass
18	0.002	0.102	N/A	0.002	0.153	N/A	Pass
19	0.003	0.118	N/A	0.003	0.178	N/A	Pass
20	0.002	0.092	N/A	0.002	0.138	N/A	Pass
21	0.006	0.107	5.3	0.007	0.161	4.1	Pass
22	0.004	0.084	N/A	0.005	0.125	N/A	Pass
23	0.002	0.098	N/A	0.002	0.147	N/A	Pass
24	0.002	0.077	N/A	0.002	0.115	N/A	Pass
25	0.004	0.090	N/A	0.004	0.135	N/A	Pass
26	0.003	0.071	N/A	0.003	0.107	N/A	Pass
27	0.010	0.083	12.0	0.011	0.125	8.5	Pass
28	0.003	0.066	N/A	0.004	0.099	N/A	Pass
29	0.003	0.078	N/A	0.004	0.116	N/A	Pass
30	0.002	0.061	N/A	0.002	0.092	N/A	Pass
31	0.005	0.073	7.4	0.006	0.109	5.1	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.004	0.068	N/A	0.004	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.004	0.064	N/A	0.005	0.096	N/A	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.003	0.061	N/A	0.003	0.091	N/A	Pass
38	0.001	0.048	N/A	0.001	0.073	N/A	Pass
39	0.005	0.058	N/A	0.005	0.087	N/A	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass

Unique Number: 005388

Voltage Source Verification Data (Run time)

EUT: ICT/ITE POWER SUPPLY
 Test category: Class-A (European limits)
 Test date: 2024/11/7
 Test duration (min): 2.5
 Comment: FULL LOAD
 Customer: GlobTek, Inc.

Tested by: ZKT
 Test Margin: 100
 End time: 21:24:02
 Data file name: WIN2105_H-000607.cts_data

Test Result: Pass Source qualification: Normal
 Measured source distortion is within the requirements of the standards
 Measurements are compliant with IEC/EN61000-3-2 Ed. 5 & IEC/EN61000-4-7 Ed. 2.1


Highest parameter values during test:

Voltage (Vrms):	220.689	Frequency(Hz):	50.00
I_Peak (Amps):	0.984	I_RMS (Amps):	0.524
I_Fund (Amps):	0.499	Crest Factor:	1.881
Power (Watts):	108.4	Power Factor:	0.940

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.090	0.441	20.35	OK
3	0.102	1.986	5.13	OK
4	0.029	0.441	6.63	OK
5	0.042	0.883	4.77	OK
6	0.013	0.441	2.89	OK
7	0.045	0.662	6.78	OK
8	0.018	0.441	4.01	OK
9	0.039	0.441	8.83	OK
10	0.017	0.441	3.91	OK
11	0.038	0.221	17.22	OK
12	0.014	0.221	6.19	OK
13	0.024	0.221	10.99	OK
14	0.014	0.221	6.36	OK
15	0.032	0.221	14.51	OK
16	0.011	0.221	5.20	OK
17	0.021	0.221	9.41	OK
18	0.012	0.221	5.24	OK
19	0.013	0.221	6.09	OK
20	0.017	0.221	7.79	OK
21	0.020	0.221	9.27	OK
22	0.010	0.221	4.45	OK
23	0.014	0.221	6.19	OK
24	0.010	0.221	4.46	OK
25	0.018	0.221	8.35	OK
26	0.013	0.221	6.04	OK
27	0.029	0.221	13.07	OK
28	0.010	0.221	4.52	OK
29	0.015	0.221	6.66	OK
30	0.010	0.221	4.40	OK
31	0.022	0.221	9.84	OK
32	0.009	0.221	4.17	OK
33	0.015	0.221	7.02	OK
34	0.009	0.221	4.26	OK
35	0.022	0.221	9.76	OK
36	0.010	0.221	4.40	OK
37	0.015	0.221	6.73	OK
38	0.010	0.221	4.37	OK
39	0.019	0.221	8.58	OK
40	0.012	0.221	5.58	OK

7. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT

7.1. Block Diagram of Test Setup

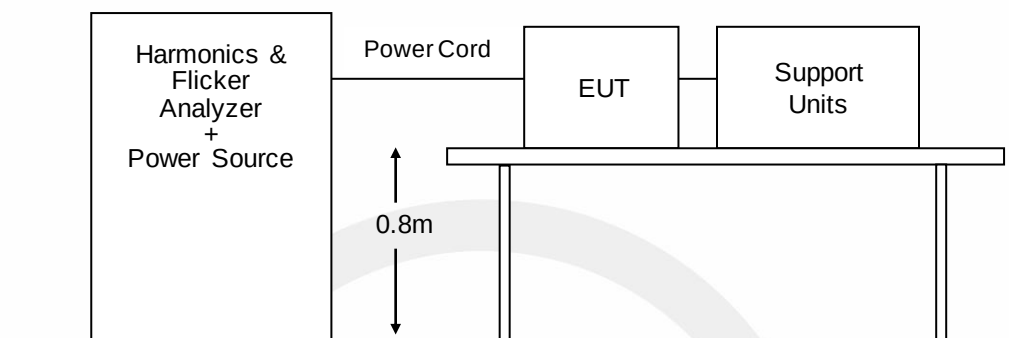

7.2. Standard Limits

SANS 61000-3-3/IEC 61000-3-3 Limits

The objective of voltage changes, voltage fluctuations and flicker in public low voltage supply systems during equipment with rated current ≤ 16 A per phase, ensures that home appliances and certain other electrical equipment do not adversely affect lighting equipment when connected to the same power system.

Voltage Fluctuation and Flicker Limits:

- the value of P_{st} shall not be greater than 1.0;
- the value of P_{lt} shall not be greater than 0.65;
- the value of $d(t)$ during a voltage change shall not exceed 3.3 % for more than 500 ms;
- the relative steady-state voltage change, dc , shall not exceed 3.3 %;
- the maximum relative voltage change, d_{max} , shall not exceed 4.0 %;

7.3. Test Procedure

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of 8% is achieved during the whole assessment procedure.

7.4. Test Results

PASS.

Please see the attached page.

Unique Number: 005388

GTM41133-9016-1.0-T3A

Flicker Test Summary per EN/IEC61000-3-3 Ed. 3.0 (2013) (Run time)

EUT: ICT/ITE POWER SUPPLY

Tested by: ZKT

Test category: All parameters (European limits)

Test Margin: 100

Test date: 2024/11/7

Start time: 21:50:52

End time: 22:01:19

Test duration (min): 10

Data file name: WIN2105_F-000612.cts_data

Comment: FULL LOAD


Customer: GlobTek, Inc.

Test Result: Pass

Status: Test Completed

Pst_t and limit line

European Limits

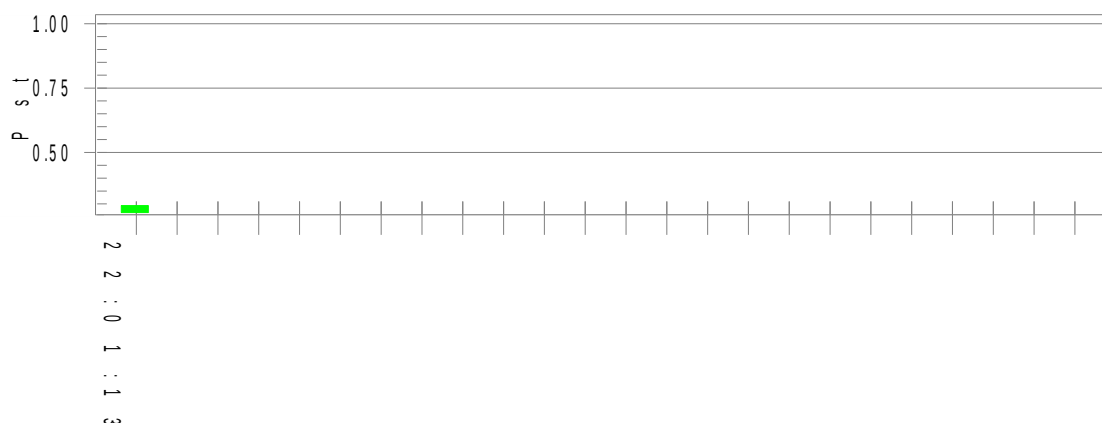


Parameter values recorded during the test:

Vrms at the end of test (Volt):	220.63			
T-max (mS):	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	-0.05	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.293	Test limit:	1.000	Pass

Unique Number: 005388

GTM41133-9016-4.0-T3A

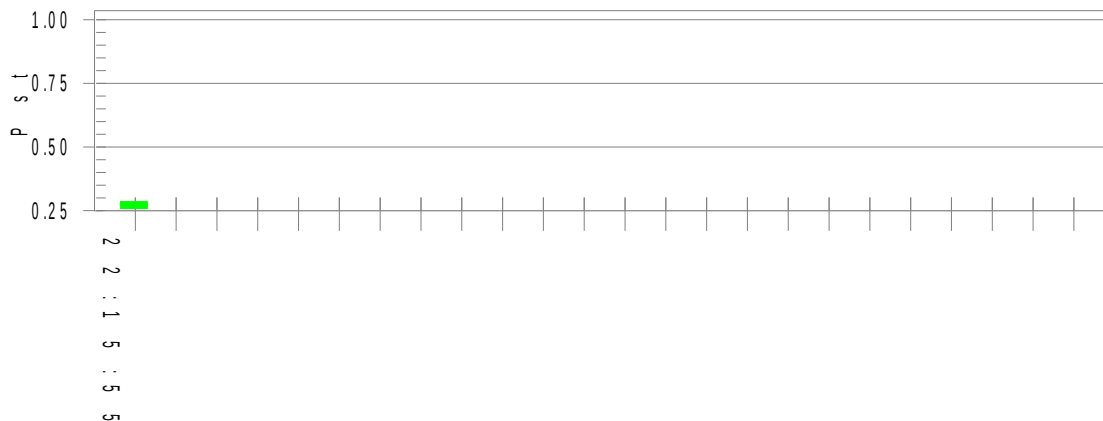Flicker Test Summary per EN/IEC61000-3-3 Ed. 3.0 (2013) (Run time)**EUT: ICT/ITE POWER SUPPLY****Test category: All parameters (European limits)****Test date: 2024/11/7****Test duration (min): 10****Comment: FULL LOAD****Customer: GlobTek, Inc.****Tested by: ZKT****Test Margin: 100****End time: 22:16:01****Start time: 22:05:34****Data file name: WIN2105_F-000613.cts_data****Test Result: Pass****Status: Test Completed****Pst_t and limit line****European Limits****Parameter values recorded during the test:**

Vrms at the end of test (Volt):	220.62	Test limit (mS):	500.0	Pass
T-max (mS):	0.0	Test limit (%):	3.30	Pass
Highest dc (%):	0.00	Test limit (%):	4.00	Pass
Highest dmax (%):	-0.05	Test limit:	1.000	Pass
Highest Pst (10 min. period):	0.285			

Unique Number: 005388

GTM41133-9024-5.0-T3A

Flicker Test Summary per EN/IEC61000-3-3 Ed. 3.0 (2013) (Run time)

EUT: ITC ITE POWER SUPPLY

Test category: All parameters (European limits)

Test date: 2024/11/7

Test duration (min): 10

Comment: FULL LOAD

Customer: GlobTek, Inc.

Tested by: ZKT

Test Margin: 100

End time: 22:40:06

Start time: 22:29:39


Data file name: WIN2105_F-000615.cts_data

Test Result: Pass

Status: Test Completed

Pst_t and limit line

European Limits

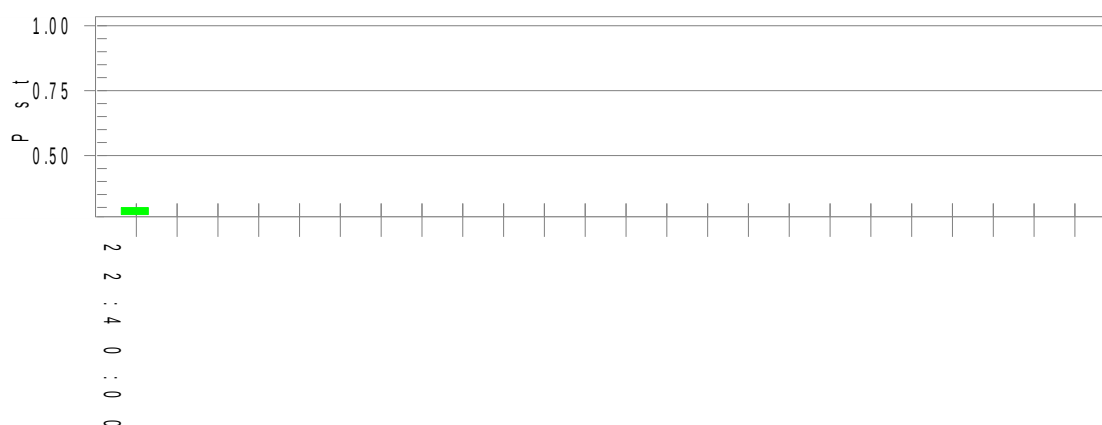


Parameter values recorded during the test:

Vrms at the end of test (Volt):	220.59			
T-max (mS):	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.07	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.299	Test limit:	1.000	Pass

Unique Number: 005388

GTM41133-9048-T3A

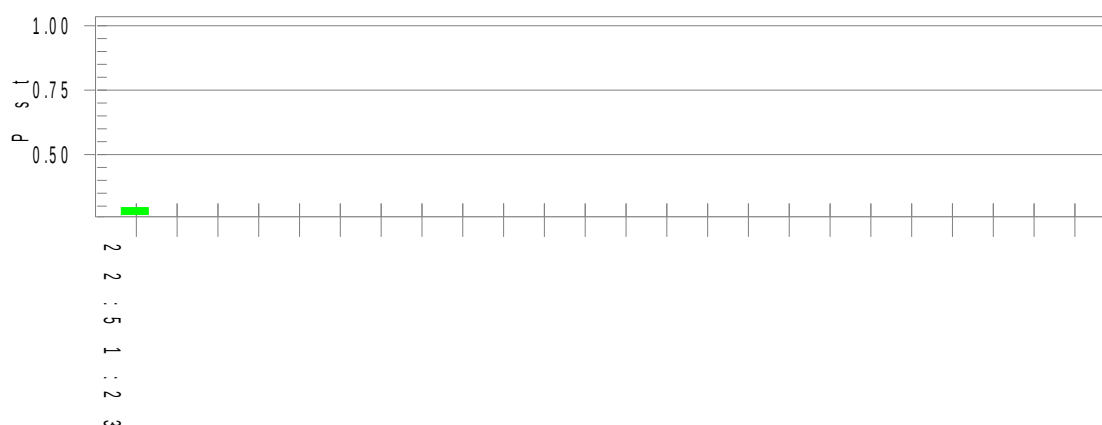Flicker Test Summary per EN/IEC61000-3-3 Ed. 3.0 (2013) (Run time)**EUT: ITC ITE POWER SUPPLY****Test category: All parameters (European limits)****Test date: 2024/11/7****Test duration (min): 10****Comment: FULL LOAD****Customer: GlobTek, Inc.****Tested by: ZKT****Test Margin: 100****End time: 22:51:29****Start time: 22:41:02****Data file name: WIN2105_F-000616.cts_data****Test Result: Pass****Status: Test Completed****Pst_i and limit line****European Limits****Parameter values recorded during the test:**

Vrms at the end of test (Volt):	220.58			
T-max (mS):	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	-0.03	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.294	Test limit:	1.000	Pass

8. IMMUNITY PERFORMANCE CRITERIA DESCRIPTION

Performance Level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level by its manufacturer or the requestor of the test, or the agreed between the manufacturer and the purchaser of the product.

Definition related to the performance level:

1. Based on the used product standard
2. Based on the declaration of the manufacturer, requestor or purchaser

SANS 2335/CISPR 35:

Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion C


Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

9. ELECTROSTATIC DISCHARGE

9.1. Test Specification

Test Standard	: SANS 2335/CISPR 35
Basic Standard	: IEC 61000-4-2
Performance criterion	: B
Test level	: $\pm 8.0\text{kV}$ (Air discharge) $\pm 4.0\text{kV}$ (Contact discharge)

9.2. Block Diagram of Test Setup

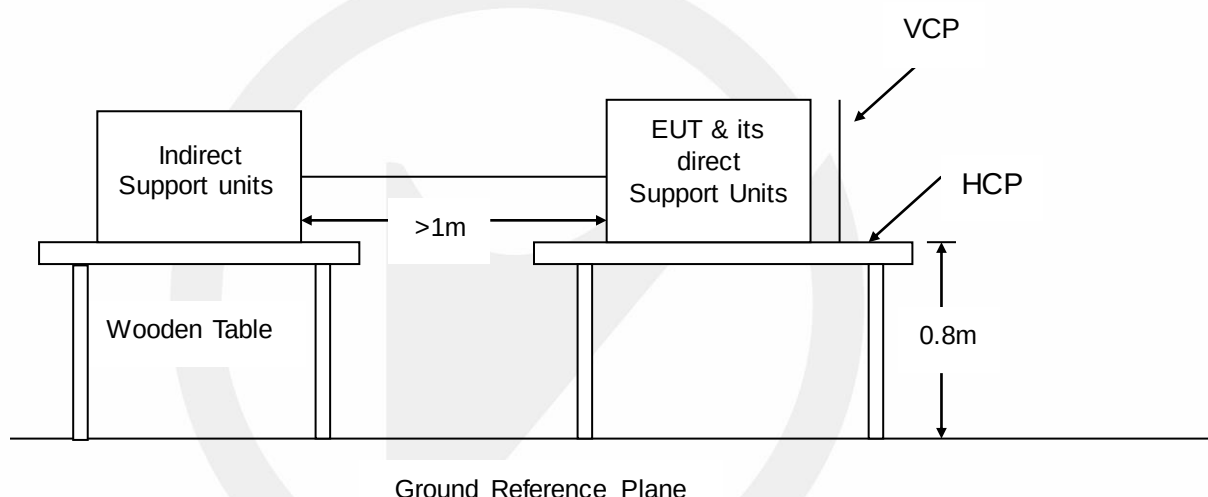

9.3. Test Procedure

- In the case of air discharge testing, the climatic conditions shall be within the following ranges:
 - ambient temperature: 15°C to 35°C ;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 kPa (860 mbar) to 106 kPa (1060 mbar)
- Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
 - If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - The contact discharge test shall not be applied to such surfaces.
- In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.

Unique Number: 005388

- f. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final test level should not exceed the product specification value in order to avoid damage to the equipment.
- g. The test shall be performed with both air discharge and contact discharge. The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied. For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- h. Ensure that the applied charge on the EUT has been dis-charged before next ESD pulse.

9.4. Test Results

PASS

Temperature : 25.1°C
 Humidity : 50%
 Atmospheric Pressure : 101kpa
 Test Engineer : ZKT
 Test Date : 2024-11-08

Air Discharge:

Test Voltage	Location	Actual criterion	Required performance criterion	Result (Pass/Fail)
±2; 4; 8 kV	LED/SLOT	A	B	Pass

Contact Discharge

Test Voltage	Location	Actual criterion	Required performance criterion	Result (Pass/Fail)
±2; 4kV	/	/	B	/

Indirect Discharge


Test Voltage	Location	Actual criterion	Required performance criterion	Result (Pass/Fail)
±2; 4 kV	HCP	A	B	Pass
±2; 4kV	VCP	A	B	Pass

10. CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES

10.1. Test Specification

Test standard	: SANS 2335/CISPR 35	
Basic standard	: IEC 61000-4-3	
Performance criterion	: A	
Frequency range &	: ☒ 80M-1000MHz	3V/m
Test level	: ☒ Spot frequency	3V/m
	: ☐ Additional spot frequency	3V/m
Modulation	: AM, 80%, 1kHz sine-wave	

10.2. Block Diagram of Test Setup

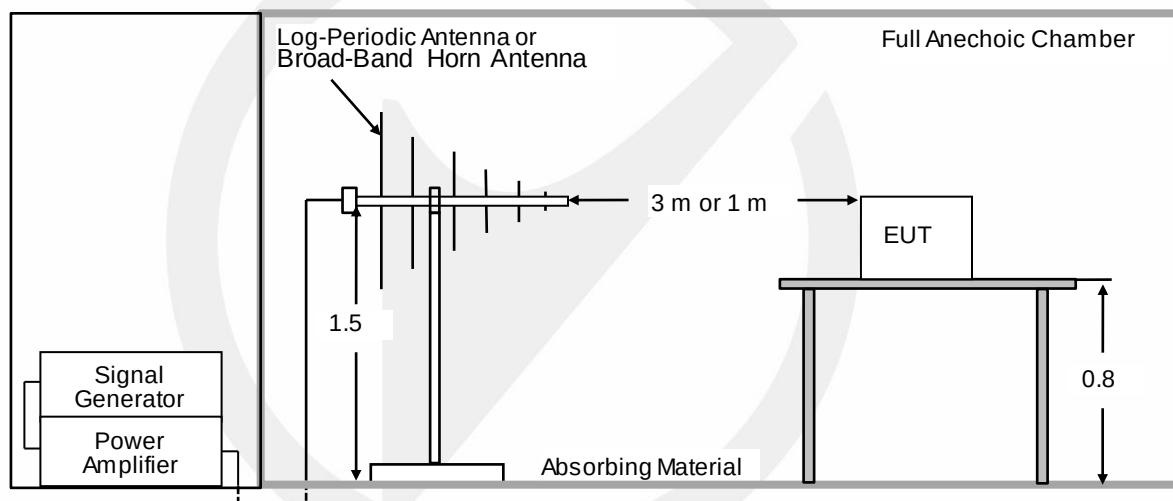

10.3. Test procedure

The procedure defined in this part requires the generation of electromagnetic fields within which the test sample is placed and its operation observed. To generate fields that are useful for simulation of actual (field) conditions may require significant antenna drive power and the resultant high field strength levels. To comply with local regulations and to prevent biological hazards to the testing personnel, it is recommended that these tests be carried out in a shielded enclosure or semi-anechoic chamber.

- The antenna which is enabling the complete frequency range of 80-1000 MHz is placed 3m (or 1m) away from the equipment. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the antenna.
- The test is performed with the antenna facing the front and back sides of the EUT with. Both vertical and horizontal polarizations from antenna are tested.

Unique Number: 005388

10.4. Test results

PASS

Temperature : 19.3°C
 Humidity : 58%
 Atmospheric Pressure : 101kpa
 Test Engineer : ZKT
 Test Date : 2024-11-08

☒ 80M-1000MHz:

Freq. Range (MHz)	Field	Modulation	Polarity	Position (°)	Actual criterion	Required performance criterion	Result
80-1000	3V/m	AM, 80%	H / V	0, 90,180, 270	A	A	Pass

☒ Spot frequency:

Freq (MHz)	Field	Modulation	Polarity	Position (°)	Actual criterion	Required performance criterion	Result
1800, 2600, 3500, 5000	3V/m	AM, 80%	H / V	0, 90,180, 270	A	A	Pass

☐ Additional spot frequency:

Freq (MHz)	Field	Modulation	Polarity	Position (°)	Actual criterion	Required performance criterion	Result
80, 120, 160, 230, 434, 460, 600, 863, 900	3V/m	AM, 80%	H / V	0, 90,180, 270	N/A	N/A	N/A


11.ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

11.1.Test Specification


Test standard : SANS 2335/CISPR 35
Basic standard : IEC 61000-4-4
Performance criterion : B
Test level : ☒ 1kV, AC mains power ports
☐ 0.5kV, DC network power ports
☐ 0.5kV, Analogue/digital data ports
Repetition frequency : ☒ 5kHz, ☐ 100kHz(Only xDSL ports)
Tr/Th: : 5/50ns
Burst period : 300ms
Test time : : 120s

11.2.Block Diagram of Test Setup

AC Lines:

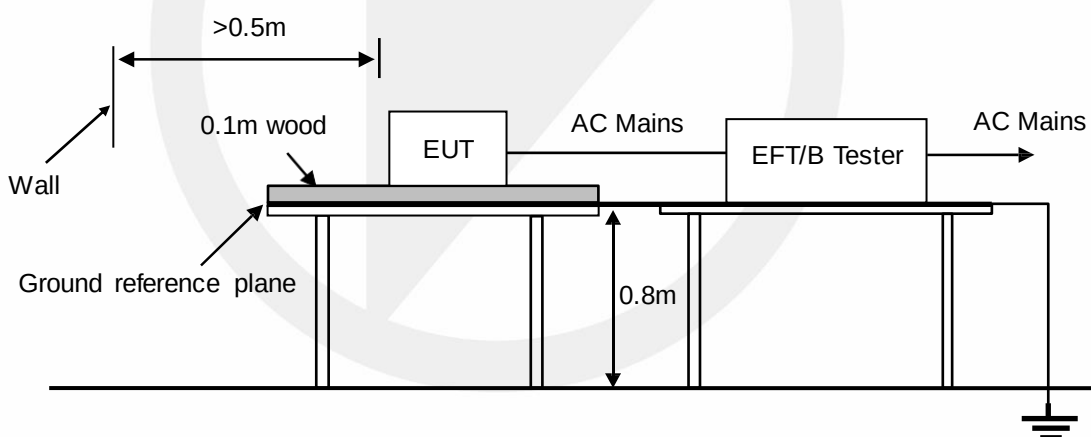

Signal lines:

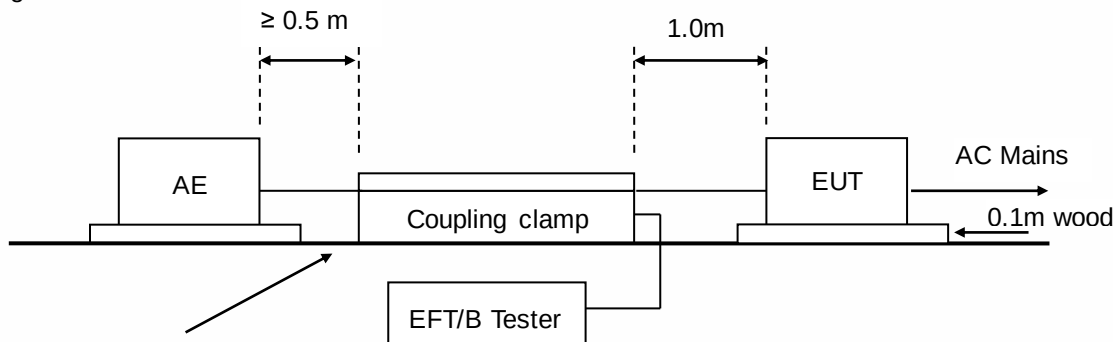

11.3. Test Procedure

The EUT is put on the table that is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

11.4. Test Results

PASS

Temperature : 24.1°C
Humidity : 47%
Atmospheric Pressure : 101kpa
Test Engineer : ZKT
Test Date : 2024-11-08


Injection Line	Voltage (kV)	Injected Method	Actual criterion	Required performance criterion	Result (Pass/Fail)
☒ AC mains power ports	± 1	☒ CDN ☐ Direct injection ☐ Capacitive coupling clamp	A	B	Pass
☐ DC network power ports	± 0.5	☐ CDN ☐ Direct injection ☐ Capacitive coupling clamp	N/A	N/A	N/A
☐ Analogue/digital data ports (Wired network port)	± 0.5	☐ CDN ☐ Direct injection ☒ Capacitive coupling clamp	N/A	N/A	N/A
☐ Analogue/digital data ports (Broadcast receiver tuner port)	± 0.5	☐ CDN ☐ Direct injection ☒ Capacitive coupling clamp	N/A	N/A	N/A

12.SURGE IMMUNITY TEST

12.1.Test Specification

Test standard	: SANS 2335/CISPR 35
Basic standard	: IEC 61000-4-5
Test level	: ☒ 1kV, Line to Line, AC mains power ports, Criterion B ☒ 2kV, Line to Earth, AC mains power ports, Criterion B ☐ 0.5kV, Line to Reference ground, DC network power ports, Criterion B ☐ 1.0kV, Lines to Ground, Unshielded symmetrical, Criterion C ☐ 4.0kV, Lines to Ground, Unshielded symmetrical, Criterion C ☐ 0.5kV, Shield to ground, Coaxial or shielded port, Criterion B
Number of surges	: 5 (for each combination of parameters)
Repetition rate	: 1 minute / time
Polarity:	: Positive / Negative
Phase angle:	: 90°, 270° (Only AC mains power ports)

12.2.Block Diagram of Test Setup

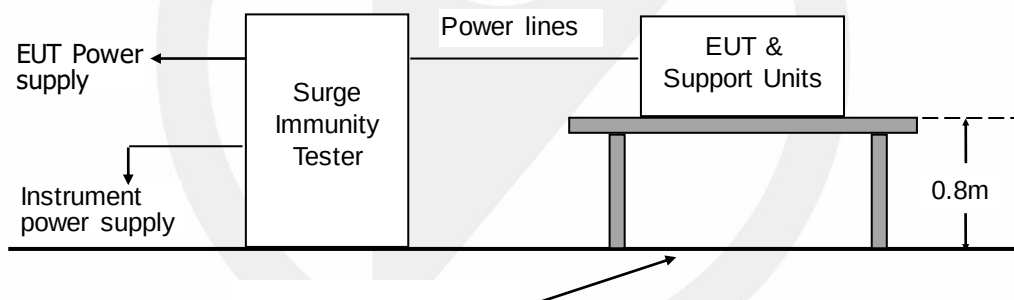

12.3.Test Procedure

This test simulates a lightning event by inducing transients onto the AC/DC power supply lines in common mode (Line to Ground) and differential mode (Line to Line). Each device was tested in a total of two surge configurations: Line to Ground (L-G): Combination Wave, Line to Protective Earth with 9uF and 10Ohm and Neutral to Protective Earth with 9uF and 10Ohm, common mode, generator earthed.

Line to Line (L-L): Combination Wave,

Line to Neutral with 18uF, differential mode, generator floated.

2 ohm : the source impedance of the low-voltage power supply network.

12 ohm : the source impedance of the low-voltage power supply network and ground.

- If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the a.c. voltage wave (positive and negative).
- The surges have to be applied line to line and line to earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan. All lower levels including the selected test level shall be satisfied.
- For testing the secondary protection, the output voltage of the generator shall be increased up to the worst-case voltage breakdown level (let-through level) of the primary protection.

Unique Number: 005388

- e. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- f. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied.

12.4. Test results

PASS

Temperature : 24.1°C
 Humidity : 47%
 Atmospheric Pressure : 101kpa
 Test Engineer : ZKT
 Test Date : 2024-11-08

☒ AC mains power ports:

Coupling Line	Voltage (kV)	Waveform (μs)	Polarity	Actual criterion	Required performance criterion	Result (Pass/Fail)
☒ Line to line	0.5, 1	1.2/50 (8/20)	Pos./ Neg.	A	B	Pass
☒ Line to earth	0.5, 1, 2	1.2/50 (8/20)	Pos./ Neg.	A	B	Pass

☐ DC network power ports:

Coupling Line	Voltage (kV)	Waveform (μs)	Polarity	Actual criterion	Required performance criterion	Result (Pass/Fail)
Line to Reference ground	0.5	1.2/50 (8/20)	Pos./ Neg.	N/A	B	N/A

☐ Analogue/digital data ports:


Port type	Coupling Line	Voltage (kV)	Waveform (μs)	Polarity	Actual criterion	Required performance criterion	Result (Pass/Fail)
☐ Unshielded symmetrical (Wired network port)	Lines to ground	0.5, 1	10/700 (5/320)	Pos./ Neg.	N/A	C	N/A
☐ Unshielded symmetrical (.....)	Lines to ground	0.5, 1	10/700 (5/320)	Pos./ Neg.	N/A	C	N/A
☐ Unshielded symmetrical	Lines to ground	0.5, 1, 2, 4	10/700 (5/320)	Pos./ Neg.	N/A	C	N/A
☐ Coaxial or shielded (Broadcast receiver tuner port)	Shield to ground	0.5	1.2/50 (8/20)	Pos./ Neg.	N/A	C	N/A
☐ Coaxial or shielded (.....)	Shield to ground	0.5	1.2/50 (8/20)	Pos./ Neg.	N/A	C	N/A

13.CONTINUOUS INDUCED RF DISTURBANCES

13.1.Test Specification

Test standard	: SANS 2335/CISPR 35
Basic standard	: IEC 61000-4-6
Performance criterion	: A
Frequency range &	: 0.15M to 10MHz, 3V
Test level	: 10M to 30MHz, 3V to 1V 30M to 80MHz, 1V
Modulation	: AM 80%, 1kHz sine-wave
Frequency Step	: 1% of fundamental

13.2.Block Diagram of Test Setup

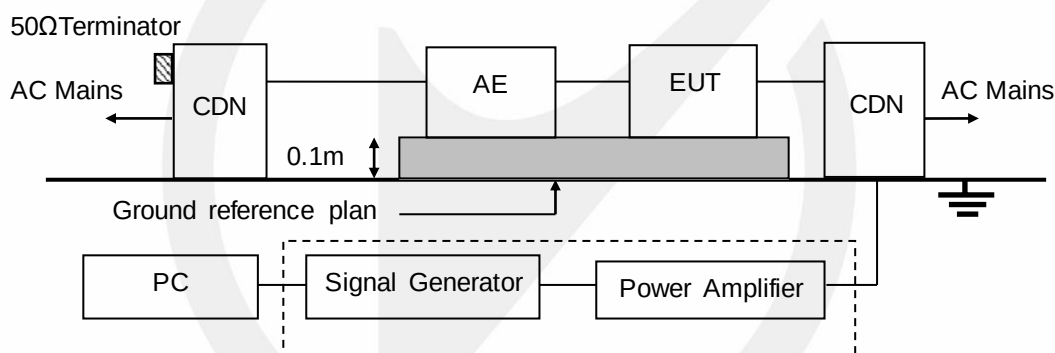

13.3.Test Procedure

- The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- The EUT is placed on a 0.1m high test table, and a well grounded cable is connected to metallic plane above the test table.
- All cables/wires must be laid out on test plate (3cm in thickness), and the EUT is set up on test plate (10 cm in thickness) as shown in test setup photo, and the cables/wires must not be in mid-air, they should be touching the surface of test plate. Ensure that the EUT is properly connected to the accessory equipment.
- The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- The frequency range is swept from 150 kHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1 kHz sine wave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency (ies) and harmonics or frequencies of dominant interest shall be analyzed separately.

Unique Number: 005388

- g. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility
h. Testing shall be performed according to a Test Plan, which shall be included in the test report.

13.4. Test results

PASS

Temperature : 24.1°C
Humidity : 47%
Atmospheric Pressure : 101kpa
Test Engineer : ZKT
Test Date : 2024-11-08


Range (MHz)	Levers (V)	Injection port	Coupling type	Actual criterion	Required performance criterion	Result (Pass/Fail)
0.15-10	3	☒ AC mains power ports	☒ CDN	A	A	Pass
10-30	3-1		☐ EM Clamp			
30-80	1		☐ Current Clamp ☐ Direct injection			
0.15-10	3	☐ DC network power ports	☒ CDN	N/A	N/A	N/A
10-30	3-1		☐ EM Clamp			
30-80	1		☐ Current Clamp ☐ Direct injection			
0.15-10	3	☐ Analogue/digital data ports (Wired network port)	☐ CDN	N/A	N/A	N/A
10-30	3-1		☒ EM Clamp			
30-80	1		☐ Current Clamp ☐ Direct injection			
0.15-10	3	☐ Analogue/digital data ports (Broadcast receiver tuner port)	☐ CDN	N/A	N/A	N/A
10-30	3-1		☐ EM Clamp			
30-80	1		☒ Current Clamp ☐ Direct injection			
0.15-10	3	☐ Analogue/digital data ports (.....)	☐ CDN	N/A	N/A	N/A
10-30	3-1		☐ EM Clamp			
30-80	1		☒ Current Clamp ☐ Direct injection			

14. POWER FREQUENCY MAGNETIC FIELD

14.1. Test Specification

Test Standard	: SANS 2335/CISPR 35
Basic Standard	: IEC 61000-4-8
Performance criterion	: A
Test level	: 1A/m

14.2. Block Diagram of Test Setup

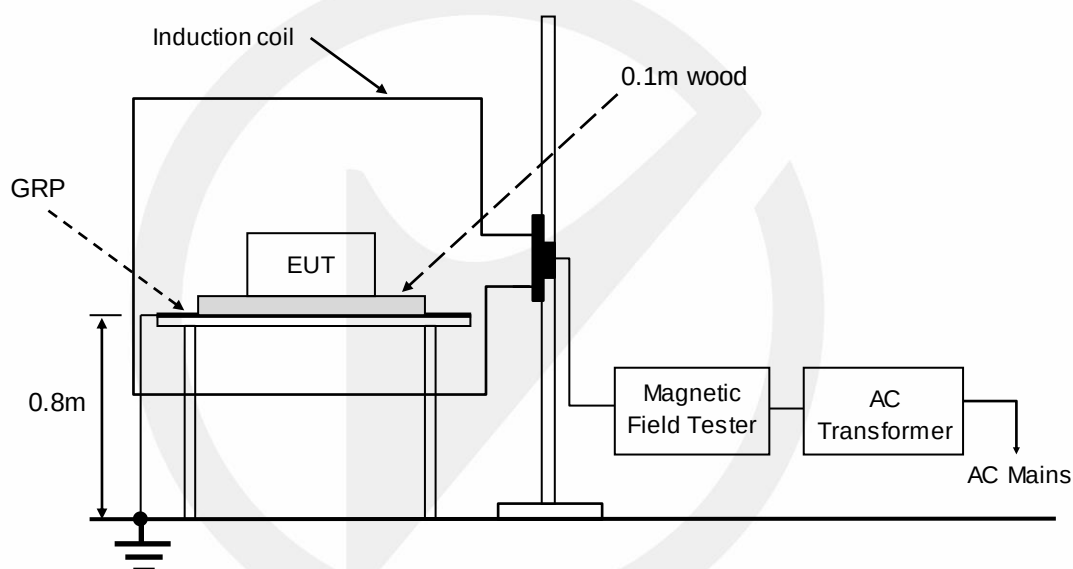

GRP: Ground reference plane
EUT: Equipment under test

14.3. Test Procedure

The EUT is placed in the middle of an induction coil (1*1m), under which is a 1*1*0.1m (high) table, this small table is also placed on a larger table, 0.8 m above the ground. Both horizontal and vertical polarization of the induction coil is set on test, so that each side of the EUT is affected by the magnetic field. Also can reach the same aim by change the position of the EUT.

Unique Number: 005388

14.4. Test Results

PASS

Temperature : 24.1°C
 Humidity : 47%
 Atmospheric Pressure : 101kpa
 Test Engineer : ZKT
 Test Date : 2024-11-08


Test Level (A/m)	Frequency	Testing Duration	Coil Orientation	Actual criterion	Required performance criterion	Result (Pass/Fail)
1	☒ 50Hz ☒ 60Hz	5 mins	☒ x-axis ☒ y-axis ☒ z-axis	A	A	Pass

15. VOLTAGE DIPS AND INTERRUPTIONS TEST

15.1. Test Specification

Test standard : SANS 2335/CISPR 35
Basic standard : IEC 61000-4-11
Test level : ☒ 0%, 0.5 period, Criterion B
☒ 70%, 25 periods for 50Hz, Criterion C
☒ 0%, 250 periods for 50Hz, Criterion C

15.2. Block Diagram of Test Setup

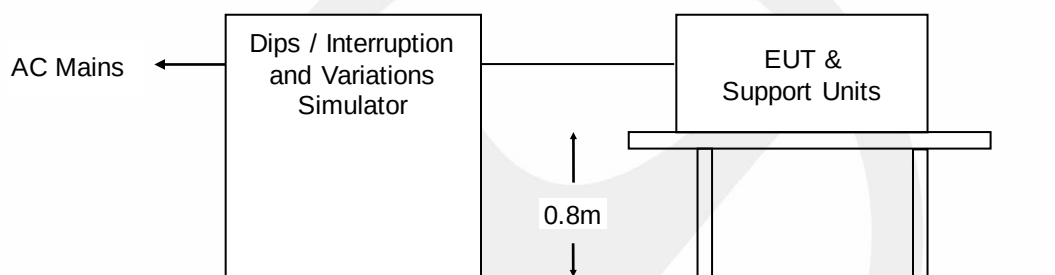

15.3. Test Procedure

- a. Where the equipment has a rated voltage the following shall apply - If the voltage range does not exceed 20% of the lower voltage specified for the rated voltage range, a single voltage within that range may be specified as a basis for test level specification.
 - In all other cases, the test procedure shall be applied for both the lowest and highest voltages declared in the voltage range.
- b. Test Conditions
 - Select operated voltage and frequency of EUT - Test of interval : 10 sec.
 - Level and duration : Sequence of 3 dips/interrupts.
 - Voltage rise (and fall) time : 1.5 μ s.

Unique Number: 005388

15.4. Test results

PASS

Temperature : 24.1°C
 Humidity : 47%
 Atmospheric Pressure : 101kpa
 Test Engineer : ZKT
 Test Date : 2024-11-08

	Test Level (% UT)	Phase angle (°)	Input Voltage (V)	Freq (Hz)	Duration (periods)	Actual criterion	Required performance criterion	Result (Pass /Fail)
☒ Voltage dips	0%	0°, 180°	AC 220V	50	0.5	A	B	Pass
☒ Voltage dips	70%	0°, 180°	AC 220V	50	25	A	C	Pass
☒ Voltage interruptions	0%	0°, 180°	AC 220V	50	250	B	C	Pass

16. PHOTOGRAPHS

16.1. Photos of Conducted Emissions from the AC Mains Power Ports



16.2.Photos of Radiation Emission Measurement



16.3.Photo of Harmonic / Flicker Measurement




16.4.Photo of Electrostatic Discharge Test



16.5.Photo of Continuous RF Electromagnetic Field Disturbances



16.6.Photos of Electrical Fast Transient / Burst Test

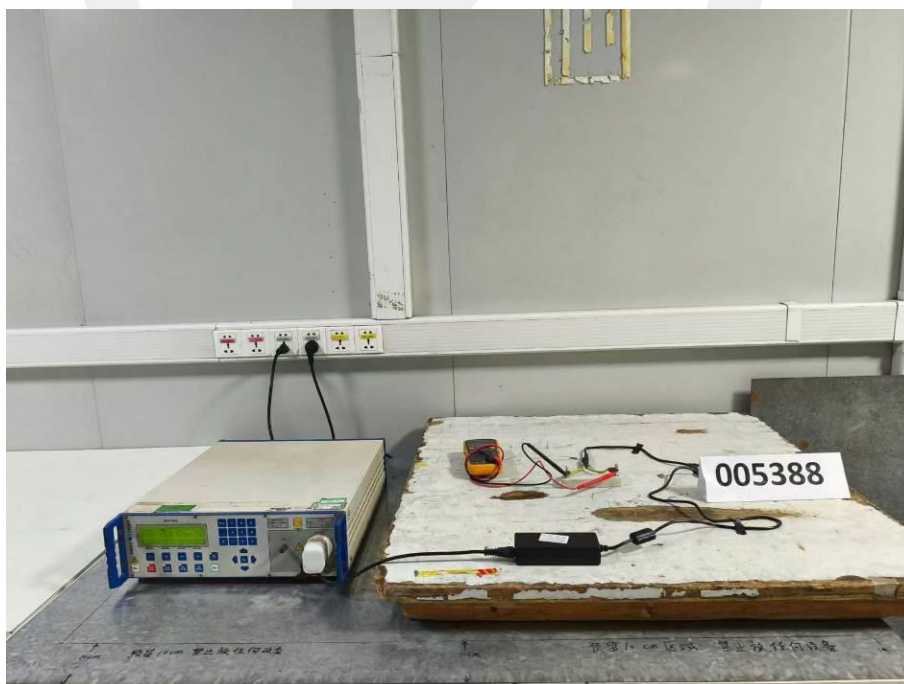

16.7.Photos of Surge Test



16.8.Photos of Continuous Induced RF Disturbances Test



16.9.Photo of Power Frequency Magnetic Field Test



16.10.Photo of Voltage Dips and Interruption Immunity Test



APPENDIX A: Photos of EUT

GTM41133-9016-1.0-T3A



Unique Number: 005388



GTM41133-9016-4.0-T3A



Unique Number: 005388



Unique Number: 005388

GTM41133-9024-5.0-T3A



Unique Number: 005388



GTM41133-9048-T3A



Unique Number: 005388



Unique Number: 005388

APPENDIX B: Critical Component List

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
Enclosure (all parts)	SABIC INNOVATIVE PLASTICS B V	945	PC, V-0, Min. thickness: 2.0mm, 120°C	IEC 62368- 1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E45329 UL E207780
Alt. use	SABIC INNOVATIVE PLASTICS US L L C	PC940	PC, V-0, Min. thickness: 2.0mm, 120°C	IEC 62368- 1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E121562
Alt. use	SABIC INNOVATIVE PLASTICS B V	C2950	PC/ABS, Min. V-0, Min. thickness: 2.0mm, 85°C	IEC 62368- 1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E45329
Appliance inlet CN1 Class I units(C6 type)	Zhejiang LECI Electronics Co., Ltd.	DB-6	2.5A, 250Vac	IEC/EN 60320- 1	VDE 40032465
Alt. use	Rich Bay Co., Ltd.	R-30790, R-307	2.5A, 250Vac	IEC/EN60320-1	VDE 40030381
Alt. use	Sun Fair Electric Wire & Cable (HK) Co. Ltd.	S-02	2.5A, 250Vac	IEC/EN 60320- 1	VDE 40034448
Alt. use	TECX-UNIONS Technology Corporation	TU-333	2.5A, 250Vac	IEC/EN 60320- 1	ENEC 00633
Alt. use	Rong Feng Industrial Co., Ltd.	RF- 190	2.5A, 250Vac	IEC/EN 60320- 1	VDE 40030379
Alt. use	Zhe Jiang Bei Er jia	ST-A04-002	2.5A, 250Vac	IEC/EN 60320- 1	VDE 40016045
PCB	WALEX ELECTRONIC (WUXI) CO LTD	T2, T2A, T2B T4	min. V-0, 130°C	IEC 62368- 1 UL 796	Tested with appliance UL E154355
Alt. use	Dafeng Arex Electronics Technology Co Ltd	02V0 03V0 04V0	min. V-0, 130°C	IEC 62368- 1 UL 796	Tested with appliance UL E186016
Alt. use	SHENZHEN TONGCHUANGXI N ELECTRONICS CO LTD	TCX	min. V-0, 130°C	IEC 62368- 1 UL 796	Tested with appliance UL E250336
Alt. use	SUZHOU CITY YILIHUA ELECTRONICS CO LTD	YLH-1	min. V-0, 130°C	IEC 62368-1 UL 796	Tested with appliance UL E251781
Alt. use	Interchangeable	Interchangeable	min. V-0, 130°C	IEC 62368- 1 UL 796	Tested with appliance UL

Unique Number: 005388

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
Mylar Insulating sheet used between the transformer and secondary D53, D54	TORAY INDUSTRIES INC	Lumirror H10	VTM-2, min. 0.4 mm thickness, 105°C	IEC/EN 62368-1 UL 94 UL 746 A/B/C/D	Tested within appliance UL E86511
Alt. use	SKC CO LTD	SH71S	VTM-2, min. 0.4 mm thickness, 105°C	IEC/EN 62368-1 UL 94 UL 746 A/B/C/D	Tested within appliance UL E74359
Alt. use	FORMEX, DIV OF IL TOOL WORKS INC, FRMRLY FASTEX, DIV OF IL TOOL WORKS INC	FORMEX GK series	V-0, min. 0.4 mm thickness, 115°C	IEC/EN 62368-1 UL 94 UL 746 A/B/C/D	Tested within appliance UL E121855
Alt. use	SABIC INNOVATIVE PLASTICS US L L C	FR60 series FR63 series FR65 series FR7 series FR700 series	V-0, min. 0.4 mm thickness, 130°C	IEC/EN 62368-1 UL 94 UL 746 A/B/C/D	Tested within appliance UL E121562
Alt. use	MIANYANG LONGHUA FILM CO LTD	PP-BK-20 PP-BK-17 PP-BK-18	VTM-0, min. 0.4 mm thickness, 80°C	IEC/EN 62368-1 UL 94 UL 746 A/B/C/D	Tested within appliance UL E254551
Alt. use	CHENGDU KANGLONGXIN PLASTICS CO LTD	KLX PP WT-10 series	VTM-0, min. 0.4 mm thickness, 110°C	IEC/EN 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E315185
Alt. use	CHENGDU KANGLONGXIN PLASTICS CO LTD	KLX FRPC-1860B	VTM-0, min. 0.4 mm thickness, 80°C	IEC/EN 62368-1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E315185
Insulating tape wrapping around the heatsink (Use insulation tape will not use Insulating tube)	3M COMPANY ELECTRICAL MARKETS DIV (EMD)	1350F- 1 1350T- 1	Min. 130°C	IEC/EN 62368- 1 UL 510	Tested with appliance UL E17385
Alt.	BONDTEC PACIFIC CO LTD	370S	Min. 130°C	IEC/EN 62368- 1 UL 510	Tested with appliance UL E175868
Alt.	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	PZ CT	Min. 130°C	IEC/EN 62368- 1 UL 510	Tested with appliance UL E165111

Unique Number: 005388

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
Alt.	JINGJIANG JINGYI ADHESIVE PRODUCT CO LTD	JY25-A	Min. 130°C	IEC/EN 62368- 1 UL 510	Tested with appliance UL E246950
Alt.	CHANG SHU LIANG YI TAPE INDUSTRY CO LTD	LY-XX	Min. 130°C	IEC/EN 62368- 1 UL 510	Tested with appliance UL E246820
Insulating tube used on heatsink and ground wire (Heatsink using insulating tube will not use insulation tape)	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR RSFR-H RSFR-HPF	600V, 125°C	IEC/EN 62368- 1 UL 224	Tested within appliance UL E203950
Alt.	QIFURUI ELECTRONICS CO	QFR-h	600V, 125°C	IEC/EN 62368- 1 UL 224	Tested within appliance UL E225897
Alt.	DONGGUAN SALIPT CO LTD	SALIPT S-901-300 SALIPT S-901-600	Min. 300V, 125°C	IEC/EN 62368- 1 UL 224	Tested within appliance UL E209436
Alt.	GUANGZHOU KAIHENG ENTERPRISE GROUP	K-2 (+) K-2 (CB)	Min. 300V, 125°C	IEC/EN 62368- 1 UL 224	Tested within appliance UL E214175
Alt.	CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-HFT	Min. 300V, 125°C	IEC/EN 62368- 1 UL 224	Tested within appliance UL E180908
Fuse (FS1, FS2) (FS2 is optional)	Suzhou Walter Electronic Co Ltd	ICP	T3.15A, 250V	IEC 60127- 1 IEC 60127-3 UL 248- 1 UL 248- 14	VDE 40012824 UL E56092
Alt. use	Conquer Electronics Co., Ltd.	MST series	T3.15A, 250V	IEC 60127-1 IEC 60127-3 UL 248-1 UL 248-14	VDE 40017118 UL E82636
Alt. use	SUZHOU WALTER ELECTRONIC CO LTD	2010	T3. 15A, 250Vac, interrupting rating 130A	IEC 60127- 1 IEC 60127-3 UL 248- 1 UL 248- 14	VDE 40018781 E56092

Unique Number: 005388

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
Alt. use	Conquer Electronics Co., Ltd	PTU	T3.15A, 250V	IEC 60127- 1 IEC 60127-3 UL 248- 1 UL 248- 14	VDE 40001462 UL E82636
Alt. use	Dongguan Better Electronics Technology Co., Ltd.	932	T3.15A, 250V	IEC 60127- 1 IEC 60127-3 UL 248- 1 UL 248- 14	VDE 40033369 UL E300003
Alt. use	Zhongshan Lanbao Electrical Appliances Co., Ltd.	RTI- 10 Serie(s)	T3.15A, 250V	IEC 60127- 1 IEC 60127-3 UL 248- 1 UL 248- 14	VDE 40017009 UL E213695
Y capacitor (CY1, CY2) (Optional)	TDK Corporation	CD	Y1, AC250V, 125°C max. 1000pF	IEC/EN 60384- 14 UL 60384- 14 UL 1414	VDE 40029780 UL E37861
Alt. use	Success Electronics Co., Ltd.	SE	Y1, AC250V, 125°C max. 1000pF	IEC/EN 60384- 14 UL 60384- 14 UL 1414	VDE 40037211 VDE 40020002 UL E114280
Alt. use	Success Electronics Co., Ltd.	SB	Y1, AC250V, 125°C max. 1000pF	IEC/EN 60384- 14 UL 60384- 14 UL 1414	VDE 40037221 VDE 40020001 UL E114280
Alt. use	Murata Mfg. Co., Ltd.	KX	Y1, AC250V, 125°C max. 1000pF	IEC/EN 60384- 14 UL 60384- 14 UL 1414	VDE 40002831 UL E37921
Alt. use	JYA-NAY Co., Ltd.	JN	Y1, AC250V, 125°C max. 1000pF	IEC/EN 60384- 14 UL 60384- 14 UL 1414	VDE 40001831 UL E201384
Alt. use	Haohua Electronic Co.	CT 7	Y1, AC250V, 125°C max. 1000pF	IEC/EN 60384- 14 UL 60384- 14 UL 1414	VDE 40003902 UL E233106
Alt. use	SHANTOU HIGH-NEW TECHNOLOGY DEVELOPMNT ZONE SONGTIAN ENTERPRISE CO LTD	CD	Y1, AC250V, 125°C max. 1000pF	IEC/EN 60384- 14 UL 60384- 14 UL 1414	VDE 40025754 UL E208107
X capacitor (CX1) (Optional)	Cheng Tung Industrial Co., Ltd.	CTX	Min. 300VAC, 110°C, X1 or X2 Max. 0.47μF	IEC 60950- 1 UL 60384- 14 UL 1414	Tested with appliance UL E193049

Unique Number: 005388

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
Alt. use	Tenta Electric Industrial Co. Ltd.	MEX	Min. 250VAC, 40/100/21/B, X1 or X2 Max. 0.47μF	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 119119 UL E222911
Alt. use	Ultra Tech Xiphi Enterprise Co. Ltd.	HQX	Min. 250VAC, 40/100/21/C, X1 or X2 Max. 0.47μF	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40015608 UL E183780
Alt. use	Sinhua Electronics (Huzhou) Co., Ltd.	MPX	Min. 250VAC, 40/100/21/C, X1 or X2 Max. 0.47μF	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40014686 UL E237560
Alt. use	Dain Electronics Co., Ltd.	MEX, MPX, NPX	Min. 250VAC, 40/100/21/C, X1 or X2 Max. 0.47μF	IEC/EN 60384-14 UL 60384-14 UL 1414	VDE 40018798 UL E147776
Bleeder Resistor (RS1, RS2)	Yageo Corporation	RV series	Max. 2MΩ, Min. 1/4W	IEC/EN 62368-1	UL CB (Cert. No.: DK-108482-UL)
Alt. use	Ralec Electronic Corp	RTV series	Max. 2MΩ, Min. 1/4W	IEC/EN 62368-1	UL CB (Cert. No.: DK-66106-M1-UL)
Alt. use	Guangdong Fenghua Advanced Technology Holding Co., Ltd.	RVS series	Max. 2MΩ, Min. 1/4W	IEC/EN 62368-1	Nemko CB (NO109708)
Alt. use	Viking Tech Corporation Kaoshiung Branch	HVRC series	Max. 2MΩ, Min. 1/4W	IEC/EN 62368-1	UL CB (Cert. No.: DK-121748-UL)
Alt. use	TZAI YUAN ENTERPRISE CO LTD	HSMD OR SMD	Max. 2MΩ, Min. 1/4W	IEC/EN 62368-1	UL CB (Cert. No.: DK-29431-M1-UL)
Alt. use	WALSIN TECHNOLOGY CORP	WF12N, WF20N, WF25N, WF08N, WF06N	Max. 2MΩ, Min. 1/4W	IEC/EN 62368-1	UL CB (Cert. No.: DK-119162-UL)
Alt. use	Yageo Corporation	AH series	Max. 2MΩ, Min. 1/4W	IEC/EN 62368-1	DK-110207-UL
Alt. use	PDC	FVS03, FVS05, FVS06, FVS20, TF25V, TF06V, TF08V, TF12V, TF20V, FVS25	Max. 2MΩ, Min. 1/4W	IEC/EN 62368-	DK-101615-UL

Unique Number: 005388

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
Bleeder resistance (RS1, RS2)	Interchangeable	Interchangeable	Max. 2MΩ, 1/4W	IEC/EN 62368- 1	Tested with appliance
optocoupler (U2)	Everlight Electronics Co., Ltd.	EL817	Dti=0.5mm Int. , dcr=6.0mm EXT.dcr=7.7mm, thermal cycling test,110oC insulation: AC 4800V min. Thermal cycling test passed. Reinforced insulation	IEC/EN 60747- 5-2	VDE 132249
Alt. use	COSMO Electronics Corporation	K1010 / KP1010	Dti=0.6mm Int. , dcr=4.0mm EXT.dcr=5.0mm, thermal cycling test,115oC insulation: AC 4800V min. Thermal cycling test passed. Reinforced insulation	IEC/EN 60747- 5-2	VDE 101347
Alt. use	Lite-On Technology Corporation	LTV-817	Dti=0.8mm Int. , EXT.dcr=7.8mm, thermal cycling test,100oC insulation: AC 4800V min. Thermal cycling test passed. Reinforced insulation	IEC/EN 60747- 5-2	VDE 40015248
Alt. use	Bright Led Electronics Corp .	BPC-817 A/B/C/D/L BPC-817 M BPC-817 S	Dti=0.4mm EXT.dcr=7.0mm, thermal cycling test, 110°C insulation: AC 4800V min. Thermal cycling test passed. Reinforced insulation	IEC/EN 60747- 5-2	VDE 40007240
Varistor MOV1 (Optional)	Xamen Set Electronics Co., Ltd.	TFV8S471K	Max. Continuous voltage: Min. 300Vac(rms), Min. 105°C, The coating is Min. V-0	IEC 61051-1, IEC 61051-2, IEC 61051-2-2, IEC 62368-1:2018 Annex G.8.1 and G.8.2	TUV-RH (J 50554061)

Unique Number: 005388

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
Alt. use	Xiamen SET Electronics Co., Ltd.	TFV10S471K	Max. Continuous voltage: Min. 300Vac(rms), Min. 105°C, The coating is Min. V-0	IEC 61051-1, IEC 61051-2, IEC 61051-2-2, IEC 62368-1:2018 Annex G.8.1 and G.8.2	TUV-RH (J 50554091)
Alt. use	SHANTOU HIGH-NEW TECHNOLOGY DEVELOPMNT ZONE SONGTIAN ENTERPRISE CO LTD	10D621K	Max. Continuous voltage: Min. 385Vac(rms), Min. 125°C, The coating is Min. V-0	IEC/EN 61051-1 IEC/EN 61051-2 UL1449	VDE 40023049
Alt. use	Guangdong Huiwan Electronics Technology Co.Ltd.	V-621K-10 DEH	Max. Continuous voltage: Min. 385Vac(rms), Min. 125°C, The coating is Min. V-0	IEC/EN 61051-1 IEC/EN 61051-2 UL1449	VDE 40043880
Alt. use	Thinking Electronic Industrial Co., Ltd.	TVR10621	Max. Continuous voltage: Min. 385Vac(rms), Min. 125°C, The coating is Min. V-0	IEC/EN 61051-1 IEC/EN 61051-2 UL1449	VDE005944
Earthing wire for Class I model	KUNSHAN NEW ZHICHENG ELECTRONICS TECHNOLOGIES CO LTD	1015 1007 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368- 1	Tested with appliance UL E237831
Alt. use	ZHUANG SHAN CHUAN ELECTRICAL PRODUCTS (KUNSHAN) CO LTD	1015 1007 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368- 1	Tested with appliance UL E333601
Alt. use	SUZHOU YEMAO ELECTRONIC CO LTD	1015 1007 1185	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368- 1	Tested with appliance UL E353532
Alt. use	GlobTek, Inc.	1015, 1007 1185	Min. 20AWG, Min. 300V, Min. 80°C	IEC/EN 62368- 1	Tested with appliance UL E464257
Alt. use	Interchangeable	Interchangeable	Min. 20 AWG, Min. 300V, Min. 80°C	IEC/EN 62368- 1	UL

Unique Number: 005388

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
Output cord	KUNSHAN NEW ZHICHENG ELECTRONICS TECHNOLOGIES CO LTD	1185 2464 2468 1015	Min. 20AWG, min. 300Vac, min. 80°C	IEC/EN 62368- 1 UL 758	Tested with appliance UL E237831
Alt. use	Suzhou Jiahuishu Electronic Co Ltd	1185, 2464, 2468, 1015	Min. 20AWG, min. 300Vac, min. 80°C	IEC/EN 62368- 1 UL 758	Tested with appliance UL E353532
Alt. use	ZHUANG SHAN CHUAN ELECTRICAL PRODUCTS (KUNSHAN) CO LTD	1185,2464,2468, 1015	Min. 20AWG, min. 300Vac, min. 80°C	IEC/EN 62368- 1 UL 758	Tested with appliance UL E333601
Alt. use	ZHUANG SHAN CHUAN ELECTRICAL PRODUCTS (KUNSHAN) CO LTD	SPT-1, SPT-2	Min. 20AWG, min. 300Vac, min. 80°C	IEC/EN 62368- 1 UL 758	Tested with appliance UL E333536
Alt. use	GLOBTEK INC	1185,2464, 2468,1015	Min. 20AWG, min. 300Vac, min. 80°C	IEC/EN 62368- 1 UL 758	Tested with appliance UL E464257
Alt. use	GLOBTEK INC	SPT-1, SPT-2	Min. 20AWG, min. 300Vac, min. 80°C	IEC/EN 62368- 1 UL 758	Tested with appliance UL E245414
Alt. use	Interchangeable	Interchangeable	Min. 24AWG, min. 300Vac, min. 80°C	IEC/EN 62368- 1 UL 758	Tested with appliance UL approved
Line filter (LF1) (Optional)	GlobTek/HAOPUWEI/ HEJIA/BOAM/ENG	LF001	130°C	IEC/EN 62368- 1	Tested with appliance
Line filter (LF2) (Optional)	GlobTek/HAOPUWEI/ HEJIA/BOAM/ENG	LF002	130°C	IEC/EN 62368- 1	Tested with appliance
Line filter (L1) (Optional)	GlobTek/HAOPUWEI/ HEJIA/BOAM/ENG	LF003	130°C	IEC/EN 62368- 1	Tested with appliance
PFC Chock (L2) (Optional)	GlobTek/HAOPUWEI/ HEJIA/BOAM/ENG	LF004	130°C	IEC/EN 62368- 1	Tested with appliance
Transformer (T1)	GlobTek / ENG / BOAM / HAOPUWEI	TF013(12-16V) TF014(16.1-24V) TF015(24.1-35V) TF012(35.1-48V)	Class B, with critical component listed below	IEC/EN 62368- 1	Tested with appliance
- Magnet wire	PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD	UEWN/U (UL E201757)	MW28-C, 130°C	IEC/EN 62368- 1	Tested with appliance

Unique Number: 005388

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
Alt. use	PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD	UEWS/U (UL E201757)	MW75-C, 130°C	IEC/EN 62368- 1	Tested with appliance
Alt. use	JUNG SHING WIRE CO LTD	UEW-4 (UL E174837)	MW75C, 130°C	IEC/EN 62368- 1	Tested with appliance
Alt. use	JUNG SHING WIRE CO LTD	UEY-2 (UL E174837)	MW28-C, 130°C	IEC/EN 62368- 1	Tested with appliance
Alt. use	JIANGSU HONGLIU MAGNET WIRE TECHNOLOGY CO LTD	2UEW/130 (UL E335065)	MW75-C, 130°C	IEC/EN 62368- 1	Tested with appliance
Alt. use	SHENZHEN DAYANG WIRE & CABLE CO LTD	2UEW/130 (UL E158909)	MW75-C, 130°C	IEC/EN 62368- 1	Tested with appliance
Alt. use	WUXI JUFENG COMPOUND LINE CO LTD	2UEWB (UL E206882)	MW75#, 130°C	IEC/EN 62368- 1	Tested with appliance
Alt. use	JIANGSU DARTONG M & E CO LTD	UEW (UL E237377)	MW 75-C, 130°C	IEC/EN 62368- 1	Tested with appliance
Alt. use	SHANDONG SAINT ELECTRIC CO LTD	UEW/130 (UL E194410)	MW75#, 130°C	IEC/EN 62368- 1	Tested with appliance
Alt. use	ZHEJIANG LANGLI ELECTRIC EQUIPMENTS CO LTD	UEW (UL E222214)	MW 79#, 130°C	IEC/EN 62368- 1	Tested with appliance
-Triple-insulated wire (Secondary)	Great Leoflon Industrial Co., Ltd.	TRW (B) Serie(s)	Class B, reinforced insulation	IEC 62368- 1 UL 2353 UL 60601- 1	VDE 136581 UL E211989
- Alt. use	COSMOLINK CO. Ltd.	TIW-M Serie(s)	Class B, reinforced insulation	IEC 62368- 1 UL 2353 UL 60601- 1	VDE 138053 UL E213764
- Alt. use	Furukawa Electric Co., Ltd. Electronics & Automotive Systems Company Global Business Development Division	TEX-E	Class B, reinforced insulation	IEC 62368- 1 UL 2353 UL 60601- 1	VDE 006735 UL E206440
- Alt. use	TOTOKU ELECTRIC CO LTD	TIW-2	Reinforced insulation, rated 130° C (Class B)	IEC 62368- 1 UL 2353 UL 60601- 1	VDE 40051990 UL 166483
- Alt. use	HOI LUEN ELECTRICAL MFR CO LTD	THL-F-xx, THL-F-SB-xx	Reinforced insulation, Class B	IEC 62368- 1 UL 2353 UL 60601- 1	UL E257525 VDE 40020365

Unique Number: 005388

Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity.
-Bobbin	CHANG CHUN PLASTICS CO LTD	T375J T375HF	V-0, 150°C, thickness 0,45 mm min.	IEC 62368- 1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E59481
- Alt. use	CHANG CHUN PLASTICS CO LTD	4130	V-0, 140°C, thickness 0,74 mm min.	IEC 62368- 1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E59481
- Alt. use	SUMITOMO BAKELITE CO LTD	PM-9820	V-0, 150°C, thickness 0,45 mm min.	IEC 62368- 1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E41429
- Alt. use	HITACHI CHEMICAL CO LTD	CP-J-8800	V-0, 150°C, thickness 0,45 mm min.	IEC 62368- 1 UL 94 UL 746 A/B/C/D	Tested with appliance UL E42956
-Insulating tape	3M COMPANY ELECTRICAL MARKETS DIV (EMD)	1350F- 1 1350T- 1 44	Min. 130°C	IEC 62368- 1 UL 510	Tested with appliance UL E17385
- Alt. use	BONDTEC PACIFIC CO LTD	370S	Min. 130°C	IEC 62368- 1 UL 510	Tested with appliance UL E175868
- Alt. use	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	PZ CT WF	Min. 130°C	IEC 62368- 1 UL 510	Tested with appliance UL E165111
- Alt. use	JINGJIANG JINGYI ADHESIVE PRODUCT CO LTD	JY25-A	Min. 130°C	IEC 62368- 1 UL 510	Tested with appliance UL E246950
- Alt. use	CHANG SHU LIANG YI TAPE INDUSTRY CO LTD	LY-XX	Min. 130°C	IEC 62368- 1 UL 510	Tested with appliance UL E246820
-PTFE tubing	GREAT HOLDING INDUSTRIAL CO LTD	TFT / TFS	Min. 300V, 200°C	IEC 62368- 1	Tested with appliance UL E156256
-Alt. use	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	WF	600V, 200°C	IEC 62368- 1	Tested with appliance UL E203950
-Alt. use	CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-TT-T / CB-TT-S	Min. 300V, 200°C	IEC 62368- 1	Tested with appliance UL E180908

End of Report

Statement

- 1 . This report is invalid without the signature of the authorized approver and "special seal for testing".
- 2 . This report shall not be copied partly without authorization.
- 3 . The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
- 4 . The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
- 5 . The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
- 6 . Objections shall be raised within 20 days from the date receiving the report.