

**FCC Part 15B**  
**Measurement and Test Report**  
**For**  
**GlobTek, Inc.**  
**186 Veterans Dr. Northvale, NJ 07647 USA**

<b>FCC Rule(s):</b>	<u>FCC Part 15 Subpart B</u>
<b>Product Description:</b>	<u>ITE / Medical Power Supply</u>
<b>Tested Model:</b>	<u>GTM96600-4005-T3</u>
<b>Report No.:</b>	<u>STR16098112E-3</u>
<b>Tested Date:</b>	<u>2016-09-12 to 2016-09-20</u>
<b>Issued Date:</b>	<u>2016-09-20</u>
<b>Tested By:</b>	<u>Jeffry Zhang / Engineer</u> <i>Jeffry Zhang</i>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u> <i>Jandy So</i>
<b>Prepared By:</b>	

**Shenzhen SEM.Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND OPERATION MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>3. CONDUCTED EMISSIONS.....</b>	<b>8</b>
3.1 TEST PROCEDURE.....	8
3.2 BASIC TEST SETUP BLOCK DIAGRAM.....	8
3.3 ENVIRONMENTAL CONDITIONS.....	8
3.4 SUMMARY OF TEST RESULTS/PLOTS.....	8
3.5 CONDUCTED EMISSIONS TEST DATA.....	9
<b>4. RADIATED EMISSION.....</b>	<b>11</b>
4.1 TEST PROCEDURE.....	11
4.2 TEST RECEIVER SETUP.....	11
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.4 ENVIRONMENTAL CONDITIONS.....	12
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	12
<b>EXHIBIT 1 - PRODUCT LABELING.....</b>	<b>15</b>
PROPOSED FCC LABEL FORMAT.....	15
PROPOSED LABEL LOCATION ON EUT.....	15
<b>EXHIBIT 2 - EUT PHOTOGRAPHS.....</b>	<b>16</b>
<b>EXHIBIT 3 - TEST SETUP PHOTOGRAPHS.....</b>	<b>20</b>
<b>EXHIBIT 4 - USERS MANUAL.....</b>	<b>21</b>


## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: GlobTek, Inc.  
Address of applicant: 186 Veterans Dr. Northvale, NJ 07647 USA

Manufacturer 1: GlobTek, Inc.  
Address of manufacturer 1: 186 Veterans Dr. Northvale, NJ 07647 USA  
Manufacturer 2: GlobTek (Suzhou) Co., Ltd  
Address of manufacturer 2: Building 4, No. 76, Jin Ling East Rd., Suzhou Industrial Park, Suzhou, JiangSu 215021, China

General Description of EUT	
Product Name:	ITE / Medical Power Supply
Trade Name:	
Model No.:	GTM96600-4005-T3
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	AC 100-240V
Rated Current:	1.5A
Rated Power:	Max.40W
Power Adapter Model:	/
Lowest Internal Frequency:	/
Highest Internal Frequency:	Below 108MHz
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the GlobTek, Inc. in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Working	/

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Cable	1.2	Shielded	With Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
AC Cable	1.0	Unshielded	Without Core

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

### 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	ETS	3116B	00088203	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

## 2. SUMMARY OF TEST RESULTS

---

Description of Test	Result
§15.107 (a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant


N/A: not applicable

### 3. Conducted Emissions

#### 3.1 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.2 Basic Test Setup Block Diagram

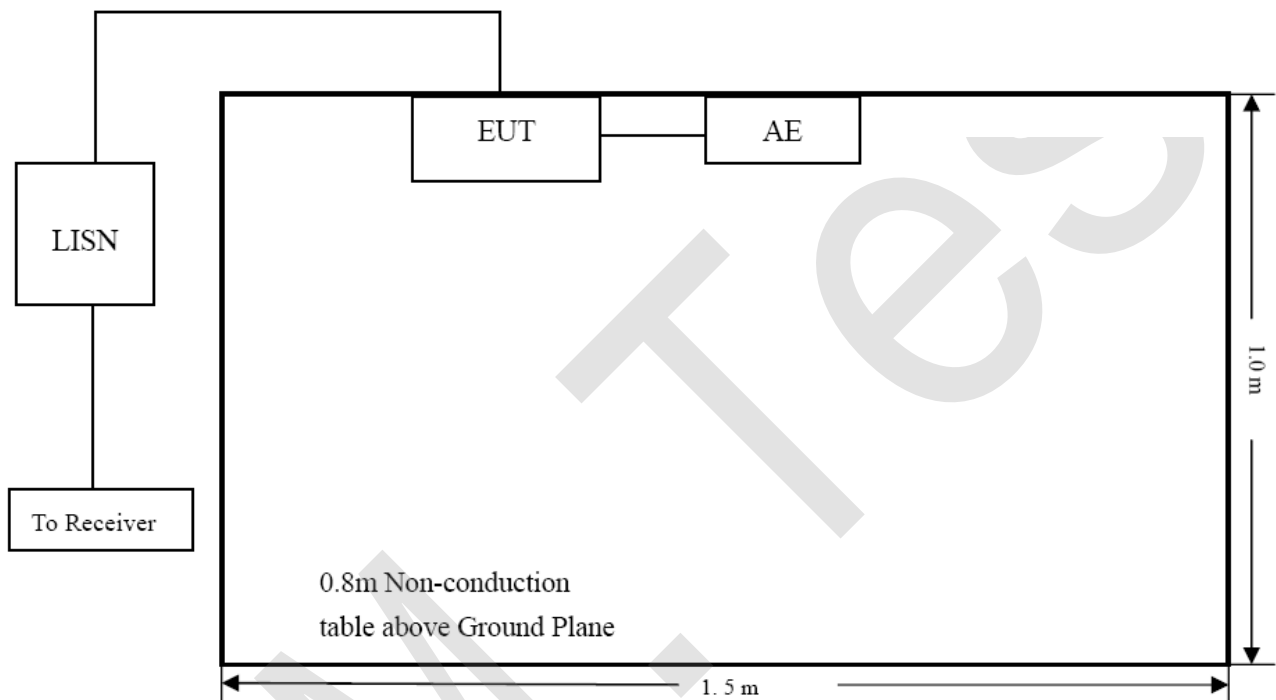

#### 3.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

#### 3.4 Summary of Test Results/Plots

According to the data in section 3.6, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

**-4.20 dB at 8.2420 MHz** in the **Neutral, QP** detector, 0.15-30MHz



### 3.5 Conducted Emissions Test Data

#### Plot of Conducted Emissions Test Data


EUT: ITE / Medical Power Supply

Tested Model: GTM96600-4005-T3

Operating Condition: TM1


Comment: AC 120V/60Hz

Test Specification: Line

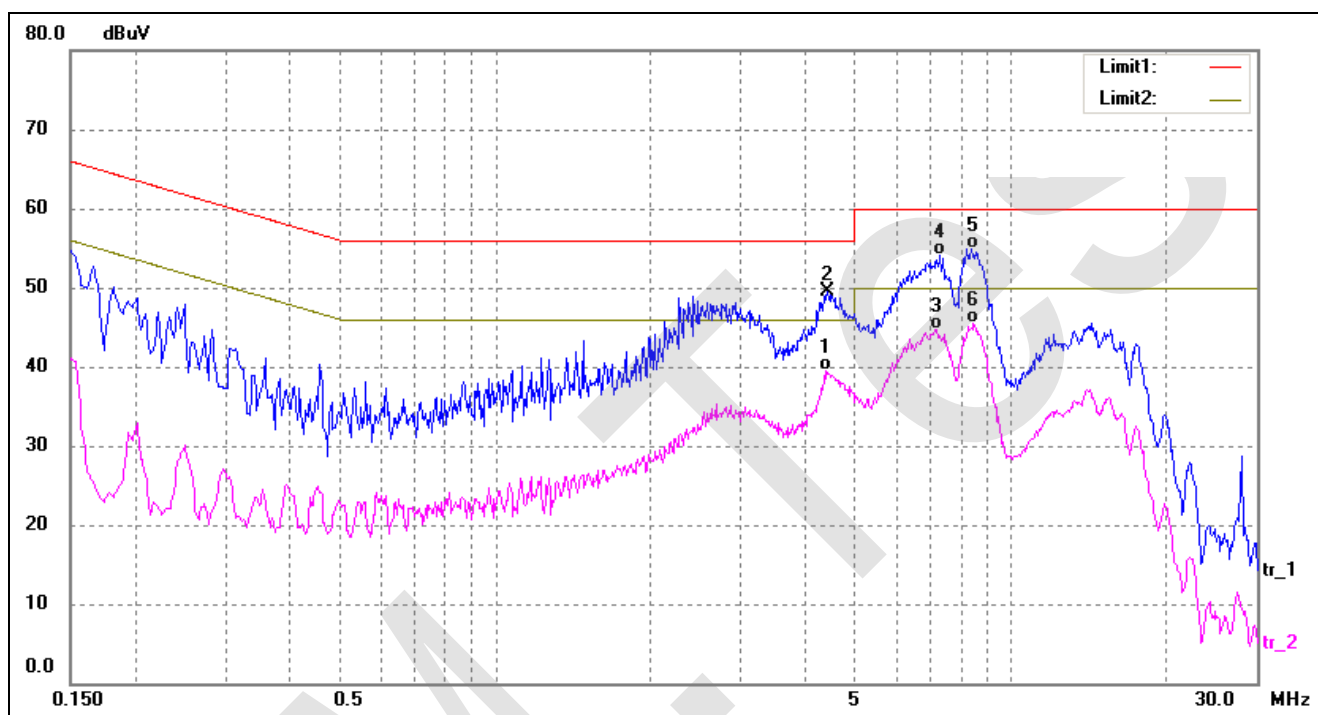

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	4.3740	33.88	5.68	39.56	46.00	-6.44	AVG
2	4.4260	43.75	5.67	49.42	56.00	-6.58	peak
3	7.1780	39.15	5.60	44.75	50.00	-5.25	AVG
4	7.3060	48.52	5.60	54.12	60.00	-5.88	QP
5	8.4020	49.36	5.56	54.92	60.00	-5.08	QP
6*	8.4780	39.87	5.56	45.43	50.00	-4.57	AVG

Test Specification: Neutral

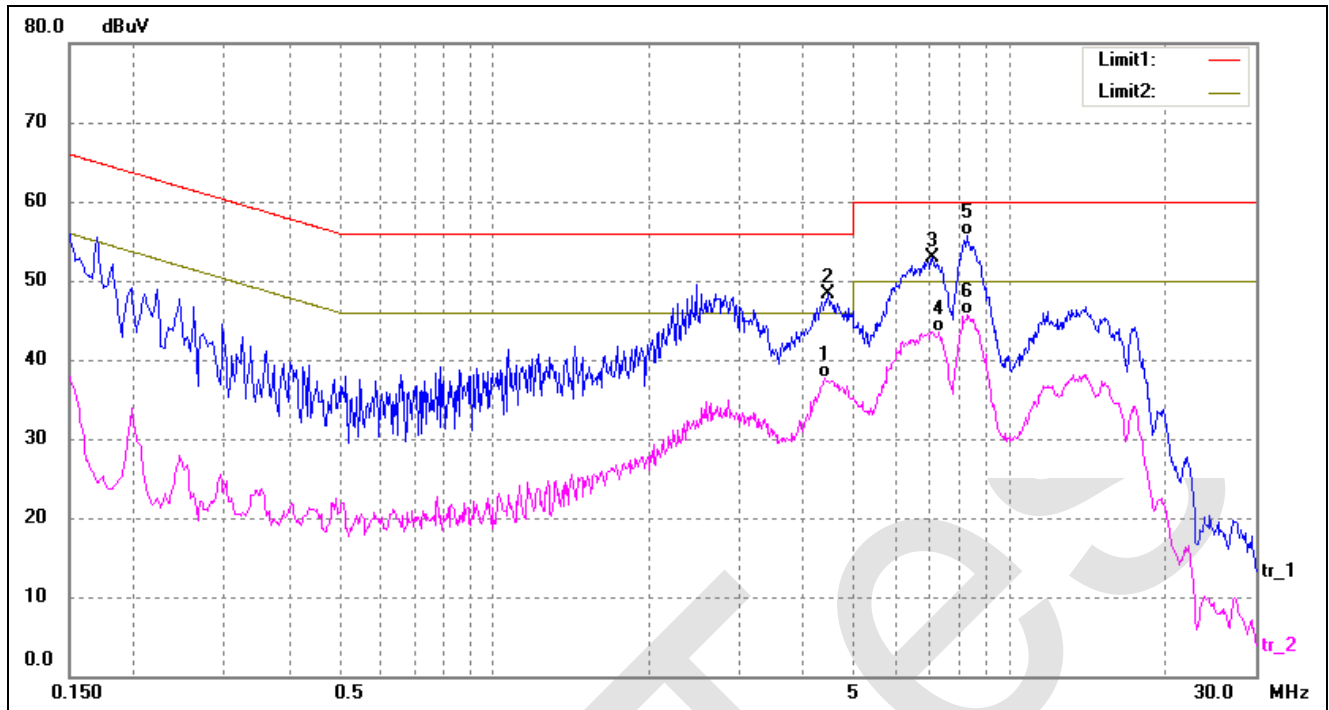

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	4.3620	32.00	5.68	37.68	46.00	-8.32	AVG
2	4.4380	42.56	5.67	48.23	56.00	-7.77	peak
3	7.0900	47.32	5.60	52.92	60.00	-7.08	peak
4	7.2940	37.96	5.60	43.56	50.00	-6.44	AVG
5*	8.2420	50.23	5.57	55.80	60.00	-4.20	QP
6	8.2940	40.13	5.57	45.70	50.00	-4.30	AVG


## 4. RADIATED EMISSION

### 4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

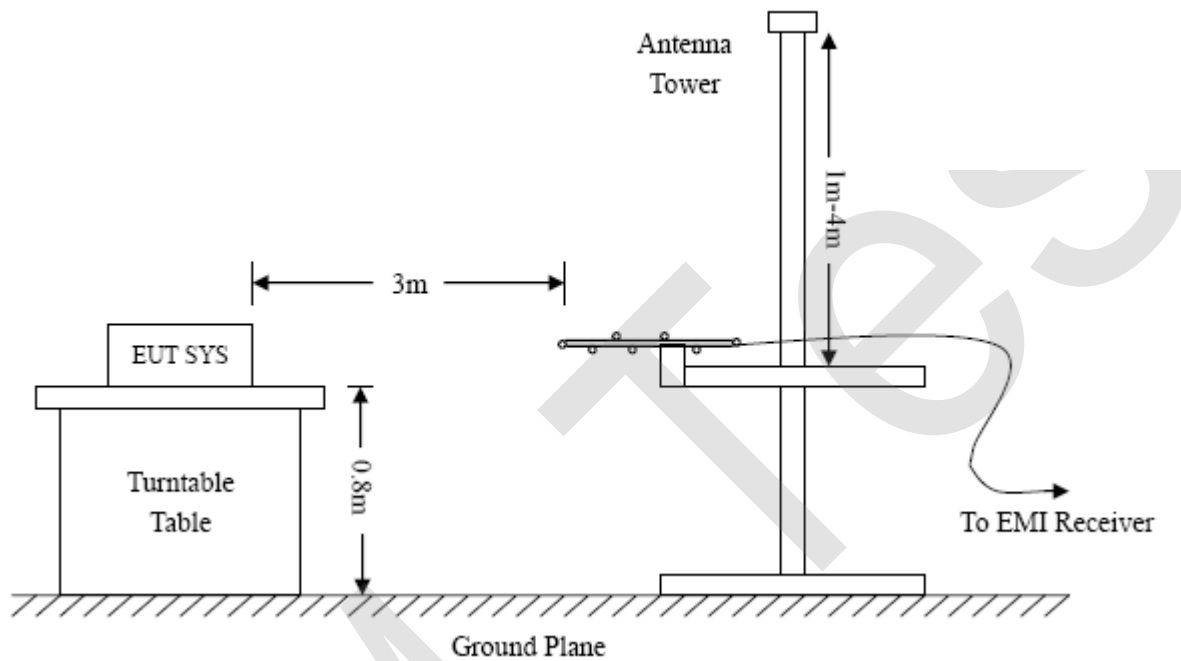

### 4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

### 4.4 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

### 4.5 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

**-7.81 dB at 93.4402 MHz in the Vertical polarization, 30 MHz to 1 GHz, 3Meters**

### Plot of Radiated Emissions Test Data


EUT: ITE / Medical Power Supply

Tested Model: GTM96600-4005-T3

Operating Condition: TM1


Comment: AC 120V/60Hz

Test Specification: Horizontal

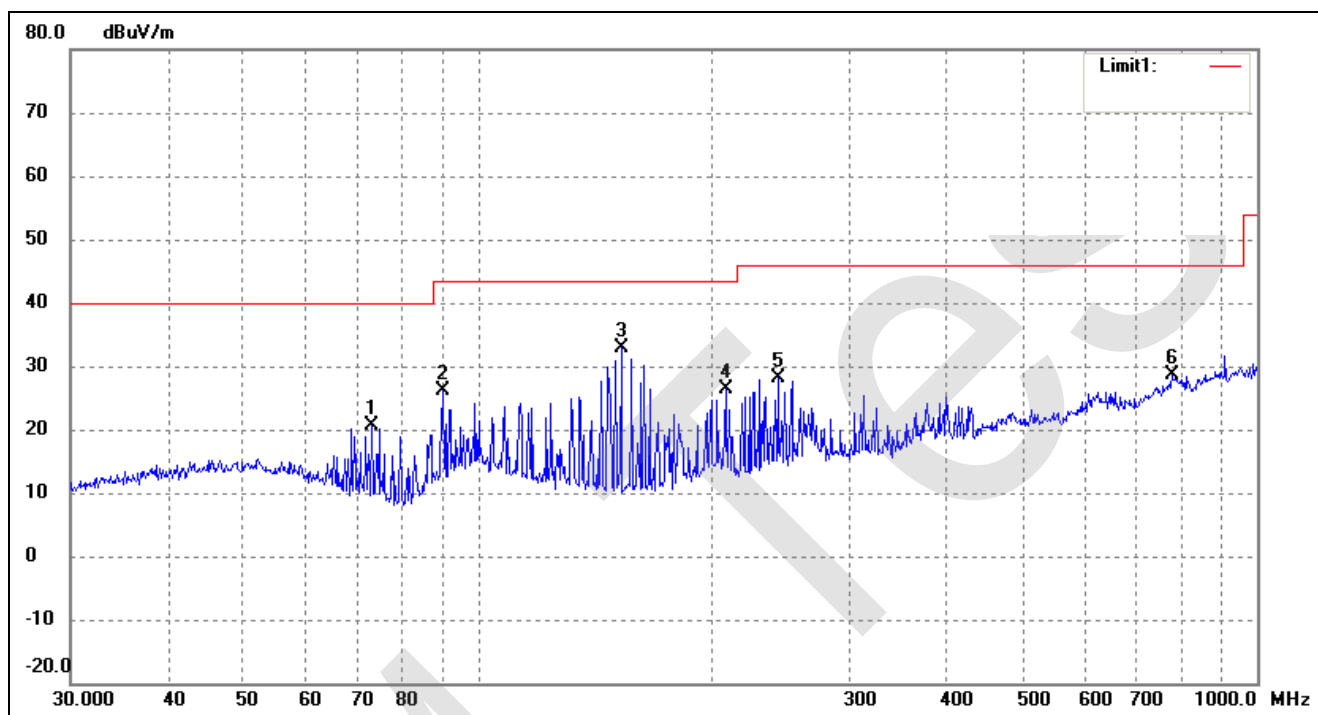

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	73.1025	36.02	-15.31	20.71	40.00	-19.29			peak
2	90.2205	39.66	-13.57	26.09	43.50	-17.41			peak
3	152.6641	47.79	-14.97	32.82	43.50	-10.68			peak
4	207.8501	38.24	-11.94	26.30	43.50	-17.20			peak
5	242.5253	38.86	-10.84	28.02	46.00	-17.98			peak
6	776.8778	28.27	0.30	28.57	46.00	-17.43			peak

Test Specification: Vertical

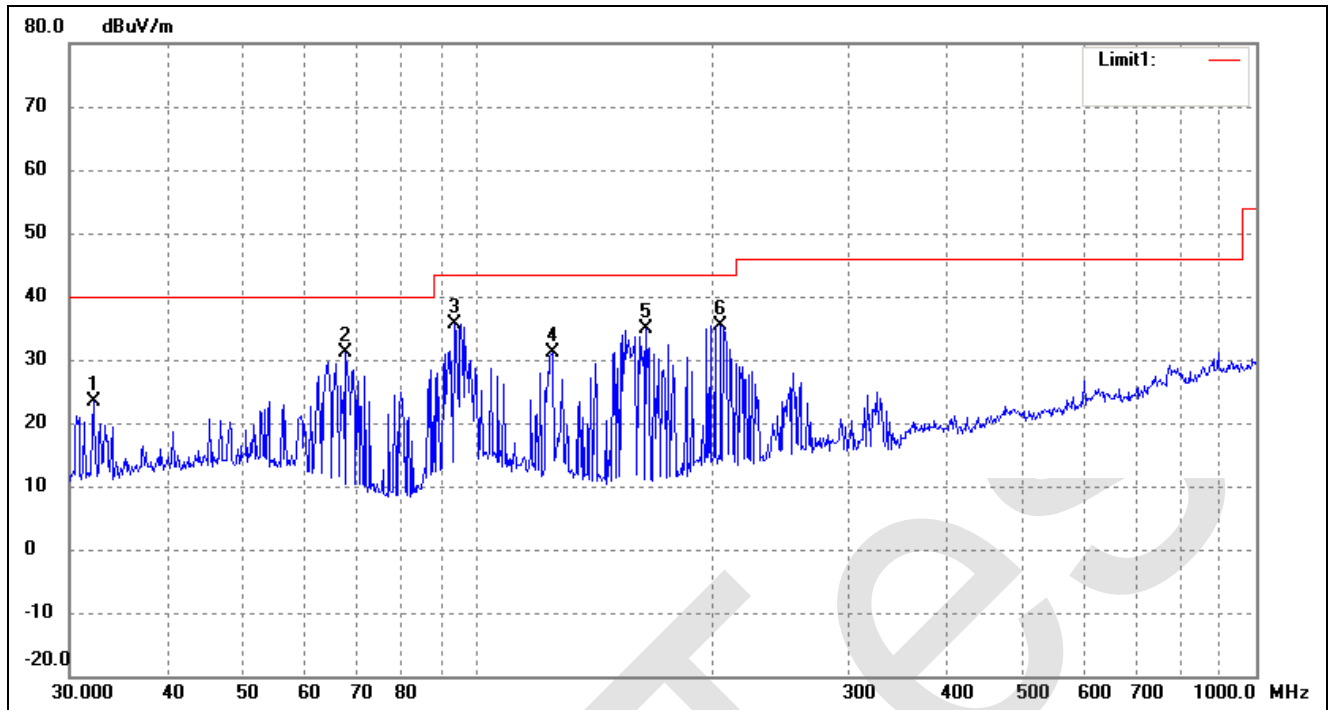

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.1795	37.78	-14.51	23.27	40.00	-16.73			peak
2	67.9129	46.78	-15.72	31.06	40.00	-8.94			peak
3	93.4402	48.54	-12.85	35.69	43.50	-7.81			peak
4	125.0066	45.16	-13.98	31.18	43.50	-12.32			peak
5	164.9075	49.70	-14.84	34.86	43.50	-8.64			peak
6	205.6751	47.20	-11.85	35.35	43.50	-8.15			peak

## EXHIBIT 1 - PRODUCT LABELING

### Proposed FCC Label Format

This device complies with Part 15 of the FCC Rules.  
Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) this device must accept any interference received,  
including interference that may cause undesired operation.

**Specifications:** Text is Black in color and is justified. Labels are printed in indelible ink on permanent adhesive backing or silk-screened onto the EUT or shall be affixed at a conspicuous location on the EUT. Where the EUT is constructed in two or more sections connected by wires and marketed together, the above statement is required to be affixed only to the main control unit. When the EUT is so small or for such use that it is not practicable to place the statement on it, the above information shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed.

### Proposed Label Location on EUT

FCC Label Location





## EXHIBIT 2 - EUT PHOTOGRAPHS



EUT View 1






EUT View 2



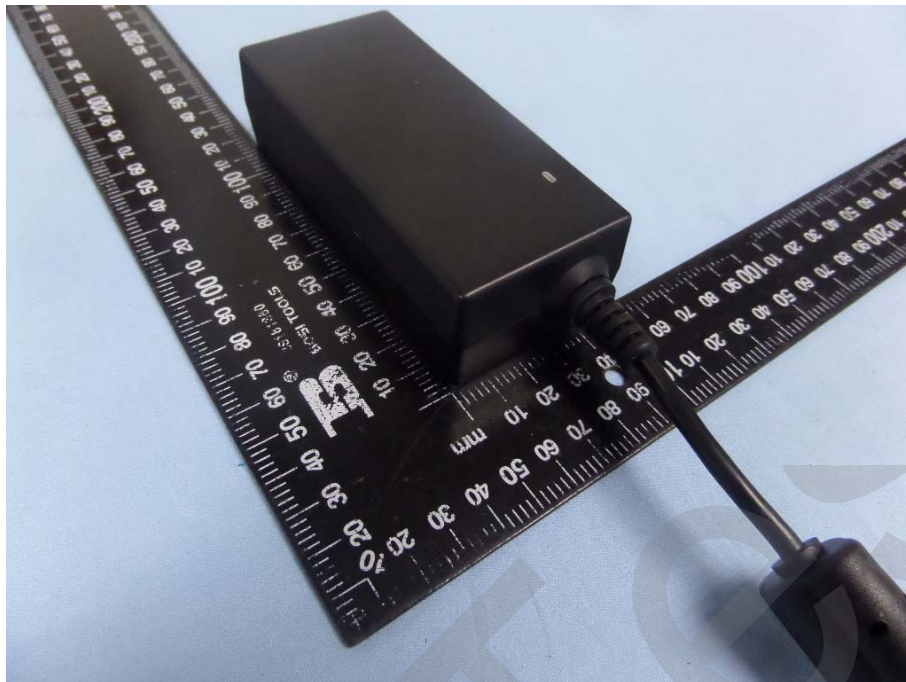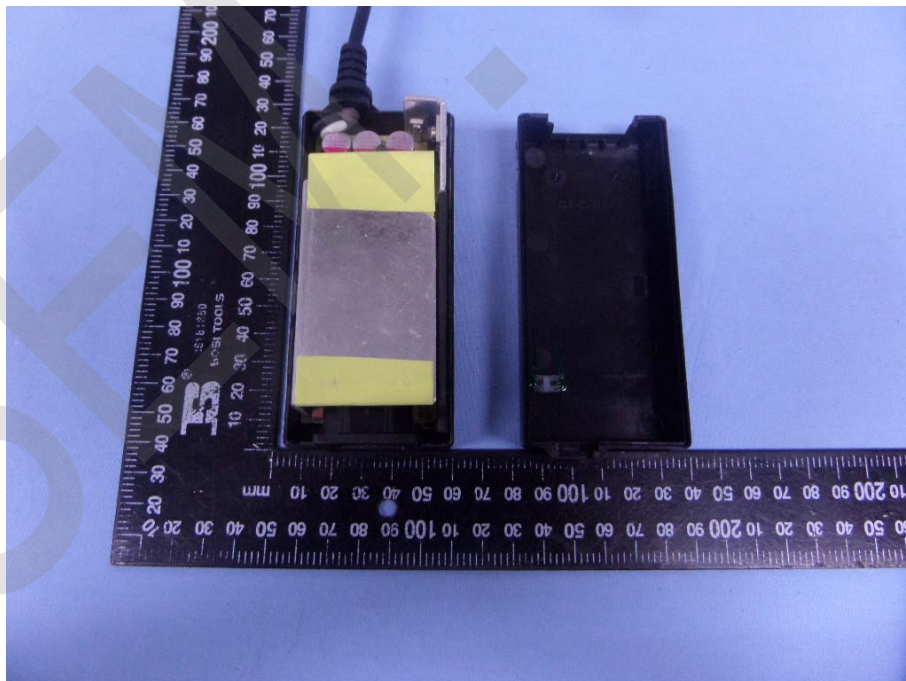

**EUT View 3****EUT Housing and Board View 1**

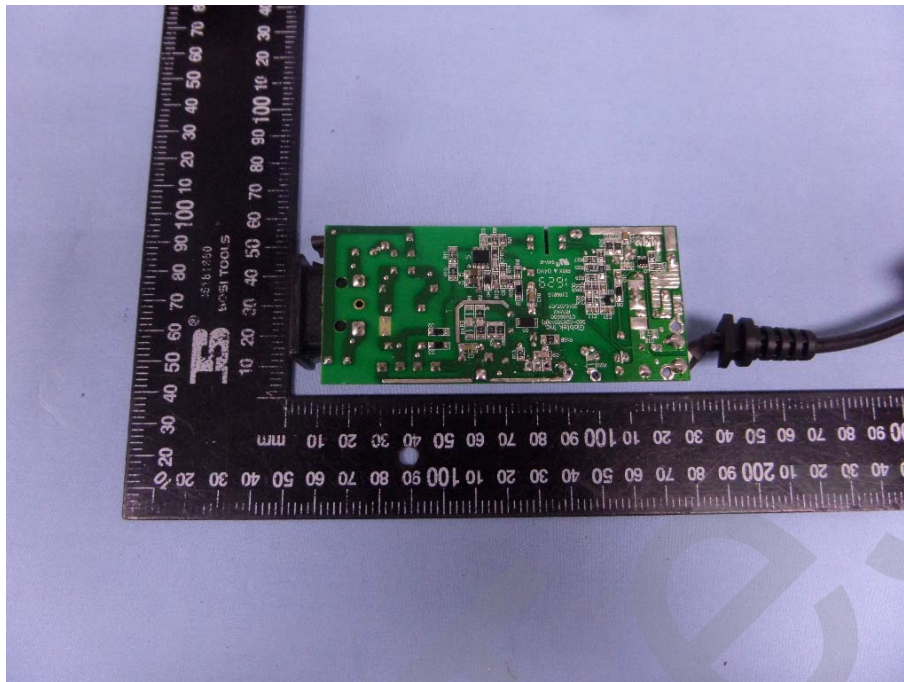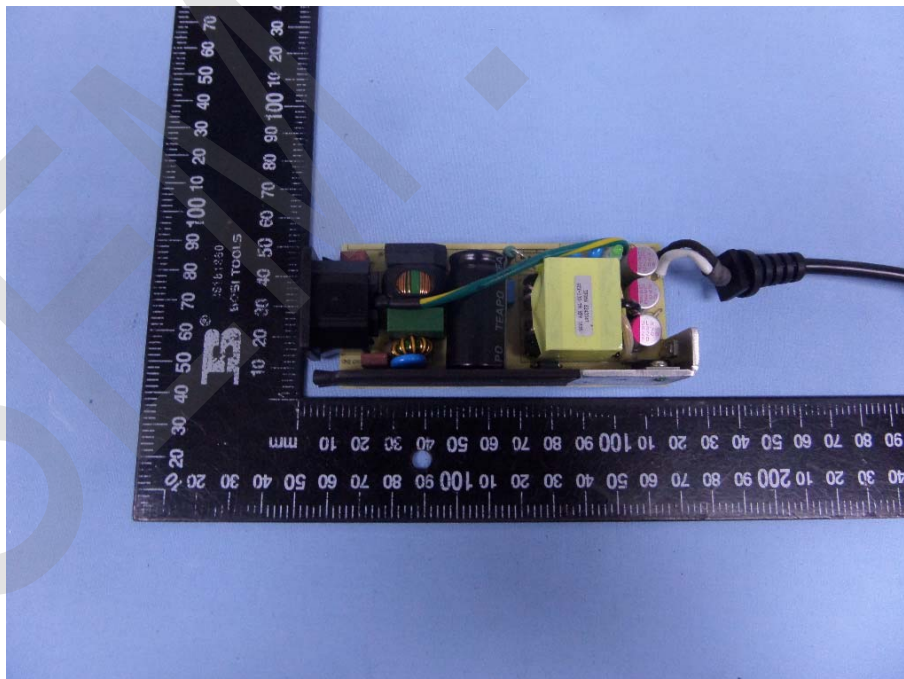**Solder Board-Component View 1****Solder Board-Component View 2**

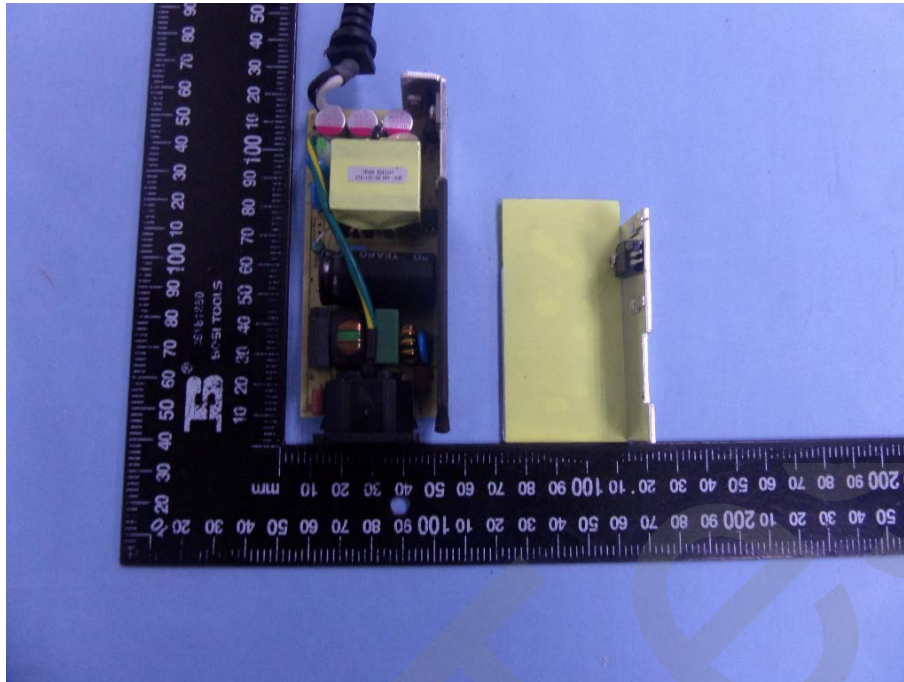**Solder Board-Component View 3**




## EXHIBIT 3 - TEST SETUP PHOTOGRAPHS

### Conducted Emission Test Setup



### Radiation Emission View

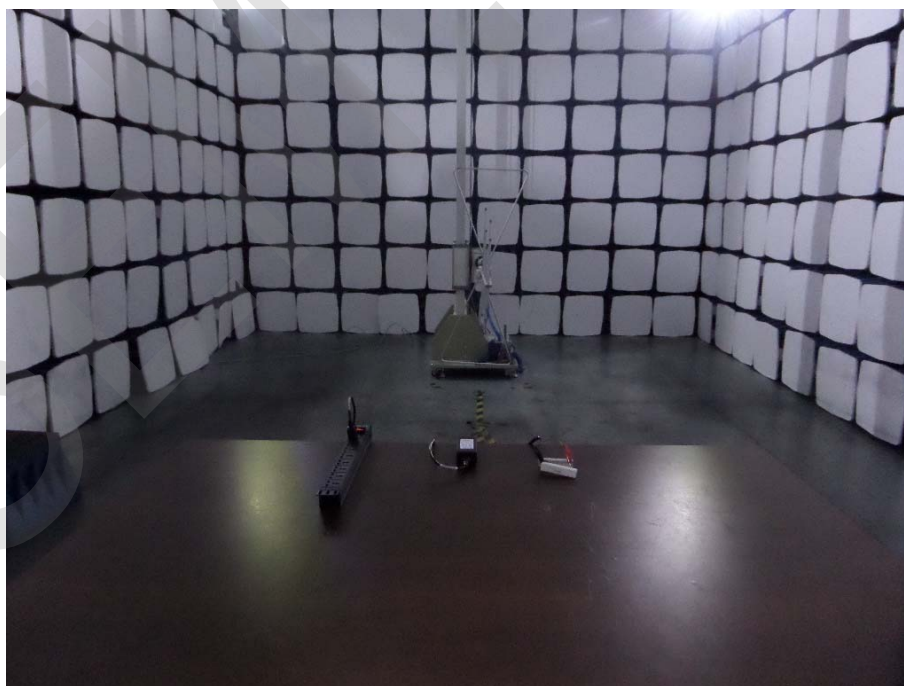

## EXHIBIT 4 - USERS MANUAL

---

### Information to Users

According to the FCC Part 15.19, 15.21, and 15.105 rules, for this EUT, the instructions or operation manual furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

### FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

\*\*\*\*\* END OF REPORT \*\*\*\*\*