1.0 Reference and Address					
Report Number	2507B2465SHA-001	Original Issued:	29-Sep-2025	Revised:	None
Standard(s)	Audio/Video, Information and Communication Technology Equipment - Part 1: Safety Requirements [UL 62368-1:2019 Ed.3+R:22Oct2021] Audio/Video, Information and Communication Technology Equipment - Part 1: Safety Requirements [CSA C22.2#62368-1:2019 Ed.3+U1]				

Applicant	GlobTek, Inc.	Manufacturer	**GlobTek (Suzhou) Co., Ltd.**
Address	186 Veterans Dr. Northvale, NJ 07647	Address	Building 4. No 76 JinLing East Road, Suzhou Industrial Park, Suzhou, JiangSu, 215021
Country	USA	Country	China
Contact	Mike Krakovyak	Contact	Demon Zhou
Phone	(201)784-1000 Ext.106	Phone	86 512 6279 0301 Ext.189
FAX	(201)784-0111	FAX	86 512 6279 0355
Email	Krakovyakm@globtek.us	Email	demon.zhou@globtek.cn

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.


2.0 Product Description	
Product	ICT/ITE Power Supply
Brand name	GlobTek, Inc.
Description	Product covered by this report is power supply module which is Class I or Class II apparatus. The product is not intended to use in the environment which altitude exceed 5000m.
Models	GT followed by -, M or H; followed by 91120-; followed by 01 to 30; followed by 07.5, 10.5, 14.5, 19.5, 24, 36 or 48; may be followed by -0.01 to -11.9; followed by -F, -FW, -P2, -P3; may be followed by six characters.
Model Similarity	GT*91120-***** Followed by "M" or "-" or "H" for market identification and not related to safety. Followed by "01" to "30" denotes the rated output wattage designation, with interval of 1, "01" stands for 1W, "30" stands for 30W. Followed by "07.5", "10.5", "14.5", "19.5", "24", "36" or "48" denotes the rated output voltage designation. Followed by "-0.01" to "-11.9" is optional deviation, subtracted from standard output voltage, with interval of 0.01, or a character to indicate no voltage differece. Followed by "-F" means open frame class I or class II with functional earth. Followed by "-FW" means open frame class II. Followed by "-P2" means encapsulated class II. Followed by "-P3" means encapsulated class I or class II with functional earth. May be followed by any six characters which can be "0" to "9", "A" to "Z", "-", "()" or "[]" or a character for marketing purposes and have no bearing on safety or compliance. Open frame models are similar to each other except for class rating, secondary winding wires of transformers, some unlisted secondary components, model numbers and ratings. Encapsulated models are similar to each other except for class rating, secondary winding wires of transformers, some unlisted secondary components, model numbers and ratings.
Ratings	Input: 100-240V ~ , 50-60Hz or 50/60Hz, 1.5A. For models GT*91120-***-P2* series and GT*91120-***-P3* series with North American standard AC power plug and cable: 100-120V ~ , 50-60Hz or 50/60Hz, 1.5A. Output: 5-48VDC, Max. 4A, Max. 30W. See section 7.0, Illustration 1 for details.
Other Ratings	NA
Conditions of Acceptability	The products covered in this Report are incomplete in construction features or limited in performance capabilities and are intended for use and evaluation in other products. Consideration should be given to the following when the component is used in or with another product. 1.The power supply shall be installed in compliance with the enclosure, mounting, spacing, casualty and segregation requirements of the ultimate application. 2.Connection and disconnection to the mains should be considered in the end use. 3.Temperature testing was performed on this component and should be double checked in end use. 4.Mechanical abuse testing was not conducted and should be considered in the end use. 5.The fuse shall be connected in an ungrounded circuit. It shall be double checked in end use, polarity terminal is provided in this product. 6.Mechanical strength should be performed on this component when installed in the end product. 7.Leakage current test was not conducted and should be considered in the end use. 8.Accessibility of live parts was not checked and should be considered in the end use. 9.The rating of enclosure in end-product shall be at least V-0. 10.Whole performance test are test with power supply not installed in end appliance. All the test results presented in this report relate only to this condition. The acceptability for the condition that the same power supply model installed in other end product model not mentioned in this report will need further evaluation, which is not covered in this report.

3.0 Product Photographs

Photo 1 - External view of EUT (Encapsulated)



Photo 2 - External view of EUT (Encapsulated)

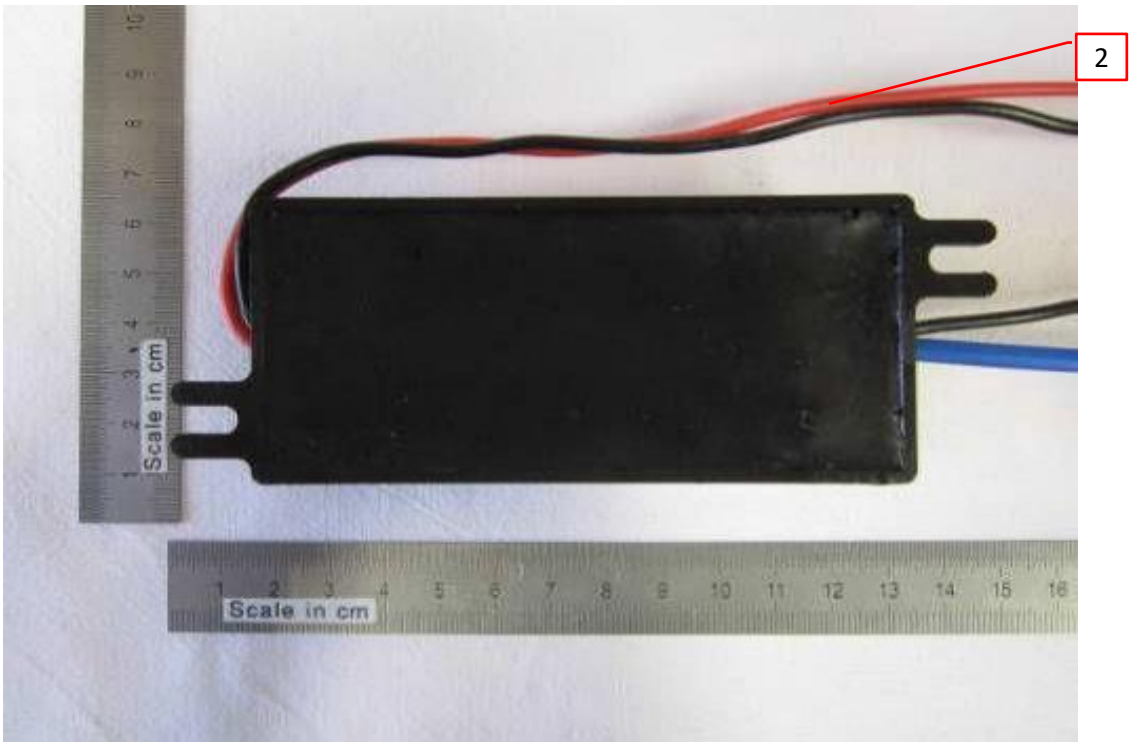

3.0 Product Photographs

Photo 3 - Internal view of EUT (Encapsulated)


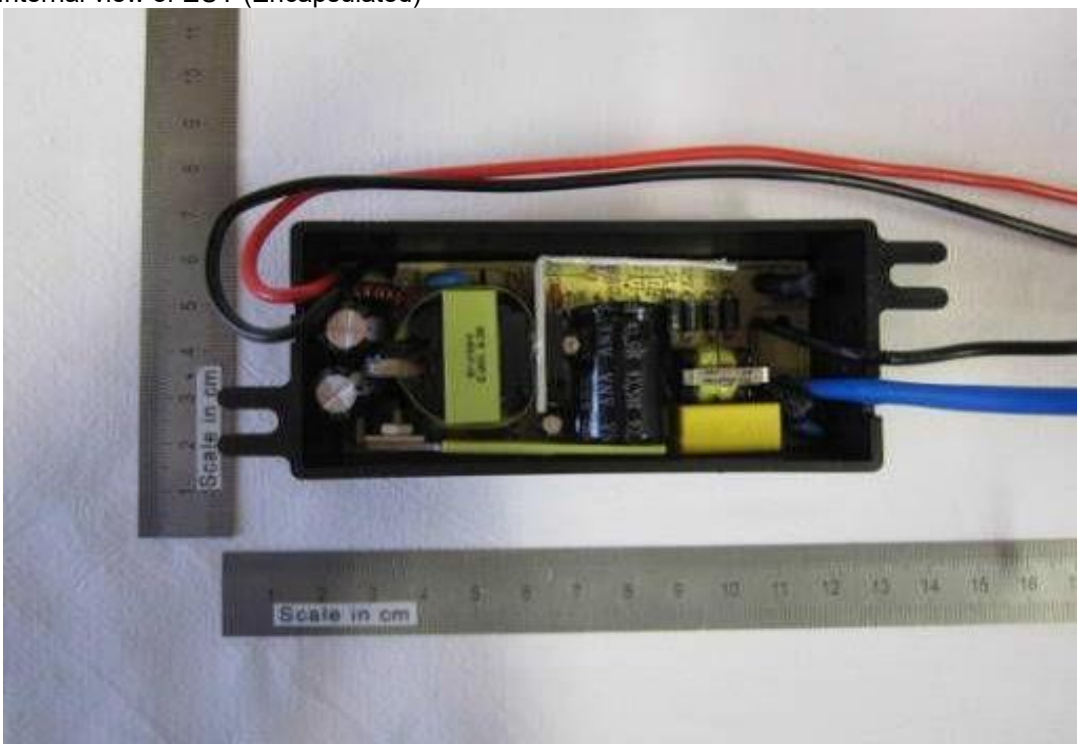


Photo 4 - Internal view of EUT (Encapsulated)

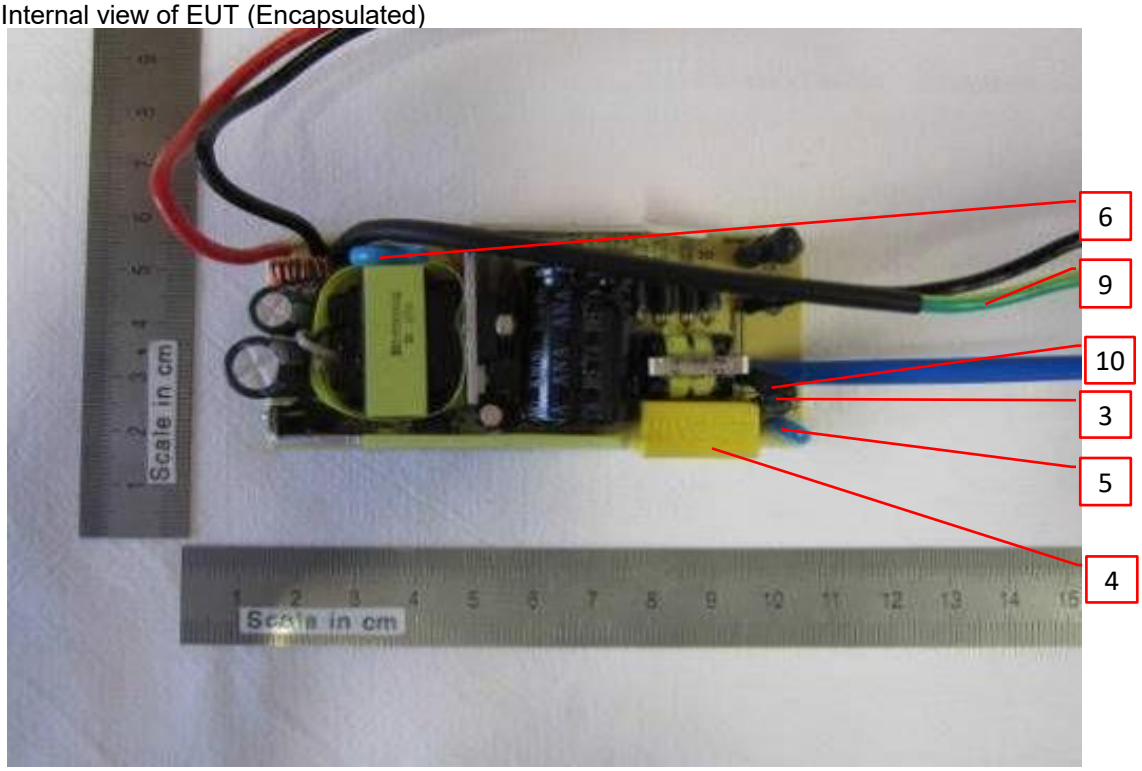

3.0 Product Photographs

Photo 5 - Internal view of EUT (Encapsulated)


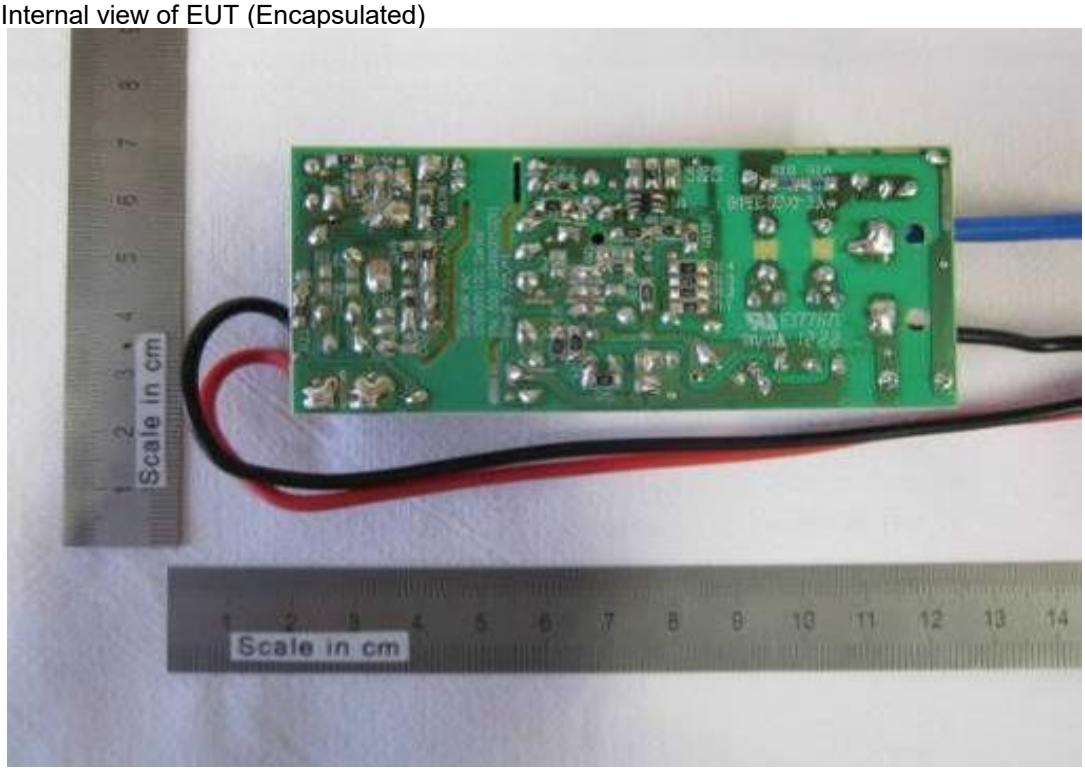


Photo 6 - External view of EUT (Open frame)

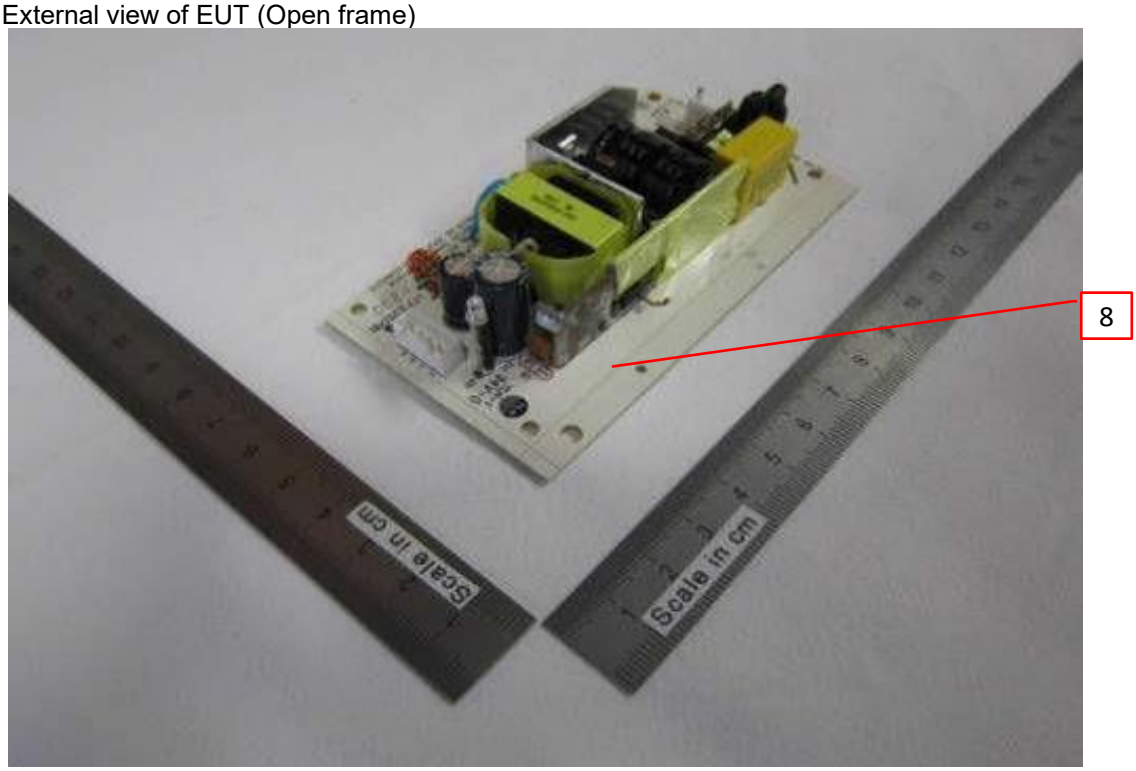

3.0 Product Photographs

Photo 7 - External view of EUT (Open frame)


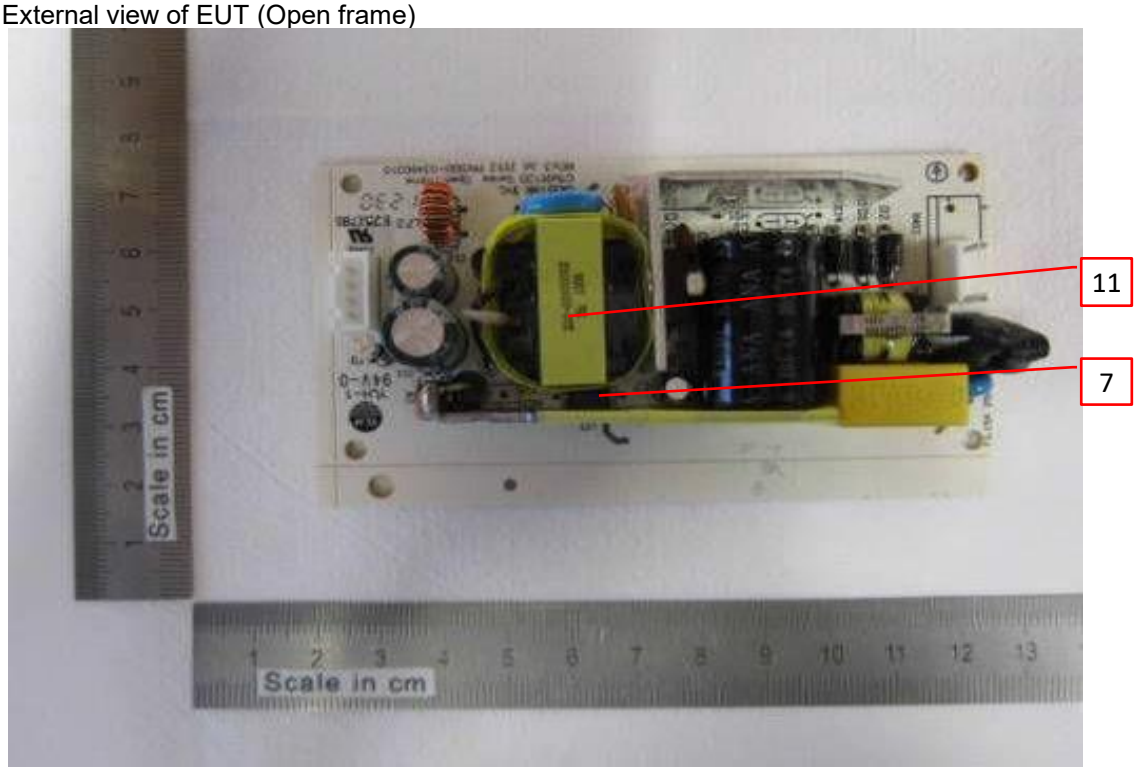


Photo 8 - External view of EUT (Open frame)

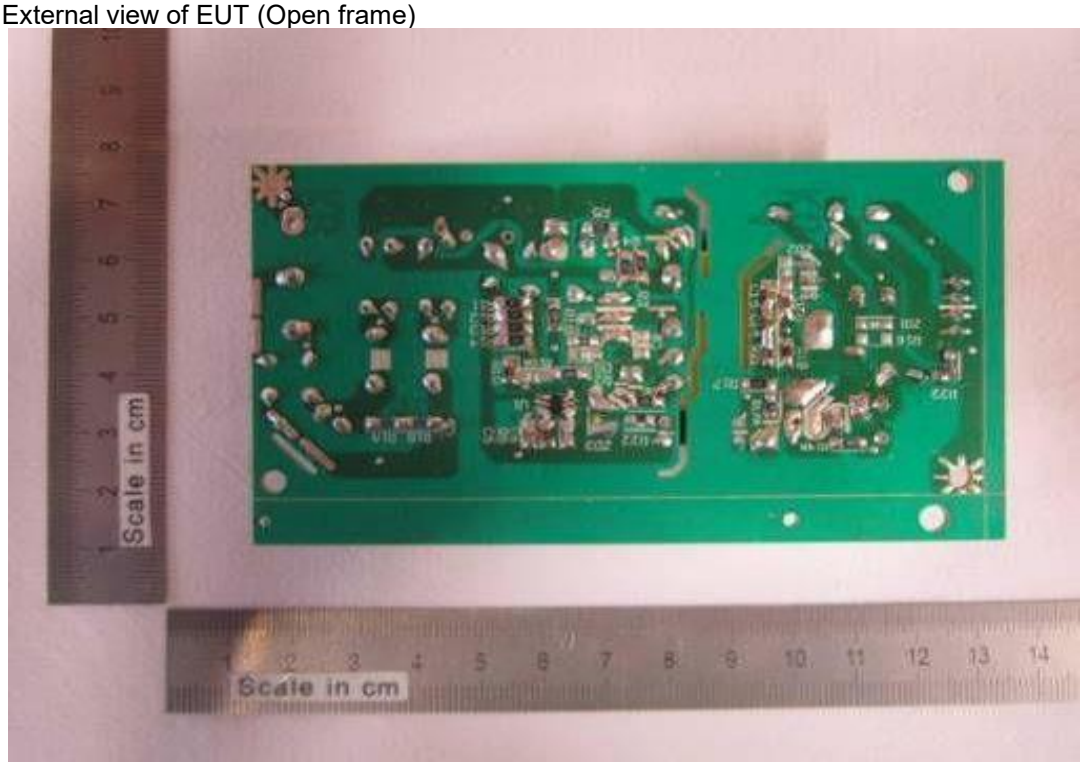

3.0 Product Photographs

Photo 9 - Transformer


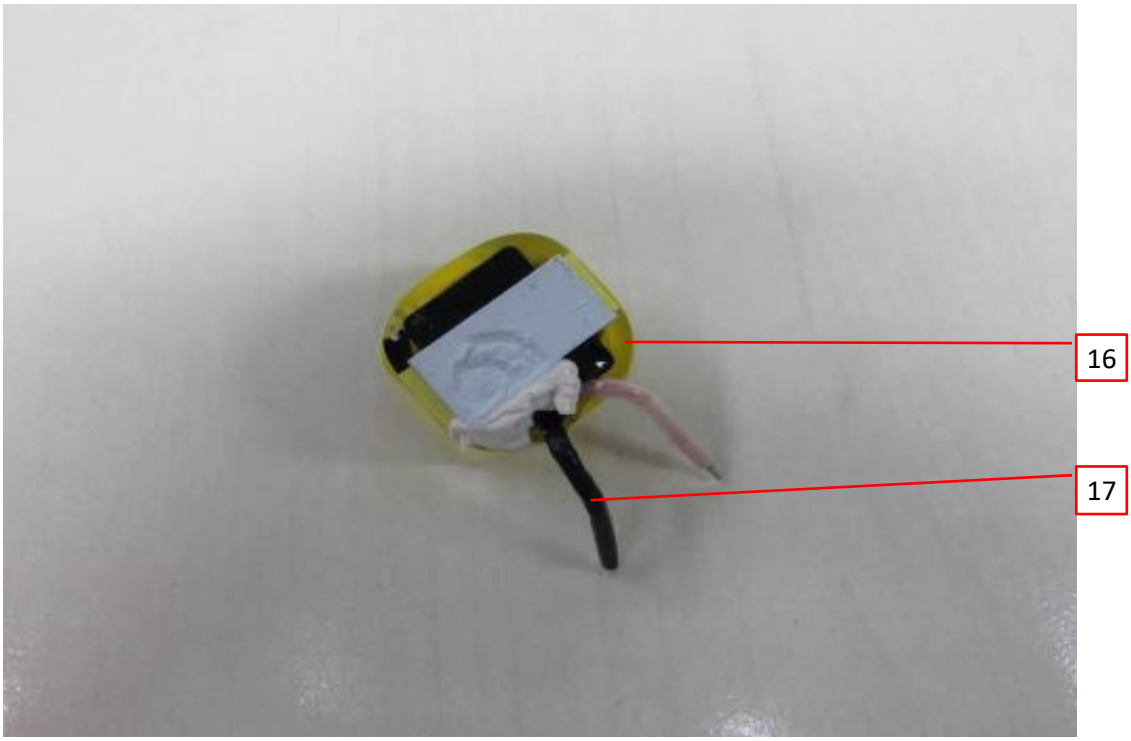


Photo 10 - Transformer

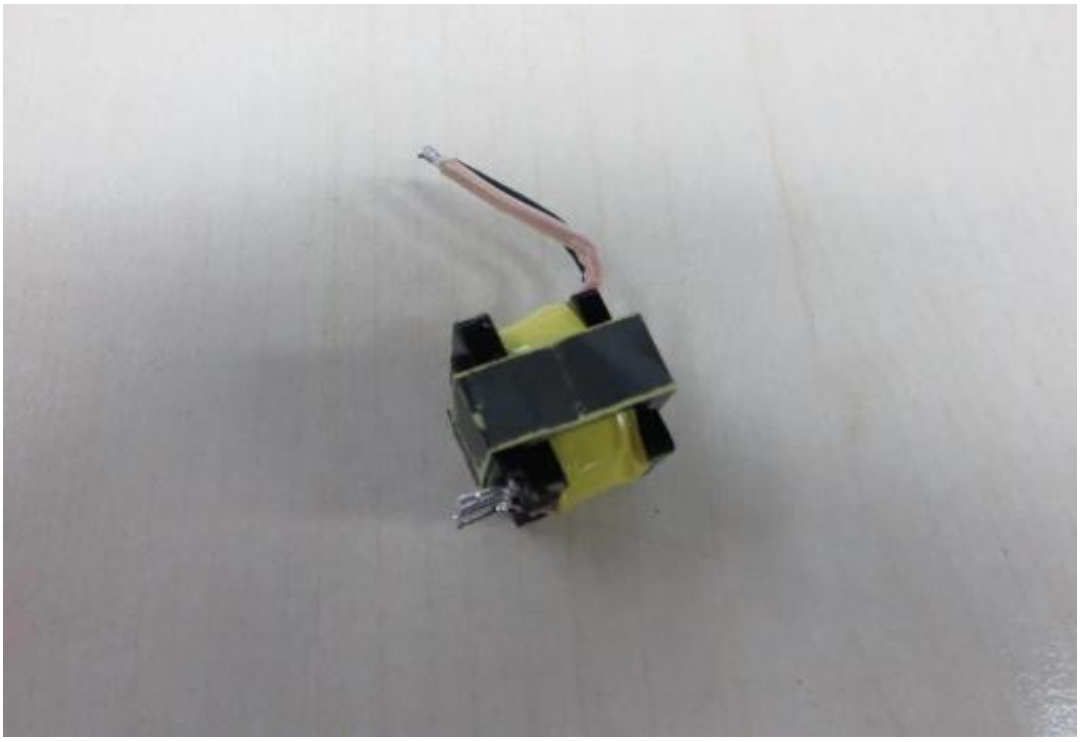

3.0 Product Photographs

Photo 11 - Transformer


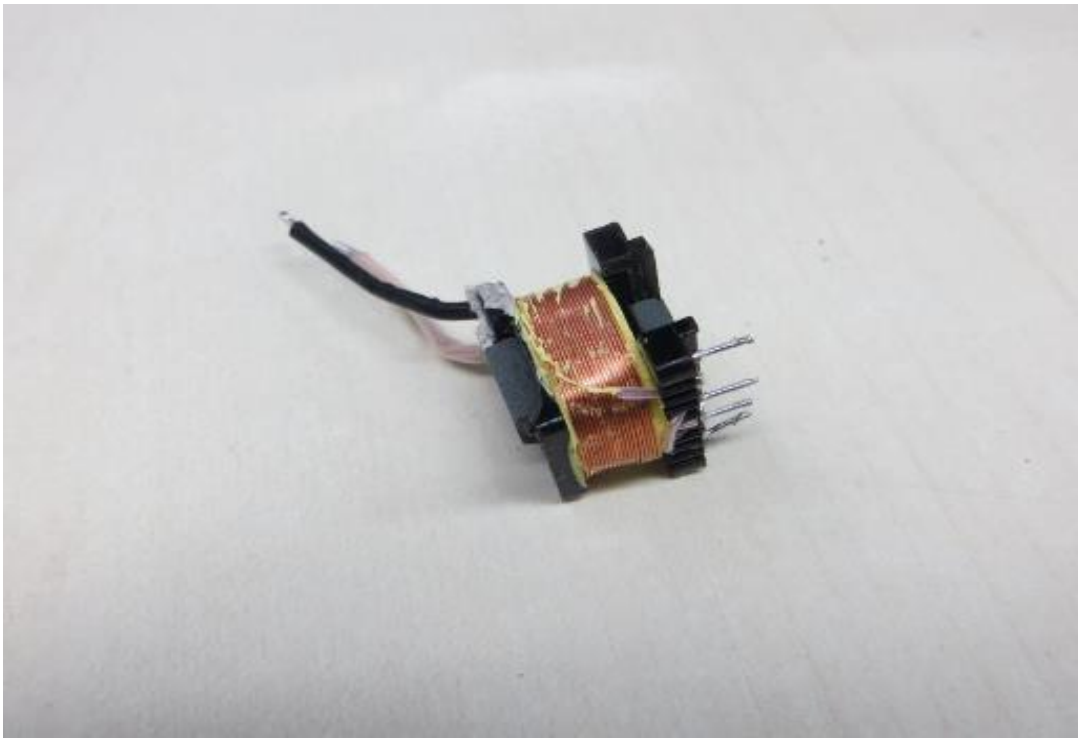


Photo 12 - Transformer

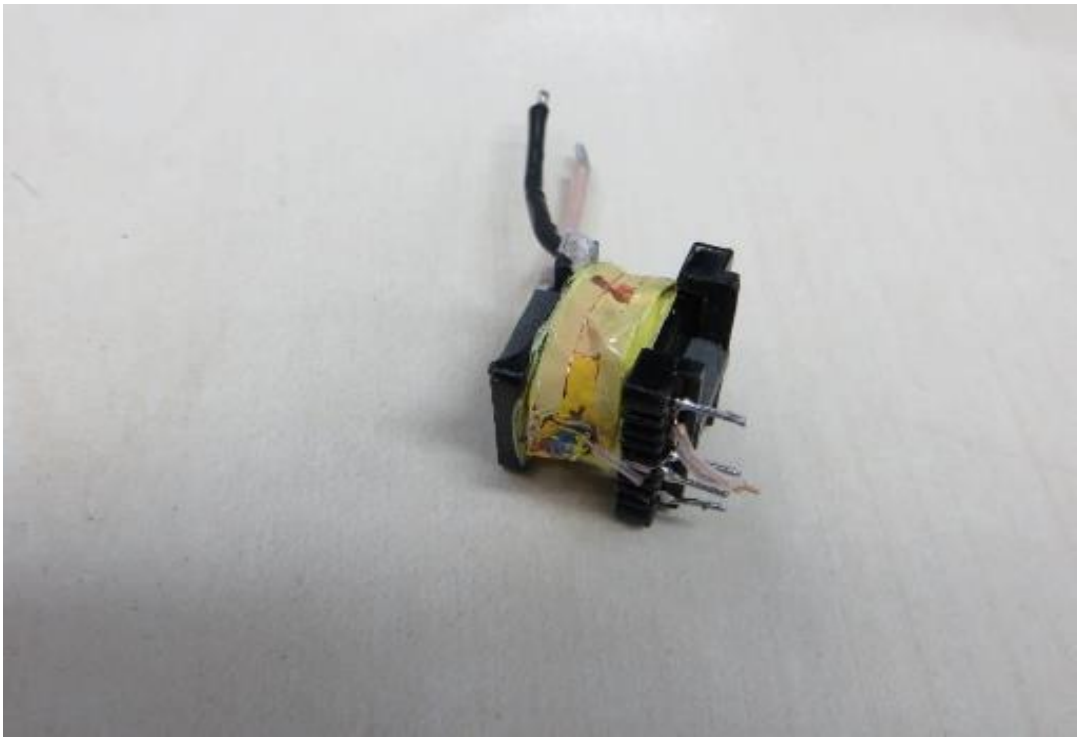

3.0 Product Photographs

Photo 13 - Transformer


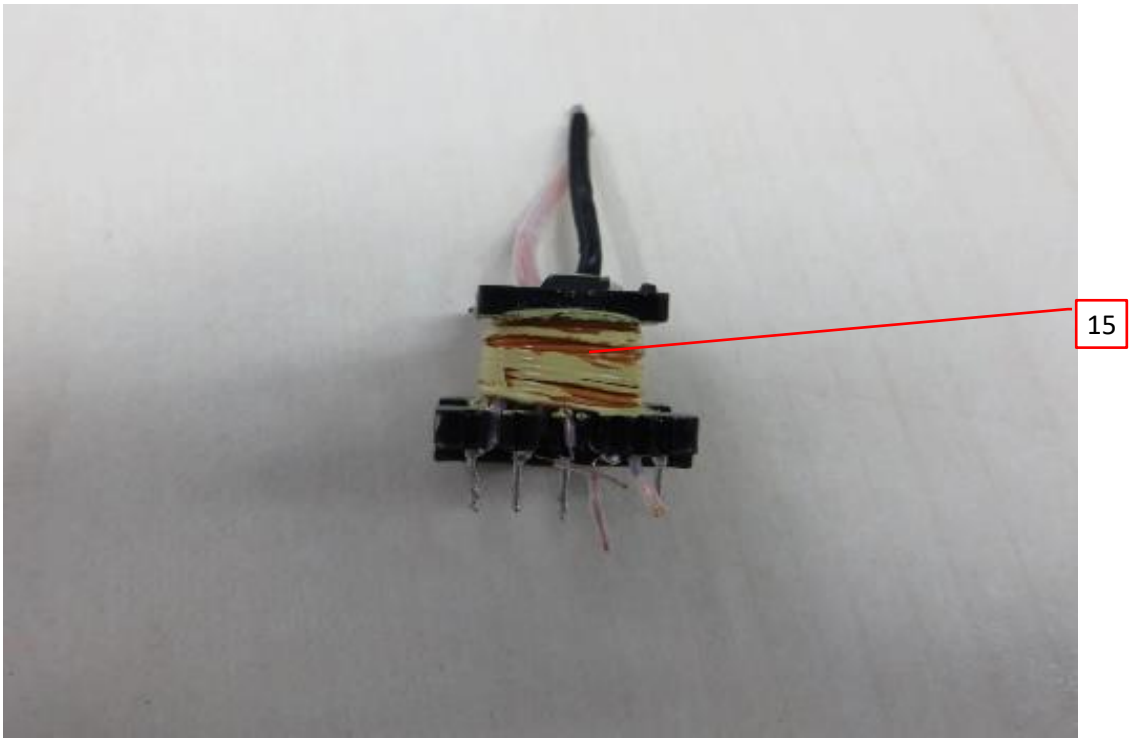


Photo 14 - Transformer

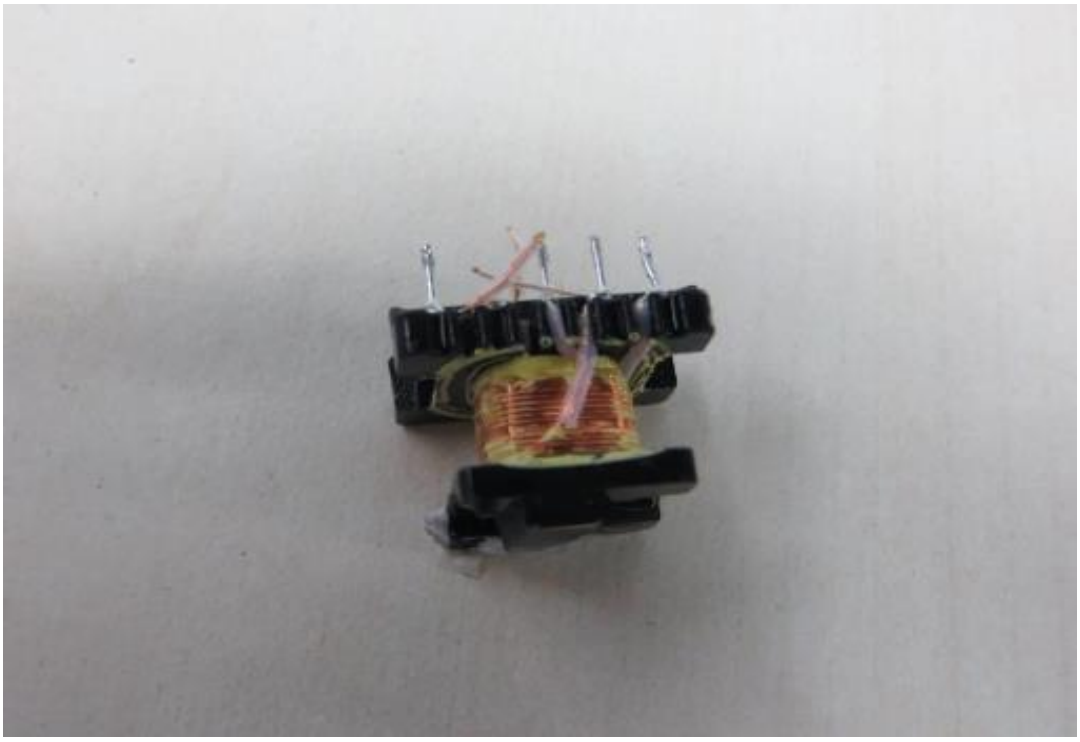

3.0 Product Photographs

Photo 15 - Transformer


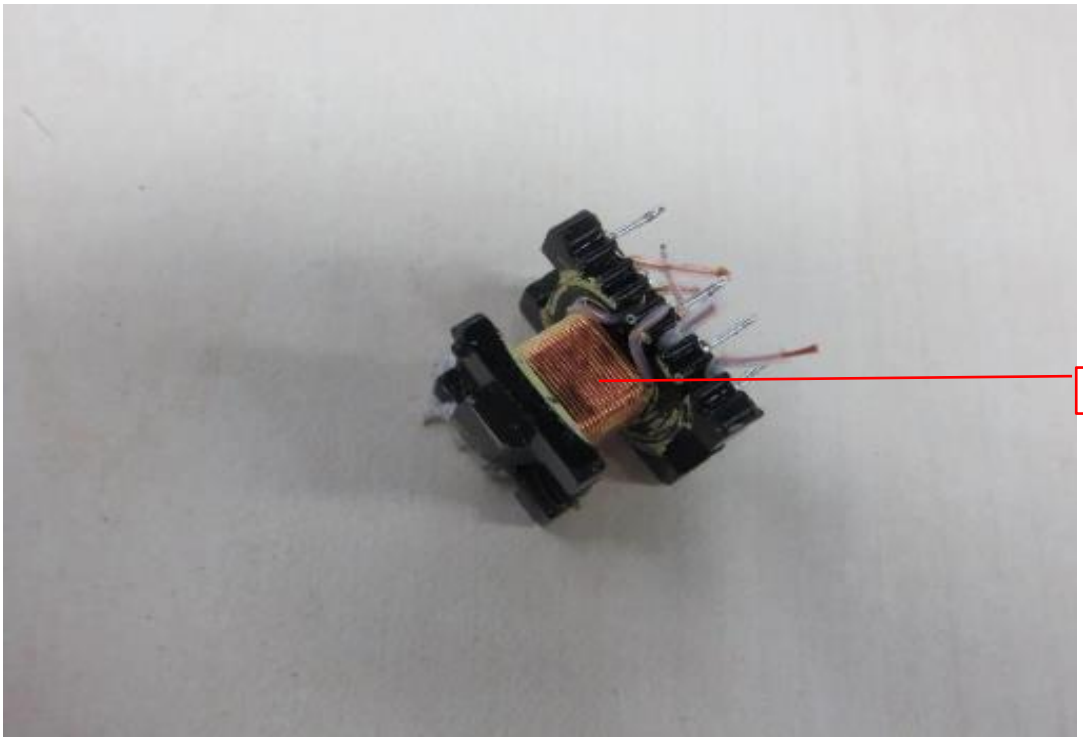


Photo 16 - Transformer

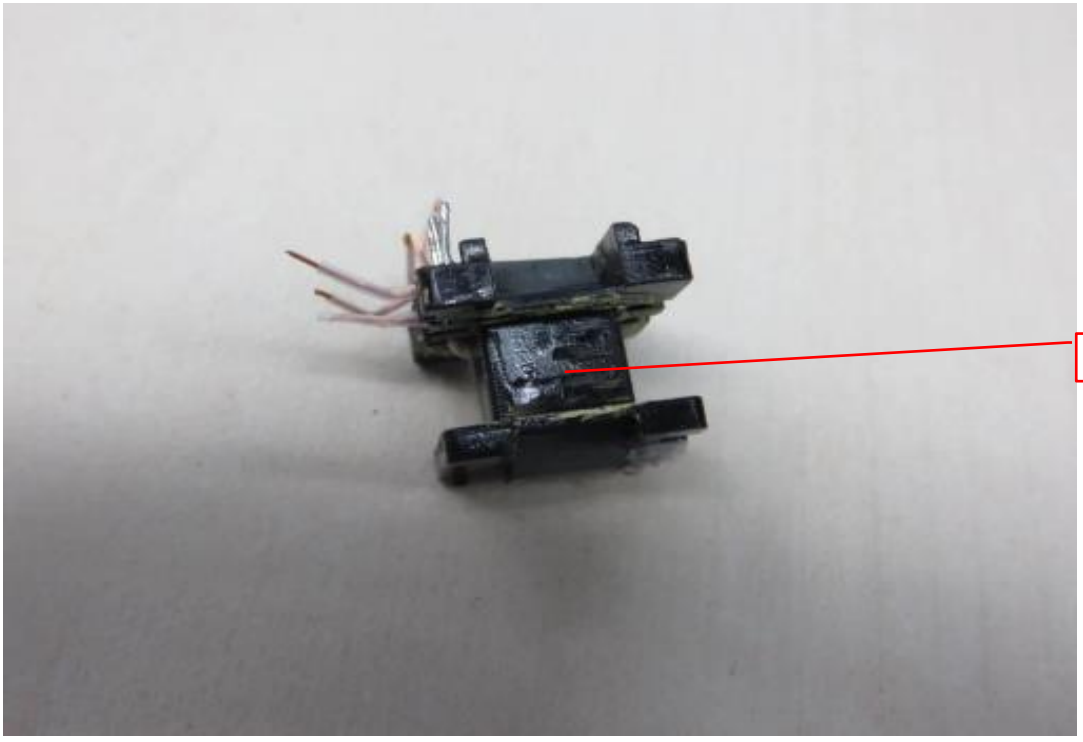


3.0 Product Photographs

Photo 17 - External view of EUT (Encapsulated)



Photo 18 - External view of EUT (Encapsulated)

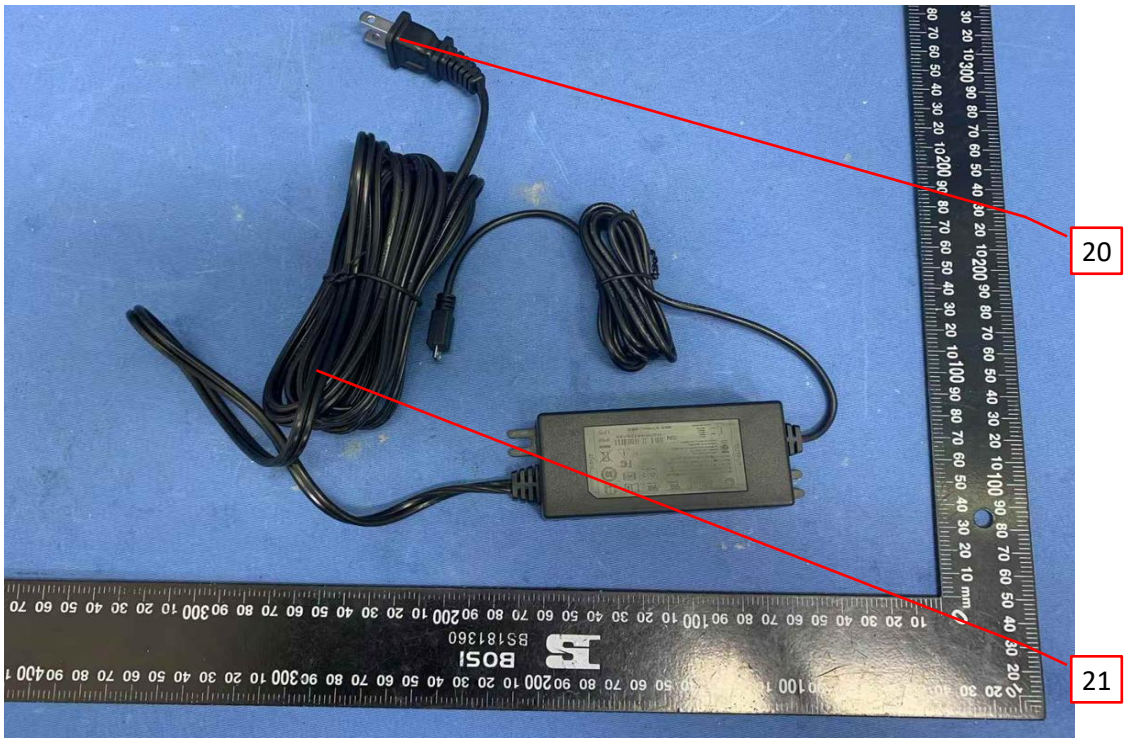


3.0 Product Photographs

Photo 19 - External view of EUT (Encapsulated)



Photo 20 - External view of EUT (Encapsulated)

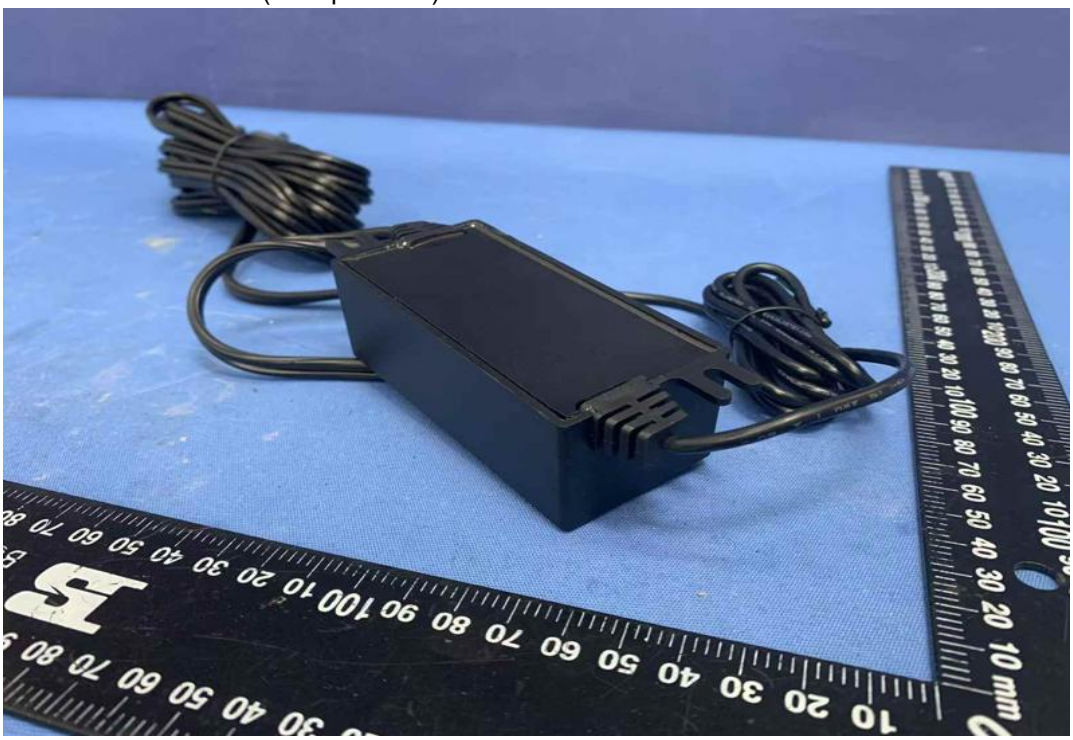


3.0 Product Photographs

Photo 21 - Internal view of EUT (Encapsulated)




Photo 22 - Internal view of EUT (Encapsulated)

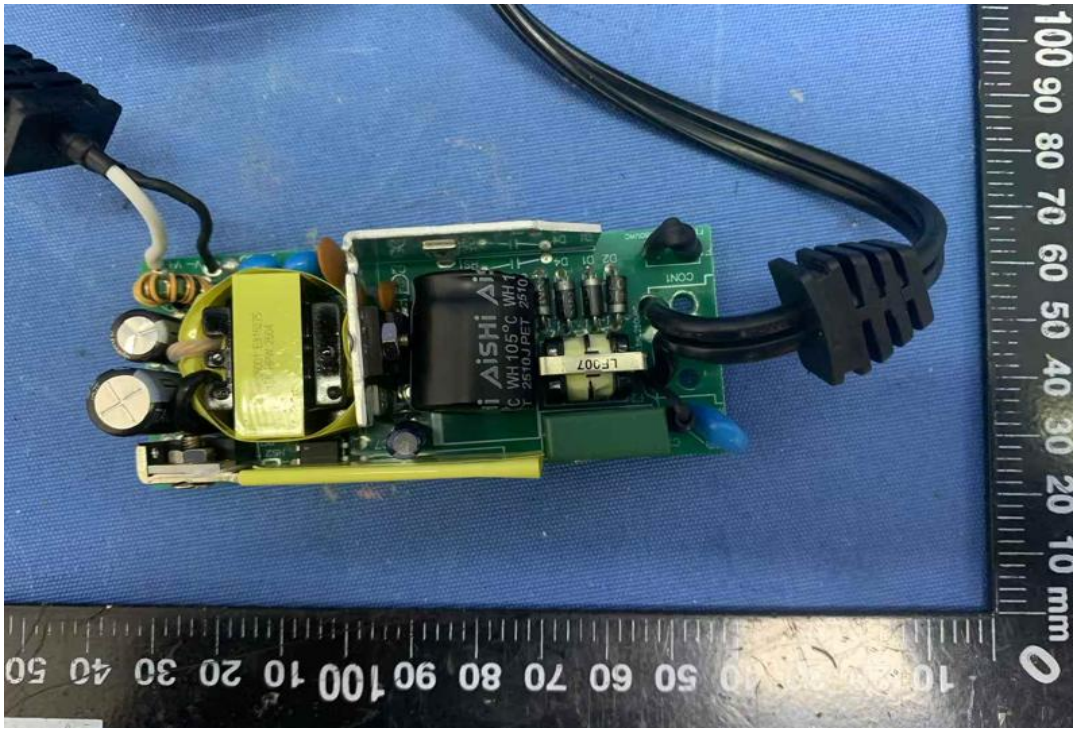

3.0 Product Photographs

Photo 23 - Internal view of EUT (Encapsulated)

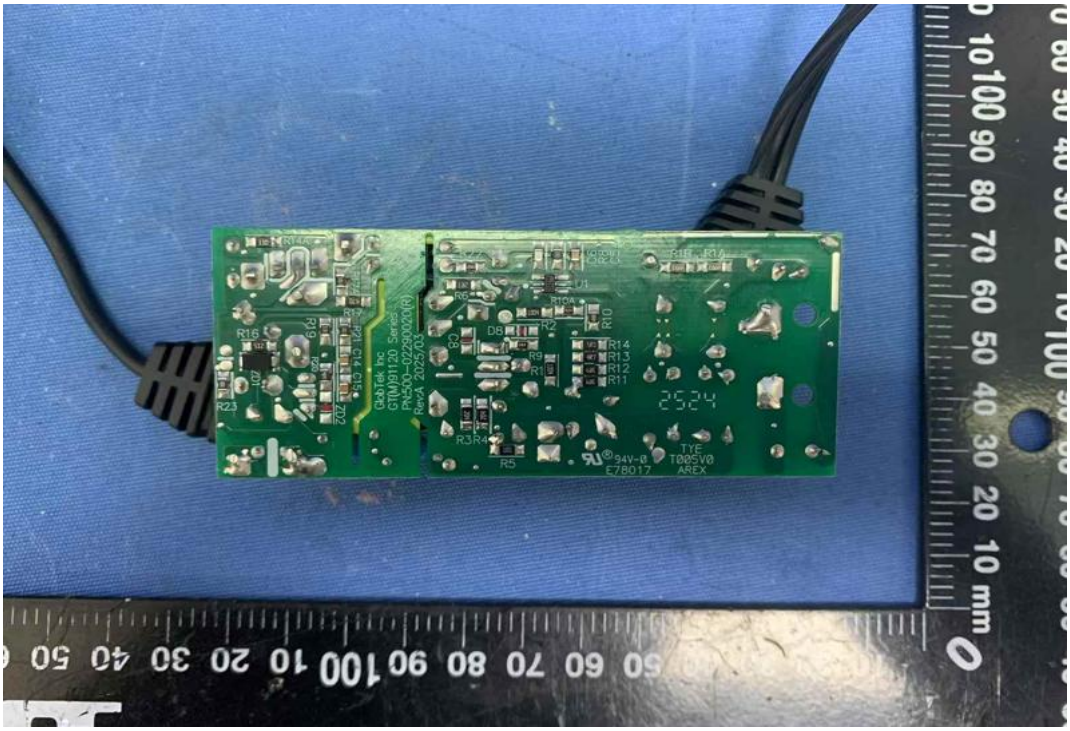

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
1	1	Enclosure	SABIC INNOVATIVE PLASTICS B V	945	PC, V-0, HWI 3, HAI 3, 120°C, min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
			SABIC JAPAN L L C	945	PC, V-0, HWI 3, HAI 3, 120°C, min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
			TEIJIN CHEMICALS LTD	LN-1250P	PC, V-0, HWI 3, HAI 0, 115°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
			TEIJIN CHEMICALS LTD	LN-1250G	PC, V-0, HWI 3, HAI 0, 115°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
			SABIC INNOVATIVE PLASTICS B V	HF500R	PC, V-0, HWI 1, HAI 3, 115°C , min thickness: 2.0mm; Fixed by ultrasonic welding and without opening;	cURus
2	2	Wire 1	KUNSHAN NEW ZHICHENG ELECTRONICS TECHNOLOGIES CO LTD	1185	Input and Output wire Min. 24AWG, min. 300Vac, min. 80°C	cURus
				1015		cURus
				2464		cURus
				2468		cURus
			Various	Various		cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
4	3	Fuse (optional)	CONQUER ELECTRONICS CO LTD	MST	T3.15AL250V	cURus
			EVER ISLAND ELECTRIC CO LTD & WALTER ELECTRIC	2010	T3.15AL250V	cURus
			EVER ISLAND ELECTRIC CO LTD & WALTER ELECTRIC	ICP	T3.15AL250V	cURus
			BEL FUSE INC	RST	T3.15AL250V	cURus
			COOPER BUSSMANN LLC	SS-5	T3.15AL250V	cURus
			SHENZHEN LANSON ELECTRONICS CO LTD	SMT	T3.15AL250V	cURus
			DONGGUAN BETTER ELECTRONICS TECHNOLOGY CO LTD	932	T3.15AL250V	cURus
			CONQUER ELECTRONICS CO LTD	MET	T3.15AL250V	cURus
			ZHONG SHAN LANBAO ELECTRICAL APPLIANCES CO LTD	RTI-10	T3.15AL250V	cURus
			CHENG TUNG INDUSTRIAL CO LTD	CTX	For CX1; Min. 300VAC, Max. 0.47µF, -40~+110°C, X1 or X2	cURus
			JOEY ELECTRONICS (DONG GUAN) CO LTD	MPX	For CX1; Min. 300VAC, Max. 0.47µF, -40~+110°C, X1 or X2	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
4	4	X capacitor (Optional)	ULTRA TECH XIPHI ENTERPRISE CO LTD	HQX	For CX1; Min. 250VAC, Max. 0.47µF, -40~+110°C, X2	cURus
			YUON YU ELECTRONICS CO LTD	MPX	For CX1; Min. 250VAC, Max. 0.47µF, -40~+100°C, X2	cURus
			SINHUA ELECTRONICS (HUZHOU) CO LTD	MPX	For CX1; Min. 250VAC, Max. 0.47µF, -40~+110°C, X1 or X2	cURus
			DAIN ELECTRONICS CO LTD	MPX NPX	For CX1; Min. 250VAC, Max. 0.47µF, -40~+110°C, X1 or X2	cURus
			DAIN ELECTRONICS CO LTD	MEX	For CX1; Min. 250VAC, Max. 0.47µF, -40~+110°C, X1 or X2	cURus
			SHANTOU FREE TRADE ZONE SONGTIAN ELECTRONIC TECHNOLOGY CO.,LTD.	MPX	For CX1; Min. 250VAC, Max. 0.47µF, -40~+110°C, X1 or X2	
			HUA JUNG COMPONENTS CO LTD	MKP	For CX1; Min. 250VAC, Max. 0.47µF, -40~+110°C, X1 or X2	
4	5	Varistor (Optional)	Xiamen Set Electronics Co., Ltd.	TFV8S471K TFV10S471K	For MOV; Max. Continuous voltage: min 300Vac(rms), 105°C	cURus
			SHANTOU HIGH-NEW TECHNOLOGY DEVELOPMNT ZONE SONGTIAN ENTERPRISE CO LTD	10D621K 14D621K	For MOV; Max. Continuous voltage: min 385Vac(rms), 125°C	
			Guangdong Huiwan Electronics Technology Co.Ltd.	V-621K-10 DEH V-621K-14 DEH	For MOV; Max. Continuous voltage: min 385Vac(rms), 125°C	
			Thinking Electronic Industrial Co., Ltd.	TVR10621 TVR14621	For MOV; Max. Continuous voltage: min 385Vac(rms), 125°C	
			SUCCESS ELECTRONICS CO LTD	SE	Y1, AC250V, max 4700pF, -40~+125°C; For CY1 and CY2	cURus
			SUCCESS ELECTRONICS CO LTD	SB	Y1, AC250V, max 4700pF, -40~+125°C; For CY1 and CY2	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
4	6	Y capacitor (Optional)	MURATA MFG CO LTD	KX	Y1, AC250V, max 4700pF, -40~+125°C; For CY1 and CY2	cURus
			TDK CORPORATION	CD	Y1, AC250V, max 4700pF, -40~+125°C; For CY1 and CY2	cURus
			JYA-NAY CO LTD	JN	Y1, AC250V, max 4700pF, -25~+125°C; For CY1 and CY2	cURus
			HAOHUA ELECTRONIC CO	CT7	Y1, AC250V, max 4700pF, -30~+125°C; For CY1 and CY2	cURus
			Guangdong Huiwan Electronics Technology Co.,LTD	AR	Y1, AC250V, max 4700pF, -30~+125°C; For CY1 and CY2	
			Shantou High-new Technology Development Zone Songtian Enterprise Co.,Ltd	CD	Y1, AC250V, max 4700pF, -30~+125°C; For CY1 and CY2	
			Jyh Chung Electronic Co., Ltd.	JD	Y1, AC250V, max 4700pF, -40~+125°C; For CY1 and CY2	cURus
7	7	Photo coupler	EVERLIGHT ELECTRONICS CO LTD	EL817	For U2; Double protection optical isolators, providing 5000 vac isolation	cURus
			COSMO ELECTRONICS CORP	K1010	For U2; Double protection optical isolators, providing 5000 vac isolation	cURus
			COSMO ELECTRONICS CORP	KP1010	For U2; Double protection optical isolators, providing 5000 vac isolation	cURus
			LITE-ON TECHNOLOGY CORP	LTV-817 LTV-817M LTV-817S	For U2; Double protection optical isolators, providing 5000 vac isolation	cURus
			BRIGHT LED ELECTRONICS CORP	BPC-817 A/B/C/D/L	For U2; Double protection optical isolators, providing 5000 vac isolation	cURus
			BRIGHT LED ELECTRONICS CORP	BPC-817M	For U2; Double protection optical isolators, providing 5000 vac isolation	cURus
			BRIGHT LED ELECTRONICS CORP	BPC-817S	For U2; Double protection optical isolators, providing 5000 vac isolation	cURus
			WALEX ELECTRONIC (WUXI) CO LTD	T2	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			WALEX ELECTRONIC (WUXI) CO LTD	T2A	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			WALEX ELECTRONIC (WUXI) CO LTD	T2B	Min. 1.6 mm thickness, min. V-0, 130°C	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
6	8	PCB	WALEX ELECTRONIC (WUXI) CO LTD	T4	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			DAFENG AREX ELECTRONICS TECHNOLOGY CO LTD	02V0	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				03V0	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				04V0	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			SHENZHEN TONGCHUANGXIN ELECTRONICS CO LTD	TCX	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			SHANGHAI H-FAST ELECTRONIC CO LTD	211001	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				411001	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				411002	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			JIANGXI ZHONG XIN HUA ELECTRONICS INDUSTRY CO LTD	ZXH-1	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				ZXH-2	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			SHENZHEN JIA LI CHUANG TECHNOLOGY DEVELOPMENT CO LTD.	JLC-8	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				JLC-1	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				JLC-2	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			SHUANG MING INDUSTRY CO LTD	T005V0	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
				T015V0	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			GUANGDE BOYA XINXING ELECTRONICTECHNOLOGY CO LTD	BY-1	Min. 1.6 mm thickness, min. V-0, 130°C	cURus
			Various	Various	Min. 1.6 mm thickness, min. V-0, 130°C, Fully comply with UL 796	cURus
4	9	Wire 2	ZHUANG SHAN CHUAN ELECTRICAL PRODUCTS (KUNSHAN) CO LTD	1015	Earthing wire for Class I models or class II models with functional earth Min. 20 AWG, Min. 300V, Min. 80°C	cURus
				1007		cURus
				1185		cURus
			Various	Various		cURus
			SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR	600V, 125°C, VW-1	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
4	10	Heat-shrinkable tubing	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR-H	600V, 125°C, VW-1	cURus
			SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR-HPF	600V, 125°C, VW-1	cURus
			QIFURUI ELECTRONICS CO	QFR-h	600V, 125°C, VW-1	cURus
			DONGGUAN SALIPT CO LTD	SALIPT S-901-300	Min. 300V, 125°C, VW-1	cURus
			DONGGUAN SALIPT CO LTD	SALIPT S-901-600	Min. 300V, 125°C, VW-1	cURus
			GUANGZHOU KAIHENG ENTERPRISE GROUP	K-2 (+)	Min. 300V, 125°C, VW-1	cURus
			GUANGZHOU KAIHENG ENTERPRISE GROUP	K-2 (CB)	Min. 300V, 125°C, VW-1	cURus
			CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-HFT	Min. 300V, 125°C, VW-1	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
7	11	Transformer	GlobTek INC	GT-3005001	Output voltage range:5-7.5Vdc. Class B with insulation system below.	NR
				GT-3009001	Output voltage range:7.6-10.5Vdc. Class B with insulation system below.	NR
				GT-3012001	Output voltage range:10.6-14.5Vdc. Class B with insulation system below.	NR
				GT-3015001	Output voltage range:14.6-19.5Vdc. Class B with insulation system below.	NR
				GT-3024001	Output voltage range:19.6-24Vdc. Class B with insulation system below.	NR
				GT-3048001	Output voltage range:24.1-48Vdc. Class B with insulation system below.	NR
			ENG ELECTRIC CO LTD	GT-3005001	Output voltage range:5-7.5Vdc. Class B with insulation system below.	NR
				GT-3009001	Output voltage range:7.6-10.5Vdc. Class B with insulation system below.	NR
				GT-3012001	Output voltage range:10.6-14.5Vdc. Class B with insulation system below.	NR
				GT-3015001	Output voltage range:14.6-19.5Vdc. Class B with insulation system below.	NR
				GT-3024001	Output voltage range:19.6-24Vdc. Class B with insulation system below.	NR
				GT-3048001	Output voltage range:24.1-48Vdc. Class B with insulation system below.	NR
			SHAN DONG BOAM ELECTRIC CO LTD	GT-3005001	Output voltage range:5-7.5Vdc. Class B with insulation system below.	NR
				GT-3009001	Output voltage range:7.6-10.5Vdc. Class B with insulation system below.	NR
				GT-3012001	Output voltage range:10.6-14.5Vdc. Class B with insulation system below.	NR
				GT-3015001	Output voltage range:14.6-19.5Vdc. Class B with insulation system below.	NR
				GT-3024001	Output voltage range:19.6-24Vdc. Class B with insulation system below.	NR
				GT-3048001	Output voltage range:24.1-48Vdc. Class B with insulation system below.	NR

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
			WUXI HAOPUWEI ELECTRONICS CO LTD	GT-3005001	Output voltage range:5-7.5Vdc. Class B with insulation system below.	NR
				GT-3009001	Output voltage range:7.6-10.5Vdc. Class B with insulation system below.	NR
				GT-3012001	Output voltage range:10.6-14.5Vdc. Class B with insulation system below.	NR
				GT-3015001	Output voltage range:14.6-19.5Vdc. Class B with insulation system below.	NR
				GT-3024001	Output voltage range:19.6-24Vdc. Class B with insulation system below.	NR
				GT-3048001	Output voltage range:24.1-48Vdc. Class B with insulation system below.	NR
7	12	Insulation system (Not shown)	GLOBTEK INC	GTX-130-TM	Class B	cURus
			ENG ELECTRIC CO LTD	ENG130-1	Class B	cURus
			SHAN DONG BOAM ELECTRIC CO LTD	BOAM-01	Class B	cURus
				B1	Class B	cURus
			WUXI HAOPUWEI ELECTRONICS CO LTD	ZT-130	Class B	cURus
16	13	Bobbin	CHANG CHUN PLASTICS CO LTD	T375J	V-0, 150°C, thickness 0,45 mm min.	cURus
			CHANG CHUN PLASTICS CO LTD	T375HF	V-0, 150°C, thickness 0,74 mm min.	cURus
			CHANG CHUN PLASTICS CO LTD	4130	V-0, 140°C, thickness 0,45mm min.	cURus
			SUMITOMO BAKELITE CO LTD	PM-9820	V-0, 150°C, thickness 0,45 mm min.	cURus
			HITACHI CHEMICAL CO LTD	CP-J-8800	V-0, 150°C, thickness 0,45 mm min.	cURus
			PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD	UEWN/U	MW28-C, 130°C	cURus
				UEWS/U	MW75-C, 130°C	cURus
			JUNG SHING WIRE CO LTD	UEW-4	MW75-C, 130°C	cURus
				UEY-2	MW28-C, 130°C	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
15	14	Magnet wire	JIANGSU HONGLIU MAGNET WIRE TECHNOLOGY CO LTD	2UEW/130	MW75-C, 130°C	cURus
			CHANGZHOU DAYANG WIRE & CABLE CO LTD	2UEW/130	MW75-C, 130°C	cURus
			WUXI JUFENG COMPOUND LINE CO LTD	2UEWB	MW75#, 130°C	cURus
			JIANGSU DARTONG M & E CO LTD	UEW	MW75-C, 130°C	cURus
			SHANDONG SAINT ELECTRIC CO LTD	UEW/130	MW75#, 130°C	cURus
			ZHEJIANG LANGLI ELECTRIC EQUIPMENTS CO LTD	UEW	MW79#, 130°C	cURus
13	15	Triple-insulated wire	GREAT LEOFLON INDUSTRIAL CO LTD	TRW(B)	Reinforced Insulation, rated 130°C (Class B), 1.41 kVolts peak for Information Technology;	cURus
			COSMOLINK CO LTD	TIW-M	Reinforced Insulation, rated 130°C (Class B), 1.41 kVolts peak for Information Technology;	cURus
			FURUKAWA ELECTRIC CO LTD	TEX-E	Reinforced Insulation, rated 130°C (Class B), 1.41 kVolts peak for Information Technology;	cURus
			TOTOKU ELECTRIC CO LTD	TIW-2X$+	Reinforced Insulation, rated 130°C (Class B), 1.40 kVolts peak for Information Technology;	cURus
			E&B TECHNOLOGY CO LTD	E&B-XXXB	Reinforced Insulation, rated 130°C (Class B), 1.40 kVolts peak for Information Technology;	cURus
			E&B TECHNOLOGY CO LTD	E&B-XXXB-1	Reinforced Insulation, rated 130°C (Class B), 1.40 kVolts peak for Information Technology;	cURus
			HOI LUEN ELECTRICAL MFR CO LTD	THL-F-xx	Reinforced Insulation, rated 130°C (Class B), 1.41 kVolts peak for Information Technology;	cURus
				THL-F-SB-xx	Reinforced Insulation, rated 130°C (Class B), 1.40 kVolts peak for Information Technology;	cURus
			3M COMPANY ELECTRICAL MARKETS DIV (EMD)	1350F-1	130°C	cURus
				1350T-1	130°C	cURus
				44	130°C	cURus
			BONDTEC PACIFIC CO LTD	370S	130°C	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
9	16	Insulating tape	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	PZ	130°C	cURus
				CT	130°C	cURus
				WF	130°C	cURus
			JINGJIANG JINGYI ADHESIVE PRODUCT CO LTD	JY25-A	130°C	cURus
			CHANG SHU LIANG YI TAPE INDUSTRY CO LTD	LY-XX	130°C	cURus
9	17	PTFE tubing	GREAT HOLDING INDUSTRIAL CO LTD	TFT	300V, 200°C	cURus
			GREAT HOLDING INDUSTRIAL CO LTD	TFS	600V, 200°C	cURus
			SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	WF	600V, 200°C	cURus
			CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-TT-T	300V, 200°C	cURus
			CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD	CB-TT-S	600V, 200°C	cURus
17	18	AC power plug 1 (optional)	Self-Man Industrial Co., Ltd.	SM-045	For GT*91120-***-P2* series model 125V, 10A	cURus
			YUNG LI CO LTD	YC-12		
			JHI WEIELECTRIC WIRE& CABLE COLTD	JW-03		
17	19	AC power flexible cable 1 (optional)	ISHENGELECTRONICS(KUNSHAN) COLTD	SPT-1	For GT*91120-***-P2* series model Min.18AWG, min.90°C,Min.300V, VW-1	cURus
				SPT-2		
			YUNG LI CO LTD	SPT-1		
				SPT-2		
			JHI WEIELECTRIC WIRE& CABLE COLTD	SPT-1		
				SPT-2		

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity[3]
			SUZHOUTONGYUANELE CTRIC WIRE& CABLE COLTD	SPT-1		
				SPT-2		
			Various	Various		
18	20	AC power plug 2 (optional)	Self-Man Industrial Co., Ltd.	SM-001	For GT*91120-***-P3* series model 125V, 10A	cURus
18	21	AC power flexible cable 2 (optional)	ISHENGELECTRONICS(KUNSHAN) COLTD	SVT	For GT*91120-***-P3* series model Min.18AWG,min. 105°CMin.300V, VW-1	cURus
			YUNG LI CO LTD	SVT		
			SUZHOUTONGYUANELE CTRIC WIRE& CABLE COLTD	SVT		
			JIANGSU SUCCESS ELECTRONICS CO LTD	SJT		
			Various	Various		

NOTES:
1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.
2) “Various“ means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.
3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.

5.0 Critical Unlisted CEC Components
No Unlisted CEC components are used in this report.

6.0 Critical Features

Recognized Component - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

Listed Component - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

Unlisted Component - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

Critical Features/Components - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.

Construction Details - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

1. Spacing - In primary circuits, 1.5 mm minimum spacing are maintained through air and 2.4 mm minimum spacing are maintained over surfaces of insulating material between current-carrying parts of opposite polarity and 3.0 mm minimum spacing are maintained through air and 4.8 mm minimum spacing are maintained over surfaces between such current-carrying parts and dead-metal parts or low voltage isolated circuits.
2. Mechanical Assembly - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
3. Corrosion Protection - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
4. Accessibility of Live Parts - Building in Power Supply, shall be considered in end use.
5. Grounding - For adapter models with earthing connection, all exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord and the equipment grounding terminal. For adapter models without earthing connection, the products are not provided with grouding means as they are reinforced insulated.
6. Polarized Connection - This product is provided with a non-polarized power supply connection.
7. Internal Wiring - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At pointswhere internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets. All wiring is minimum 24AWG, with a minimum rating of 300V, 80°C.
8. Schematics - Refer to Illustration No. 2 for schematics requiring verification during Field Representative Inspection Audits.
9. Transformer - Supplier records must be provided that indicate the received shipment of transformers (section 4.0, item 11) was constructed as indicated in Illustrations No(s). 3-10. These records must be available at the factory for inspection on every received shipment.
10. Markings - The product is marked on enclosure system as described as follows:
    a. Brand name: refer to sec. 2.0
    b. Model: refer to sec. 2.0
    c. electrical ratings: refer to sec. 2.0
11. Cautionary Markings - none required.
12. Installation, Operating and Safety Instructions - Building in Power Supply, the instruction is not required.


7.0 Illustrations

Illustration 1 - Model list

Model	Output Voltage	Max. output current	Max. output power
GT*91120-*07.5*- F/FW/P2/P3*	5-7.5V	4A	30W
GT*91120-*10.5*- F/FW/P2/P3*	7.6-10.5V	3.94A	30W
GT*91120-*14.5*- F/FW/P2/P3*	10.6-14.5V	2.83A	30W
GT*91120-*19.5*- F/FW/P2/P3*	14.6-19.5V	2A	30W
GT*91120-*24*- F/FW/P2/P3*	19.6-24V	1.6A	30W
GT*91120-*36*- F/FW/P2/P3*	24.1-36V	1.25A	30W
GT*91120-*48*- F/FW/P2/P3*	36.1-48V	0.83A	30W

7.0 Illustrations

Illustration 2 - Schematics

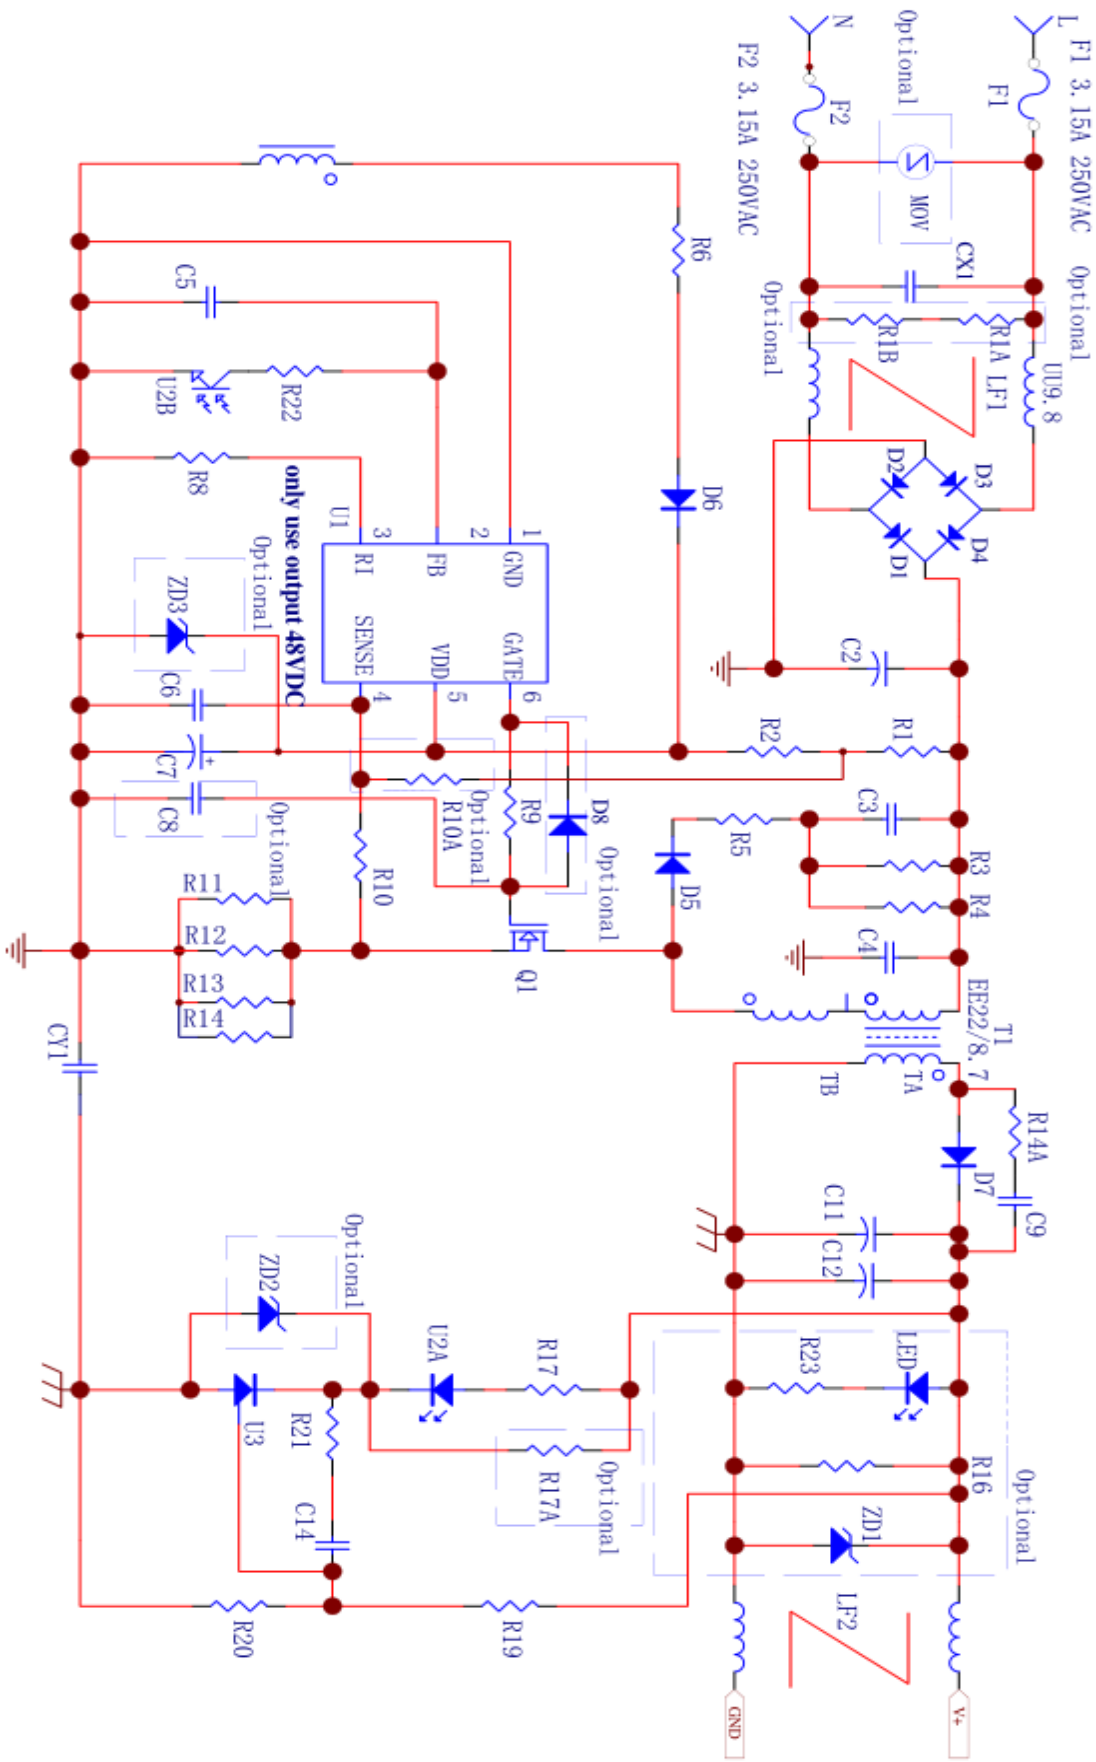


7.0 Illustrations

Illustration 3 - Transformer list

Product Model	Voltage Range	Transformer model
GTM91120 series	5-7.5V	GT-3005001
	7.6V-10.5V	GT-3009001
	10.6V-14.5V	GT-3012001
	14.6V-19.5V	GT-3015001
	19.6V-24V	GT-3024001
	24.1V-48V	GT-3048001

7.0 Illustrations

Illustration 4 - Transformer specification

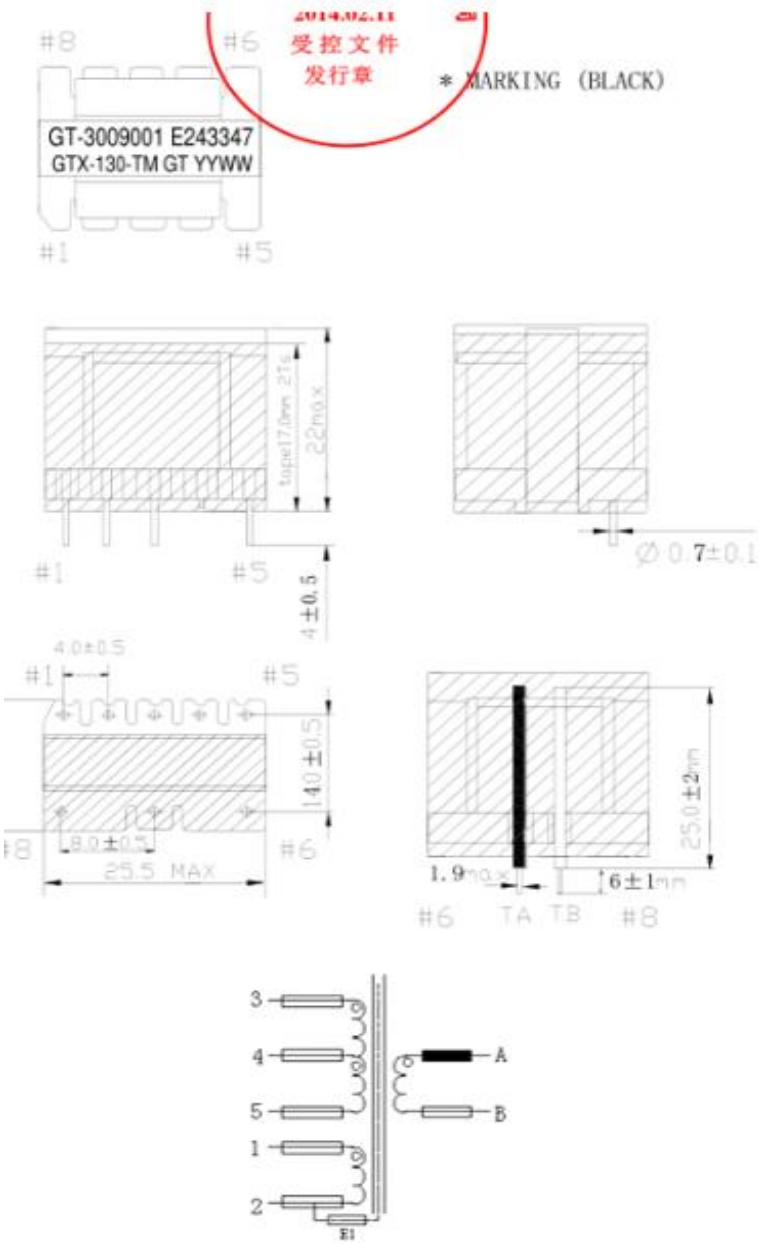

7.0 Illustrations

Illustration 5 - Transformer specification for transformer model GT-3005001

顺序 Order	PIN 脚 PIN No.	铜线 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	3--4	2UEW ϕ0.35 Class B	40TS		密绕	
1turns W=9.0mm,T=0.025mm insulation tape						
W2	1--2	2UEW ϕ0.19*3 Class B	13TS		密绕	
2turns W=9.0mm,T=0.025mm insulation tape						
W3	A--B	TRWB ϕ0.45*2	5TS		Center	
2turns W=9.0mm,T=0.025mm insulation tape						
W4	--2	0.05*5 COPPRT+TAPE	0.9TS			
2turns W=9.0mm,T=0.025mm insulation tape						
W5	4--5	2UEW ϕ0.35 Class B	20TS		密绕	

7.0 Illustrations

Illustration 6 - Transformer specification for transformer model GT-3009001

NO	PIN NO. (S-F) S:START, F:FINISH	WIRE	TURNS	WINDING METHOD
W1	(3)—(4)	2UEW Φ0.35	40	SOLENOID WINDING
	FIRST LAYER INSULATION	t= 0.025mm, w=9mm, 1 Ts		
	INSULATION: POLYESTER TAPE	t= 0.025mm, w=9mm, 1 Ts		
W2	(1)—(2)	2UEW Φ0.19*3	12	SOLENOID WINDING
	INSULATION: POLYESTER TAPE	t= 0.025mm, w=9mm, 2 Ts		
W3	(TA)—(TB)	TEX-E Φ0.45*3	7	SOLENOID WINDING
	INSULATION: POLYESTER TAPE	t= 0.025mm, w=9mm, 2 Ts		
W4	—(2)	0.05/7.0 mm,COPER+TAPE	0.9	CENTER
	INSULATION: POLYESTER TAPE	t= 0.025mm, w=9mm, 2Ts		
W5	(4)—(5)	2UEW Φ0.35	20	SOLENOID WINDING

GLOBTEK SUZHOU 2014.02.11 受控文件 发行章

7.0 Illustrations

Illustration 7 - Transformer specification for transformer model GT-3012001

顺序 Order	PIN 脚 PIN No.	铜线 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	3--4	2UEW ϕ0.35 Class B	40TS		密绕	
1turns W=9.0mm,T=0.025mm insulation tape						
W2	1--2	2UEW ϕ0.19*3 Class B	12TS		密绕	
2turns W=9.0mm,T=0.025mm insulation tape						
W3	A--B	TRWB ϕ0.60 *2	9TS		Center	
2turns W=9.0mm,T=0.025mm insulation tape						
W4	--2	0.05*7 COPPRT+TAPE	0.9TS			
2turns W=9.0mm,T=0.025mm insulation tape						
W5	4--5	2UEW ϕ0.35 Class B	20TS		密绕	

7.0 Illustrations

Illustration 8 - Transformer specification for transformer model GT-3015001

NO	PIN NO. (S-F) S:START, F:FINISH	WIRE	TURNS	WINDING METHOD
W1	(3)—(4)	2UEW Φ0.35	40	SOLENOID WINDING
INSULATION: POLYESTER TAPE t= 0.025mm, w=9.0.mm,1Ts				
W2	(1)--(2)	2UEW Φ0.19*3	12	SOLENOID WINDING
INSULATION: POLYESTER TAPE t= 0.025mm, w=9.0mm,2Ts				
W3	(A)—(B)	TEX-E 0.40*2	12	SOLENOID WINDING
INSULATION: POLYESTER TAPE t= 0.025mm, w=9.0.mm, 2 Ts				
W4	—(2)	0.05/7.0 mm,COPER+TAPE	0.9	CENTER
INSULATION: POLYESTER TAPE t= 0.025mm, w=9.0.mm, 2Ts				
W5	(4)--(5)	2UEW Φ0.35	20	SOLENOID WINDING

7.0 Illustrations

Illustration 9 - Transformer specification for transformer model GT-3024001

顺序 Order	PIN 脚 PIN No.	铜线 Copper wire	圈数 Turns	线槽 Slot	方向 Direction	备注 Remarks
W1	3--4	2UEW ϕ0.35 Class B	40TS		密绕	
1turns W=9.0mm,T=0.025mm insulation tape						
W2	1--2	2UEW ϕ0.19*3 Class B	13TS		密绕	
2turns W=9.0mm,T=0.025mm insulation tape						
W3	A--B	TRWB ϕ0.60	17TS		Center	
2turns W=9.0mm,T=0.025mm insulation tape						
W4	--2	0.05*7 COPPRT+TAPE	0.9TS			
2turns W=9.0mm,T=0.025mm insulation tape						
W5	4--5	2UEW ϕ0.35 Class B	20TS		密绕	

7.0 Illustrations

Illustration 10 - Transformer specification for transformer model GT-3048001

NO	PIN NO. (S-F) S:START, F:FINISH	WIRE	TURNS	WINDING METHOD
W1	(3)—(4)	2UEW Φ0.35	40	SOLENOID WINDING
INSULATION: POLYESTER TAPE t= 0.025mm, w=9.0.mm,1Ts				
W2	(1)--(2)	2UEW Φ0.19*3	13	SOLENOID WINDING
INSULATION: BROWN TAPE t= 0.025mm, w=9.0mm,2Ts				
W3	(A)—(B)	TEX-E 0.35	32	SOLENOID WINDING
INSULATION: POLYESTER TAPE t= 0.025mm, w=9.0.mm, 2 Ts				
W4	—(2)	0.05/7.0 mm,COPER+TAPE	0.9	CENTER
INSULATION: POLYESTER TAPE t= 0.025mm, w=9.0.mm, 2Ts				
W5	(4)--(5)	2UEW Φ0.35	20	SOLENOID WINDING

格特拉克（苏州）电源科技有限公司 GLOBTEK SUZHOU
2014.02.07
受控文件
发行章

8.0 Test Summary					
Evaluation Period	7-Jul-2025 to 19-Aug-2025			Project No.	2507B2465SHA
Sample Rec. Date	5-Jul-2025	Condition	Prototype	Sample ID.	A250705-11-001
Test Location	Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China				
Test Procedure	Testing Lab				
Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria.					
The following tests were performed:					

Test Description	UL 62368-1:2019 Ed.3+R:22Oct2021 & CSA C22.2#62368-1:2019 Ed.3+U1 Clause
Classification of electrical energy sources	5.2
Accessibility to electrical energy sources and safeguards (Accessibility test)	5.3.2, Annex V
Heating test and abnormal &fault condition test	5.4.1.4, 6.3, 6.4, 9.0, B.2.6, B.3, B.4, Annex G.5.3, G.5.4
Determination of working voltage	5.4.1.8
Ball pressure test	5.4.1.10.3
Annex X, Measurement of Clearance and Creepage Distances	5.4.2, 5.4.3
Humidity test	5.4.8
Electric strength test	5.4.9
Safeguards against capacitance discharge test	5.5.2.2
Resistance of the protective bonding system (Ground continuity test)	5.6.6
Measurement of touch current	5.7.2.1
Unearthed accessible part test	5.7.4
Earthed accessible conductive part test	5.7.5
Electrical Power Source (PS) measurements for classification	6.2.2
Determination of Potential Ignition Sources (Arcing PIS)	6.2.3.1
Determination of Potential Ignition Sources (Resistive PIS)	6.2.3.2
Openings of the fire enclousre	6.4.8.3.3, 6.4.8.3.4, 6.4.8.3.5
Input test	Annex B.2.5
Simulated abnormal operating and single fault Conditions	Annex B.3, B4
Durability, legibility and permanence of markings	Annex F.3.10
Limited power source test (LPS)	Annex Q.1
Steady force test, 100N or 250N	Annex T.4, T.5
Drop test	Annex T.7
Stress relief test	Annex T.8

8.1 Signatures			
A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0.			
Completed by:	Adage Zhang	Reviewed by:	Sam Li
Title:	Certification engineer	Title:	Reviewer
Signature:		Signature:	

9.0 Correlation Page For Multiple Listings	
The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program.	
BASIC LISTEE	GlobTek, Inc.
Address	186 Veterans Dr. Northvale, NJ 07647
Country	USA
Product	ICT/ITE Power Supply

MULTIPLE LISTEE 1	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	

MULTIPLE LISTEE 1 MODELS	BASIC LISTEE MODELS

MULTIPLE LISTEE 2	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	

MULTIPLE LISTEE 2 MODELS	BASIC LISTEE MODELS

MULTIPLE LISTEE 3	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	

MULTIPLE LISTEE 3 MODELS	BASIC LISTEE MODELS

10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments

LISTING MARK

The ETL Listing mark applied to the products shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
3) a control number issued by Intertek
4) a product descriptor that identifies the standards used for certification. Example:

For US standards, the words, “Conforms to” shall appear with the standard number along with the word, “Standard” or “Std.” Example: “Conforms to ANSI/UL Std. XX.”

For Canadian standards, the words “Certified to CAN/CSA Standard CXX No. XX.” shall be used, or abbreviated, “Cert. to CAN/CSA Std. CXX No. XX.”

Can be used together when both standards are used.

If all standards on the ATM have the same standard title, the shared title or its abbreviation may be used in place of the examples above. Example: "Medical Electrical Equipment" or "MEE"; "Information Technology Equipment" or "ITE"; "Audio/Video Information And Communication Technology Equipment" or "A/V ICTE".

Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use. The facsimile need not have a control number. A control number will be issued **after signed Certification Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory

MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

The Applicant will be notified, in writing, via the applicable contact methods, as defined in Section 1.0, when these components must be selected and sent to Component Evaluation Center (CEC) for re-evaluation.

Due to particular testing requirements, some components may be requested to be shipped to specific labs. Thus, specific shipment destination(s) for each sample will be provided in the written notification.

Managing CEC Location:
Intertek Testing Services (Shanghai FTZ) Co., Ltd
ETL Component Evaluation Center
Building No. 86, 1198 Qinzhou Road (North)
Shanghai 200233, China
Attn: Ms. Emiliana Zhou
Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

11.0 Manufacturing and Production Tests

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

Required Tests

Dielectric Voltage Withstand Test

11.1 Dielectric Voltage Withstand Test

Method

One hundred percent of production of the products covered by this Report shall be subjected to a routine production line dielectric withstand test.
The test shall be conducted on products, which are fully assembled. Prior to applying the test potential, all switches, contactors, relays, etc., should be closed so that all primary circuits are energized by the test potential. If all primary circuits cannot be tested at one time, then separate applications of the test potential shall be made.

The test voltage specified below shall be applied between primary circuits and accessible dead-metal parts. The test voltage may be gradually increased to the specified value but must be maintained at the specified value for one second or one minute as required.

Test Equipment

The test equipment shall incorporate a transformer with an essentially sinusoidal output, a means to indicate the applied test potential, and an audible and/or visual indicator of dielectric breakdown.
The test equipment shall incorporate a voltmeter in the output circuit to indicate directly the applied test potential if the rated output of the test equipment is less than 500VA.
If the rated output of the test equipment is 500VA or more, the applied test potential may be indicated by either:
1 - a voltmeter in the primary circuit;
2 - a selector switch marked to indicate the test potential; or
3 - a marking in a readily visible location to indicate the test potential for test equipment having a single test potential output.
In cases 2 and 3, the test equipment shall include a lamp or other visual means to indicate that the test potential is present at the test equipment output. All test equipment shall be maintained in current calibration.

Products Requiring Dielectric Voltage Withstand Test:

Product - One sample from each shipment of Section 4.0 item 11:	**Test Voltage**	**Test Time**
Between primary circuit and secondary output	4000Vdc	1 min
Between secondary circuit and core	4000Vdc	1 min
Product	**Test Voltage**	**Test Time**
All products covered by this Report.		
Between input circuit and accessible enclosure surface	3600Vdc	1 s
Between input circuit and secondary circuit/output terminal	3600Vdc	1 s

12.0 Revision Summary				
The following changes are in compliance with the declaration of Section 8.1:				
Date/ Proj # Site ID	Project Handler/ Reviewer	Section	Item	Description of Change
				None