does not have legal validity and



CERTIFICATE FOR CANNOT BE USED IN ISOLATION CHINA COMPULSORY PRODUCT CERTIFICATION

CERTIFICATE NO.: 2014010907692948

NAME AND ADDRESS OF THE APPLICANT

GlobTek,Inc.

186 Veterans Dr Northvale, NJ 07647 / USA

NAME AND ADDRESS OF THE MANUFACTURER

GlobTek,Inc.

186 Veterans Dr Northvale, NJ 07647 / USA

NAME AND LOCATION OF THE FACTORY

GlobTek (Suzhou) Co., Ltd

Building 4, No. 76 JinLing East Road, Suzhou Industrial Park, Suzhou, JiangSu, 215021, China.

PRODUCT NAME, MODEL AND SPECIFICATION

power supply for business machine see appendix, Altitude up to 5000m, sale with duck head

STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS

GB 17625.1-2022 (Class A) ;GB 4943.1-2022;GB/T 9254.1-2021

This is to certify that the above mentioned product(s) complies with the requirements of implementation rules for compulsory certification(REFNO. CNCA-C09-01:2023).

Valid from: Feb.04,2024 Valid until: Oct.26,2027

Date of original issued: May.09,2014

The certificate information and validity could be checked by scanning the QR code below or logging in to the website of the issuing authority, or on the website of the CNCA (www.cnca.gov.cn).

Accredited by China National Accreditation Service for Conformity Assessment CNAS C001-P



SIGNATURE: 谢肇順



CHINA QUALITY CERTIFICATION CENTRE



This translated document does not have legal validity and cannot be used in isolation



CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

CERTIFICATE NO.: 2014010907692948

Appendix: Page 1 of 2

Model: GT*41134*****, GT*96060*****

(The 1st "*" part can be 'M' or '-' or 'H' for market identification and not related to safety.

The 2nd "*" part can be "-" or "CC","-" = Constant Voltage Model, CC = Constant Current Model.

The 3rd "*" denotes the rated output wattage designation, which can be "01" to "06", with interval of 1.

The 4th "*" denotes the standard rated output voltage designation, which can be "03", "03.3", "04", "06", "12", "15", "18", "24", "36" or "48".

The 5th "*" is optional deviation, subtracted from standard output voltage, which can be "-0.1" to "- 11.9" with interval of 0.01, or blank to indicate no voltage different.

The 4th "*" and 5th "*" together denote the output voltage, with a range of 3.3 - 48 volts.

The 6th "*" =Blank means directly plug in series,

The last * denote any six character = 0-9 or A-Z or ()[] or – or blank for marketing purposes.)

Input:100-240Vac,0.3A or 0.6A,50-60Hz,

Output: see below table:

Model	Output Voltage(Vdc)	Max.Output Current(A)	Max.Output Wattage(W)
GT*41134**03***	3.3V	1.8A	6W
GT*41134**04***	3.4-4V	1.76A	6W
GT*41134**06***	4.1-6V	1.46A	6W
GT*96060**06***	5-6V	1.2A	6W
GT*41134**12*** GT*96060**12***	6.1-12V	0.98A	6W
GT*41134**15*** GT*96060**15***	12.1-15V	0.50A	6W

This page is attached to the certificate and should be used at the same time as the certificate page.



CHINA QUALITY CERTIFICATION CENTRE

This translated document does not have legal validity and cannot be used in isolation




CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

CERTIFICATE NO.: 2014010907692948

Appendix: Page 2 of 2

GT*41134**18*** GT*96060**18***	15.1-18V	0.40A	6W
GT*41134**24*** GT*96060**24***	18.1-24V	0.33A	6W
GT*41134**36***	24.1-36V	0.25A	6W
GT*41134**48***	36.1-48V	0.16A	6W
GT*96060**06-1.0	5.0V	1.5A	7.5W

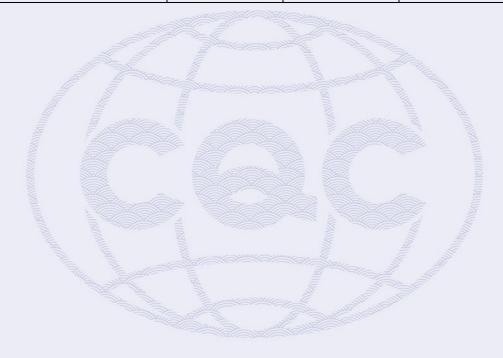

This page is attached to the certificate and should be used at the same time as the certificate page.



CHINA QUALITY CERTIFICATION CENTRE