


**TEST REPORT**  
**C381.1-17**
**Test Method for Calculating the Energy Efficiency of Single-Voltage  
External Ac-Dc and Ac-Ac Power Supplies**

|  |  |
|--|--|
| <b>Report Reference No.</b>  | 387971/En01  |
| Tested by<br>(printed name and signature)  | Lisa Lee<br>  |
| Approved by<br>(printed name and signature)  | Kenny Ho<br>  |
| Date of issue  | 2019-12-10   |
| Total number of pages  | 10   |
| <b>Testing Laboratory</b>  | Nemko Shanghai Ltd., Shenzhen Branch   |
| Address  | Unit C &D, Floor 2 & Floor 10, Financial Base Tower 2, Kefa Road 8#, Hi-Technology Park, Nanshan District, Shenzhen 518057, China  |
| Testing location   | As above   |
| <b>Applicant's name</b>  | GlobTek, Inc.  |
| Address  | 186 Veterans Dr. Northvale, NJ 07647 USA<br>USA  |
| <b>Test specification:</b>   |  |
| Standard   | International Efficiency Marking Protocol ver.3.0<br>C381.1-17: Energy performance of external ac-dc and ac-ac power supplies  |
| Test procedure   | Appendix Z to Subpart B, Part 430 of Title 10 to the United States Code of Federal Regulations, entitled Uniform Test Method for Measuring the Energy Consumption of External Power Supplies |
| <b>Test Report Form No.</b>  | C381.1-17_A  |
| Test Report Form(s) Originator   | Nemko Shenzhen   |
| Master TRF   | 2019-10  |
| This test report is based on the content of the internal test program. The test program considered selected clauses of the a.m. standard(s) and experience gained with product testing. It was prepared by Nemko Shenzhen. |  |
| Nemko Group takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.                                  |  |

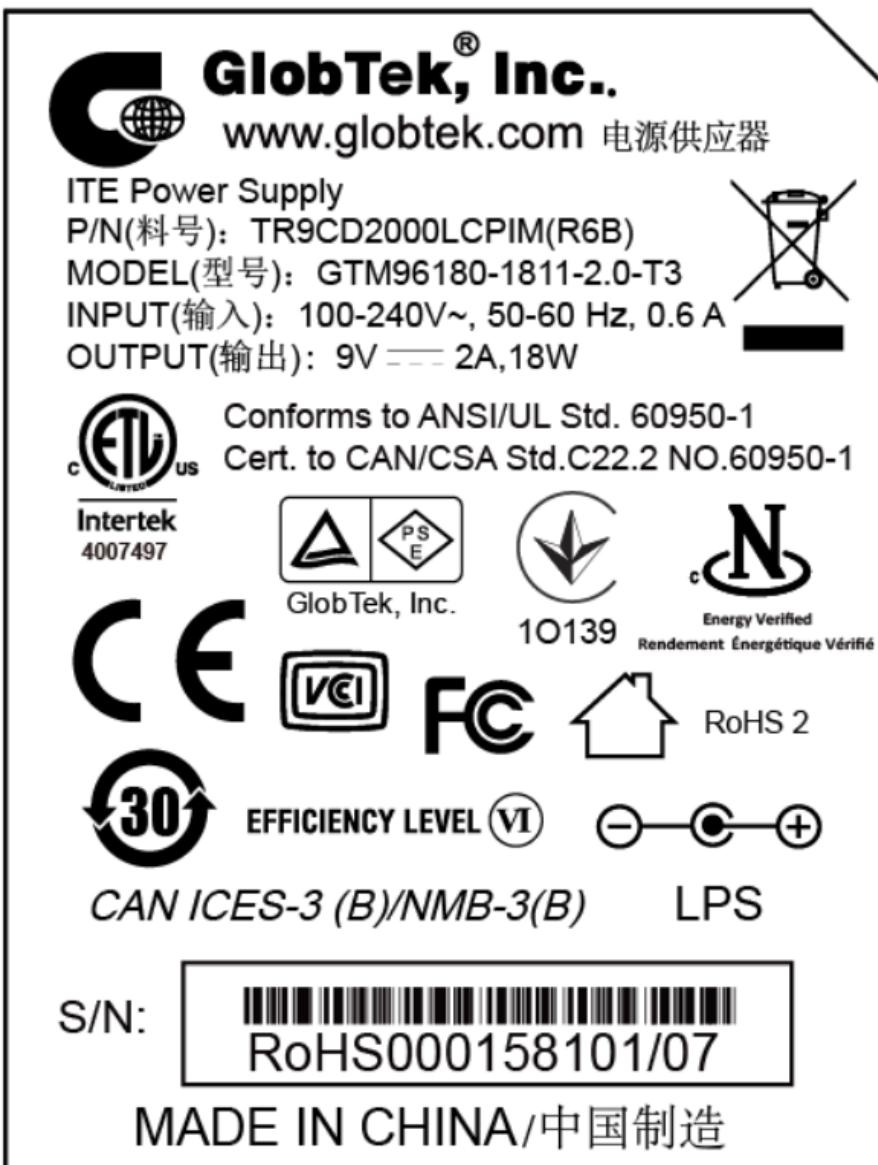

|                                   |   |
|-----------------------------------|---|
| Test item description .....       | ITE Power Supply  |
| Trademark .....                   | GlobTek   |
| Manufacturer .....                | Same as applicant   |
| Factory .....                     | See page 4  |
| Model and/or type reference ..... | GTM96180-1811-2.0-T3, GTM96180-1811-2.0-T3A,<br>GTM96180-1811-2.0-T2, GTM96180-1811-2.0-T2A |
| Rating(s) (V; Hz) .....           | AC input: 100-240 Vac 50-60 Hz 0.6A<br>DC output: 9Vdc, 2A ,18W<br>Cl. II, Cl. I            |

**Copy of marking plate****Summary of testing:**

This EUT comply with efficiency requirement of C381.1-17: Energy performance of external ac-dc and ac-ac power supplies.

**Possible test case verdicts:**

- test case does not apply to the test object .....: N/A (Not applicant)
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

**Testing:**

Date of receipt of test item.....: 2019-12-6

Date (s) of performance of tests .....: 2019-12-6

**General remarks:**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.  
"(See Annex #)" refers to additional information appended to the report.

Throughout this report a point is used as the decimal separator.

Determination of the test result includes consideration of measurement uncertainty from the test equipment and methods

**General product information:**

The rated output power (Po) of the EUT=18 W

|  | <b>Result</b> | <b>International Efficiency<br/>Marking Protocol ver.3.0</b> |
|--|---------------|--|
|  | Vin=115V 60Hz | Mark VI  |
| No load condition power consumption (W)  | 0.03          | 0.10   |
| Average active efficiency  | 85.34%        | 85.00%   |
| Supplementary Information: No-Load condition power consumption of<br>ROUND(MAX(UUT1,UUT2,UUT3),2)=0.03 W |               |  |
| Supplementary Information: average value efficiency of (Min(85.82%, 85.92% , 85.34% ))= 85.34%           |               |  |
| Remark: International Efficiency Marking Protocol ver.3.0  |               |  |

**Factory Information:**

1、Name: GlobTek, Inc.

Address: 186 Veterans Dr. Northvale, NJ 07647 USA

2、Name: GlobTek (Suzhou) Co., Ltd

Address: Building 4, No. 76, Jin Ling East Rd., Suzhou Industrial Park, Suzhou,JiangSu 215021,  
China

**C381.1-17**

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| Ref. No | Test equipment          | Manufacturer | Model       | Serial number | Calibration due date |
|---------|-------------------------|--------------|-------------|---------------|----------------------|
| NSZ2018 | Digital AC Power Source | All power    | APW-150N    | 888130        | 06 Jan 2020          |
| NSZ2013 | EUP Power Meter         | Xitron       | 2801        | 28010907016   | 06 Jan 2020          |
| NSZ2046 | DC Electric Load        | ARRAY        | 3711A       | A06BH02082    | 06 Jan 2020          |
| NSZ2050 | Thermo-hygrometer       | Corintech    | EL-WiFi-TH+ | 4703          | 12 Mar 2020          |

|  | <b>Test conditions</b>  | —                              |
|--|---|--------------------------------|
|  | Ambient temperature in °C ..... : See the test result table.              | —                              |
|  | Information describing the test set-up used at each load condition..... : | Low power measurement circuit. |

|  | <b>Test configuration</b>   | — |
|--|---|---|
|  | Nominal test supply voltage (V) ..... : 115Vac                            | — |
|  | Nominal total harmonic distortion of supply voltage waveform ..... : <2%  | — |
|  | Test frequency (Hz) ..... : 60Hz  | — |
|  | Any notes regarding the operation of the product : --                     | — |
|  | Did the EPS have a built-in ON/OFF switch on the input? ..... : No        | — |
|  | Was the output voltage selectable? ..... : No                             | — |
|  | Setting used when performing tests ..... : Low power measurement circuit. | — |
|  | Output cable length (to the nearest cm) ..... : 120cm±3cm                 | — |

**C381.1-17**

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

**TABLE: Test results****P**

Vin=115V 60Hz UUT 1

|                              | No load | Power Modes |      |       |       |         |
|------------------------------|---------|-------------|------|-------|-------|---------|
| Percent of nameplate current | 0%      | 25%         | 50%  | 75%   | 100%  | Average |
| DC output current (A r.m.s)  | 0       | 0.5         | 1    | 1.5   | 2     |         |
| DC output voltage (V r.m.s)  | 9.1     | 9.08        | 9.06 | 9.02  | 8.99  |         |
| DC output power (W r.m.s)    | 0.00    | 4.54        | 9.06 | 13.53 | 17.98 |         |

|  |        |        |        |        |        |        |
|--|--------|--------|--------|--------|--------|--------|
| Maximum AC input voltage (V r.m.s)         | 115.02 | 114.99 | 114.96 | 114.94 | 114.92 |        |
| Minimum AC input voltage (V r.m.s)         | 114.97 | 114.94 | 114.91 | 114.89 | 114.87 |        |
| Maximum ambient temperature (°C)           | 24.15  | 24.08  | 24.08  | 24.09  | 24.08  |        |
| Minimum ambient temperature (°C)           | 24.15  | 24.08  | 24.08  | 24.09  | 24.08  |        |
| AC input power (W)                         | 0.03   | 5.24   | 10.43  | 15.78  | 21.4   |        |
| Current total harmonic distortion (THD)(%) | 0.0922 | 1.7005 | 1.5312 | 1.3944 | 1.2596 |        |
| True power factor                          | 0.03   | 0.48   | 0.05   | 0.55   | 0.59   |        |
| Crest Factor                               | 1.418  | 1.416  | 1.42   | 1.421  | 1.42   |        |
| Power consumed (W)                         | 0.03   | 0.70   | 1.37   | 2.25   | 3.42   |        |
| Active mode efficiency                     |        | 86.64% | 86.86% | 85.74% | 84.02% | 85.82% |
| Average efficiency of active modes         |        |        |        |        |        | 85.82% |
| Calculated measurement uncertainty         | 0.0000 | 0.0105 | 0.0135 | 0.0208 | 0.0291 |        |
| Uncertainty requirement                    | 0.0796 | 0.2018 | 0.0469 | 0.3156 | 0.4280 |        |
| Supplementary information:                 |        |        |        |        |        |        |
|  |        |        |        |        |        |        |

**C381.1-17**

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

**TABLE: Test results****P**

Vin=115V 60Hz UUT 2

|                              | No load | Power Modes |      |        |      |         |
|------------------------------|---------|-------------|------|--------|------|---------|
| Percent of nameplate current | 0%      | 25%         | 50%  | 75%    | 100% | Average |
| DC output current (A r.m.s)  | 0       | 0.5         | 1    | 1.5    | 2    |         |
| DC output voltage (V r.m.s)  | 9.12    | 9.09        | 9.06 | 9.03   | 9    |         |
| DC output power (W r.m.s)    | 0       | 4.545       | 9.06 | 13.545 | 18   |         |

|  |        |        |        |        |        |        |
|--|--------|--------|--------|--------|--------|--------|
| Maximum AC input voltage (V r.m.s)         | 115.01 | 114.97 | 114.94 | 114.92 | 114.9  |        |
| Minimum AC input voltage (V r.m.s)         | 114.96 | 114.92 | 114.89 | 114.87 | 114.85 |        |
| Maximum ambient temperature (°C)           | 24.07  | 24.07  | 24.07  | 24.07  | 24.07  |        |
| Minimum ambient temperature (°C)           | 24.07  | 24.07  | 24.07  | 24.07  | 24.07  |        |
| AC input power (W)                         | 0.03   | 5.22   | 10.45  | 15.8   | 21.38  |        |
| Current total harmonic distortion (THD)(%) | 7.33   | 169.20 | 152.64 | 138.92 | 128.23 |        |
| True power factor                          | 0.03   | 0.49   | 0.53   | 0.56   | 0.58   |        |
| Crest Factor                               | 1.415  | 1.415  | 1.418  | 1.42   | 1.42   |        |
| Power consumed (W)                         | 0.03   | 0.68   | 1.39   | 2.26   | 3.38   |        |
| Active mode efficiency                     |        | 87.07% | 86.70% | 85.73% | 84.19% |        |
| Average efficiency of active modes         |        |        |        |        |        | 85.92% |
| Calculated measurement uncertainty         | 0.0000 | 0.0105 | 0.0135 | 0.0209 | 0.0291 |        |
| Uncertainty requirement                    | 0.0795 | 0.2018 | 0.2090 | 0.3160 | 0.4276 |        |
| Supplementary information:                 |        |        |        |        |        |        |
|  |        |        |        |        |        |        |

**C381.1-17**

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

**TABLE: Test results****P**

Vin=115V 60Hz UUT 3

|                              | No load | Power Modes |     |       |       |         |
|------------------------------|---------|-------------|-----|-------|-------|---------|
| Percent of nameplate current | 0%      | 25%         | 50% | 75%   | 100%  | Average |
| DC output current (A r.m.s)  | 0       | 0.5         | 1   | 1.5   | 2     |         |
| DC output voltage (V r.m.s)  | 9.08    | 9.05        | 9   | 8.98  | 8.94  |         |
| DC output power (W r.m.s)    | 0       | 4.525       | 9   | 13.47 | 17.88 |         |

|  |        |        |        |        |        |        |
|--|--------|--------|--------|--------|--------|--------|
| Maximum AC input voltage (V r.m.s)         | 115.02 | 114.98 | 114.95 | 114.93 | 114.91 |        |
| Minimum AC input voltage (V r.m.s)         | 114.97 | 114.93 | 114.89 | 114.87 | 114.85 |        |
| Maximum ambient temperature (°C)           | 24.07  | 24.07  | 24.07  | 24.07  | 24.07  |        |
| Minimum ambient temperature (°C)           | 24.07  | 24.07  | 24.07  | 24.07  | 24.07  |        |
| AC input power (W)                         | 0.03   | 5.25   | 10.45  | 15.85  | 21.27  |        |
| Current total harmonic distortion (THD)(%) | 9.56   | 170.56 | 153.79 | 139.84 | 129.84 |        |
| True power factor                          | 0.03   | 0.48   | 0.52   | 0.56   | 0.58   |        |
| Crest Factor                               | 1.418  | 1.416  | 1.42   | 1.421  | 1.421  |        |
| Power consumed (W)                         | 0.03   | 0.73   | 1.45   | 2.38   | 3.39   |        |
| Active mode efficiency                     |        | 86.19% | 86.12% | 84.98% | 84.06% |        |
| Average efficiency of active modes         |        |        |        |        |        | 85.34% |
| Calculated measurement uncertainty         | 0.0000 | 0.0105 | 0.0141 | 0.0218 | 0.0300 |        |
| Uncertainty requirement                    | 0.0883 | 0.2018 | 0.2090 | 0.3170 | 0.4254 |        |
| Supplementary information:                 |        |        |        |        |        |        |
|  |        |        |        |        |        |        |

**C381.1-17**

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

|  | <b>Conclusion</b>  |  |
|--|--|--|
|  | No-Load condition power consumption (W).....:                | 0.03                                   |
|  | No-Load limit applied (W) .....                              | 0.10                                   |
|  | Regulatory conference .....                                  | No load power consumption of C381.1-17 |
|  | No-Load verdict (PASS/FAIL) .....                            | PASS                                   |
|  |  |  |
|  | Calculated average efficiency of active modes (%):           | 85.34                                  |
|  | Average efficiency of active modes limit applied (%) .....   | 85.00                                  |
|  | Regulatory reference.....                                    | No load power consumption of C381.1-17 |
|  | Average efficiency of active modes verdict (PASS/FAIL) ..... | PASS                                   |

## Annex 1 - Photo

