中国认可
国际互认
检测
TESTING
CNAS L4062

TEST REPORT

Reference No.	:	WTX25X11306821E001
Applicant	:	GlobTek, Inc.
Address	:	186 Veterans Dr. Northvale, NJ 07647 USA
Manufacturer	:	GlobTek, Inc.
Address	:	186 Veterans Dr. Northvale, NJ 07647 USA
Product Name	:	ICT/ITE Power Supply
Model No.	:	GTM96183-*PD*-USB1C*, GTM96181-*PD***
Standards	:	**EN 55032:2015+A11:2020** **EN 55032:2015+A1:2020** **EN IEC 61000-3-2:2019+A1:2021+A2:2024** **EN 61000-3-3:2013+A1:2019+A2:2021** **EN 55035:2017+A11:2020**
Date of Receipt sample	:	2025-12-05
Date of Test	:	2025-12-05 to 2025-12-10
Date of Issue	:	2025-12-12
Test Report Form No.	:	WTX_EN 55032_2015_B
Test Result	:	**Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Toby Zhang / Project Engineer

Approved by:

Evan Cai / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION 4
   1.1 Product Description for Equipment Under Test (EUT) 4
   1.2 Test Standards 6
   1.3 Test Location 6
   1.4 EUT Setup and Operation Mode 7
   1.5 Measurement Uncertainty 8
   1.6 Test Equipment List and Details 9
2. SUMMARY OF TEST RESULTS 11
3. EVALUATION RESULTS (EVALUATION) 12
   3.1 Harmonic current emission 12
4. EMISSION TEST RESULTS (EMI) 13
   4.1 Conducted emissions from AC mains power ports (150kHz-30MHz) 13
   4.2 Radiated emissions (30MHz-1GHz) 62
   4.3 Voltage fluctuations and flicker 111
5. IMMUNITY TEST RESULTS (EMS) 118
   5.1 Electrostatic discharges 119
   5.2 RF electromagnetic field disturbances 121
   5.3 Electrical fast transients / burst for AC mains power ports 123
   5.4 Surges for AC mains power ports 125
   5.5 Continuous induced RF disturbances for AC mains power ports (150kHz-80MHz) 127
   5.6 Power frequency magnetic field 128
   5.7 Voltage dips and interruptions 129
6. EXHIBIT 1 - PRODUCT LABELING 130
   6.1 Proposed Label Format 130
   6.2 Proposed Label Location of EUT 130
7. EXHIBIT 2 - EUT PHOTOGRAPHS 134
8. EXHIBIT 3 - TEST SETUP PHOTOGRAPHS 161

Report version

Version No.	Date of issue	Description
Rev.00	2025-12-12	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory name1: GlobTek, Inc.

Factory address1: 186 Veterans Dr. Northvale, NJ 07647 USA

Factory name2: GlobTek (Suzhou) Co., Ltd

Factory address2: Building 4, No. 76, Jin Ling East Rd., Suzhou Industrial Park, Suzhou, JiangSu 215021, China

General Description of EUT	
Product Name:	ICT/ITE Power Supply
Trade Name:	GlobTek, Inc.
Model No.:	GTM96183-*PD*-USB1C*, GTM96181-*PD***
Adding Model(s):	/

Note: The test data is gathered from production sample, provided by the manufacturer.

*GTM96183-*PD*-USB1C*:*

The 1st "" denotes the rated output wattage designation, which can be "18" or "36";*

The 2nd ""= "-PPS" or blank, "PPS" means power supply with PPS (programmable power supply) function, the rated output voltage can be "5.0" to "21.0" with interval of 0.1Vdc, the rated output maximum current can be 3.0A; blank means power supply without PPS (programmable power supply) function, the rated output voltage can be "5.0" to "20.0" with interval of 0.1Vdc;*

The last "" denote any six character=0-9 or A-Z or () or [] or – or blank for marketing purposes.*

The whole series output will be any one voltage/current combinations (power profiles), between 5.0V and 21V.

*GTM96181-*PD***:*

The 1st "" denotes the rated output wattage designation, which can be "18" or "36"; with interval of 1.*

The 2nd ""= "-PPS" or blank, "PPS" means power supply with PPS (programmable power supply) function, the rated output voltage can be "5.0" to "21.0" with interval of 0.1Vdc, the rated output maximum current can be 3.0A; blank means power supply without PPS (programmable power supply) function, the rated output voltage can be "5.0" to "20.0" with interval of 0.1Vdc;*

The 3rd "" =blank means wall plug in with interchangeable blade,*

="-T2" means desktop class II with C8 AC inlet

="-T2A" means desktop class II with C18 AC inlet

="-T3" means desktop class I with C14 AC inlet

="-T3A" means desktop class I with C6 AC inlet

The last "" denote any six character=0-9 or A-Z or () or [] or – or blank for marketing purposes.*

The whole series output will be any one voltage/current combinations (power profiles), between 5.0V and 21V.

Technical Characteristics of EUT	
Power Supply:	Input: 100-240V 50-60Hz 1.2A Output: 5-21V 36W Max
Power Adaptor:	/
Cable:	Model:GTM96181-36PD-PPS-T2 DC Cable 1 (length 1.50m, Unshielded, Without Ferrite, Without Chip) Model:GTM96181-18PD-PPS-T2 DC Cable 1 (length 1.50m, Unshielded, Without Ferrite, Without Chip) Model:GTM96181-36PD-PPS-T3 DC Cable 1 (length 1.0m, Unshielded, Without Ferrite, Without Chip) Model:GTM96181-18PD-PPS-T3 DC Cable 1 (length 1.0m, Unshielded, Without Ferrite, Without Chip)
Rated Power:	/
Rated Current:	/
Highest Internal Frequency:	Below 108MHz
Classification of Equipment:	Class B

1.2 Test Standards

The tests were performed according to following standards:

EN 55032:2015+A11:2020: Electromagnetic compatibility of multimedia equipment - Emission requirements

EN 55032:2015+A1:2020: Electromagnetic compatibility of multimedia equipment - Emission requirements

EN IEC 61000-3-2:2019+A1:2021+A2:2024: Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16A per phase)

EN 61000-3-3:2013+A1:2019+A2:2021: Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16A per phase and not subject to conditional connection

EN 55035:2017+A11:2020: Electromagnetic compatibility of multimedia equipment - Immunity requirements.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

1.3 Test Location

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

1.4 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission/immunity level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

No	Title	Description
TM1	Model:GTM96183-36PD-PPS-USB1C (5V 3A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM2	Model:GTM96183-36PD-PPS-USB1C (5V 3A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM3	Model:GTM96183-36PD-PPS-USB1C (20V 1.8A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM4	Model:GTM96183-36PD-PPS-USB1C (20V 1.8A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM5	Model:GTM96183-18PD-PPS-USB1C (5V 3A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM6	Model:GTM96183-18PD-PPS-USB1C (5V 3A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM7	Model:GTM96183-18PD-PPS-USB1C (20V 0.9A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM8	Model:GTM96183-18PD-PPS-USB1C (20V 0.9A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM9	Model:GTM96181-36PD-PPS-T2 (5V 3A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM10	Model:GTM96181-36PD-PPS-T2 (5V 3A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM11	Model:GTM96181-36PD-PPS-T2 (20V 1.8A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM12	Model:GTM96181-36PD-PPS-T2 (20V 1.8A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM13	Model:GTM96181-18PD-PPS-T2 (5V 3A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM14	Model:GTM96181-18PD-PPS-T2 (5V 3A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM15	Model:GTM96181-18PD-PPS-T2 (20V 0.9A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM16	Model:GTM96181-18PD-PPS-T2 (20V 0.9A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM17	Model:GTM96181-36PD-PPS-T3 (5V 3A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM18	Model:GTM96181-36PD-PPS-T3 (5V 3A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM19	Model:GTM96181-36PD-PPS-T3 (20V 1.8A)	AC 230V/50Hz Type-C Output port is connected to Cement load

TM20	Model:GTM96181-36PD-PPS-T3 (20V 1.8A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM21	Model:GTM96181-18PD-PPS-T3 (5V 3A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM22	Model:GTM96181-18PD-PPS-T3 (5V 3A)	AC 120V/60Hz Type-C Output port is connected to Cement load
TM23	Model:GTM96181-18PD-PPS-T3 (20V 0.9A)	AC 230V/50Hz Type-C Output port is connected to Cement load
TM24	Model:GTM96181-18PD-PPS-T3 (20V 0.9A)	AC 120V/60Hz Type-C Output port is connected to Cement load

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Cement load	/	/	/

Special Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
AC Cable	1.0	Unshielded	Without	Without

1.5 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions (AC Mains 150k - 30MHz)	±3.34dB
Radiated Emissions (30M - 1000MHz)	30MHz to 1GHz: ±5.70 dB
Voltage Flicker	U = 2.0%, k=2

1.6 Test Equipment List and Details

Conducted emissions from AC mains power ports (150kHz-30MHz)					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
LISN	Rohde & Schwarz	ENV 216	100097	2025-02-23	2026-02-22
EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2025-02-23	2026-02-22
8-WIRE ISN CAT5	Schwarz beck	8158	CAT5-8158-0117	2025-02-23	2026-02-22
EMI Test Software/EZ-EMC	Farad	3A1*CE-RE	1.1.4.3	/	/

Radiated emissions (30MHz-1GHz)					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2025-02-23	2026-02-22
Amplifier	Agilent	8447D	2944A10457	2025-02-23	2026-02-22
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
EMI Test Software/EZ-EMC	Farad	RA-03A1	1.1.4.2	/	/

Voltage fluctuations and flicker					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
Power Source	California Instrument	5001IX-CTS-400	60077	2025-02-23	2026-02-22
Digital Power Analyzer	California Instrument	CTS	72831	2025-02-23	2026-02-22
Test Software/CTS4	AMETEK	/	4.32	/	/

Electrostatic discharges					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
ESD Generator	LIONCEL	ESD-203B	0170901	2025-11-25	2026-11-24

RF electromagnetic field disturbances					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
Power Meter	Agilent	E4419B	GB42420578	2025-02-23	2026-02-22
Antenna	SCHWARZBECK	STLP 9129	9129 114	/	/
RF Power Amplifier	MicoTop	MPA-1000-6000-100	MPA1906238	2025-02-23	2026-02-22
RF Power Amplifier	MicoTop	MPA-80-1000-250	MPA1906239	2025-02-23	2026-02-22
Power Sensor	Agilent	E9304A	MY55081055	2025-02-23	2026-02-22
Power Sensor	Agilent	E9301A	MY52450001	2025-02-23	2026-02-22
Signal Generator	HP	8665B	3438A00604	2025-02-23	2026-02-22
Test Software/EM3	EMtrace	/	V1.2.9.1	/	/

Electrical fast transients / burst for AC mains power ports					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
EFT Generator	EVERFINE	EMS61000-4A	P635789CS1 441117	2025-06-11	2026-06-10

Surges for AC mains power ports					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
Surge Generator	EVERFINE	EMS61000-5A	P612004TD1 441112	2025-06-11	2026-06-10

Continuous induced RF disturbances for AC mains power ports (150kHz-80MHz)					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
EM Clamp	TESEQ	KEMZ801A	45028	2025-02-23	2026-02-22
CDN	LIONCEL	CDN-T8	0210401	2025-02-23	2026-02-22
CDN	Luthi	L-801M2/M3	2665	2025-02-23	2026-02-22
Attenuator	EMTEST	MA-5100/6BF2	1009	2025-02-23	2026-02-22
CONDUCTED IMMUNITY TEST SYSTEM	FRANKONIA	CIT-10/75	126B1247/2013	2025-02-23	2026-02-22
Test Software/EMC-S	SKET	/	V1.4.0.16	/	/

Power frequency magnetic field					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
Instantaneous PMF Generator Module	LIONCEL	PMF-801C-T	0171001	2025-02-23	2026-02-22
PMF Antenna	LIONCEL	PMF-801C-A	0180302	2025-02-23	2026-02-22
PMF Generator	LIONCEL	PMF-801C-C	0171101	2025-02-23	2026-02-22

Voltage dips and interruptions					
Description	**Manufacturer**	**Model**	**Serial No.**	**Cal. Date**	**Due. Date**
Voltage sag generator	EVERFINE	EMS61000-11C	P660569CM1 451112	2025-06-11	2026-06-10

2. SUMMARY OF TEST RESULTS

Item	Standard	Method	Result
Conducted emissions from AC mains power ports (150kHz-30MHz)	EN 55032:2015+A11:2020 EN 55032:2015+A1:2020	Clause 7 of CISPR 16-2-1:2014/AMD1:2017	Compliant
Radiated emissions (30MHz-1GHz)	EN 55032:2015+A11:2020 EN 55032:2015+A1:2020	Clause 7.3 of CISPR 16-2-3:2016	Compliant
Harmonic current emission	EN IEC 61000-3-2:2019+A1:2021 +A2:2024	EN IEC 61000-3-2:2019+A1:2021 +A2:2024	Compliant
Voltage fluctuations and flicker	EN 61000-3-3:2013+A1:2019 +A2:2021	EN 61000-3-3:2013+A1:2019 +A2:2021	Compliant
Electrostatic discharges	EN 55035:2017+A11:2020	EN 61000-4-2: 2009	Compliant
RF electromagnetic field disturbances	EN 55035:2017+A11:2020	EN IEC 61000-4-3: 2020	Compliant
Electrical fast transients / burst for AC mains power ports	EN 55035:2017+A11:2020	EN 61000-4-4: 2012	Compliant
Surges for AC mains power ports	EN 55035:2017+A11:2020	EN 61000-4-5: 2014 +A1: 2017	Compliant
Continuous induced RF disturbances for AC mains power ports (150kHz-80MHz)	EN 55035:2017+A11:2020	EN 61000-4-6: 2014	Compliant
Power frequency magnetic field	EN 55035:2017+A11:2020	EN 61000-4-8: 2010	Compliant
Voltage dips and interruptions	EN 55035:2017+A11:2020	EN IEC 61000-4-11: 2020	Compliant

3. Evaluation Results (Evaluation)

3.1 Harmonic current emission

Test Requirement:	Class A
Test Limit:	Not specified
Test Method:	EN IEC 61000-3-2:2019+A1:2021+A2:2024

3.1.1 E.U.T. Operation

Environmental Conditions	
Temperature:	24.6 °C
Relative Humidity:	55 %
Atmospheric Pressure:	102 kPa
Test mode:	TM3, TM7, TM11, TM15, TM19, TM23

3.1.2 Summary of Test Results

Refer to EN IEC 61000-3-2 clause 7.1:
"For the following categories of equipment, limits are not specified in this document:
– lighting equipment with a rated power less than but not equal to 5 W;
– equipment with a rated power of 75 W or less, other than lighting equipment;"
Since the rated power of the EUT is less than above described, it is deemed to comply with the requirement.

4. Emission Test Results (EMI)

4.1 Conducted emissions from AC mains power ports (150kHz-30MHz)

Test Requirement:	Class B
Test Limit:	**Frequency Range** / **Limit (Quasi-Peak)** / **Limit (Average)** 0.15MHz to 0.5MHz / 66dB(μV) to 56dB(μV) / 56dB(μV) to 46dB(μV) 0.5MHz to 5MHz / 56dB(μV) / 46dB(μV) 5MHz to 30MHz / 60dB(μV) / 50dB(μV) Detector: / Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz
Test Method:	Clause 7 of CISPR 16-2-1:2014/AMD1:2017
Procedure:	An initial pre-scan was performed with peak detector.Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected. Remark: Level= Read Level+ Cable Loss+ LISN Factor

4.1.1 E.U.T. Operation

Environmental Conditions	
Temperature:	23.5 °C
Relative Humidity:	54 %
Atmospheric Pressure:	102 kPa
Test mode:	TM1, TM2, TM3, TM4, TM5, TM6, TM7, TM8, TM9, TM10, TM11, TM12, TM13, TM14, TM15, TM16, TM17, TM18, TM19, TM20, TM21, TM22, TM23, TM24

4.1.2 Basic Test Setup Block Diagram

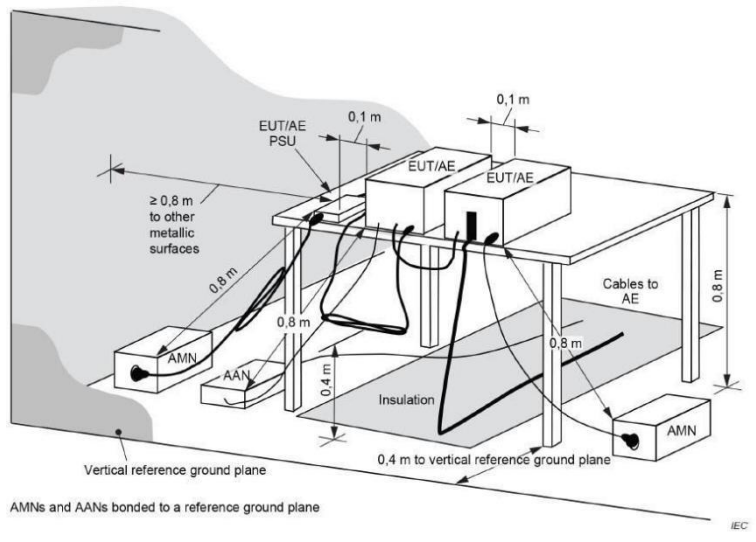

4.1.3 Summary of Test Results

TM1 / Line: Line

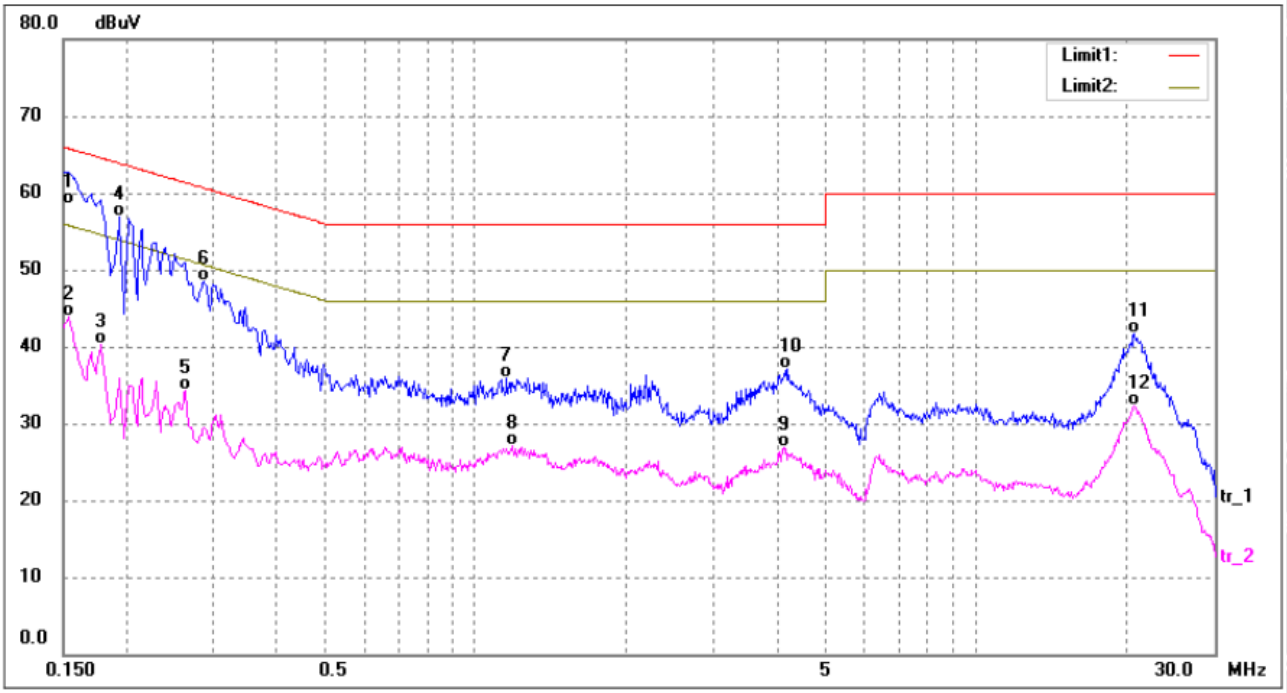

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1500	49.14	9.40	58.54	65.99	-7.45	QP
2	0.1539	34.44	9.42	43.86	55.78	-11.92	AVG
3	0.1780	30.84	9.51	40.35	54.57	-14.22	AVG
4*	0.1940	47.29	9.58	56.87	63.86	-6.99	QP
5	0.2620	24.74	9.60	34.34	51.36	-17.02	AVG
6	0.2860	38.89	9.60	48.49	60.64	-12.15	QP
7	1.1580	26.34	9.64	35.98	56.00	-20.02	QP
8	1.1900	17.58	9.62	27.20	46.00	-18.80	AVG
9	4.1420	17.55	9.41	26.96	46.00	-19.04	AVG
10	4.2060	27.64	9.42	37.06	56.00	-18.94	QP
11	20.7540	32.32	9.40	41.72	60.00	-18.28	QP
12	20.7540	22.86	9.40	32.26	50.00	-17.74	AVG

TM1 / Line: Neutral

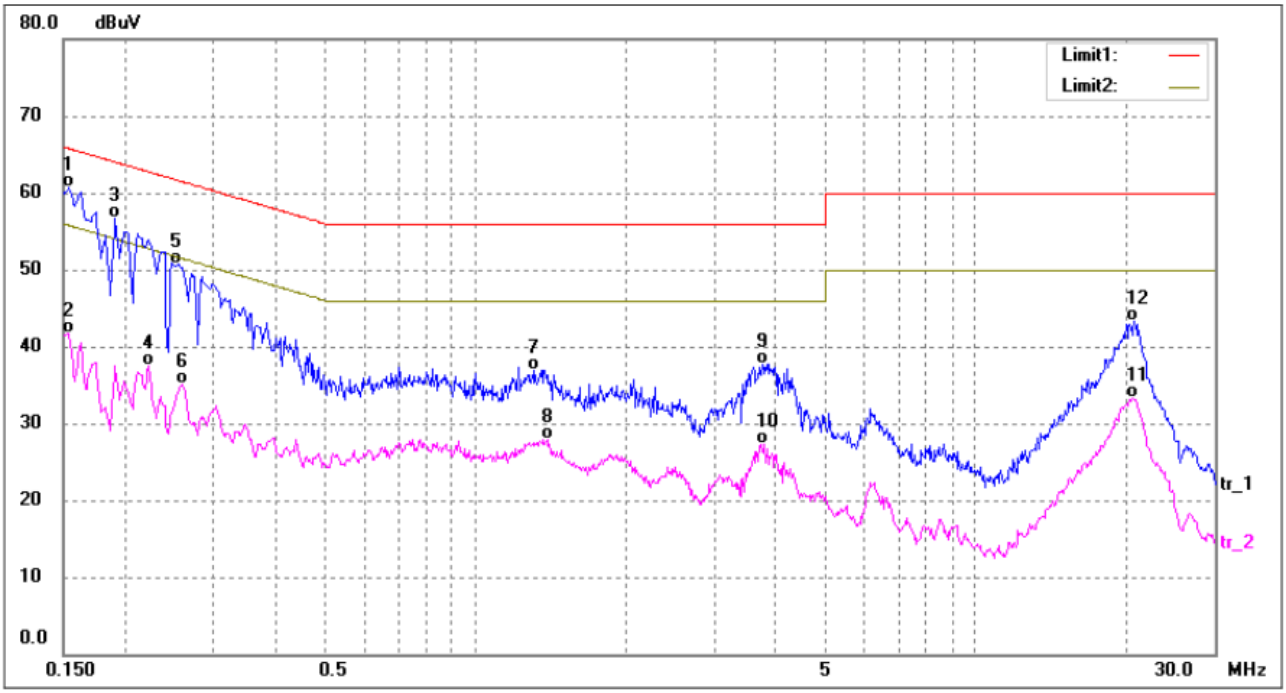

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1539	51.35	9.42	60.77	65.78	-5.01	QP
2	0.1539	32.34	9.42	41.76	55.78	-14.02	AVG
3	0.1900	47.09	9.56	56.65	64.03	-7.38	QP
4	0.2220	28.00	9.60	37.60	52.74	-15.14	AVG
5	0.2481	41.08	9.60	50.68	61.82	-11.14	QP
6	0.2580	25.48	9.60	35.08	51.49	-16.41	AVG
7	1.3099	27.38	9.58	36.96	56.00	-19.04	QP
8	1.3900	18.44	9.54	27.98	46.00	-18.02	AVG
9	3.7540	28.40	9.39	37.79	56.00	-18.21	QP
10	3.7620	17.98	9.39	27.37	46.00	-18.63	AVG
11	20.6580	23.95	9.40	33.35	50.00	-16.65	AVG
12	20.7340	33.83	9.40	43.23	60.00	-16.77	QP

TM2 / Line: Line

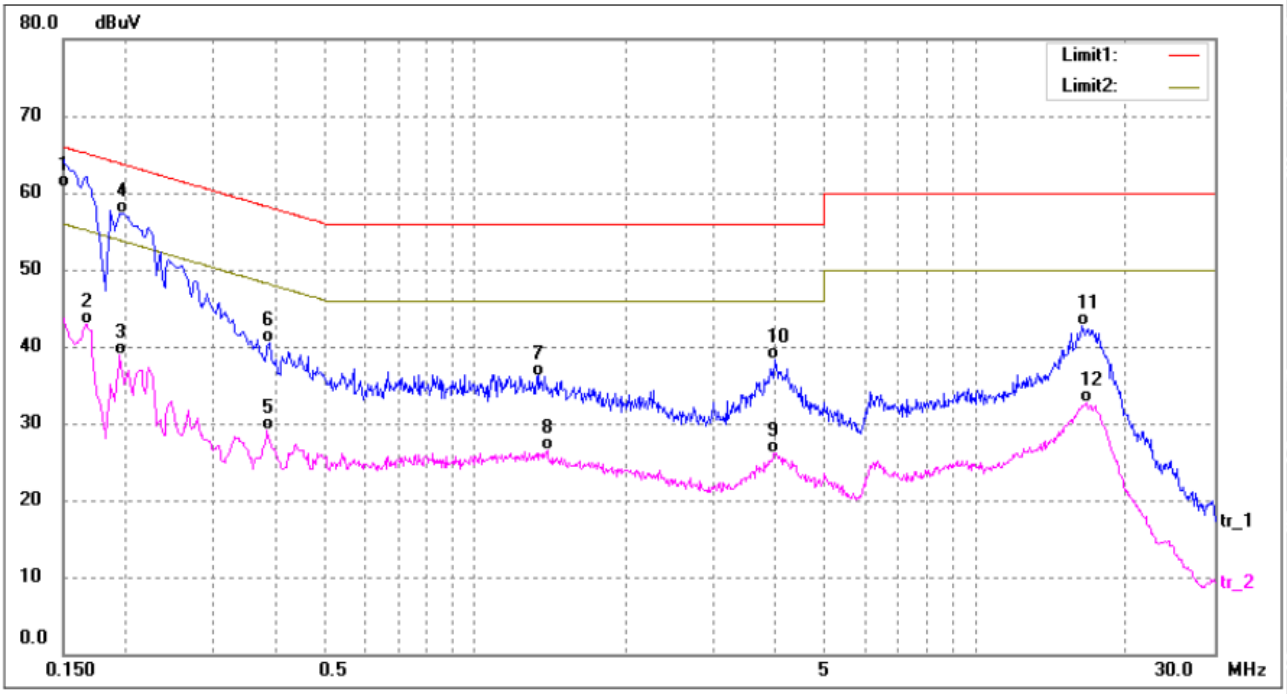

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1500	51.36	9.40	60.76	65.99	-5.23	QP
2	0.1660	33.41	9.46	42.87	55.15	-12.28	AVG
3	0.1940	29.31	9.58	38.89	53.86	-14.97	AVG
4	0.1980	47.75	9.59	57.34	63.69	-6.35	QP
5	0.3820	19.50	9.60	29.10	48.23	-19.13	AVG
6	0.3860	30.93	9.60	40.53	58.15	-17.62	QP
7	1.3380	26.64	9.56	36.20	56.00	-19.80	QP
8	1.3940	16.95	9.54	26.49	46.00	-19.51	AVG
9	3.9580	16.77	9.40	26.17	46.00	-19.83	AVG
10	3.9820	28.87	9.40	38.27	56.00	-17.73	QP
11	16.3340	33.36	9.40	42.76	60.00	-17.24	QP
12	16.7099	23.31	9.40	32.71	50.00	-17.29	AVG

TM2 / Line: Neutral

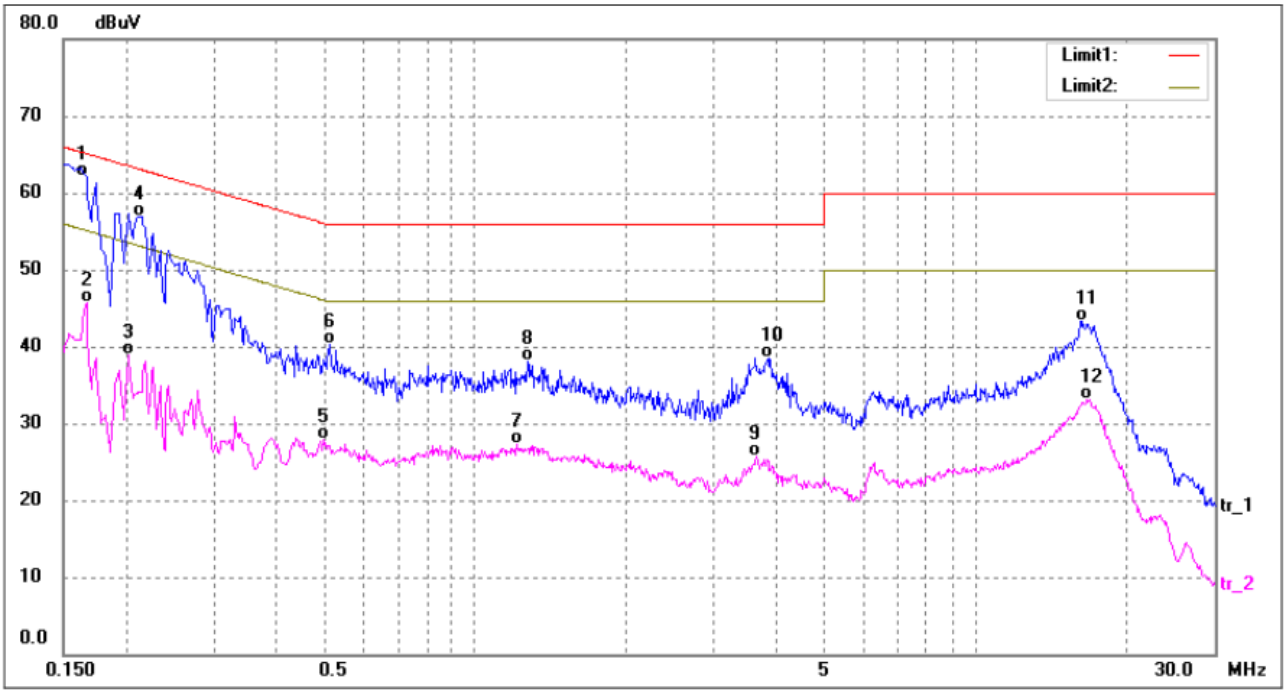

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1620	52.75	9.45	62.20	65.36	-3.16	QP
2	0.1660	36.17	9.46	45.63	55.15	-9.52	AVG
3	0.2020	29.21	9.60	38.81	53.52	-14.71	AVG
4	0.2100	47.26	9.60	56.86	63.20	-6.34	QP
5	0.4980	18.34	9.60	27.94	46.03	-18.09	AVG
6	0.5100	30.72	9.60	40.32	56.00	-15.68	QP
7	1.2100	17.63	9.62	27.25	46.00	-18.75	AVG
8	1.2740	28.53	9.59	38.12	56.00	-17.88	QP
9	3.6540	16.30	9.38	25.68	46.00	-20.32	AVG
10	3.8460	29.08	9.39	38.47	56.00	-17.53	QP
11	16.3540	33.87	9.40	43.27	60.00	-16.73	QP
12	16.7460	23.71	9.40	33.11	50.00	-16.89	AVG

TM3 / Line: Line

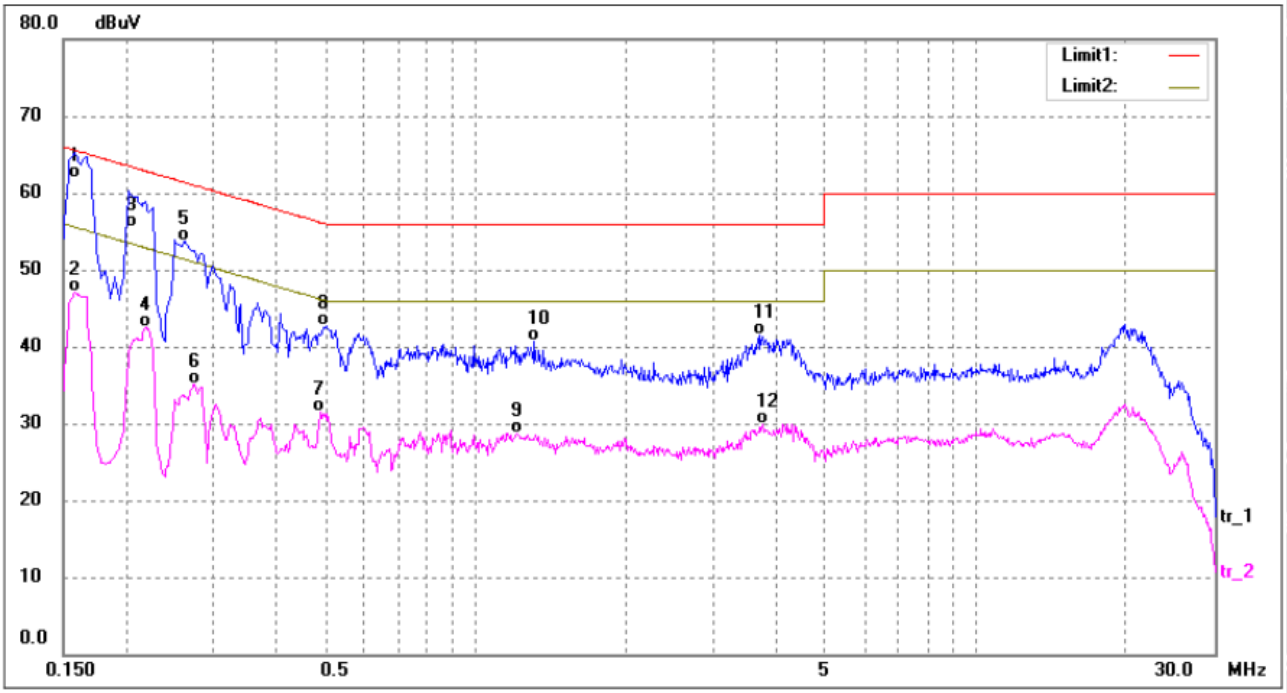

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1580	52.54	9.43	61.97	65.56	-3.59	QP
2	0.1580	37.61	9.43	47.04	55.56	-8.52	AVG
3	0.2020	46.00	9.60	55.60	63.52	-7.92	QP
4	0.2180	32.83	9.60	42.43	52.89	-10.46	AVG
5	0.2620	44.15	9.60	53.75	61.36	-7.61	QP
6	0.2740	25.55	9.60	35.15	50.99	-15.84	AVG
7	0.4900	21.82	9.60	31.42	46.17	-14.75	AVG
8	0.5020	33.10	9.60	42.70	56.00	-13.30	QP
9	1.2140	19.17	9.61	28.78	46.00	-17.22	AVG
10	1.3140	31.08	9.57	40.65	56.00	-15.35	QP
11	3.6980	32.03	9.38	41.41	56.00	-14.59	QP
12	3.7500	20.42	9.39	29.81	46.00	-16.19	AVG

TM3 / Line: Neutral

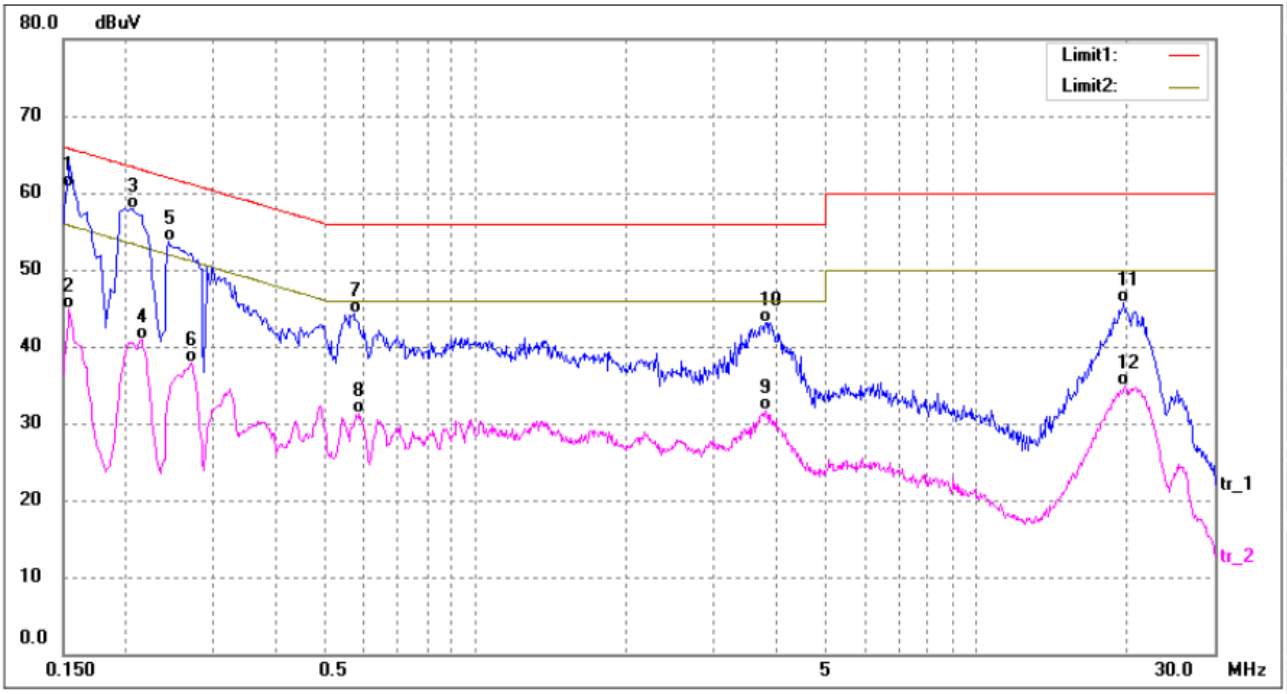

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1539	51.29	9.42	60.71	65.78	-5.07	QP
2	0.1539	35.55	9.42	44.97	55.78	-10.81	AVG
3	0.2060	48.37	9.60	57.97	63.36	-5.39	QP
4	0.2140	31.39	9.60	40.99	53.04	-12.05	AVG
5	0.2420	44.11	9.60	53.71	62.02	-8.31	QP
6	0.2700	28.33	9.60	37.93	51.12	-13.19	AVG
7	0.5700	34.75	9.63	44.38	56.00	-11.62	QP
8	0.5860	21.64	9.64	31.28	46.00	-14.72	AVG
9	3.8140	22.40	9.39	31.79	46.00	-14.21	AVG
10	3.8260	33.79	9.39	43.18	56.00	-12.82	QP
11	19.8100	36.32	9.40	45.72	60.00	-14.28	QP
12	19.9060	25.58	9.40	34.98	50.00	-15.02	AVG

TM4 / Line: Line

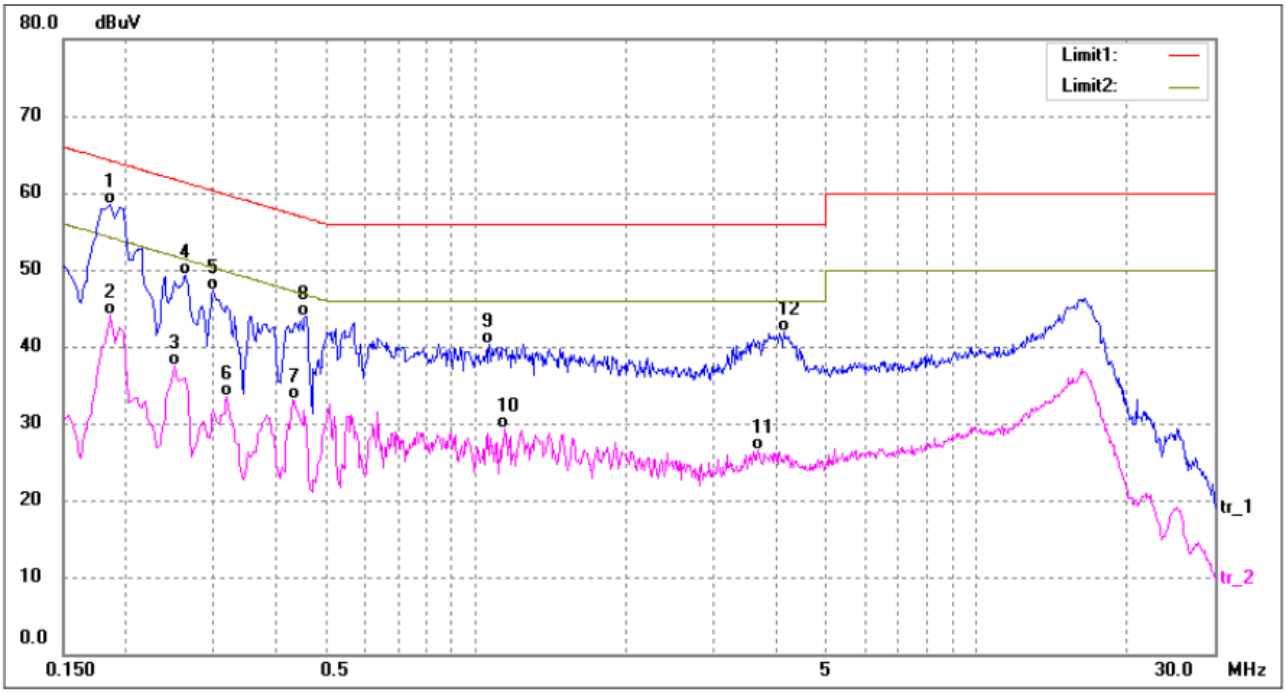

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1860	49.01	9.54	58.55	64.21	-5.66	QP
2	0.1860	34.61	9.54	44.15	54.21	-10.06	AVG
3	0.2500	27.93	9.60	37.53	51.75	-14.22	AVG
4	0.2620	39.67	9.60	49.27	61.36	-12.09	QP
5	0.2980	37.69	9.60	47.29	60.30	-13.01	QP
6	0.3180	23.90	9.60	33.50	49.76	-16.26	AVG
7	0.4300	23.46	9.60	33.06	47.25	-14.19	AVG
8	0.4580	34.25	9.60	43.85	56.73	-12.88	QP
9	1.0660	30.57	9.67	40.24	56.00	-15.76	QP
10	1.1420	19.58	9.64	29.22	46.00	-16.78	AVG
11	3.6700	17.18	9.38	26.56	46.00	-19.44	AVG
12	4.1460	32.42	9.41	41.83	56.00	-14.17	QP

TM4 / Line: Neutral

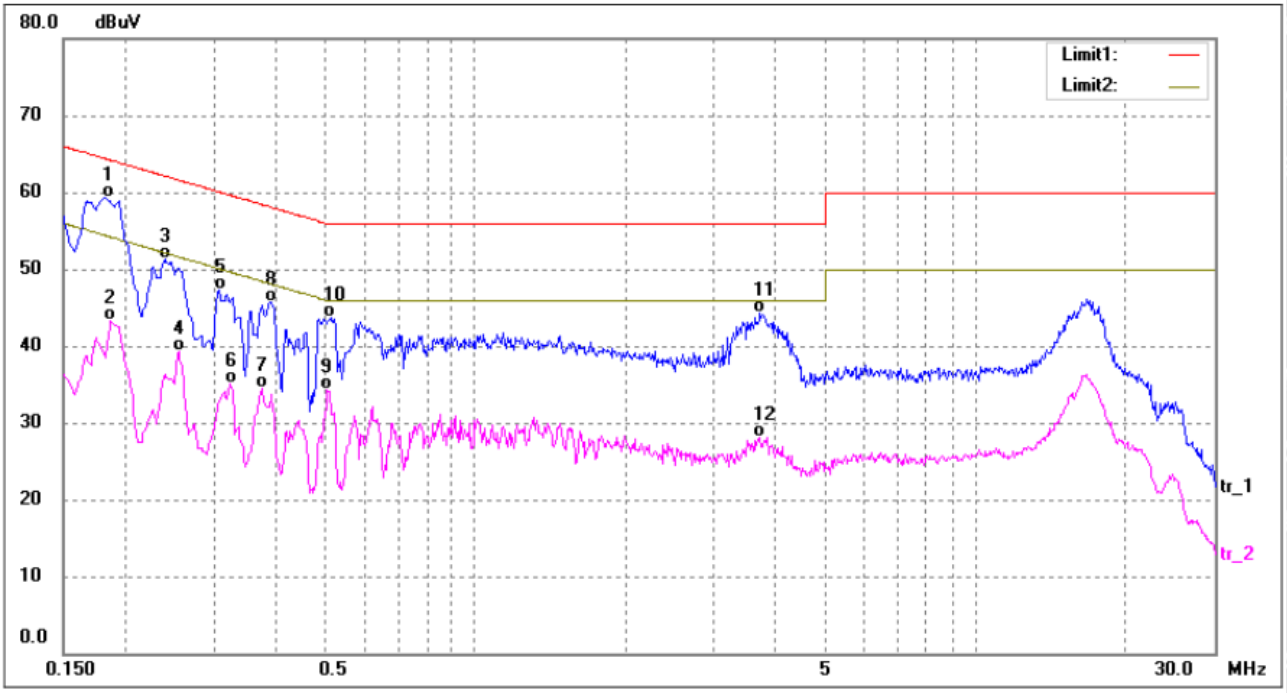

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1819	49.85	9.53	59.38	64.39	-5.01	QP
2	0.1860	33.70	9.54	43.24	54.21	-10.97	AVG
3	0.2380	41.66	9.60	51.26	62.16	-10.90	QP
4	0.2540	29.74	9.60	39.34	51.62	-12.28	AVG
5	0.3060	37.63	9.60	47.23	60.08	-12.85	QP
6	0.3220	25.41	9.60	35.01	49.65	-14.64	AVG
7	0.3740	24.83	9.60	34.43	48.41	-13.98	AVG
8	0.3899	36.17	9.60	45.77	58.06	-12.29	QP
9	0.5060	24.66	9.60	34.26	46.00	-11.74	AVG
10	0.5140	34.05	9.61	43.66	56.00	-12.34	QP
11	3.7020	34.94	9.39	44.33	56.00	-11.67	QP
12	3.7020	18.77	9.39	28.16	46.00	-17.84	AVG

TM5 / Line: Line

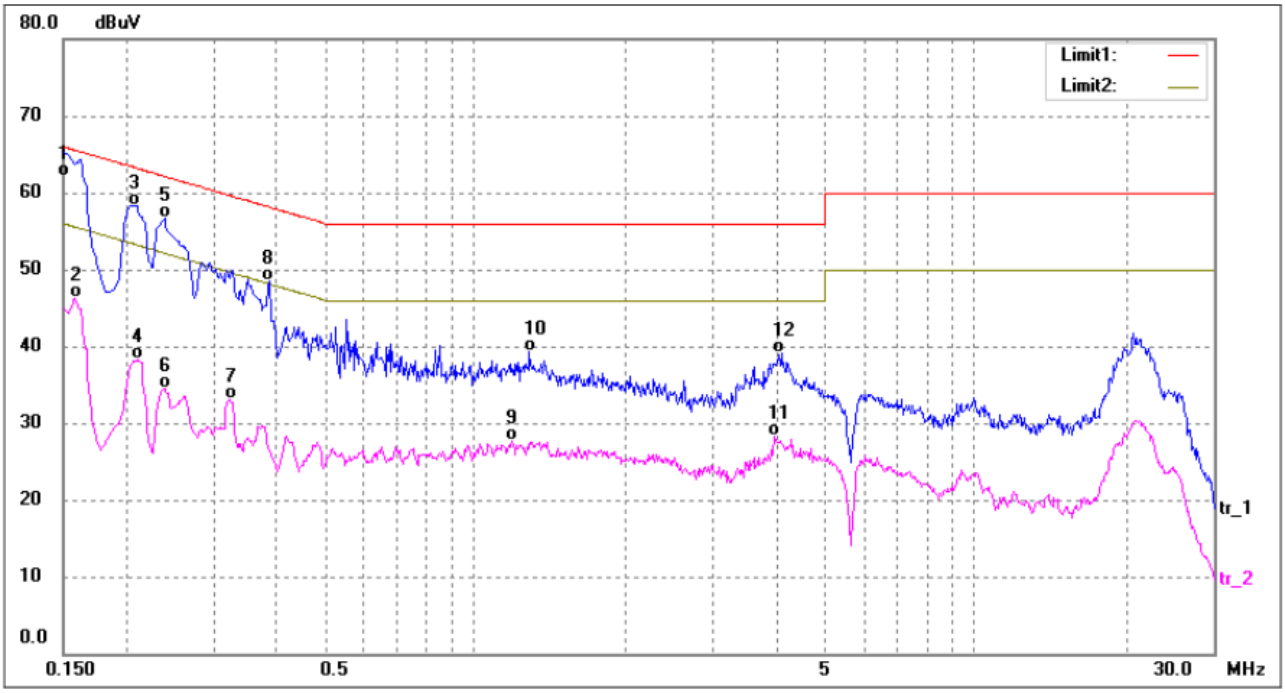

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1500	52.62	9.40	62.02	65.99	-3.97	QP
2	0.1580	36.81	9.43	46.24	55.56	-9.32	AVG
3	0.2060	48.69	9.60	58.29	63.36	-5.07	QP
4	0.2100	28.62	9.60	38.22	53.20	-14.98	AVG
5	0.2380	47.01	9.60	56.61	62.16	-5.55	QP
6	0.2380	24.90	9.60	34.50	52.16	-17.66	AVG
7	0.3220	23.43	9.60	33.03	49.65	-16.62	AVG
8	0.3860	38.83	9.60	48.43	58.15	-9.72	QP
9	1.1860	18.02	9.63	27.65	46.00	-18.35	AVG
10	1.2860	29.75	9.59	39.34	56.00	-16.66	QP
11	3.9780	18.82	9.40	28.22	46.00	-17.78	AVG
12	4.1100	29.71	9.41	39.12	56.00	-16.88	QP

TM5 / Line: Neutral

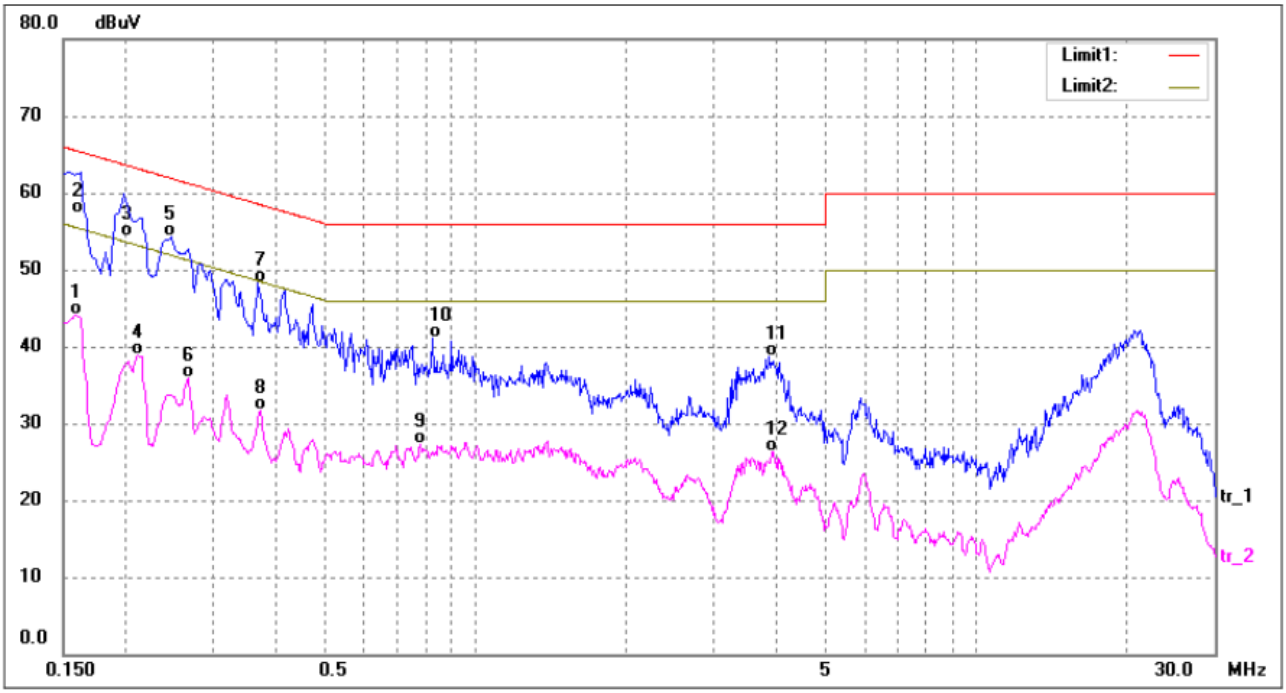

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1580	34.67	9.43	44.10	55.56	-11.46	AVG
2	0.1620	47.89	9.45	57.34	65.36	-8.02	QP
3	0.1980	44.75	9.59	54.34	63.69	-9.35	QP
4	0.2100	29.31	9.60	38.91	53.20	-14.29	AVG
5*	0.2460	44.65	9.60	54.25	61.89	-7.64	QP
6	0.2660	26.32	9.60	35.92	51.24	-15.32	AVG
7	0.3660	38.75	9.60	48.35	58.59	-10.24	QP
8	0.3700	22.11	9.60	31.71	48.50	-16.79	AVG
9	0.7780	17.57	9.70	27.27	46.00	-18.73	AVG
10	0.8220	31.40	9.70	41.10	56.00	-14.90	QP
11	3.8700	29.34	9.39	38.73	56.00	-17.27	QP
12	3.9420	16.83	9.40	26.23	46.00	-19.77	AVG

TM6 / Line: Line

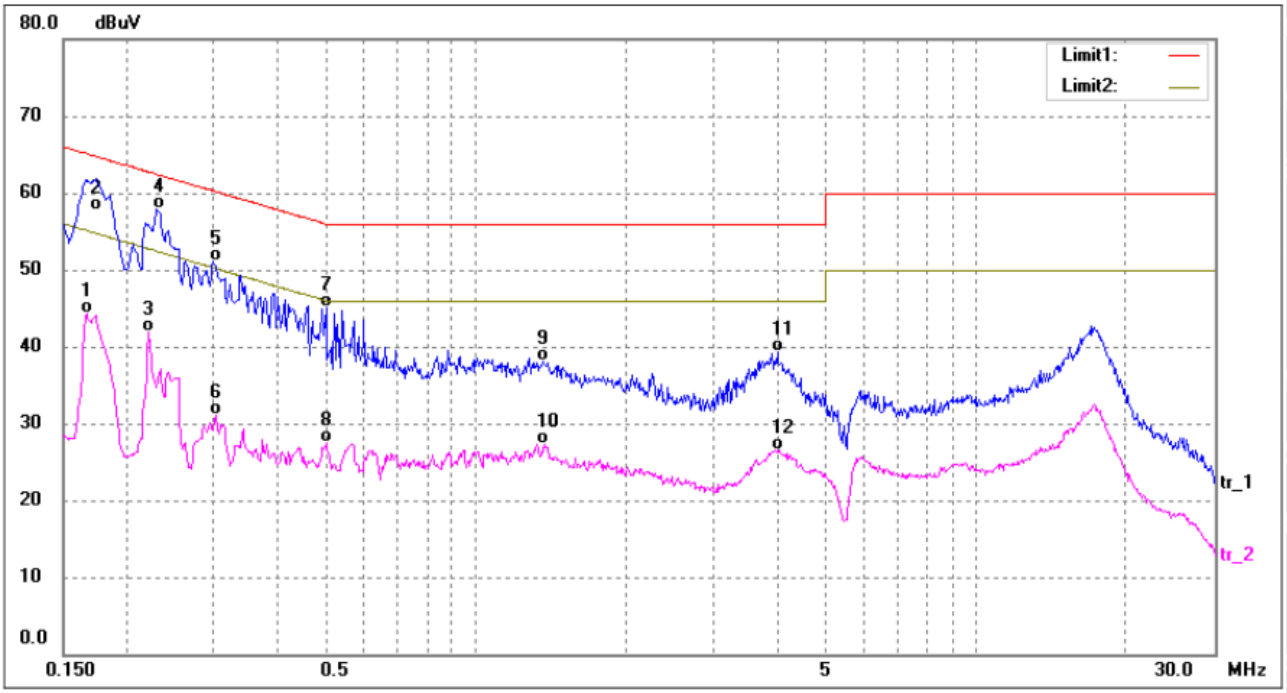

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1660	34.92	9.46	44.38	55.15	-10.77	AVG
2	0.1740	48.25	9.50	57.75	64.76	-7.01	QP
3	0.2220	32.23	9.60	41.83	52.74	-10.91	AVG
4*	0.2300	48.34	9.60	57.94	62.45	-4.51	QP
5	0.2980	41.53	9.60	51.13	60.30	-9.17	QP
6	0.3020	21.51	9.60	31.11	50.19	-19.08	AVG
7	0.5020	35.54	9.60	45.14	56.00	-10.86	QP
8	0.5020	17.82	9.60	27.42	46.00	-18.58	AVG
9	1.3660	28.53	9.55	38.08	56.00	-17.92	QP
10	1.3779	17.83	9.55	27.38	46.00	-18.62	AVG
11	4.0140	29.97	9.40	39.37	56.00	-16.63	QP
12	4.0140	17.15	9.40	26.55	46.00	-19.45	AVG

TM6 / Line: Neutral

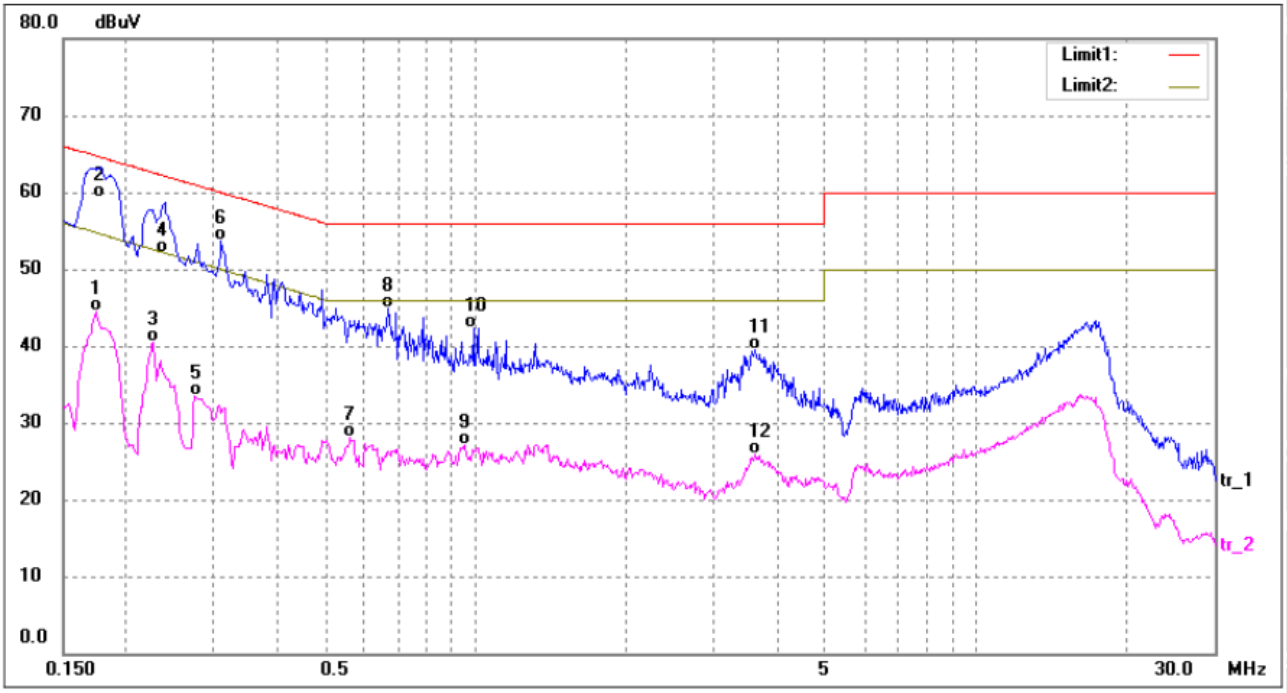

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1740	35.05	9.50	44.55	54.76	-10.21	AVG
2*	0.1780	49.82	9.51	59.33	64.57	-5.24	QP
3	0.2260	30.87	9.60	40.47	52.59	-12.12	AVG
4	0.2380	42.42	9.60	52.02	62.16	-10.14	QP
5	0.2740	23.99	9.60	33.59	50.99	-17.40	AVG
6	0.3100	44.17	9.60	53.77	59.97	-6.20	QP
7	0.5620	18.55	9.63	28.18	46.00	-17.82	AVG
8	0.6700	35.23	9.68	44.91	56.00	-11.09	QP
9	0.9500	17.41	9.70	27.11	46.00	-18.89	AVG
10	0.9900	32.61	9.70	42.31	56.00	-13.69	QP
11	3.6340	30.06	9.38	39.44	56.00	-16.56	QP
12	3.6340	16.45	9.38	25.83	46.00	-20.17	AVG

TM7 / Line: Line

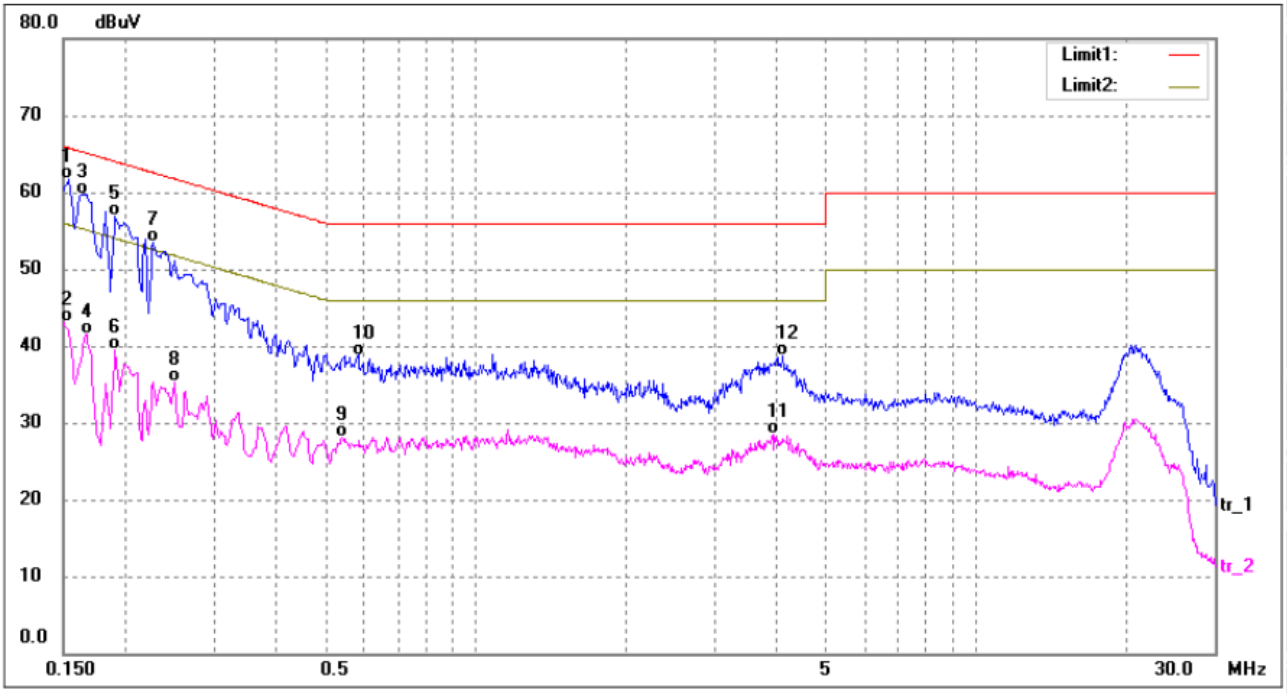

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1539	52.28	9.42	61.70	65.78	-4.08	QP
2	0.1539	33.59	9.42	43.01	55.78	-12.77	AVG
3	0.1620	50.35	9.45	59.80	65.36	-5.56	QP
4	0.1660	32.10	9.46	41.56	55.15	-13.59	AVG
5	0.1900	47.43	9.56	56.99	64.03	-7.04	QP
6	0.1900	30.03	9.56	39.59	54.03	-14.44	AVG
7	0.2260	43.95	9.60	53.55	62.59	-9.04	QP
8	0.2500	25.75	9.60	35.35	51.75	-16.40	AVG
9	0.5420	18.44	9.62	28.06	46.00	-17.94	AVG
10	0.5820	29.16	9.64	38.80	56.00	-17.20	QP
11	3.9420	19.16	9.40	28.56	46.00	-17.44	AVG
12	4.1140	29.21	9.41	38.62	56.00	-17.38	QP

TM7 / Line: Neutral

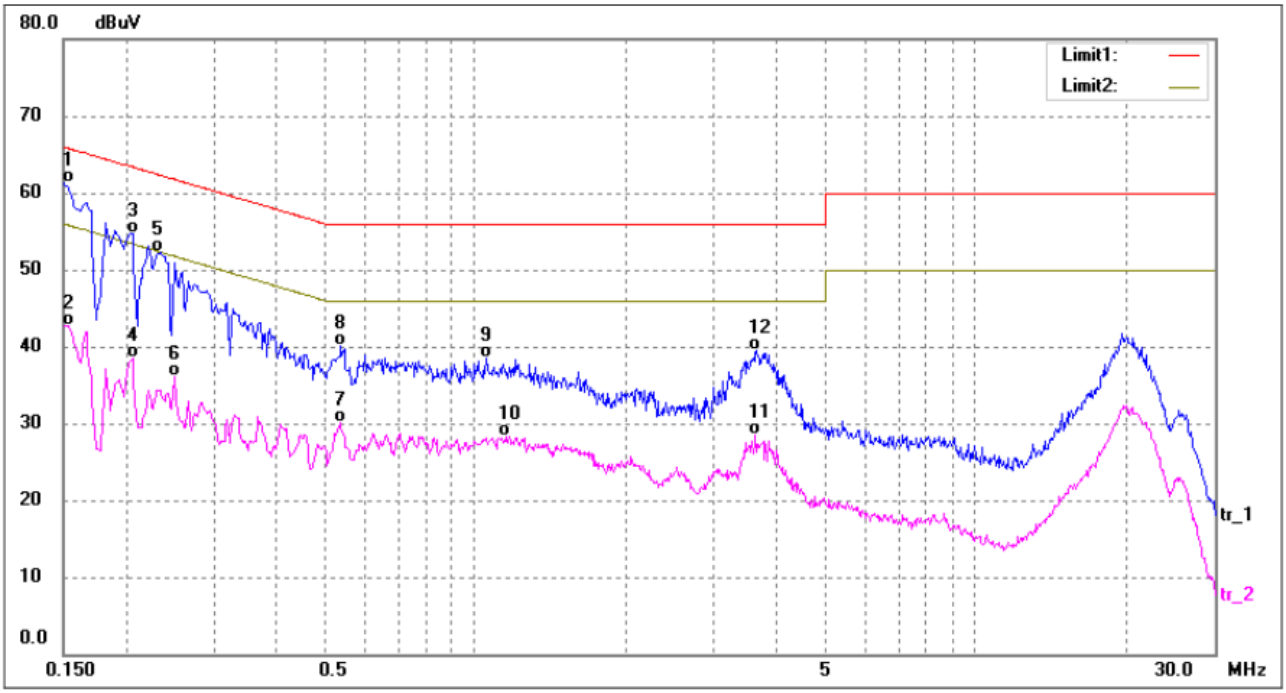

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1500	51.93	9.40	61.33	65.99	-4.66	QP
2	0.1539	33.34	9.42	42.76	55.78	-13.02	AVG
3	0.2060	45.12	9.60	54.72	63.36	-8.64	QP
4	0.2060	28.84	9.60	38.44	53.36	-14.92	AVG
5	0.2340	42.64	9.60	52.24	62.30	-10.06	QP
6	0.2500	26.53	9.60	36.13	51.75	-15.62	AVG
7	0.5340	20.41	9.62	30.03	46.00	-15.97	AVG
8	0.5380	30.44	9.62	40.06	56.00	-15.94	QP
9	1.0500	28.84	9.68	38.52	56.00	-17.48	QP
10	1.1500	18.75	9.64	28.39	46.00	-17.61	AVG
11	3.6340	19.04	9.38	28.42	46.00	-17.58	AVG
12	3.6420	30.08	9.38	39.46	56.00	-16.54	QP

TM8 / Line: Line

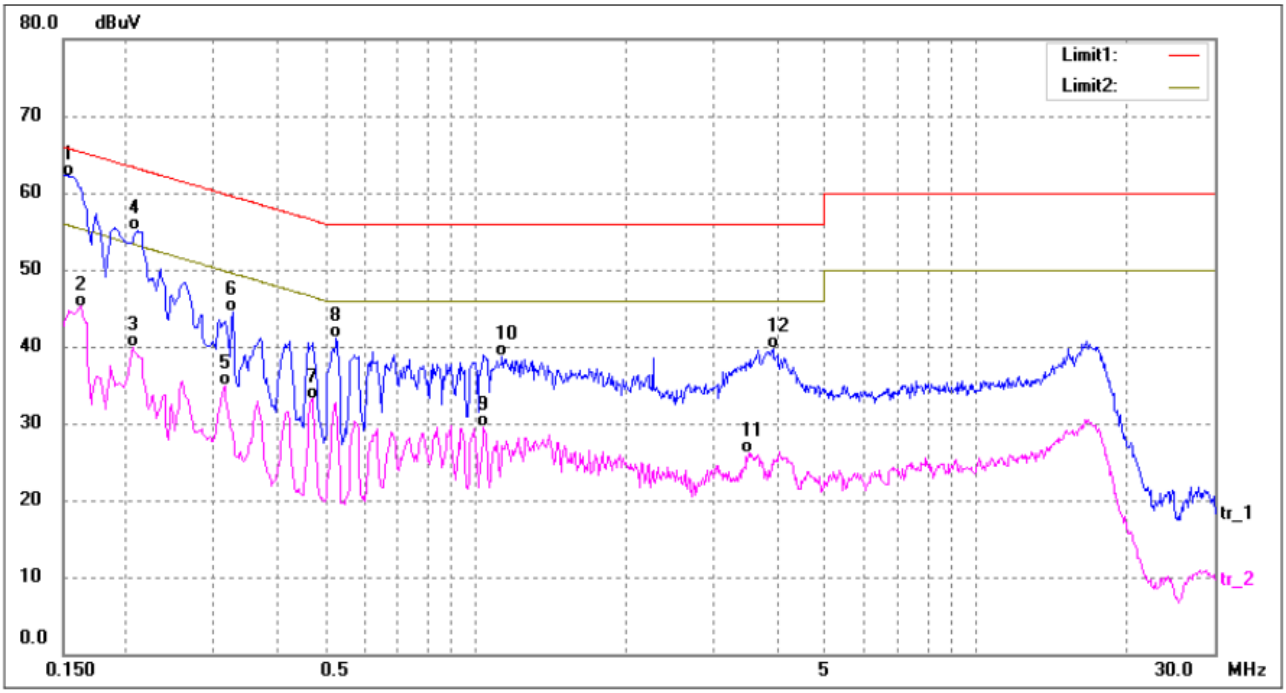

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1548	52.72	9.42	62.14	65.73	-3.59	QP
2	0.1620	35.75	9.45	45.20	55.36	-10.16	AVG
3	0.2060	30.38	9.60	39.98	53.36	-13.38	AVG
4	0.2100	45.43	9.60	55.03	63.20	-8.17	QP
5	0.3140	25.38	9.60	34.98	49.86	-14.88	AVG
6	0.3260	34.92	9.60	44.52	59.55	-15.03	QP
7	0.4700	23.60	9.60	33.20	46.51	-13.31	AVG
8	0.5260	31.55	9.61	41.16	56.00	-14.84	QP
9	1.0420	19.88	9.68	29.56	46.00	-16.44	AVG
10	1.1300	29.00	9.65	38.65	56.00	-17.35	QP
11	3.5220	16.76	9.38	26.14	46.00	-19.86	AVG
12	3.9380	30.27	9.40	39.67	56.00	-16.33	QP

TM8 / Line: Neutral

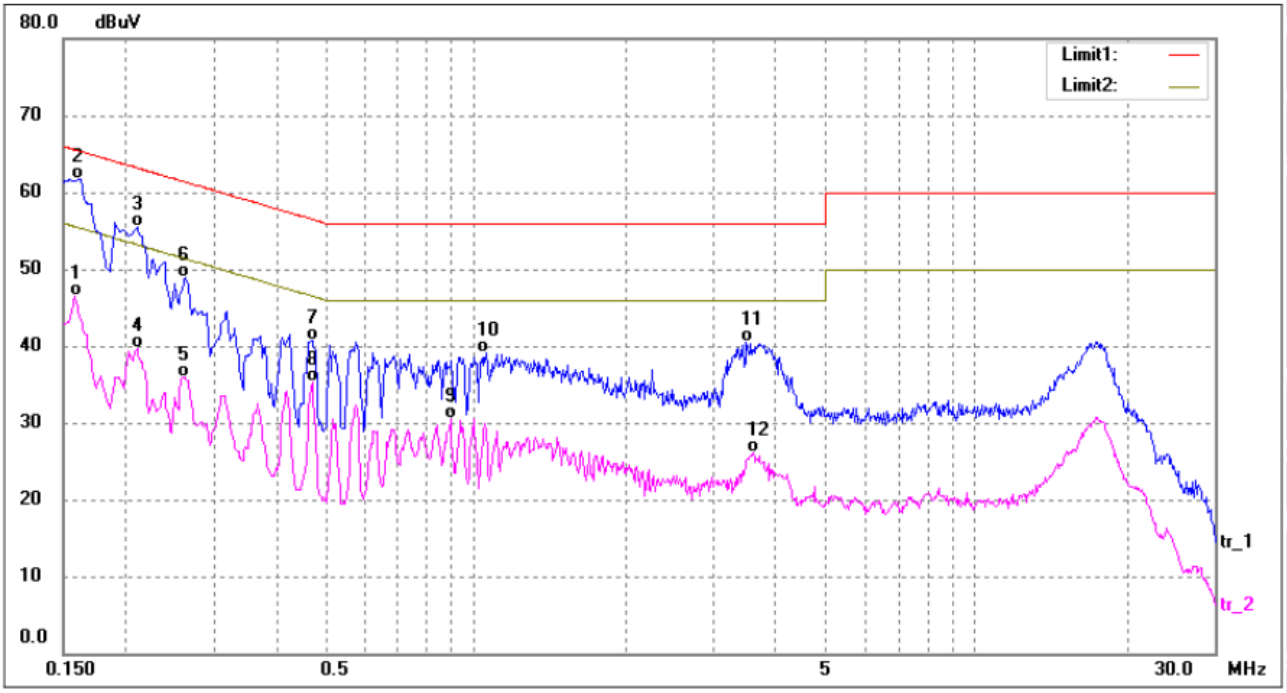

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1580	37.05	9.43	46.48	55.56	-9.08	AVG
2*	0.1620	52.27	9.45	61.72	65.36	-3.64	QP
3	0.2100	45.93	9.60	55.53	63.20	-7.67	QP
4	0.2100	30.19	9.60	39.79	53.20	-13.41	AVG
5	0.2580	26.35	9.60	35.95	51.49	-15.54	AVG
6	0.2620	39.35	9.60	48.95	61.36	-12.41	QP
7	0.4700	31.17	9.60	40.77	56.51	-15.74	QP
8	0.4700	25.66	9.60	35.26	46.51	-11.25	AVG
9	0.8900	20.86	9.70	30.56	46.00	-15.44	AVG
10	1.0500	29.38	9.68	39.06	56.00	-16.94	QP
11	3.4900	31.07	9.37	40.44	56.00	-15.56	QP
12	3.6020	16.78	9.38	26.16	46.00	-19.84	AVG

TM9 / Line: Line

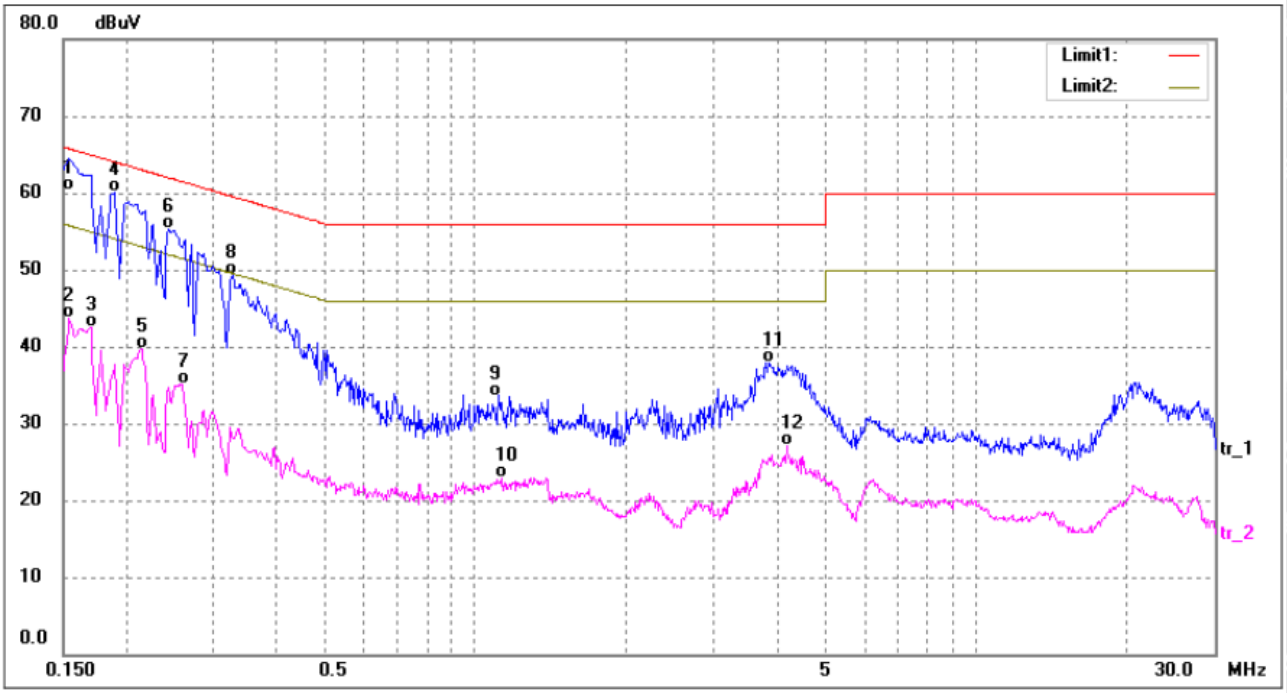

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1539	50.95	9.42	60.37	65.78	-5.41	QP
2	0.1539	34.27	9.42	43.69	55.78	-12.09	AVG
3	0.1700	33.06	9.48	42.54	54.96	-12.42	AVG
4*	0.1900	50.52	9.56	60.08	64.03	-3.95	QP
5	0.2140	30.15	9.60	39.75	53.04	-13.29	AVG
6	0.2420	45.80	9.60	55.40	62.02	-6.62	QP
7	0.2580	25.52	9.60	35.12	51.49	-16.37	AVG
8	0.3260	39.66	9.60	49.26	59.55	-10.29	QP
9	1.1140	23.95	9.65	33.60	56.00	-22.40	QP
10	1.1340	13.21	9.65	22.86	46.00	-23.14	AVG
11	3.8140	28.61	9.39	38.00	56.00	-18.00	QP
12	4.1820	17.72	9.42	27.14	46.00	-18.86	AVG

TM9 / Line: Neutral

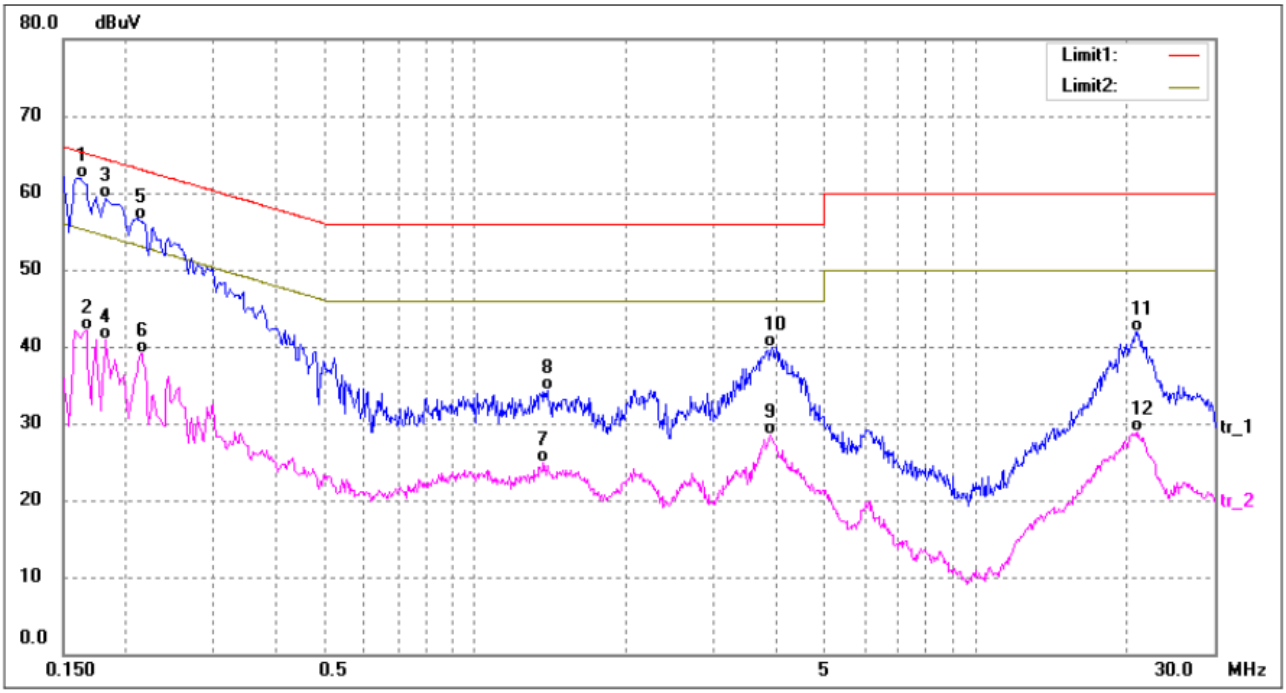

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1620	52.38	9.45	61.83	65.36	-3.53	QP
2	0.1660	32.68	9.46	42.14	55.15	-13.01	AVG
3	0.1819	49.78	9.53	59.31	64.39	-5.08	QP
4	0.1819	31.28	9.53	40.81	54.39	-13.58	AVG
5	0.2117	46.94	9.60	56.54	63.13	-6.59	QP
6	0.2140	29.60	9.60	39.20	53.04	-13.84	AVG
7	1.3700	15.29	9.55	24.84	46.00	-21.16	AVG
8	1.3940	24.76	9.54	34.30	56.00	-21.70	QP
9	3.8940	19.20	9.39	28.59	46.00	-17.41	AVG
10	3.9220	30.50	9.40	39.90	56.00	-16.10	QP
11	21.1020	32.52	9.40	41.92	60.00	-18.08	QP
12	21.1020	19.43	9.40	28.83	50.00	-21.17	AVG

TM10 / Line: Line

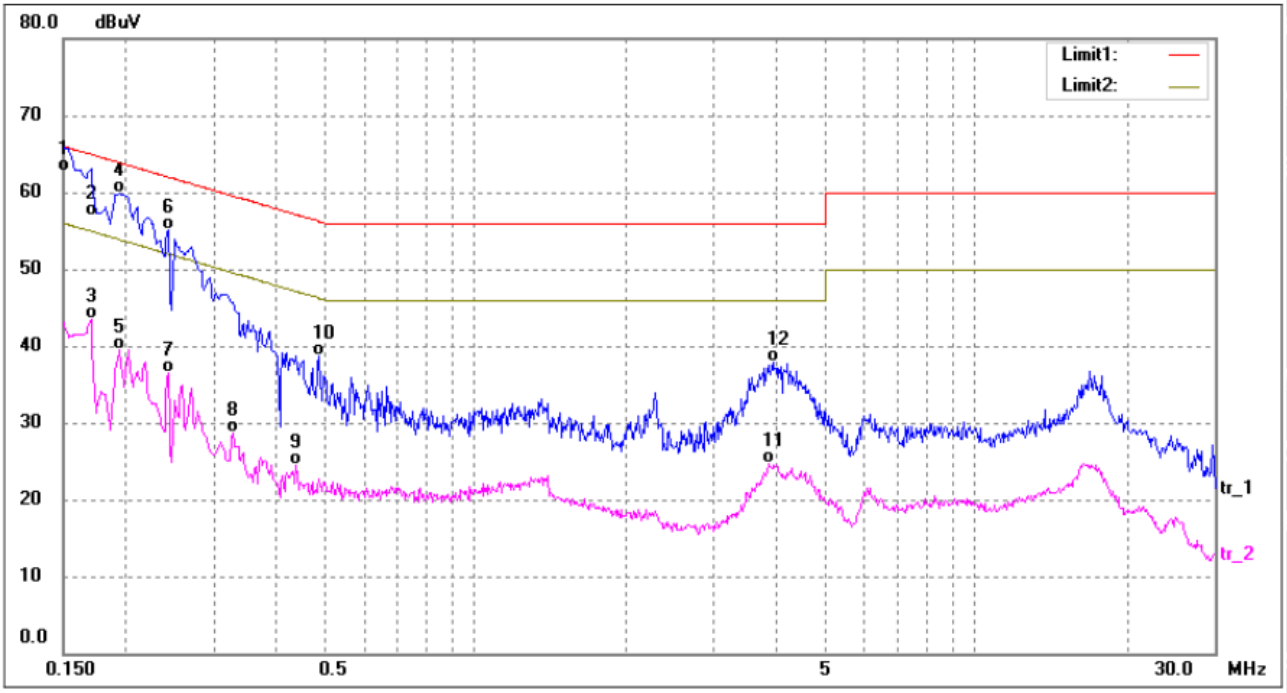

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1516	53.20	9.41	62.61	65.91	-3.30	QP
2	0.1700	47.34	9.48	56.82	64.96	-8.14	QP
3	0.1700	33.98	9.48	43.46	54.96	-11.50	AVG
4	0.1940	50.26	9.58	59.84	63.86	-4.02	QP
5	0.1940	29.96	9.58	39.54	53.86	-14.32	AVG
6	0.2420	45.44	9.60	55.04	62.02	-6.98	QP
7	0.2420	26.86	9.60	36.46	52.02	-15.56	AVG
8	0.3260	19.01	9.60	28.61	49.55	-20.94	AVG
9	0.4380	14.94	9.60	24.54	47.10	-22.56	AVG
10	0.4860	29.17	9.60	38.77	56.24	-17.47	QP
11	3.8700	15.31	9.39	24.70	46.00	-21.30	AVG
12	3.9420	28.52	9.40	37.92	56.00	-18.08	QP

TM10 / Line: Neutral

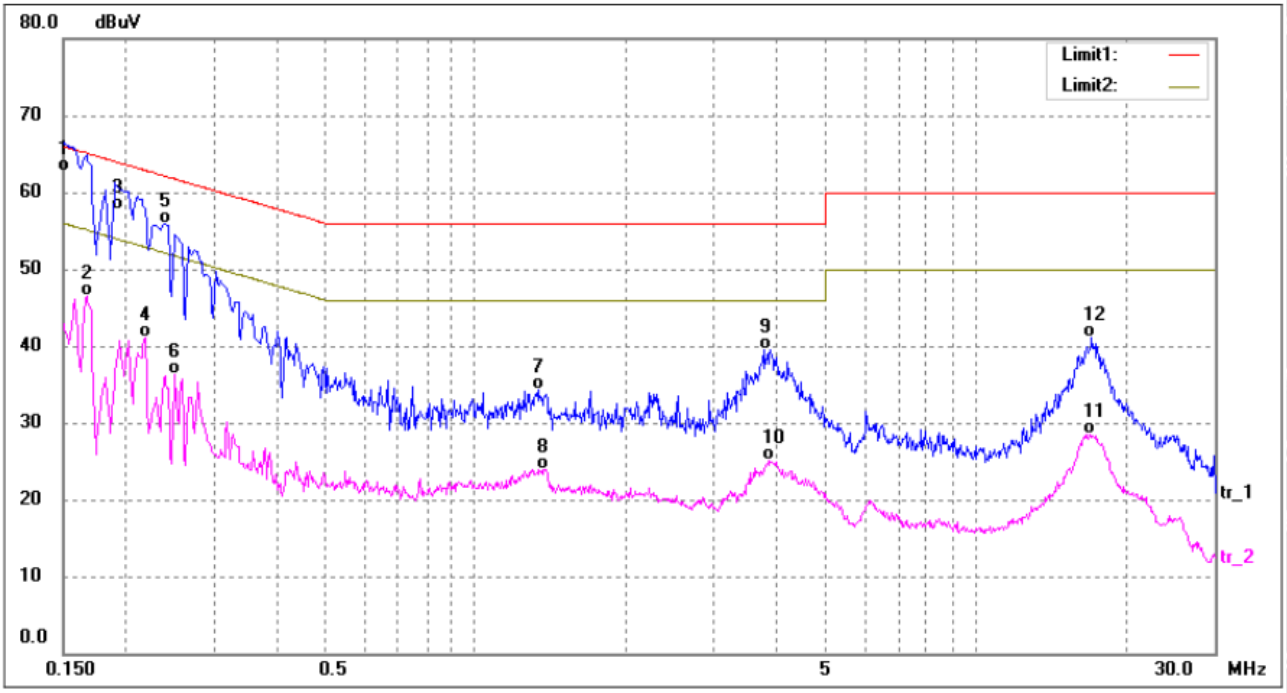

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1500	53.37	9.40	62.77	65.99	-3.22	QP
2	0.1660	37.11	9.46	46.57	55.15	-8.58	AVG
3	0.1900	48.19	9.56	57.75	64.03	-6.28	QP
4	0.2180	31.50	9.60	41.10	52.89	-11.79	AVG
5	0.2380	46.26	9.60	55.86	62.16	-6.30	QP
6	0.2500	26.70	9.60	36.30	51.75	-15.45	AVG
7	1.3340	24.68	9.57	34.25	56.00	-21.75	QP
8	1.3700	14.32	9.55	23.87	46.00	-22.13	AVG
9	3.7660	30.06	9.39	39.45	56.00	-16.55	QP
10	3.8700	15.77	9.39	25.16	46.00	-20.84	AVG
11	16.9100	19.14	9.40	28.54	50.00	-21.46	AVG
12	17.0820	31.73	9.40	41.13	60.00	-18.87	QP

TM11 / Line: Line

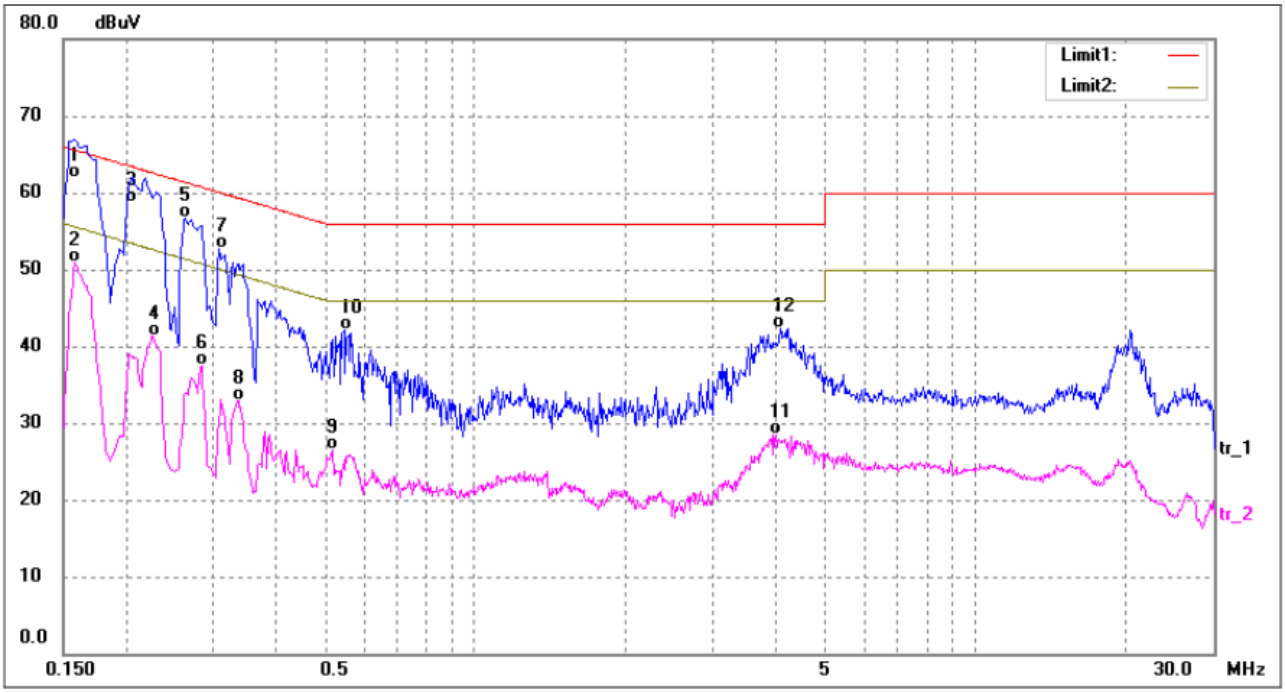

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1580	52.51	9.43	61.94	65.56	-3.62	QP
2	0.1580	41.54	9.43	50.97	55.56	-4.59	AVG
3	0.2060	49.01	9.60	58.61	63.36	-4.75	QP
4	0.2260	31.76	9.60	41.36	52.59	-11.23	AVG
5	0.2620	47.16	9.60	56.76	61.36	-4.60	QP
6	0.2819	27.84	9.60	37.44	50.76	-13.32	AVG
7	0.3060	43.17	9.60	52.77	60.08	-7.31	QP
8	0.3339	23.30	9.60	32.90	49.35	-16.45	AVG
9	0.5180	16.91	9.61	26.52	46.00	-19.48	AVG
10	0.5460	32.47	9.62	42.09	56.00	-13.91	QP
11	4.0020	19.05	9.40	28.45	46.00	-17.55	AVG
12	4.0860	32.90	9.41	42.31	56.00	-13.69	QP

TM11 / Line: Neutral

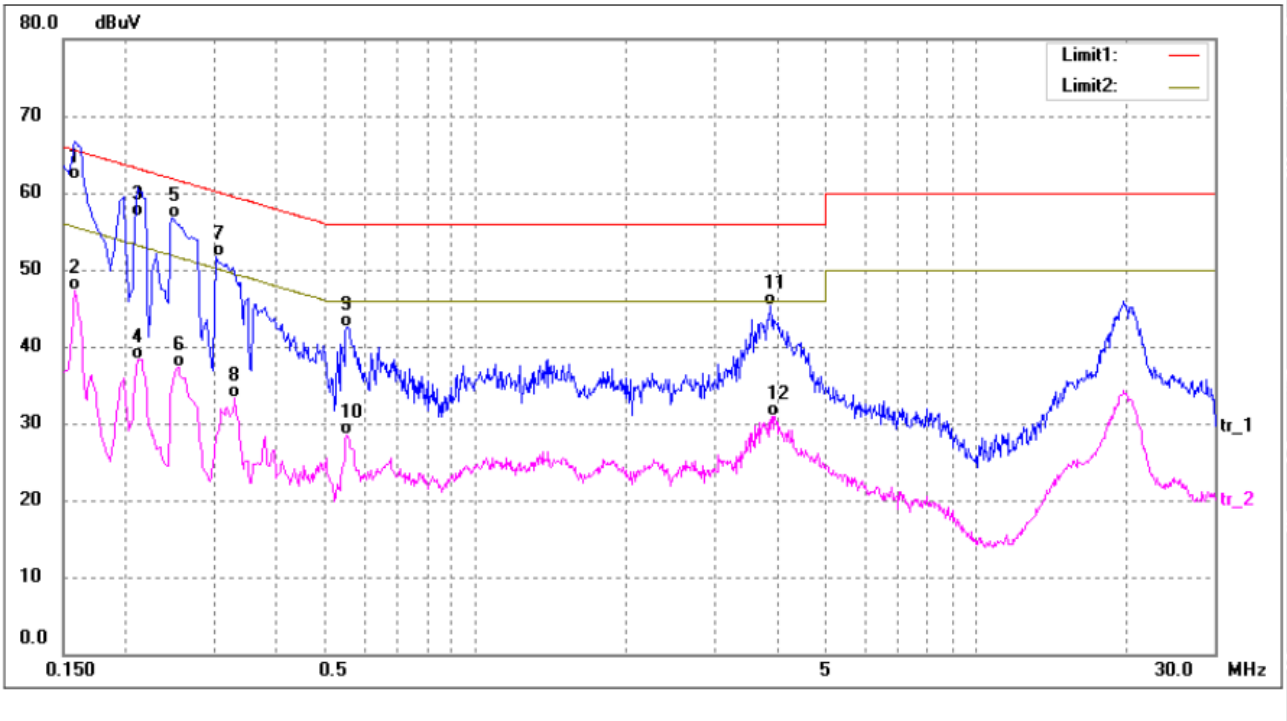

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1580	52.26	9.43	61.69	65.56	-3.87	QP
2	0.1580	37.92	9.43	47.35	55.56	-8.21	AVG
3	0.2100	47.35	9.60	56.95	63.20	-6.25	QP
4	0.2100	28.74	9.60	38.34	53.20	-14.86	AVG
5	0.2460	47.19	9.60	56.79	61.89	-5.10	QP
6	0.2540	27.78	9.60	37.38	51.62	-14.24	AVG
7	0.3020	42.19	9.60	51.79	60.19	-8.40	QP
8	0.3300	23.71	9.60	33.31	49.45	-16.14	AVG
9	0.5540	32.79	9.63	42.42	56.00	-13.58	QP
10	0.5540	18.85	9.63	28.48	46.00	-17.52	AVG
11	3.8820	35.90	9.39	45.29	56.00	-10.71	QP
12	3.9820	21.60	9.40	31.00	46.00	-15.00	AVG

TM12 / Line: Line

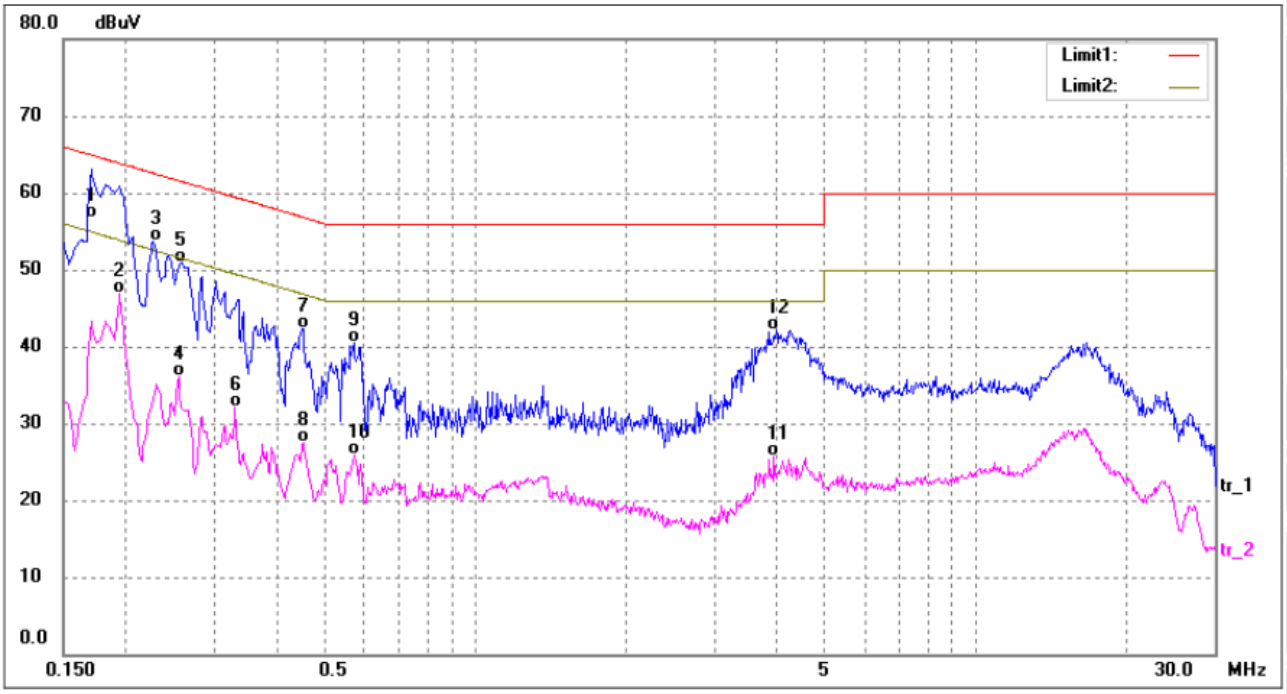

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1700	47.30	9.48	56.78	64.96	-8.18	QP
2*	0.1940	37.39	9.58	46.97	53.86	-6.89	AVG
3	0.2260	44.16	9.60	53.76	62.59	-8.83	QP
4	0.2540	26.52	9.60	36.12	51.62	-15.50	AVG
5	0.2580	41.32	9.60	50.92	61.49	-10.57	QP
6	0.3300	22.47	9.60	32.07	49.45	-17.38	AVG
7	0.4500	32.74	9.60	42.34	56.87	-14.53	QP
8	0.4500	17.97	9.60	27.57	46.87	-19.30	AVG
9	0.5700	30.86	9.63	40.49	56.00	-15.51	QP
10	0.5700	16.36	9.63	25.99	46.00	-20.01	AVG
11	3.9460	16.26	9.40	25.66	46.00	-20.34	AVG
12	3.9940	32.71	9.40	42.11	56.00	-13.89	QP

TM12 / Line: Neutral

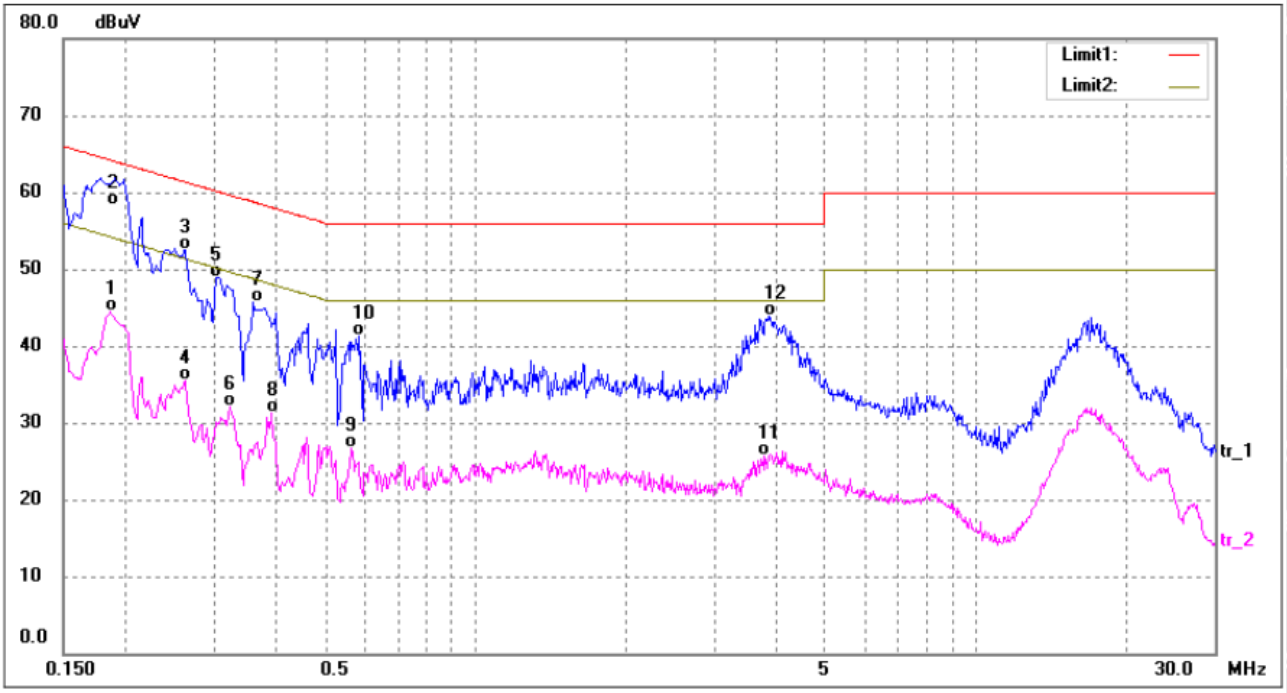

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1860	34.89	9.54	44.43	54.21	-9.78	AVG
2*	0.1900	48.84	9.56	58.40	64.03	-5.63	QP
3	0.2620	42.92	9.60	52.52	61.36	-8.84	QP
4	0.2620	25.88	9.60	35.48	51.36	-15.88	AVG
5	0.3020	39.35	9.60	48.95	60.19	-11.24	QP
6	0.3220	22.58	9.60	32.18	49.65	-17.47	AVG
7	0.3580	36.11	9.60	45.71	58.77	-13.06	QP
8	0.3899	21.61	9.60	31.21	48.06	-16.85	AVG
9	0.5660	17.00	9.63	26.63	46.00	-19.37	AVG
10	0.5860	31.64	9.64	41.28	56.00	-14.72	QP
11	3.7980	16.34	9.39	25.73	46.00	-20.27	AVG
12	3.8540	34.51	9.39	43.90	56.00	-12.10	QP

TM13 / Line: Line

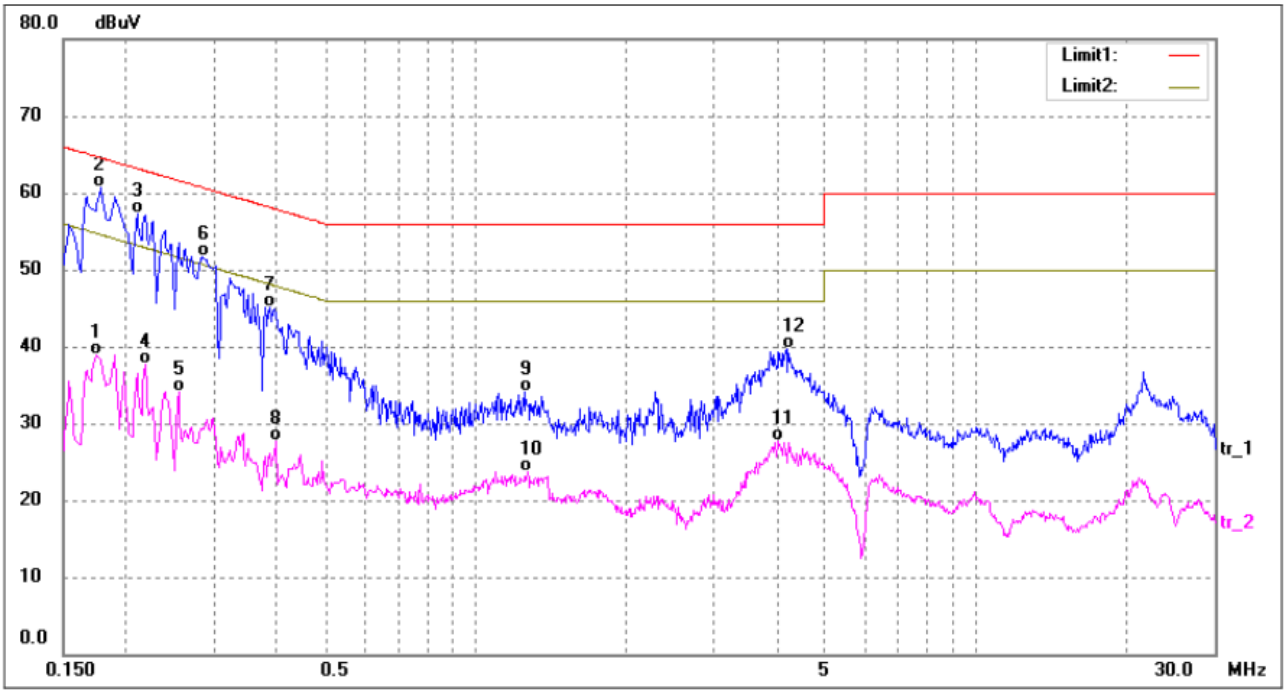

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1740	29.50	9.50	39.00	54.76	-15.76	AVG
2*	0.1780	51.14	9.51	60.65	64.57	-3.92	QP
3	0.2100	47.70	9.60	57.30	63.20	-5.90	QP
4	0.2180	28.18	9.60	37.78	52.89	-15.11	AVG
5	0.2540	24.49	9.60	34.09	51.62	-17.53	AVG
6	0.2819	42.03	9.60	51.63	60.76	-9.13	QP
7	0.3860	35.43	9.60	45.03	58.15	-13.12	QP
8	0.3980	18.05	9.60	27.65	47.89	-20.24	AVG
9	1.2579	24.43	9.60	34.03	56.00	-21.97	QP
10	1.2740	14.11	9.59	23.70	46.00	-22.30	AVG
11	4.0460	18.26	9.40	27.66	46.00	-18.34	AVG
12	4.1820	30.24	9.42	39.66	56.00	-16.34	QP

TM13 / Line: Neutral

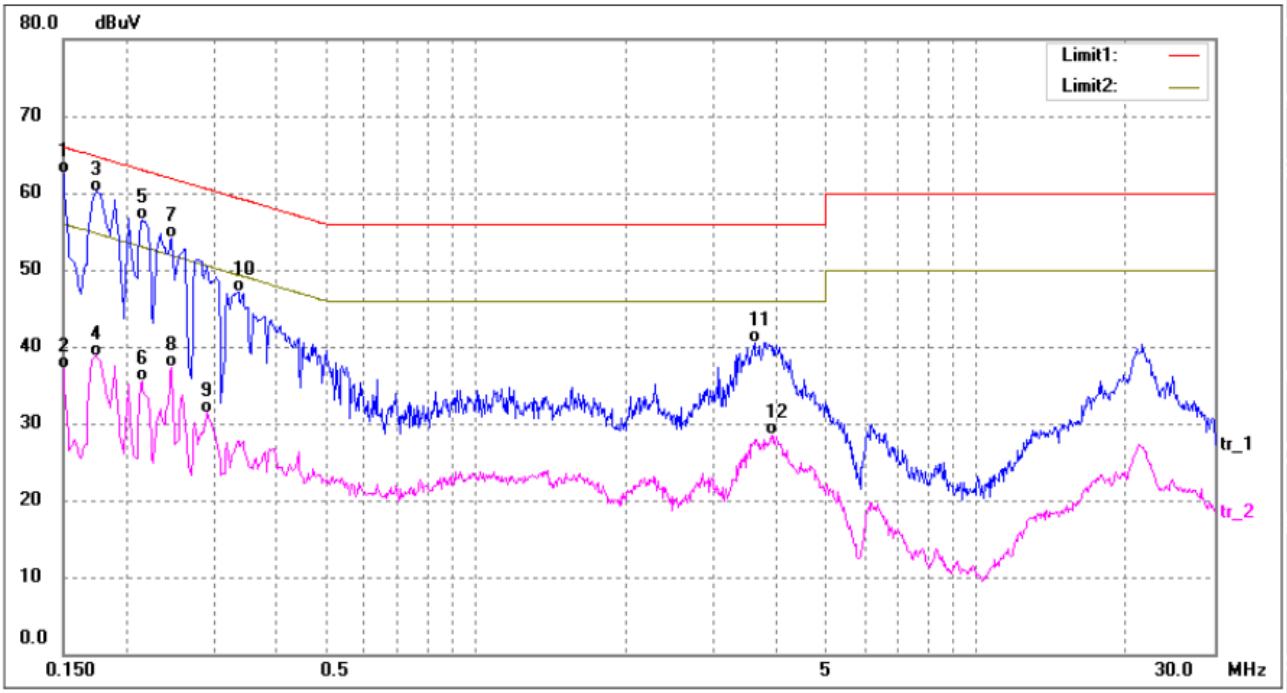

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1500	53.04	9.40	62.44	65.99	-3.55	QP
2	0.1500	27.69	9.40	37.09	55.99	-18.90	AVG
3	0.1740	50.70	9.50	60.20	64.76	-4.56	QP
4	0.1740	29.30	9.50	38.80	54.76	-15.96	AVG
5	0.2140	46.82	9.60	56.42	63.04	-6.62	QP
6	0.2140	25.91	9.60	35.51	53.04	-17.53	AVG
7	0.2460	44.54	9.60	54.14	61.89	-7.75	QP
8	0.2460	27.76	9.60	37.36	51.89	-14.53	AVG
9	0.2900	21.80	9.60	31.40	50.52	-19.12	AVG
10	0.3339	37.54	9.60	47.14	59.35	-12.21	QP
11	3.6140	31.15	9.38	40.53	56.00	-15.47	QP
12	3.9180	19.16	9.40	28.56	46.00	-17.44	AVG

TM14 / Line: Line

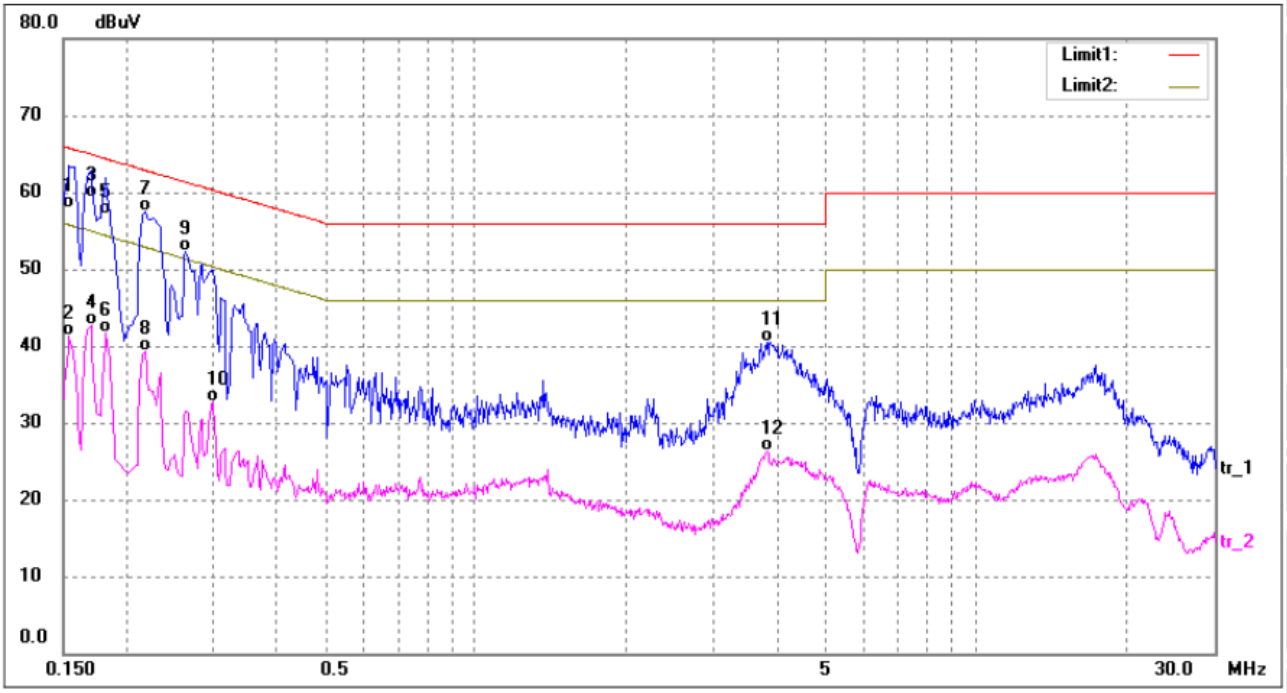

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1539	48.50	9.42	57.92	65.78	-7.86	QP
2	0.1539	31.80	9.42	41.22	55.78	-14.56	AVG
3	0.1700	49.77	9.48	59.25	64.96	-5.71	QP
4	0.1700	33.28	9.48	42.76	54.96	-12.20	AVG
5	0.1819	47.49	9.53	57.02	64.39	-7.37	QP
6	0.1819	32.23	9.53	41.76	54.39	-12.63	AVG
7*	0.2180	47.91	9.60	57.51	62.89	-5.38	QP
8	0.2180	29.69	9.60	39.29	52.89	-13.60	AVG
9	0.2620	42.77	9.60	52.37	61.36	-8.99	QP
10	0.2980	23.08	9.60	32.68	50.30	-17.62	AVG
11	3.8380	31.17	9.39	40.56	56.00	-15.44	QP
12	3.8380	16.91	9.39	26.30	46.00	-19.70	AVG

TM14 / Line: Neutral

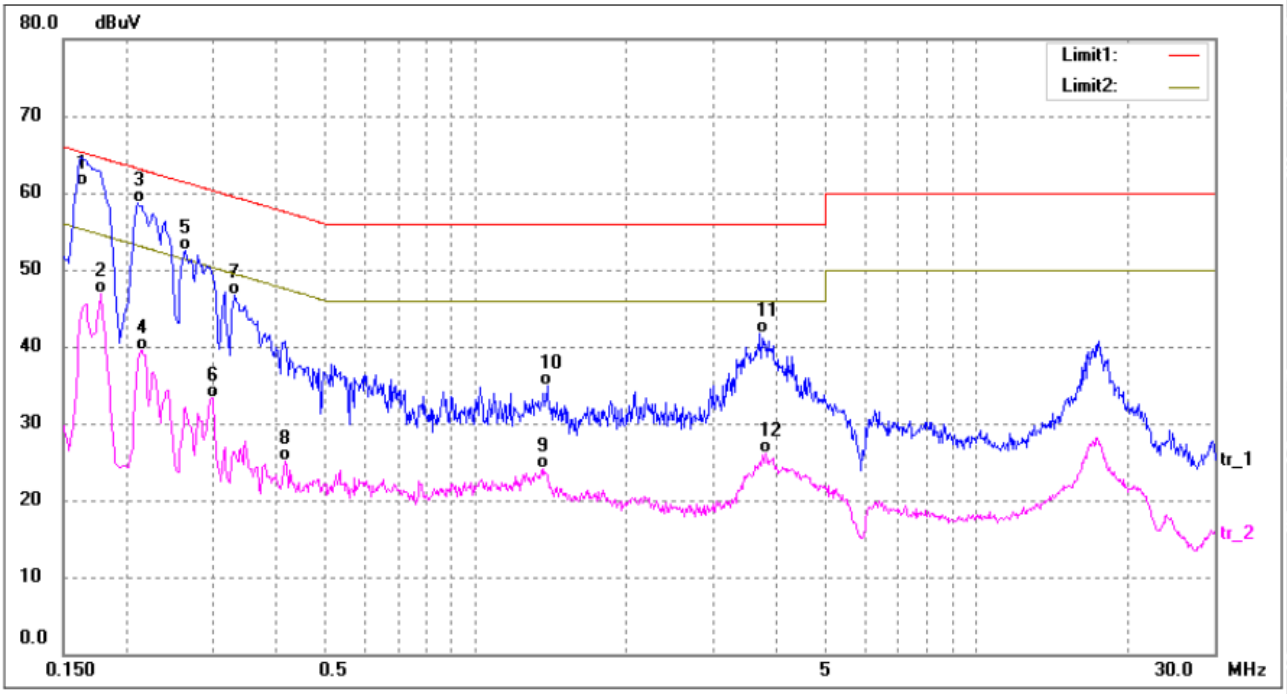

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1620	51.46	9.45	60.91	65.36	-4.45	QP
2	0.1780	37.30	9.51	46.81	54.57	-7.76	AVG
3	0.2100	49.03	9.60	58.63	63.20	-4.57	QP
4	0.2140	29.89	9.60	39.49	53.04	-13.55	AVG
5	0.2620	42.81	9.60	52.41	61.36	-8.95	QP
6	0.2980	23.80	9.60	33.40	50.30	-16.90	AVG
7	0.3300	37.08	9.60	46.68	59.45	-12.77	QP
8	0.4140	15.44	9.60	25.04	47.57	-22.53	AVG
9	1.3700	14.52	9.55	24.07	46.00	-21.93	AVG
10	1.3940	25.33	9.54	34.87	56.00	-21.13	QP
11	3.7060	32.40	9.39	41.79	56.00	-14.21	QP
12	3.8140	16.65	9.39	26.04	46.00	-19.96	AVG

TM15 / Line: Line

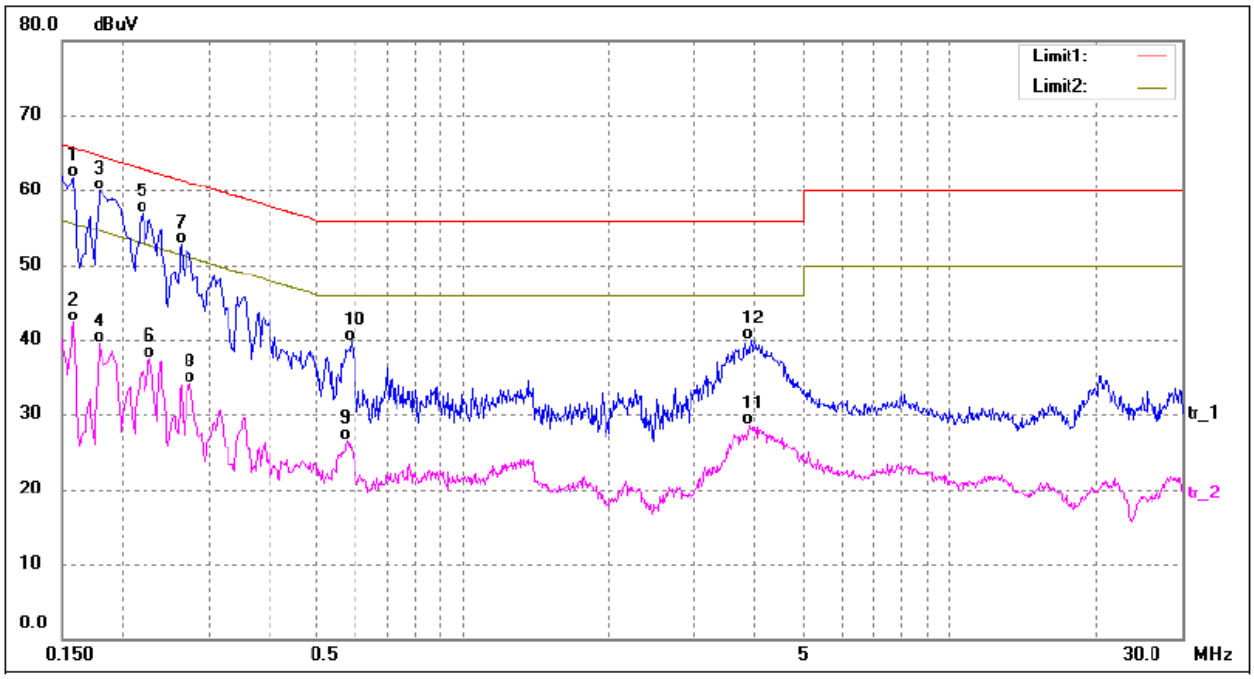

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	52.30	9.43	61.73	65.56	-3.83	QP
2	0.1580	32.88	9.43	42.31	55.56	-13.25	AVG
3	0.1780	50.36	9.51	59.87	64.57	-4.70	QP
4	0.1780	30.02	9.51	39.53	54.57	-15.04	AVG
5	0.2180	47.24	9.60	56.84	62.89	-6.05	QP
6	0.2260	27.89	9.60	37.49	52.59	-15.10	AVG
7	0.2620	43.09	9.60	52.69	61.36	-8.67	QP
8	0.2740	24.53	9.60	34.13	50.99	-16.86	AVG
9	0.5780	16.91	9.64	26.55	46.00	-19.45	AVG
10	0.5899	30.11	9.64	39.75	56.00	-16.25	QP
11	3.8860	19.11	9.39	28.50	46.00	-17.50	AVG
12	3.9180	30.56	9.40	39.96	56.00	-16.04	QP

TM15 / Line: Neutral

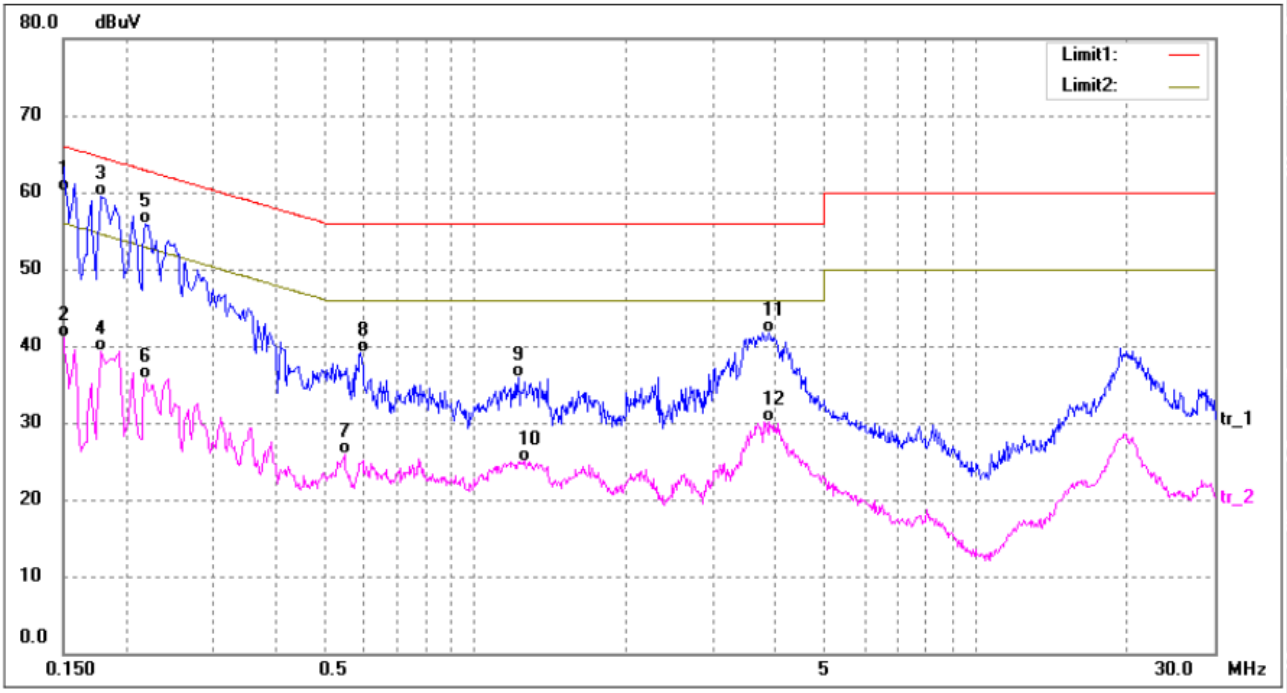

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1500	50.63	9.40	60.03	65.99	-5.96	QP
2	0.1500	31.63	9.40	41.03	55.99	-14.96	AVG
3*	0.1780	49.90	9.51	59.41	64.57	-5.16	QP
4	0.1780	29.89	9.51	39.40	54.57	-15.17	AVG
5	0.2180	46.31	9.60	55.91	62.89	-6.98	QP
6	0.2180	26.07	9.60	35.67	52.89	-17.22	AVG
7	0.5460	16.25	9.62	25.87	46.00	-20.13	AVG
8	0.5899	29.38	9.64	39.02	56.00	-16.98	QP
9	1.2220	26.32	9.61	35.93	56.00	-20.07	QP
10	1.2500	15.40	9.60	25.00	46.00	-21.00	AVG
11	3.8740	32.31	9.39	41.70	56.00	-14.30	QP
12	3.8740	20.71	9.39	30.10	46.00	-15.90	AVG

TM16 / Line: Line

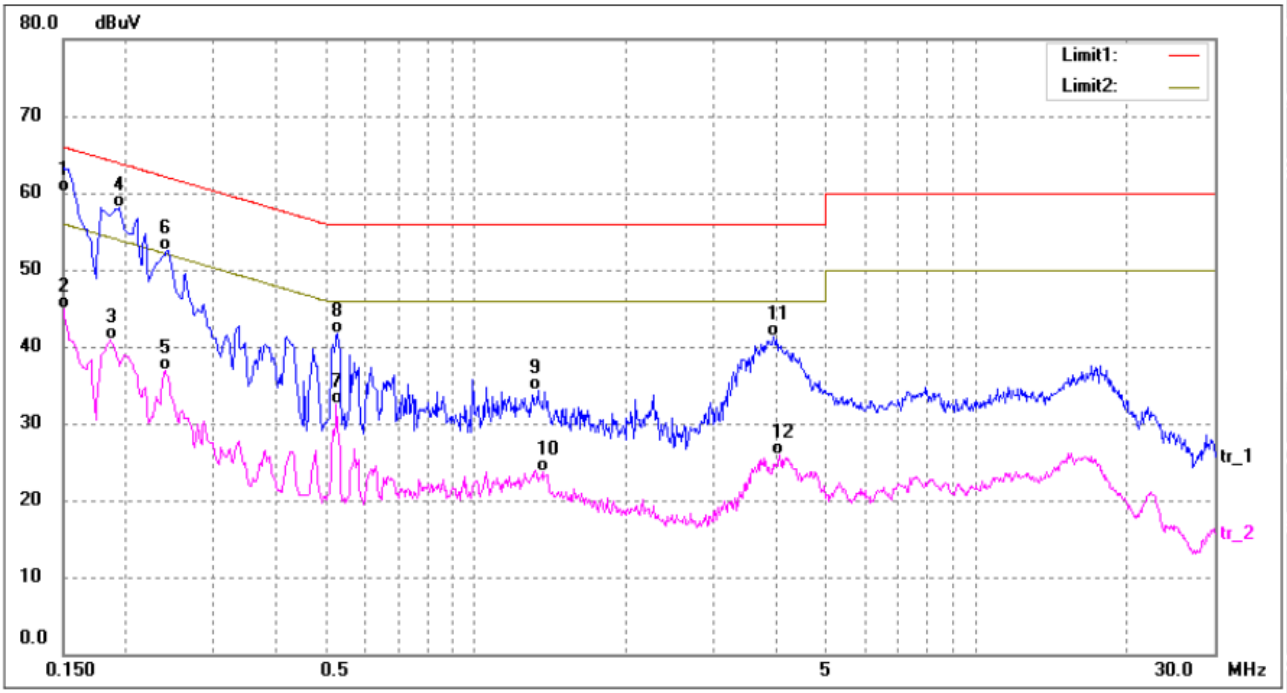

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1516	50.71	9.41	60.12	65.91	-5.79	QP
2	0.1516	35.53	9.41	44.94	55.91	-10.97	AVG
3	0.1860	31.42	9.54	40.96	54.21	-13.25	AVG
4	0.1940	48.46	9.58	58.04	63.86	-5.82	QP
5	0.2380	27.27	9.60	36.87	52.16	-15.29	AVG
6	0.2420	42.89	9.60	52.49	62.02	-9.53	QP
7	0.5260	22.94	9.61	32.55	46.00	-13.45	AVG
8	0.5299	32.12	9.61	41.73	56.00	-14.27	QP
9	1.3340	24.79	9.57	34.36	56.00	-21.64	QP
10	1.3619	14.12	9.55	23.67	46.00	-22.33	AVG
11	3.9540	31.82	9.40	41.22	56.00	-14.78	QP
12	4.0660	16.47	9.41	25.88	46.00	-20.12	AVG

TM16 / Line: Neutral

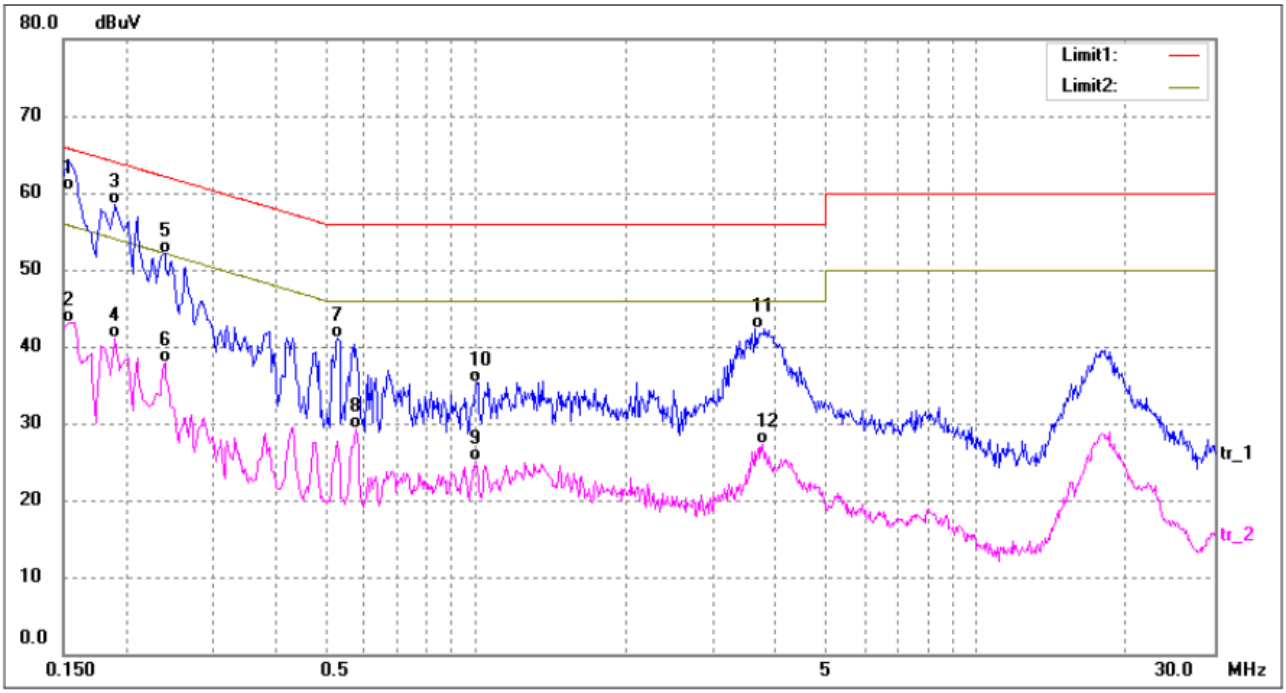

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1539	50.88	9.42	60.30	65.78	-5.48	QP
2	0.1539	33.77	9.42	43.19	55.78	-12.59	AVG
3	0.1900	48.89	9.56	58.45	64.03	-5.58	QP
4	0.1900	31.47	9.56	41.03	54.03	-13.00	AVG
5	0.2380	42.53	9.60	52.13	62.16	-10.03	QP
6	0.2380	28.38	9.60	37.98	52.16	-14.18	AVG
7	0.5299	31.40	9.61	41.01	56.00	-14.99	QP
8	0.5780	19.65	9.64	29.29	46.00	-16.71	AVG
9	1.0020	15.40	9.70	25.10	46.00	-20.90	AVG
10	1.0100	25.65	9.70	35.35	56.00	-20.65	QP
11	3.6260	32.87	9.38	42.25	56.00	-13.75	QP
12	3.7460	17.83	9.39	27.22	46.00	-18.78	AVG

TM17 / Line: Line

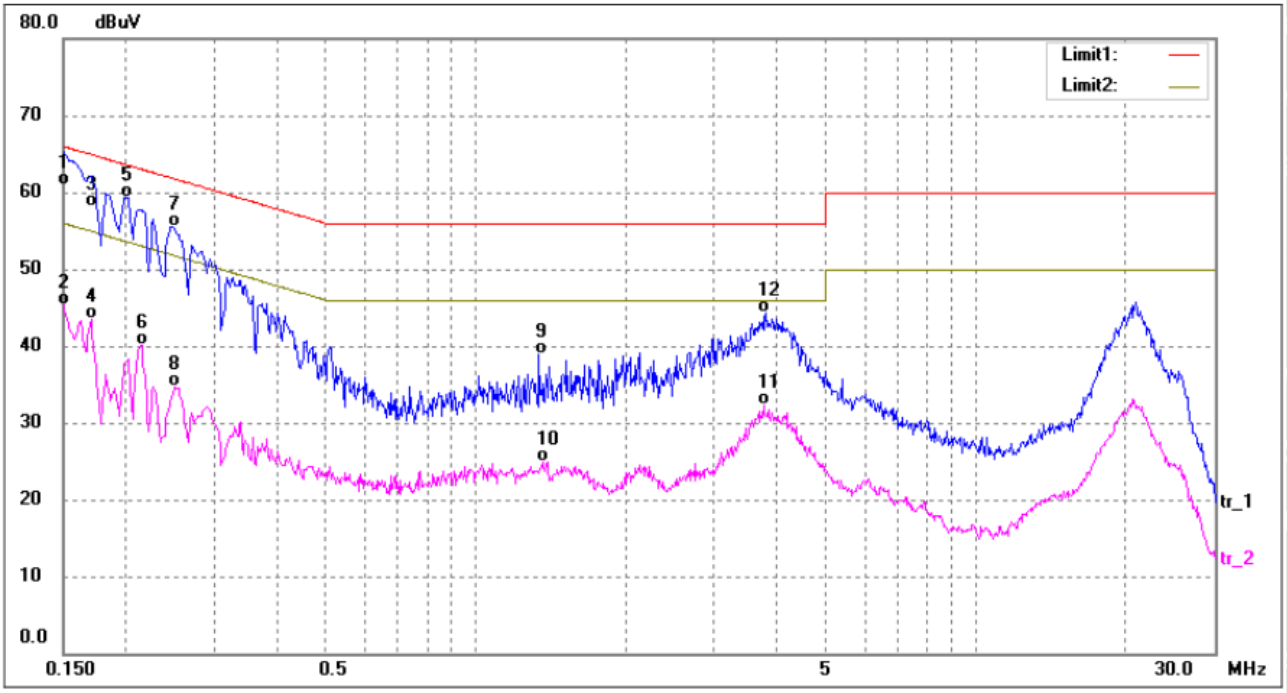

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1500	51.57	9.40	60.97	65.99	-5.02	QP
2	0.1500	35.82	9.40	45.22	55.99	-10.77	AVG
3	0.1700	48.67	9.48	58.15	64.96	-6.81	QP
4	0.1700	34.05	9.48	43.53	54.96	-11.43	AVG
5*	0.1980	49.78	9.59	59.37	63.69	-4.32	QP
6	0.2140	30.60	9.60	40.20	53.04	-12.84	AVG
7	0.2460	46.00	9.60	55.60	61.89	-6.29	QP
8	0.2500	25.16	9.60	34.76	51.75	-16.99	AVG
9	1.3420	29.33	9.56	38.89	56.00	-17.11	QP
10	1.3700	15.31	9.55	24.86	46.00	-21.14	AVG
11	3.7780	22.84	9.39	32.23	46.00	-13.77	AVG
12	3.8140	34.93	9.39	44.32	56.00	-11.68	QP

TM17 / Line: Neutral

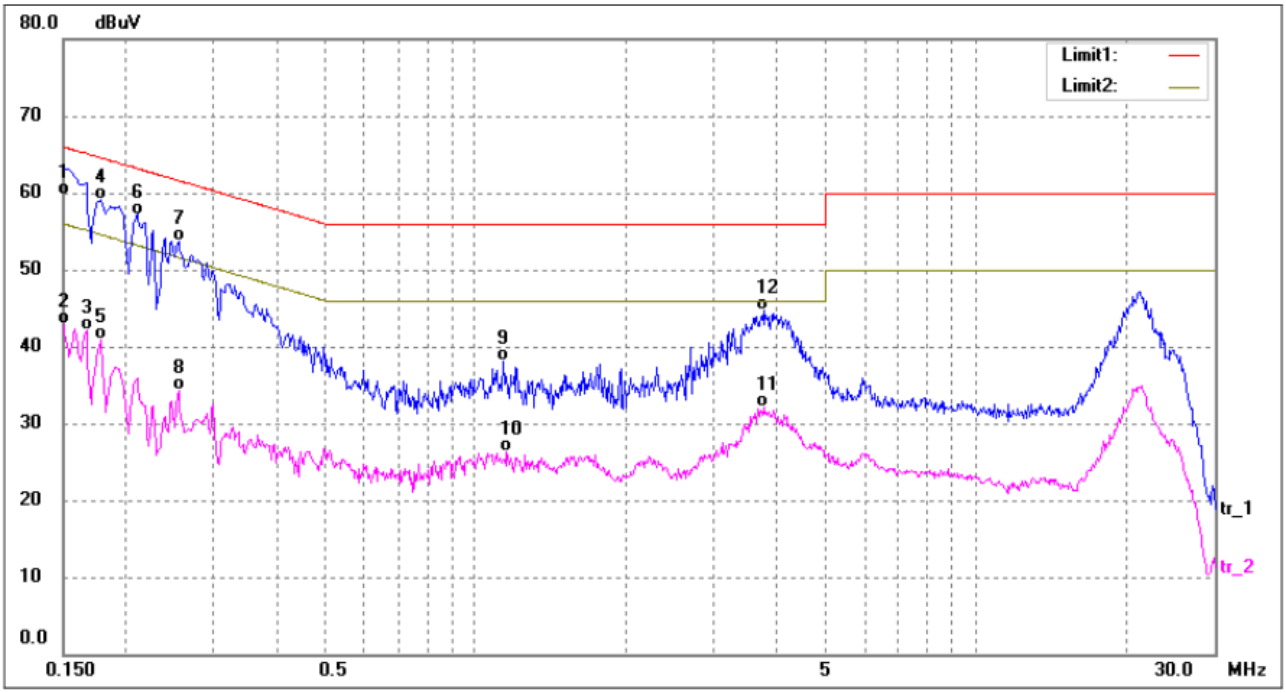

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1500	50.26	9.40	59.66	65.99	-6.33	QP
2	0.1500	33.41	9.40	42.81	55.99	-13.18	AVG
3	0.1660	32.63	9.46	42.09	55.15	-13.06	AVG
4*	0.1780	49.64	9.51	59.15	64.57	-5.42	QP
5	0.1780	31.38	9.51	40.89	54.57	-13.68	AVG
6	0.2100	47.60	9.60	57.20	63.20	-6.00	QP
7	0.2540	44.06	9.60	53.66	61.62	-7.96	QP
8	0.2540	24.76	9.60	34.36	51.62	-17.26	AVG
9	1.1380	28.41	9.64	38.05	56.00	-17.95	QP
10	1.1539	16.73	9.64	26.37	46.00	-19.63	AVG
11	3.7660	22.65	9.39	32.04	46.00	-13.96	AVG
12	3.7980	35.39	9.39	44.78	56.00	-11.22	QP

TM18 / Line: Line

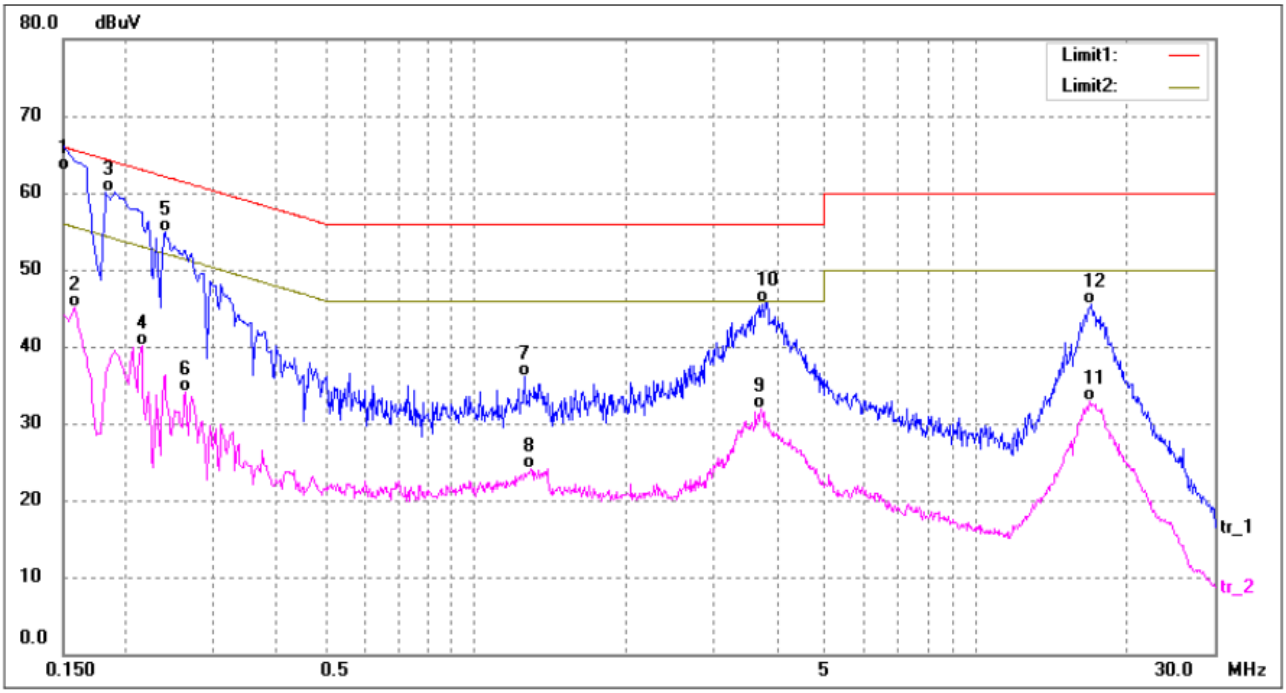

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1500	53.48	9.40	62.88	65.99	-3.11	QP
2	0.1580	35.61	9.43	45.04	55.56	-10.52	AVG
3	0.1819	50.64	9.53	60.17	64.39	-4.22	QP
4	0.2140	30.49	9.60	40.09	53.04	-12.95	AVG
5	0.2380	45.34	9.60	54.94	62.16	-7.22	QP
6	0.2620	24.43	9.60	34.03	51.36	-17.33	AVG
7	1.2540	26.56	9.60	36.16	56.00	-19.84	QP
8	1.2900	14.56	9.58	24.14	46.00	-21.86	AVG
9	3.7380	22.53	9.39	31.92	46.00	-14.08	AVG
10	3.8140	36.33	9.39	45.72	56.00	-10.28	QP
11	16.8420	23.44	9.40	32.84	50.00	-17.16	AVG
12	17.1060	36.09	9.40	45.49	60.00	-14.51	QP

TM18 / Line: Neutral

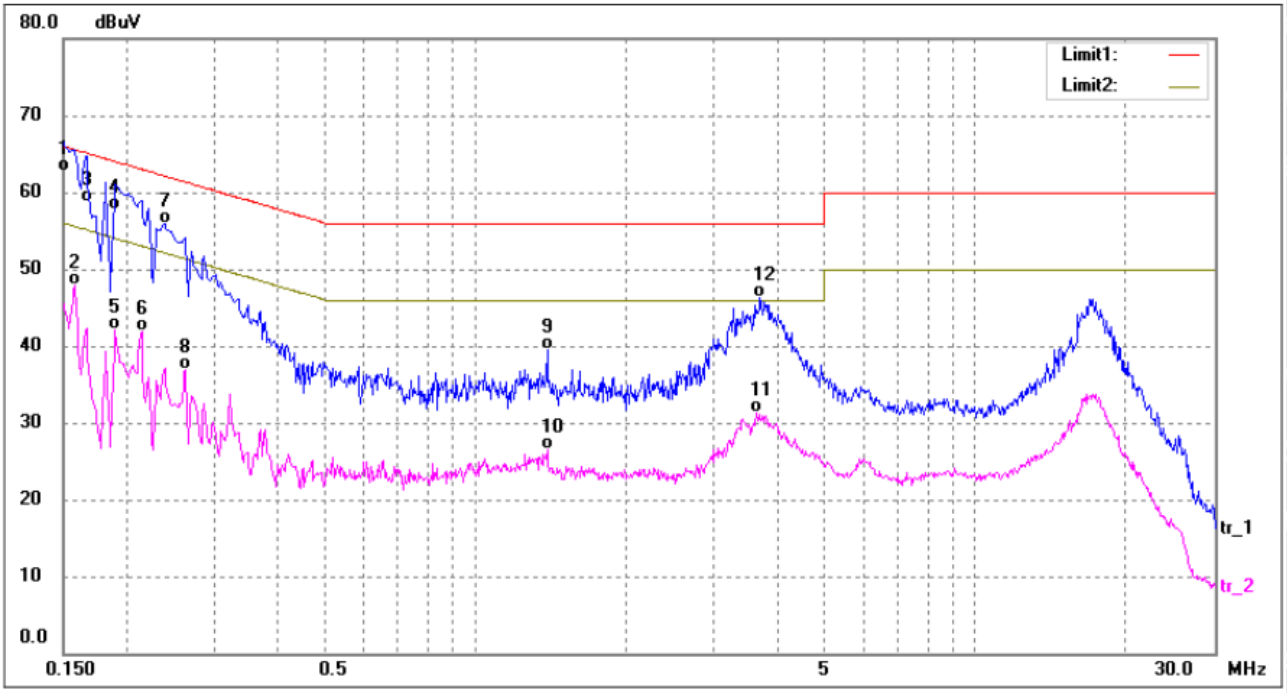

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1524	53.29	9.41	62.70	65.86	-3.16	QP
2	0.1580	38.56	9.43	47.99	55.56	-7.57	AVG
3	0.1660	49.15	9.46	58.61	65.15	-6.54	QP
4	0.1900	48.18	9.56	57.74	64.03	-6.29	QP
5	0.1900	32.47	9.56	42.03	54.03	-12.00	AVG
6	0.2140	32.22	9.60	41.82	53.04	-11.22	AVG
7	0.2380	46.27	9.60	55.87	62.16	-6.29	QP
8	0.2620	27.28	9.60	36.88	51.36	-14.48	AVG
9	1.3940	29.89	9.54	39.43	56.00	-16.57	QP
10	1.3940	16.91	9.54	26.45	46.00	-19.55	AVG
11	3.6500	21.86	9.38	31.24	46.00	-14.76	AVG
12	3.7100	36.91	9.39	46.30	56.00	-9.70	QP

TM19 / Line: Line

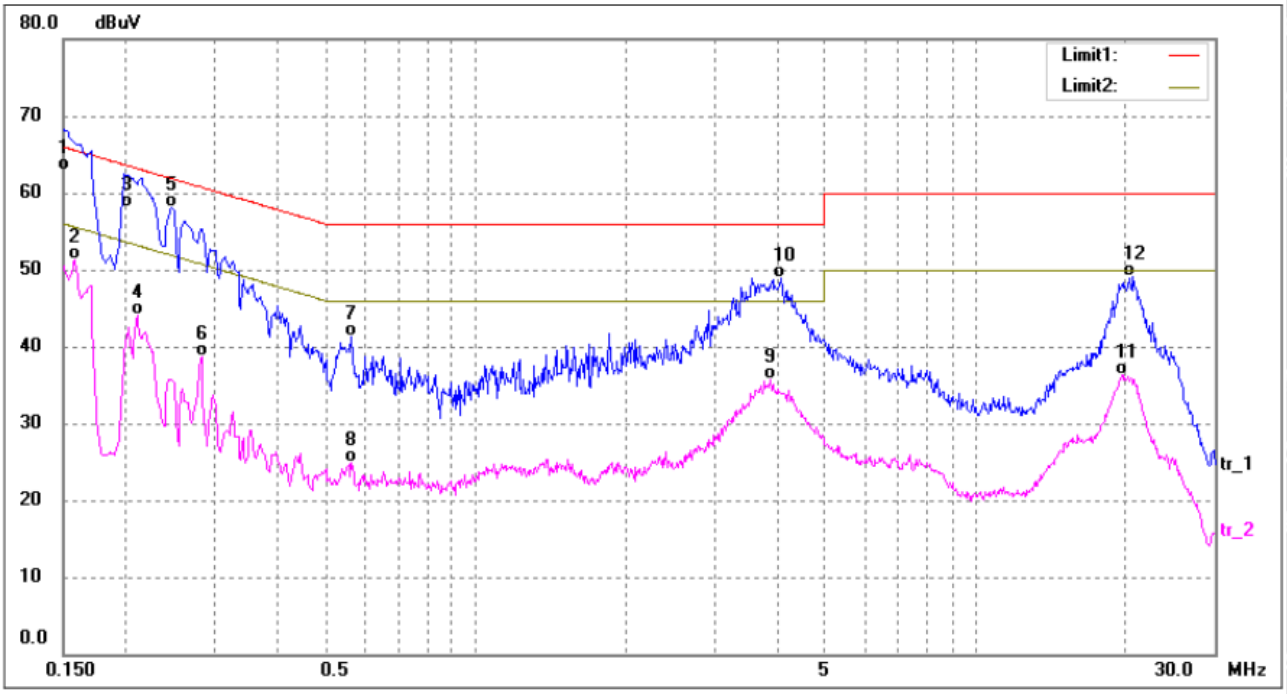

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1516	53.49	9.41	62.90	65.91	-3.01	QP
2	0.1580	41.89	9.43	51.32	55.56	-4.24	AVG
3	0.1980	48.61	9.59	58.20	63.69	-5.49	QP
4	0.2100	34.51	9.60	44.11	53.20	-9.09	AVG
5	0.2460	48.44	9.60	58.04	61.89	-3.85	QP
6	0.2819	29.08	9.60	38.68	50.76	-12.08	AVG
7	0.5660	31.65	9.63	41.28	56.00	-14.72	QP
8	0.5660	15.30	9.63	24.93	46.00	-21.07	AVG
9	3.8980	26.32	9.39	35.71	46.00	-10.29	AVG
10	4.0900	39.57	9.41	48.98	56.00	-7.02	QP
11	19.5980	26.96	9.40	36.36	50.00	-13.64	AVG
12	20.6060	39.65	9.40	49.05	60.00	-10.95	QP

TM19 / Line: Neutral

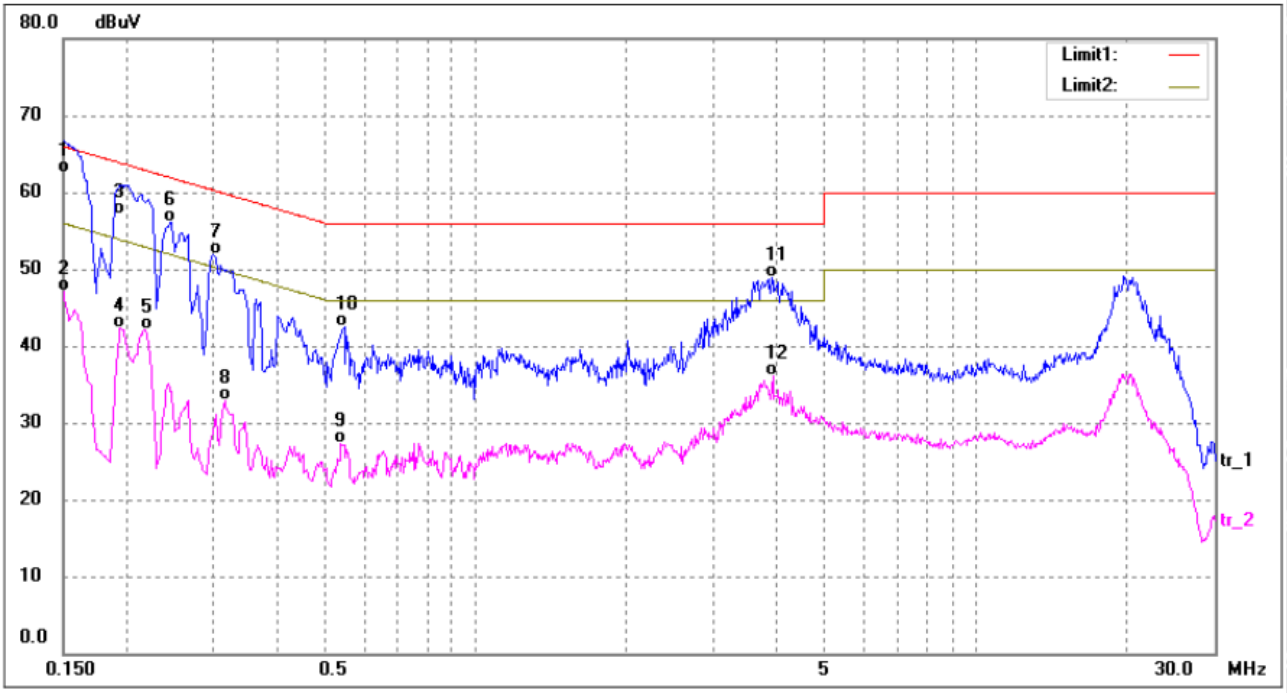

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1500	53.10	9.40	62.50	65.99	-3.49	QP
2	0.1500	37.79	9.40	47.19	55.99	-8.80	AVG
3	0.1940	47.50	9.58	57.08	63.86	-6.78	QP
4	0.1940	32.78	9.58	42.36	53.86	-11.50	AVG
5	0.2180	32.57	9.60	42.17	52.89	-10.72	AVG
6	0.2460	46.52	9.60	56.12	61.89	-5.77	QP
7	0.2980	42.24	9.60	51.84	60.30	-8.46	QP
8	0.3140	23.28	9.60	32.88	49.86	-16.98	AVG
9	0.5380	17.63	9.62	27.25	46.00	-18.75	AVG
10	0.5460	32.87	9.62	42.49	56.00	-13.51	QP
11	3.9180	39.58	9.40	48.98	56.00	-7.02	QP
12	3.9380	26.65	9.40	36.05	46.00	-9.95	AVG

TM20 / Line: Line

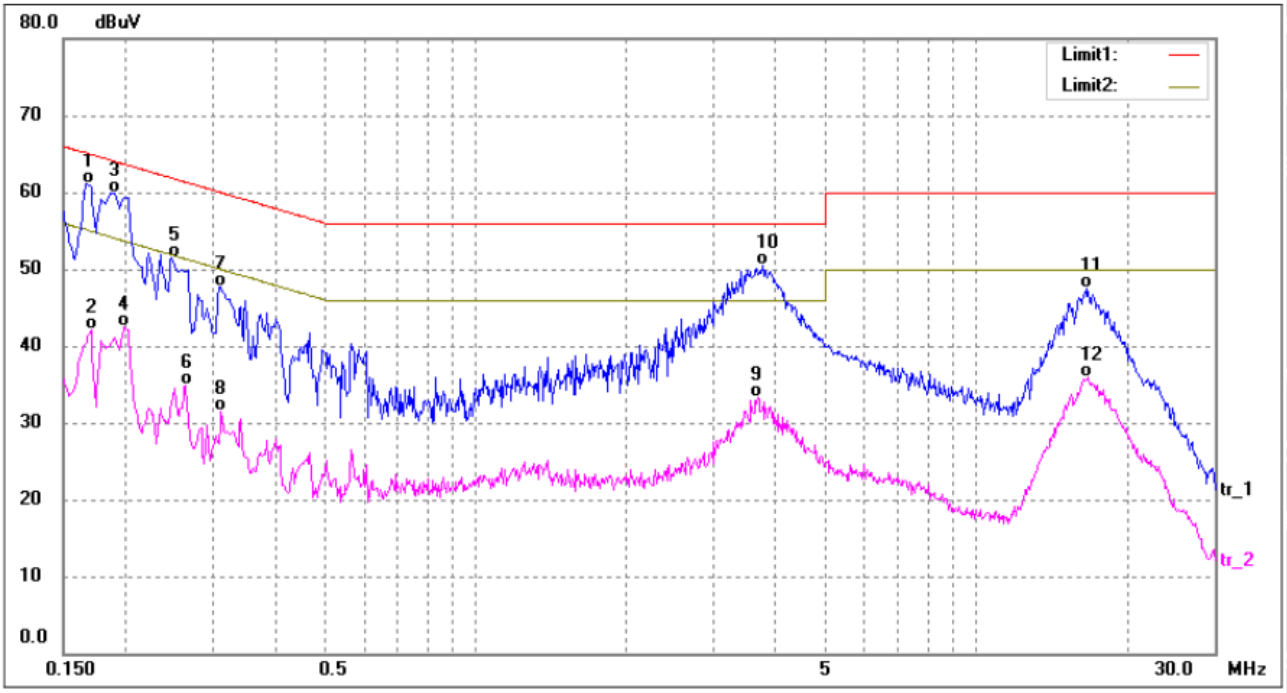

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1660	51.70	9.46	61.16	65.15	-3.99	QP
2	0.1700	32.55	9.48	42.03	54.96	-12.93	AVG
3	0.1900	50.38	9.56	59.94	64.03	-4.09	QP
4	0.1980	32.85	9.59	42.44	53.69	-11.25	AVG
5	0.2460	41.99	9.60	51.59	61.89	-10.30	QP
6	0.2620	25.25	9.60	34.85	51.36	-16.51	AVG
7	0.3100	38.05	9.60	47.65	59.97	-12.32	QP
8	0.3100	21.99	9.60	31.59	49.97	-18.38	AVG
9	3.6620	23.95	9.38	33.33	46.00	-12.67	AVG
10	3.7460	41.02	9.39	50.41	56.00	-5.59	QP
11	16.6700	38.08	9.40	47.48	60.00	-12.52	QP
12	16.7620	26.56	9.40	35.96	50.00	-14.04	AVG

TM20 / Line: Neutral

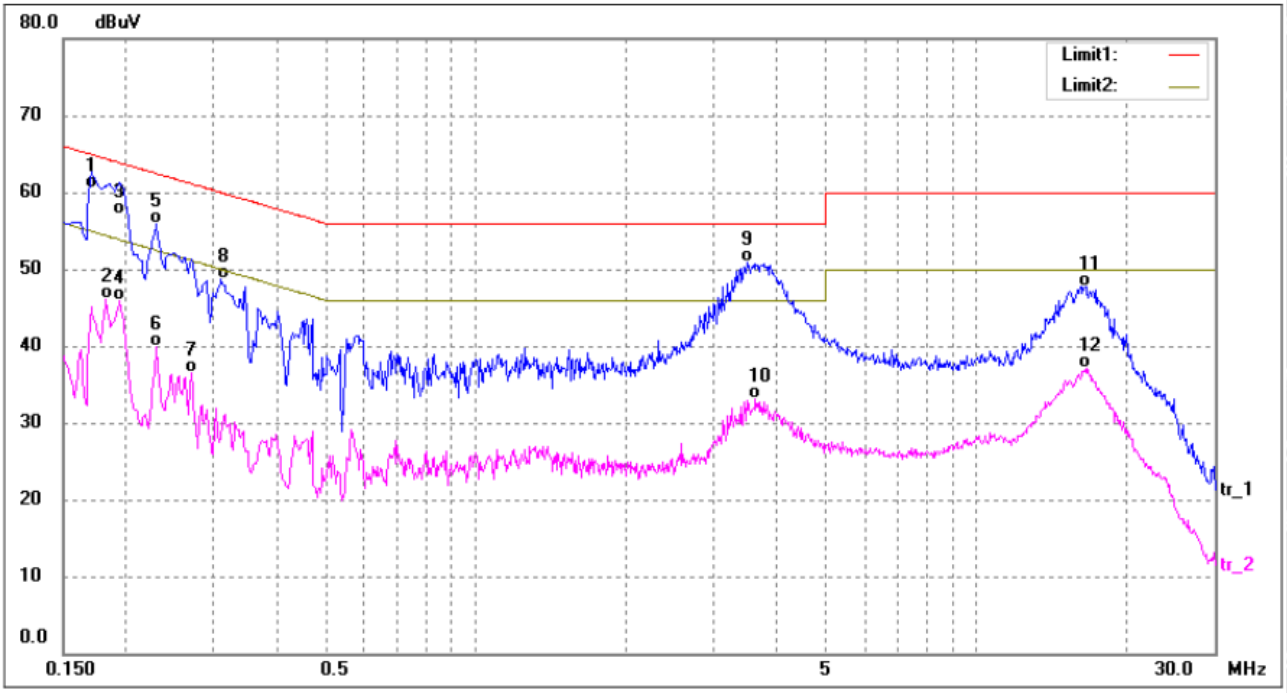

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1700	51.10	9.48	60.58	64.96	-4.38	QP
2	0.1819	36.58	9.53	46.11	54.39	-8.28	AVG
3	0.1940	47.46	9.58	57.04	63.86	-6.82	QP
4	0.1940	36.33	9.58	45.91	53.86	-7.95	AVG
5	0.2300	46.23	9.60	55.83	62.45	-6.62	QP
6	0.2300	30.25	9.60	39.85	52.45	-12.60	AVG
7	0.2700	26.84	9.60	36.44	51.12	-14.68	AVG
8	0.3100	39.09	9.60	48.69	59.97	-11.28	QP
9	3.5060	41.47	9.38	50.85	56.00	-5.15	QP
10	3.6300	23.67	9.38	33.05	46.00	-12.95	AVG
11	16.5500	38.38	9.40	47.78	60.00	-12.22	QP
12	16.6100	27.77	9.40	37.17	50.00	-12.83	AVG

TM21 / Line: Line

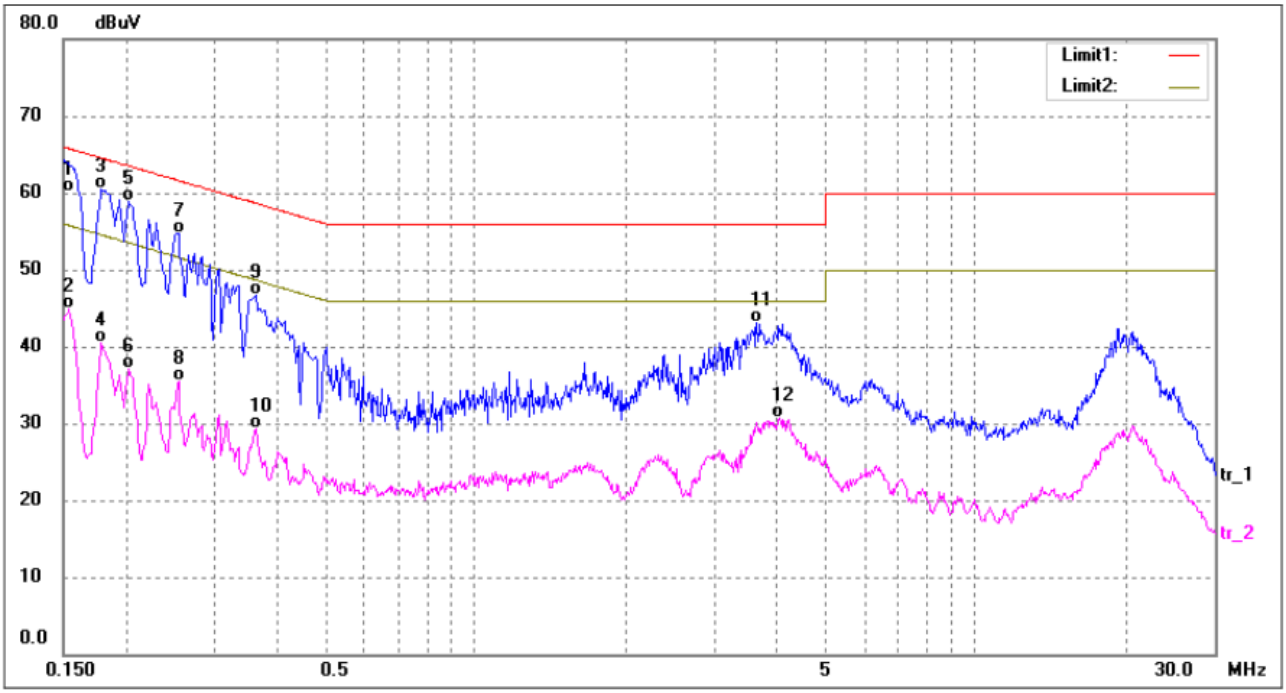

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1516	50.78	9.41	60.19	65.91	-5.72	QP
2	0.1539	35.40	9.42	44.82	55.78	-10.96	AVG
3*	0.1780	50.94	9.51	60.45	64.57	-4.12	QP
4	0.1780	30.92	9.51	40.43	54.57	-14.14	AVG
5	0.2020	49.28	9.60	58.88	63.52	-4.64	QP
6	0.2020	27.44	9.60	37.04	53.52	-16.48	AVG
7	0.2540	45.05	9.60	54.65	61.62	-6.97	QP
8	0.2540	25.85	9.60	35.45	51.62	-16.17	AVG
9	0.3620	37.02	9.60	46.62	58.68	-12.06	QP
10	0.3620	19.72	9.60	29.32	48.68	-19.36	AVG
11	3.6420	33.67	9.38	43.05	56.00	-12.95	QP
12	4.0580	21.23	9.41	30.64	46.00	-15.36	AVG

TM21 / Line: Neutral

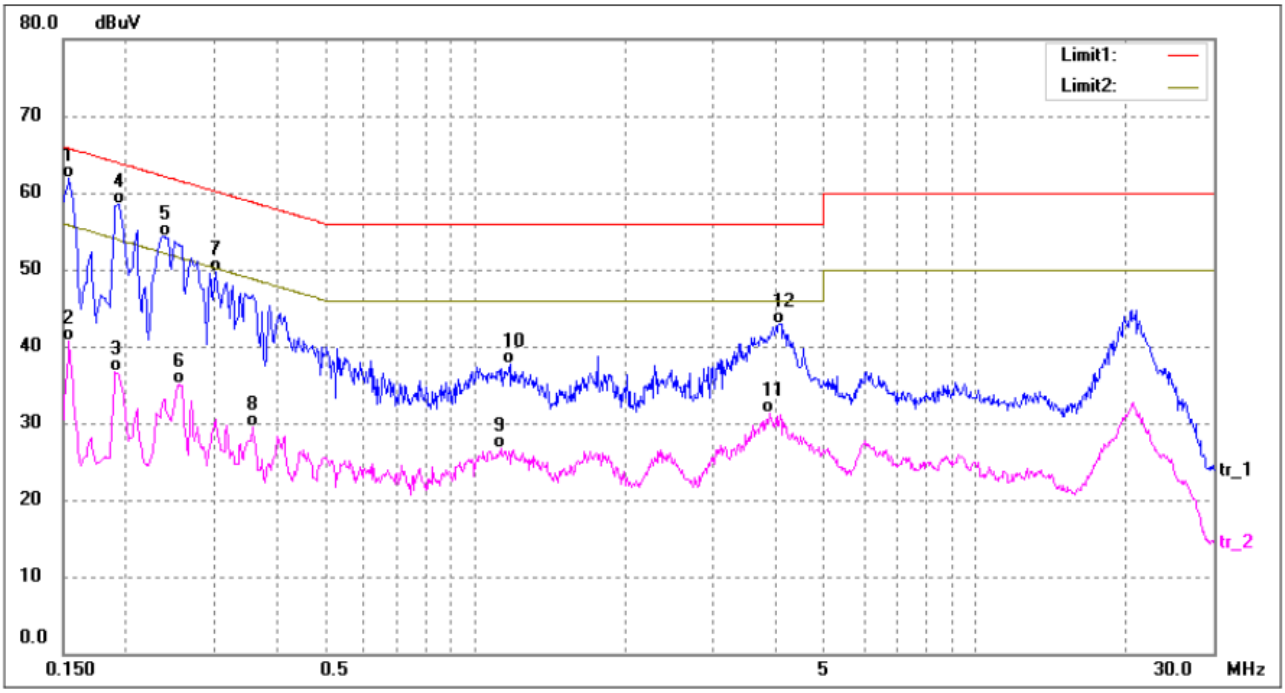

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1539	52.43	9.42	61.85	65.78	-3.93	QP
2	0.1539	31.22	9.42	40.64	55.78	-15.14	AVG
3	0.1900	27.22	9.56	36.78	54.03	-17.25	AVG
4	0.1940	48.95	9.58	58.53	63.86	-5.33	QP
5	0.2380	44.72	9.60	54.32	62.16	-7.84	QP
6	0.2540	25.49	9.60	35.09	51.62	-16.53	AVG
7	0.3020	40.19	9.60	49.79	60.19	-10.40	QP
8	0.3580	19.97	9.60	29.57	48.77	-19.20	AVG
9	1.1260	17.10	9.65	26.75	46.00	-19.25	AVG
10	1.1780	27.99	9.63	37.62	56.00	-18.38	QP
11	3.8940	21.99	9.39	31.38	46.00	-14.62	AVG
12	4.0660	33.52	9.41	42.93	56.00	-13.07	QP

TM22 / Line: Line

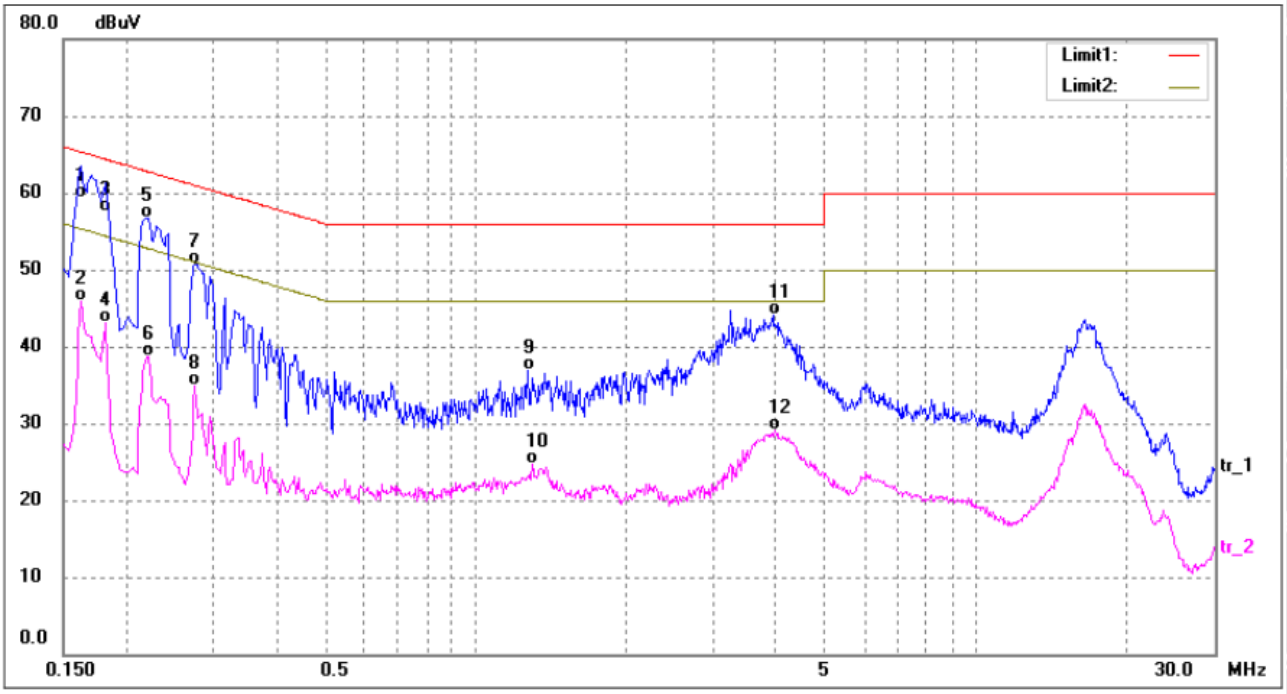

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1620	49.83	9.45	59.28	65.36	-6.08	QP
2	0.1620	36.51	9.45	45.96	55.36	-9.40	AVG
3	0.1819	47.96	9.53	57.49	64.39	-6.90	QP
4	0.1819	33.60	9.53	43.13	54.39	-11.26	AVG
5	0.2180	47.11	9.60	56.71	62.89	-6.18	QP
6	0.2220	29.18	9.60	38.78	52.74	-13.96	AVG
7	0.2740	41.18	9.60	50.78	60.99	-10.21	QP
8	0.2740	25.32	9.60	34.92	50.99	-16.07	AVG
9	1.2740	27.25	9.59	36.84	56.00	-19.16	QP
10	1.3020	15.04	9.58	24.62	46.00	-21.38	AVG
11	3.9300	34.61	9.40	44.01	56.00	-11.99	QP
12	3.9660	19.65	9.40	29.05	46.00	-16.95	AVG

TM22 / Line: Neutral

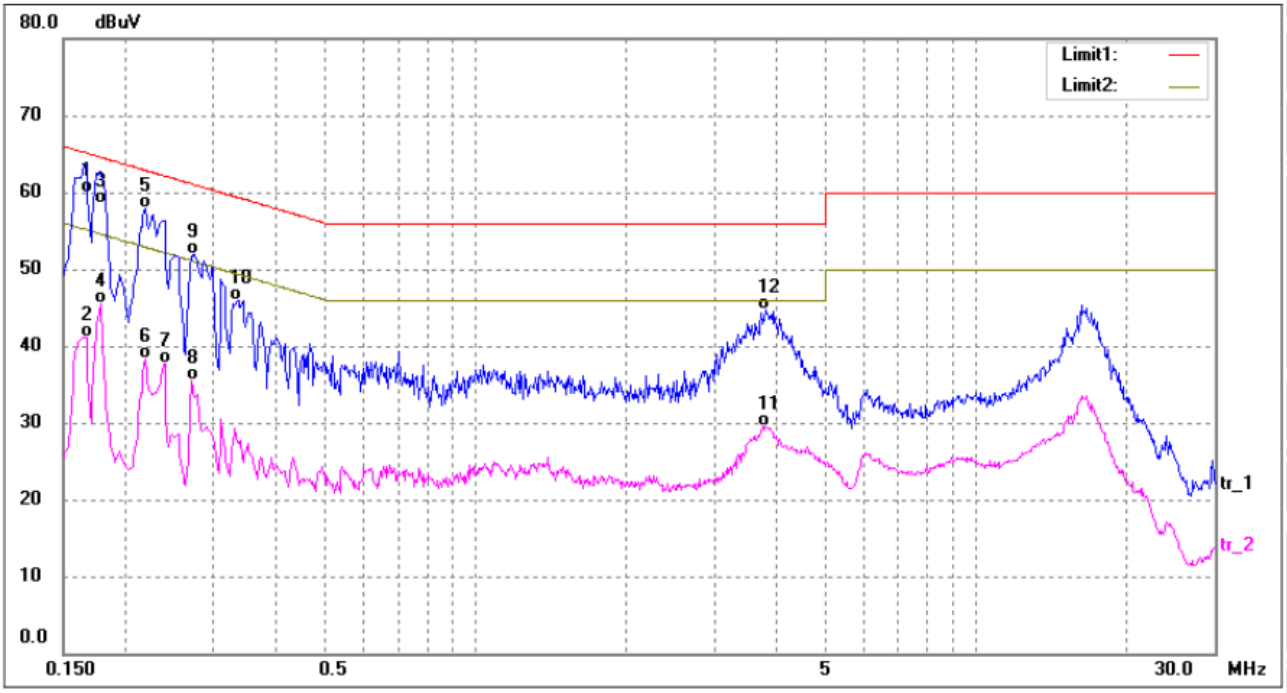

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1660	50.52	9.46	59.98	65.15	-5.17	QP
2	0.1660	31.67	9.46	41.13	55.15	-14.02	AVG
3	0.1780	49.06	9.51	58.57	64.57	-6.00	QP
4	0.1780	36.03	9.51	45.54	54.57	-9.03	AVG
5*	0.2180	48.33	9.60	57.93	62.89	-4.96	QP
6	0.2180	28.66	9.60	38.26	52.89	-14.63	AVG
7	0.2380	28.14	9.60	37.74	52.16	-14.42	AVG
8	0.2700	25.95	9.60	35.55	51.12	-15.57	AVG
9	0.2740	42.23	9.60	51.83	60.99	-9.16	QP
10	0.3339	36.34	9.60	45.94	59.35	-13.41	QP
11	3.7980	20.12	9.39	29.51	46.00	-16.49	AVG
12	3.8180	35.38	9.39	44.77	56.00	-11.23	QP

TM23 / Line: Line

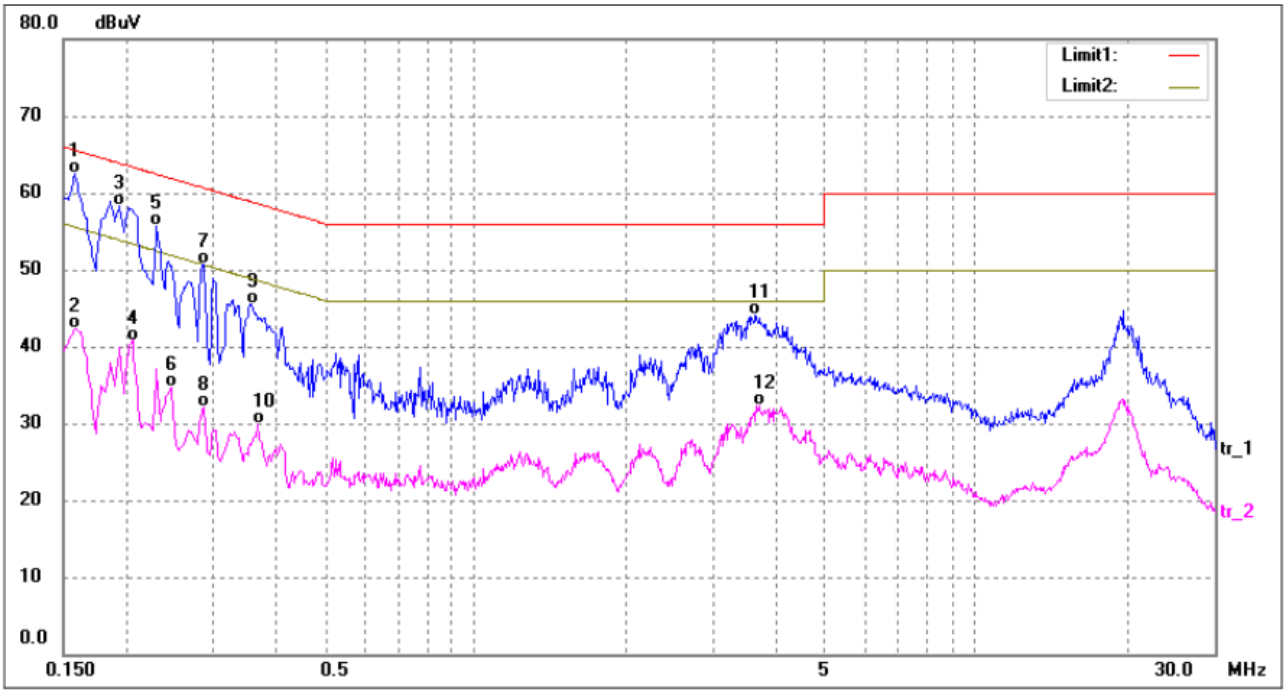

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1580	53.06	9.43	62.49	65.56	-3.07	QP
2	0.1580	32.86	9.43	42.29	55.56	-13.27	AVG
3	0.1940	48.74	9.58	58.32	63.86	-5.54	QP
4	0.2060	31.20	9.60	40.80	53.36	-12.56	AVG
5	0.2300	46.05	9.60	55.65	62.45	-6.80	QP
6	0.2460	25.07	9.60	34.67	51.89	-17.22	AVG
7	0.2860	41.16	9.60	50.76	60.64	-9.88	QP
8	0.2860	22.52	9.60	32.12	50.64	-18.52	AVG
9	0.3540	35.88	9.60	45.48	58.87	-13.39	QP
10	0.3660	20.23	9.60	29.83	48.59	-18.76	AVG
11	3.6380	34.79	9.38	44.17	56.00	-11.83	QP
12	3.6940	23.01	9.38	32.39	46.00	-13.61	AVG

TM23 / Line: Neutral

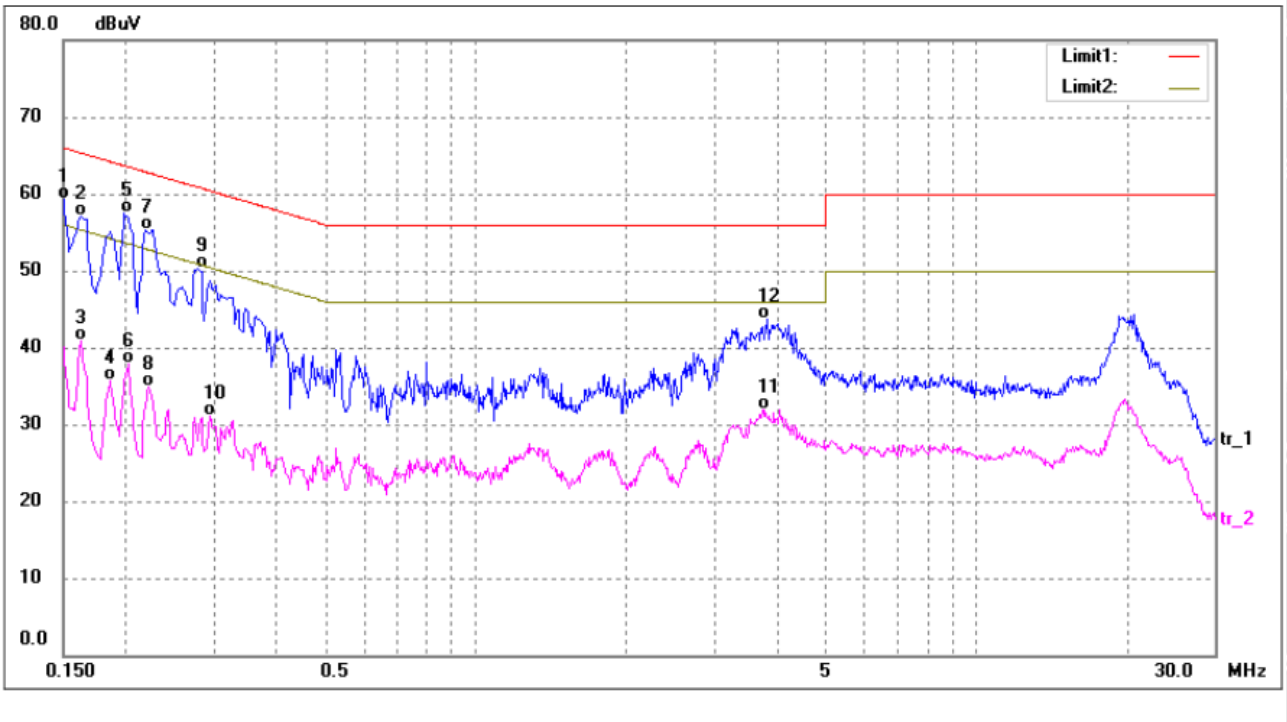

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1500	49.81	9.40	59.21	65.99	-6.78	QP
2	0.1620	47.68	9.45	57.13	65.36	-8.23	QP
3	0.1620	31.43	9.45	40.88	55.36	-14.48	AVG
4	0.1860	26.24	9.54	35.78	54.21	-18.43	AVG
5*	0.1980	47.86	9.59	57.45	63.69	-6.24	QP
6	0.2020	28.30	9.60	37.90	53.52	-15.62	AVG
7	0.2180	45.80	9.60	55.40	62.89	-7.49	QP
8	0.2220	25.34	9.60	34.94	52.74	-17.80	AVG
9	0.2779	40.74	9.60	50.34	60.88	-10.54	QP
10	0.2940	21.54	9.60	31.14	50.41	-19.27	AVG
11	3.7900	22.59	9.39	31.98	46.00	-14.02	AVG
12	3.8260	34.37	9.39	43.76	56.00	-12.24	QP

TM24 / Line: Line

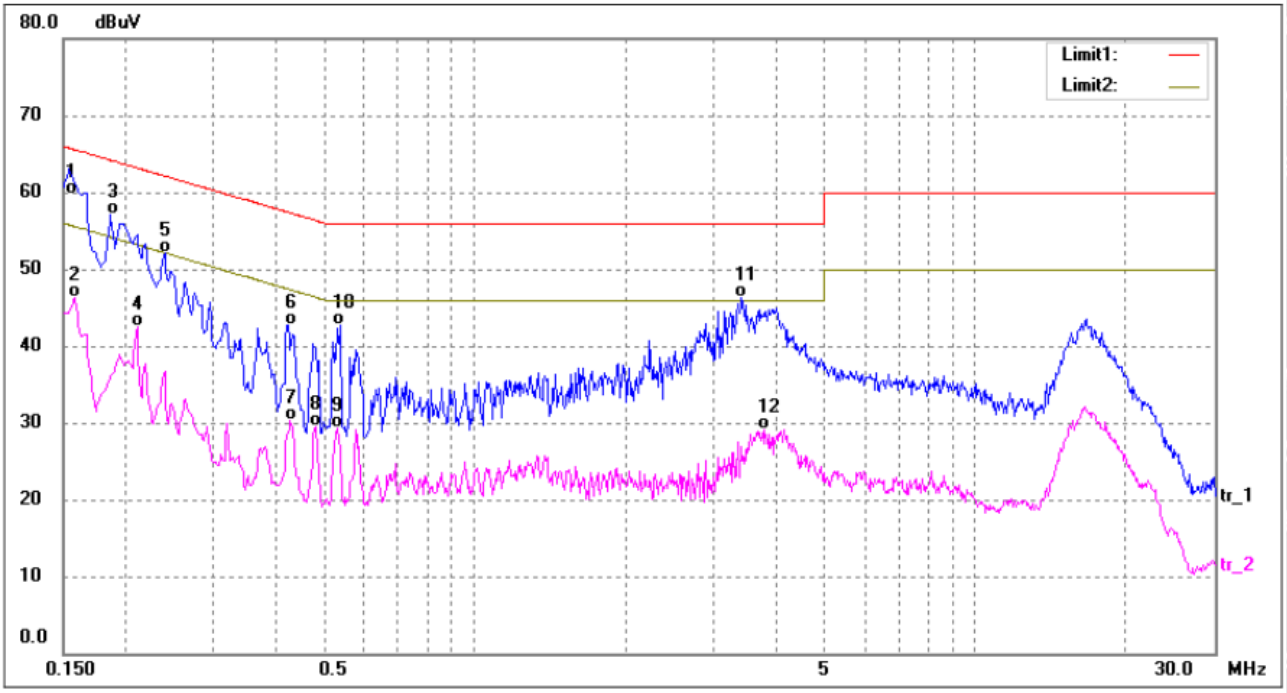

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1539	50.38	9.42	59.80	65.78	-5.98	QP
2	0.1580	36.84	9.43	46.27	55.56	-9.29	AVG
3	0.1860	47.65	9.54	57.19	64.21	-7.02	QP
4	0.2100	32.97	9.60	42.57	53.20	-10.63	AVG
5	0.2380	42.42	9.60	52.02	62.16	-10.14	QP
6	0.4180	33.02	9.60	42.62	57.49	-14.87	QP
7	0.4260	20.77	9.60	30.37	47.33	-16.96	AVG
8	0.4780	19.86	9.60	29.46	46.37	-16.91	AVG
9	0.5299	19.79	9.61	29.40	46.00	-16.60	AVG
10	0.5380	33.01	9.62	42.63	56.00	-13.37	QP
11	3.4020	36.99	9.37	46.36	56.00	-9.64	QP
12	3.7940	19.74	9.39	29.13	46.00	-16.87	AVG

TM24 / Line: Neutral

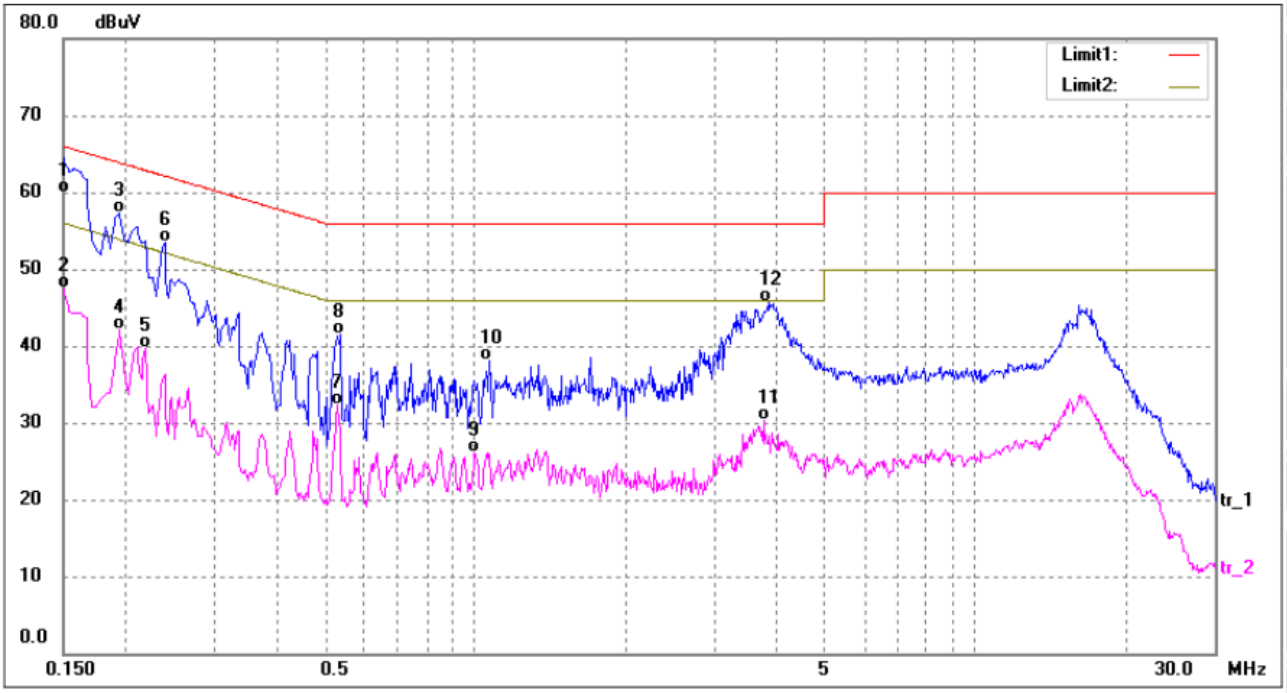

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1524	50.58	9.41	59.99	65.86	-5.87	QP
2	0.1524	38.09	9.41	47.50	55.86	-8.36	AVG
3	0.1940	47.76	9.58	57.34	63.86	-6.52	QP
4	0.1940	32.52	9.58	42.10	53.86	-11.76	AVG
5	0.2180	30.14	9.60	39.74	52.89	-13.15	AVG
6	0.2380	43.86	9.60	53.46	62.16	-8.70	QP
7	0.5299	22.65	9.61	32.26	46.00	-13.74	AVG
8	0.5380	31.96	9.62	41.58	56.00	-14.42	QP
9	0.9980	16.36	9.70	26.06	46.00	-19.94	AVG
10	1.0660	28.45	9.67	38.12	56.00	-17.88	QP
11	3.7700	20.93	9.39	30.32	46.00	-15.68	AVG
12	3.8420	36.24	9.39	45.63	56.00	-10.37	QP

4.2 Radiated emissions (30MHz-1GHz)

Test Requirement:	Class B
Test Limit:	**Frequency (MHz)** / **Limit [dB(uV/m) at 10m]** / **Limit [dB(uV/m) at 3m]** 30 to 230 / 30 / 40 230 to 1000 / 37 / 47 Detector: / Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz
Test Method:	Clause 7.3 of CISPR 16-2-3:2016
Procedure:	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

4.2.1 E.U.T. Operation

Environmental Conditions	
Temperature:	23.5 °C
Relative Humidity:	54 %
Atmospheric Pressure:	102 kPa
Test mode:	TM1, TM2, TM3, TM4, TM5, TM6, TM7, TM8, TM9, TM10, TM11, TM12, TM13, TM14, TM15, TM16, TM17, TM18, TM19, TM20, TM21, TM22, TM23, TM24

4.2.2 Basic Test Setup Block Diagram

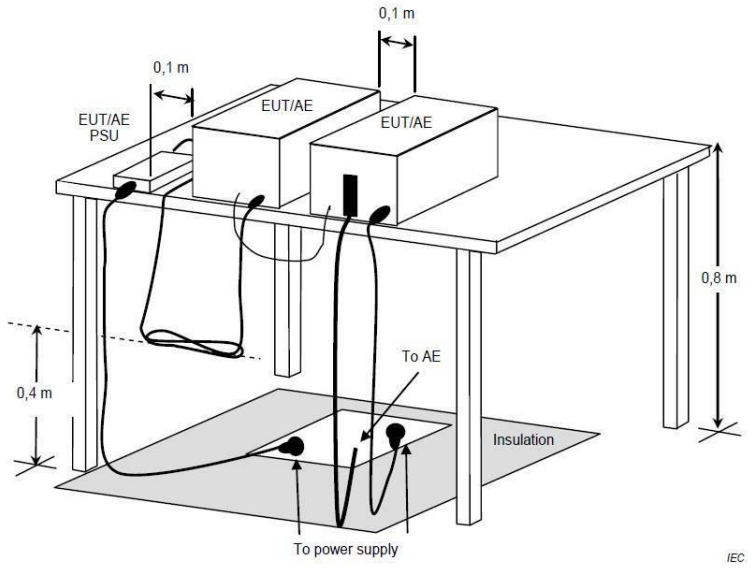

4.2.3 Summary of Test Results

TM1 / Polarization: Horizontal

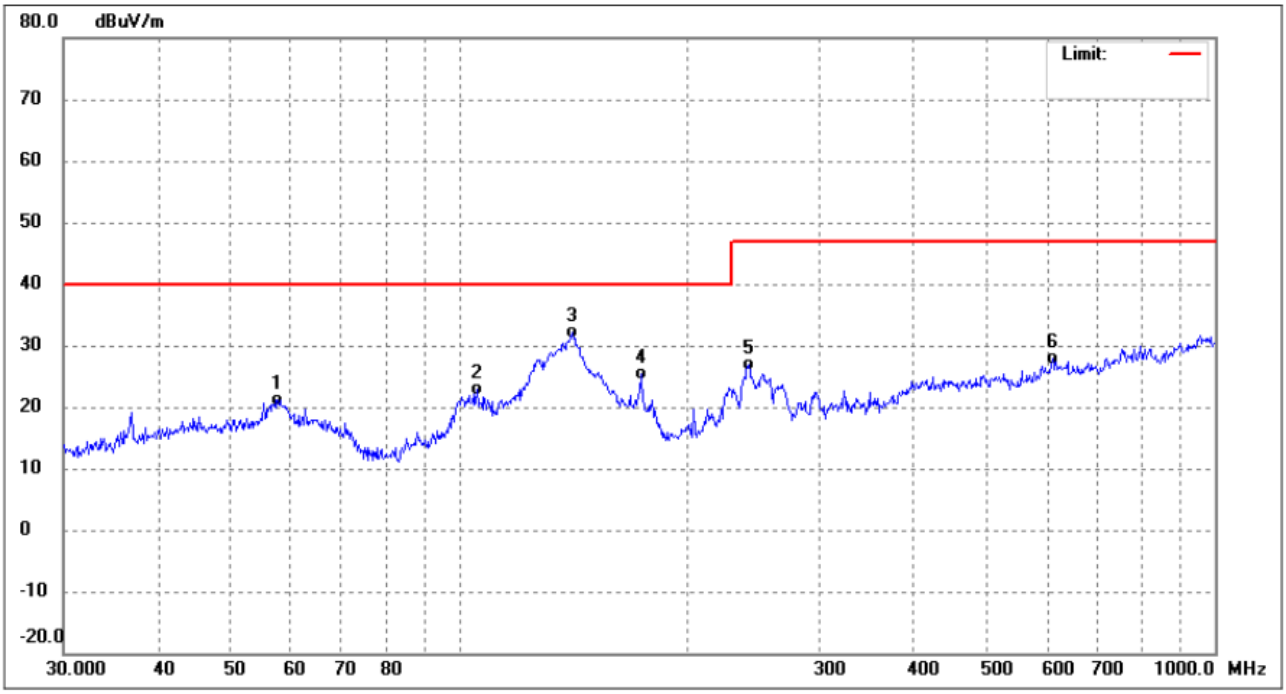

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	57.5939	31.74	-10.50	21.24	40.00	-18.76	QP
2	105.6415	34.75	-11.97	22.78	40.00	-17.22	QP
3	141.3298	47.32	-15.20	32.12	40.00	-7.88	QP
4	174.4241	38.90	-13.64	25.26	40.00	-14.74	QP
5	241.6763	36.91	-10.13	26.78	47.00	-20.22	QP
6	609.9217	28.88	-1.11	27.77	47.00	-19.23	QP

TM1 / Polarization: Vertical

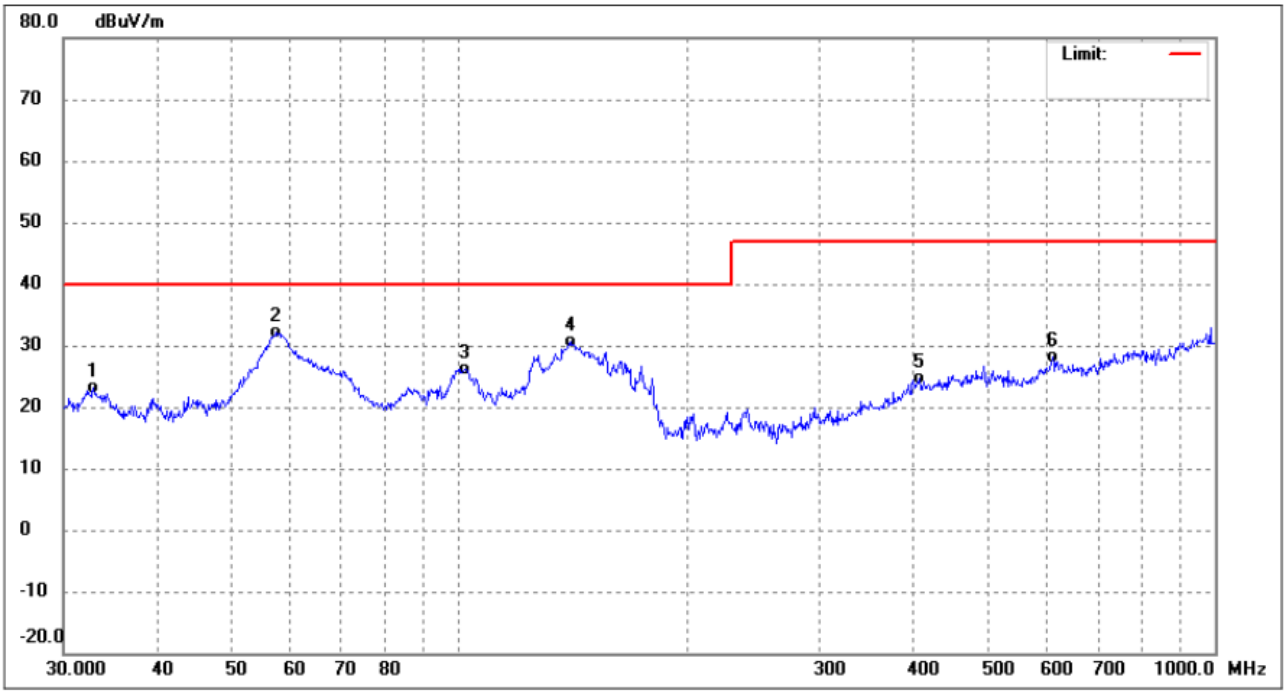

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	32.8637	36.35	-13.24	23.11	40.00	-16.89	QP
2	57.3923	42.51	-10.47	32.04	40.00	-7.96	QP
3	101.6443	37.91	-11.77	26.14	40.00	-13.86	QP
4	140.3421	45.73	-15.21	30.52	40.00	-9.48	QP
5	406.0880	28.58	-4.05	24.53	47.00	-22.47	QP
6	609.9217	29.34	-1.11	28.23	47.00	-18.77	QP

TM2 / Polarization: Horizontal

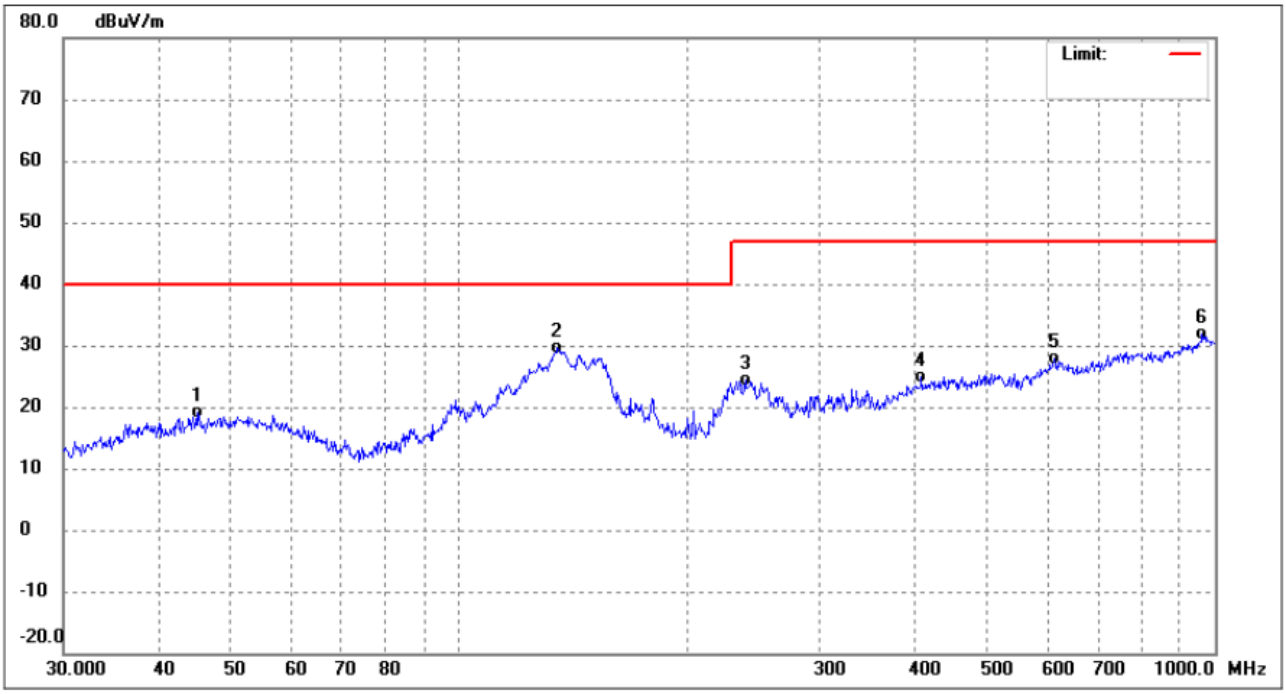

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	45.0583	29.21	-10.00	19.21	40.00	-20.79	QP
2	135.0319	44.67	-15.11	29.56	40.00	-10.44	QP
3	239.1473	34.49	-10.14	24.35	47.00	-22.65	QP
4	408.9460	28.79	-3.99	24.80	47.00	-22.20	QP
5	614.2142	28.96	-1.03	27.93	47.00	-19.07	QP
6	962.1623	28.30	3.61	31.91	47.00	-15.09	QP

TM2 / Polarization: Vertical

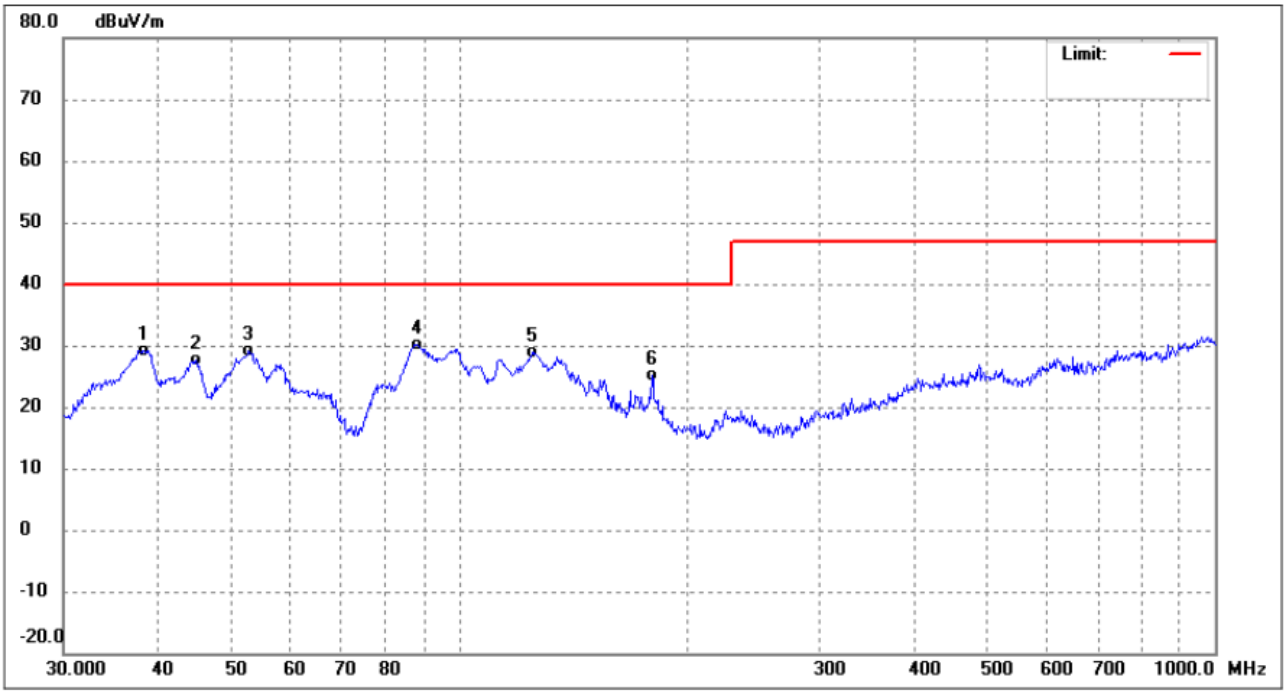

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	38.3462	40.90	-11.66	29.24	40.00	-10.76	QP
2	44.9006	37.59	-10.02	27.57	40.00	-12.43	QP
3	52.7600	39.15	-9.90	29.25	40.00	-10.75	QP
4	88.0329	44.50	-14.42	30.08	40.00	-9.92	QP
5	125.0066	43.18	-14.35	28.83	40.00	-11.17	QP
6	180.0165	38.38	-13.30	25.08	40.00	-14.92	QP

TM3 / Polarization: Horizontal

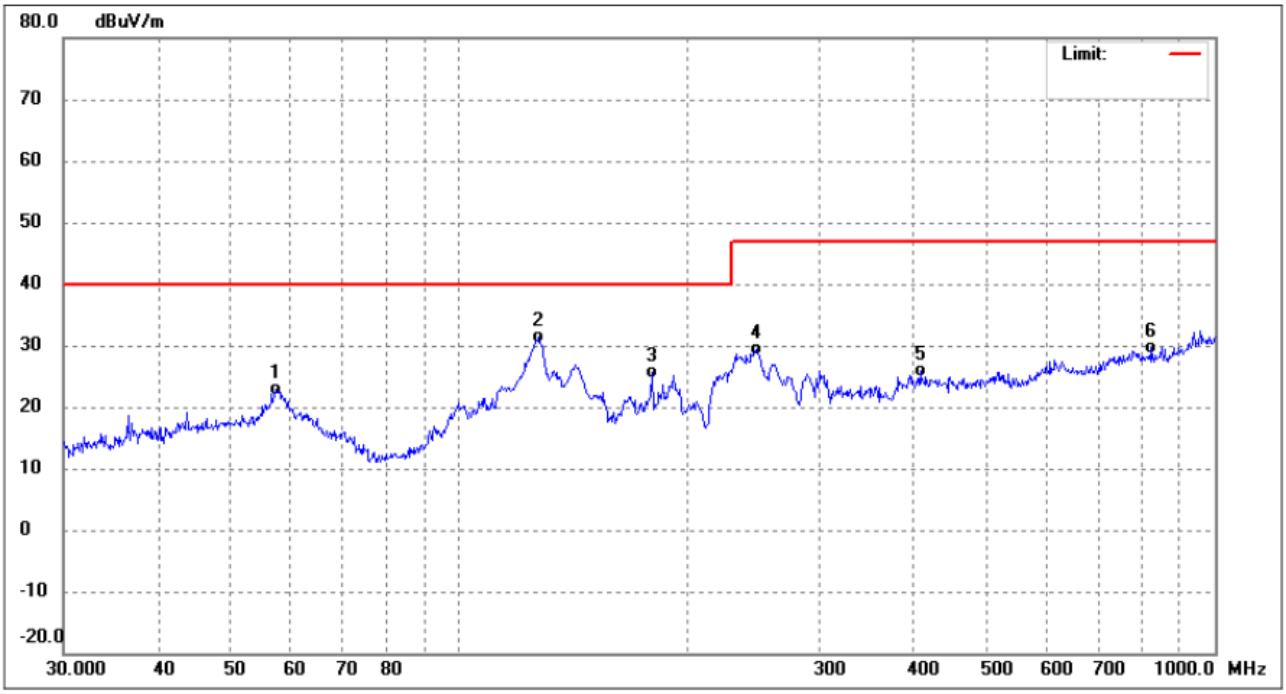

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	57.1914	33.26	-10.43	22.83	40.00	-17.17	QP
2	127.6645	45.89	-14.61	31.28	40.00	-8.72	QP
3	180.0165	39.03	-13.30	25.73	40.00	-14.27	QP
4	247.6819	39.80	-10.37	29.43	47.00	-17.57	QP
5	407.5145	29.87	-4.02	25.85	47.00	-21.15	QP
6	824.5968	29.02	0.53	29.55	47.00	-17.45	QP

TM3 / Polarization: Vertical

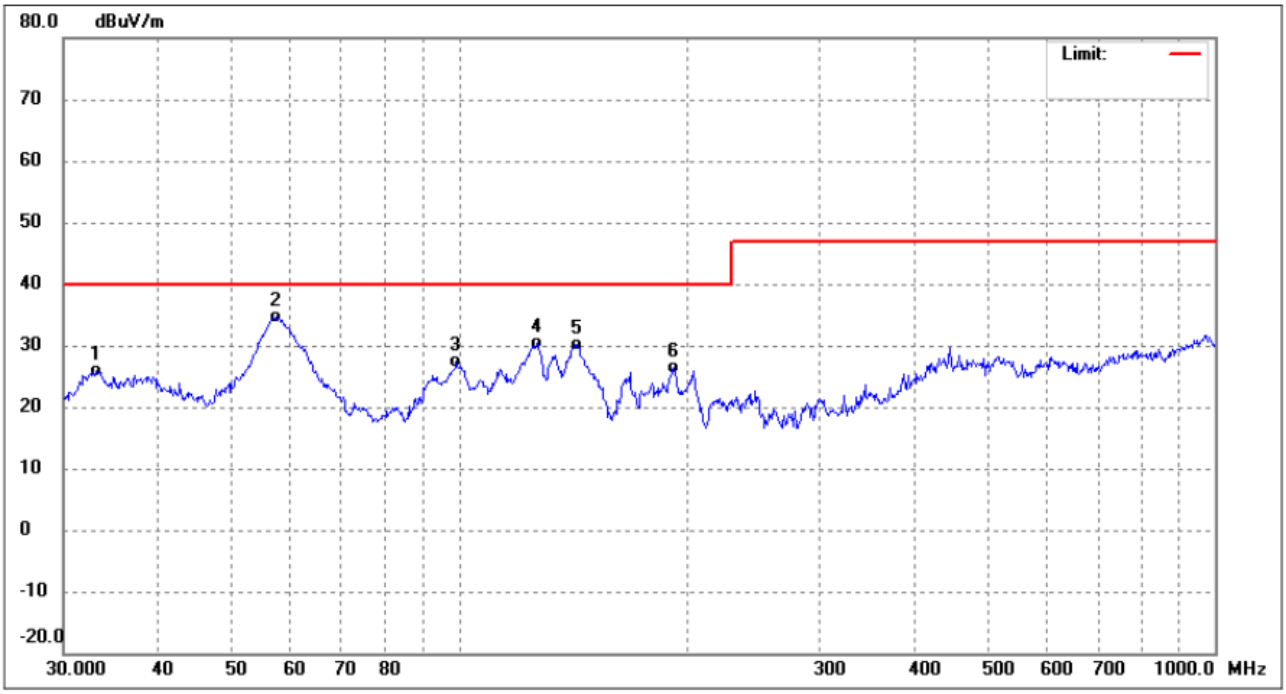

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	33.2112	38.91	-13.12	25.79	40.00	-14.21	QP
2	57.3923	45.13	-10.47	34.66	40.00	-5.34	QP
3	99.1797	39.37	-11.88	27.49	40.00	-12.51	QP
4	126.7723	44.83	-14.52	30.31	40.00	-9.69	QP
5	143.3261	45.40	-15.20	30.20	40.00	-9.80	QP
6	192.4186	37.77	-11.46	26.31	40.00	-13.69	QP

TM4 / Polarization: Horizontal

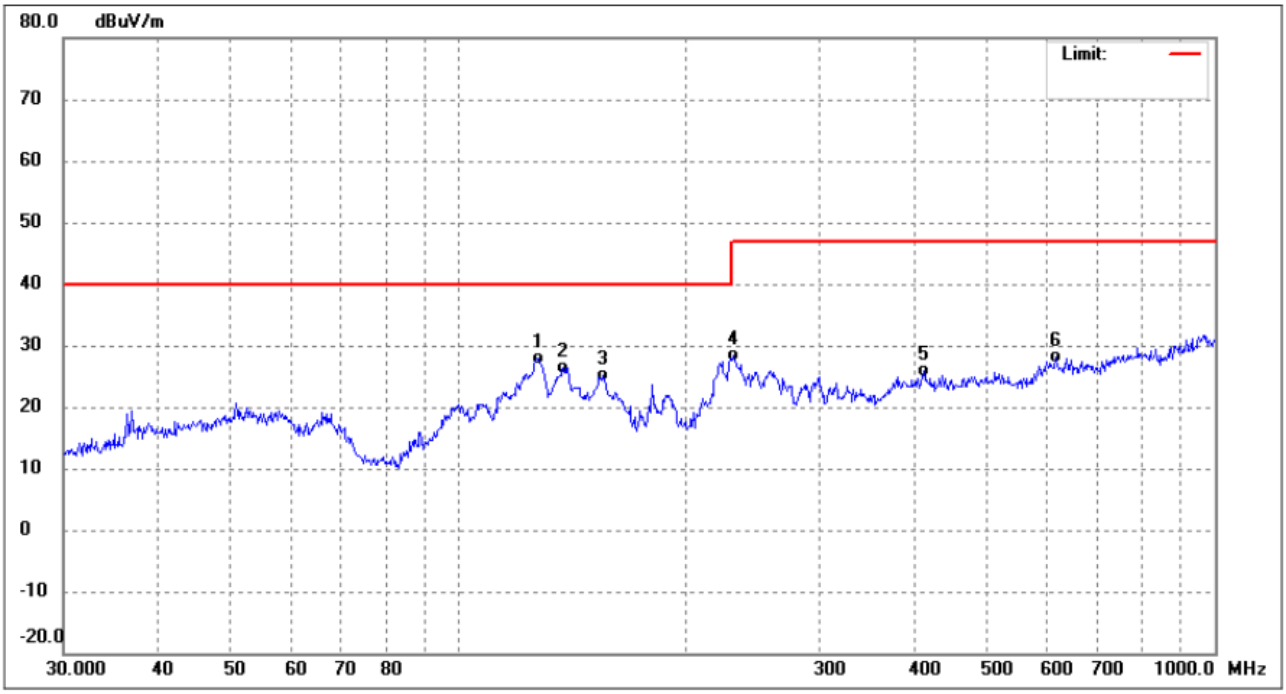

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	127.6645	42.59	-14.61	27.98	40.00	-12.02	QP
2	137.4202	41.67	-15.18	26.49	40.00	-13.51	QP
3	154.8204	39.99	-14.81	25.18	40.00	-14.82	QP
4	230.9068	39.06	-10.68	28.38	47.00	-18.62	QP
5	411.8240	29.86	-3.97	25.89	47.00	-21.11	QP
6	616.3718	29.12	-1.02	28.10	47.00	-18.90	QP

TM4 / Polarization: Vertical

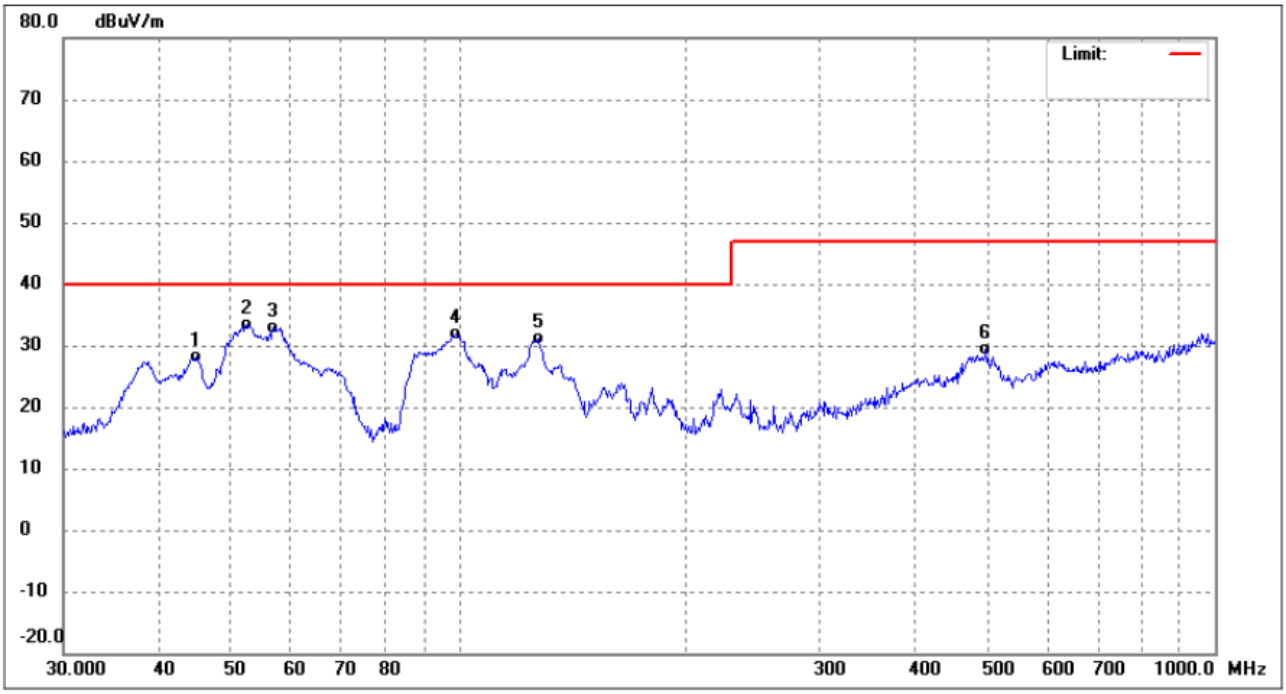

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	44.9006	38.04	-10.02	28.02	40.00	-11.98	QP
2	52.3912	43.23	-9.88	33.35	40.00	-6.65	QP
3	56.7917	43.22	-10.36	32.86	40.00	-7.14	QP
4	99.1797	43.71	-11.88	31.83	40.00	-8.17	QP
5	127.2176	45.67	-14.55	31.12	40.00	-8.88	QP
6	497.6765	32.90	-3.60	29.30	47.00	-17.70	QP

TM5 / Polarization: Horizontal

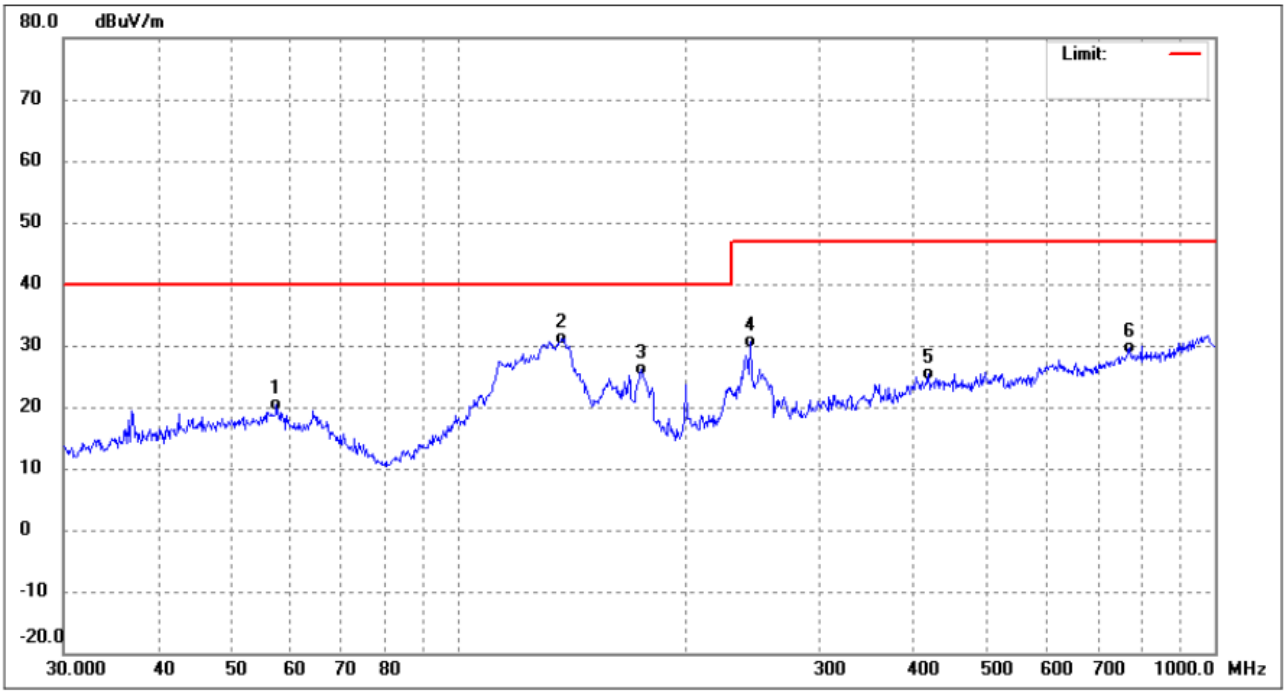

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	57.3923	30.80	-10.47	20.33	40.00	-19.67	QP
2	136.9391	46.28	-15.17	31.11	40.00	-8.89	QP
3	174.4241	39.88	-13.64	26.24	40.00	-13.76	QP
4	242.5253	40.83	-10.16	30.67	47.00	-16.33	QP
5	417.6411	29.22	-3.93	25.29	47.00	-21.71	QP
6	771.4486	29.31	0.33	29.64	47.00	-17.36	QP

TM5 / Polarization: Vertical

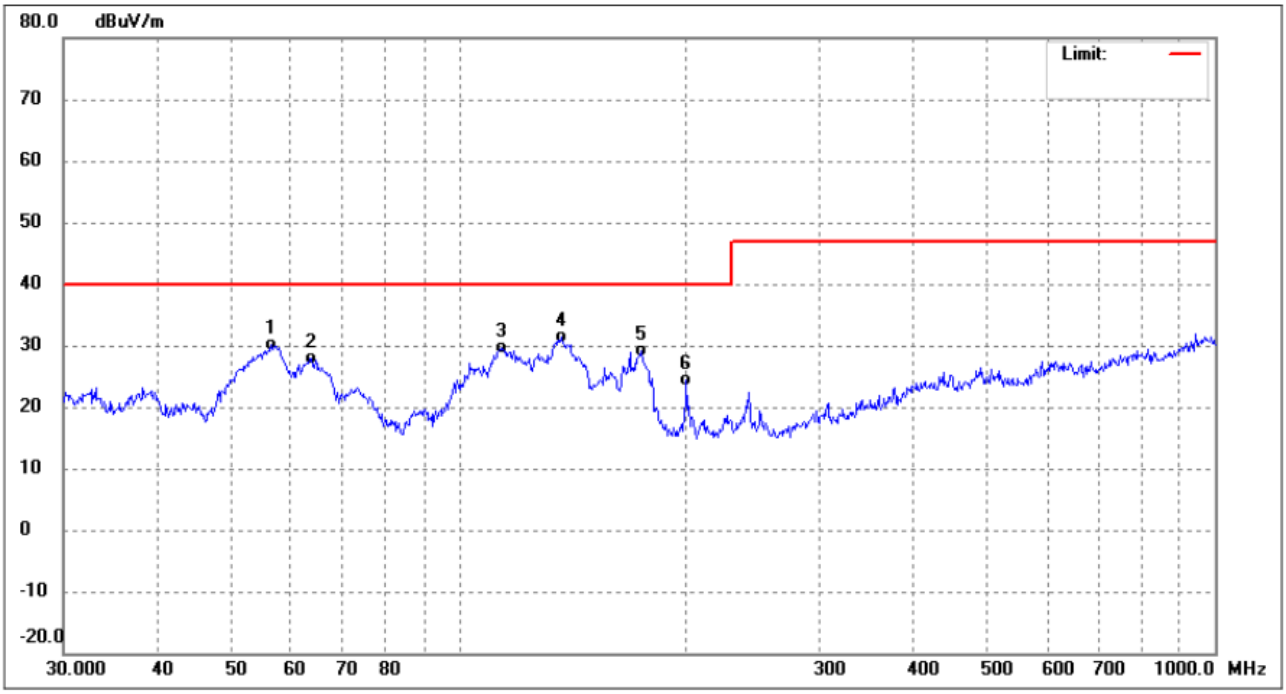

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	56.3948	40.41	-10.30	30.11	40.00	-9.89	QP
2	63.7588	40.02	-12.05	27.97	40.00	-12.03	QP
3	113.7143	42.46	-12.84	29.62	40.00	-10.38	QP
4	136.4598	46.60	-15.15	31.45	40.00	-8.55	QP
5	174.4241	42.85	-13.64	29.21	40.00	-10.79	QP
6	199.9856	35.72	-11.29	24.43	40.00	-15.57	QP

TM6 / Polarization: Horizontal

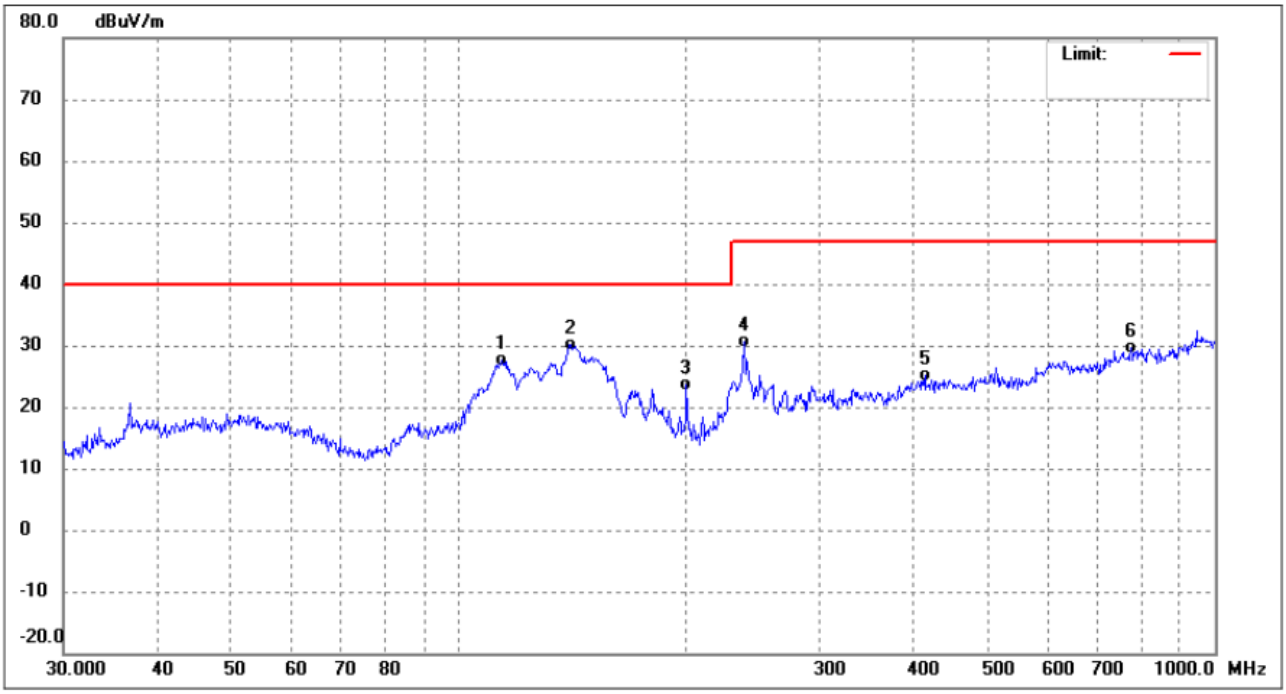

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	114.1138	40.44	-12.90	27.54	40.00	-12.46	QP
2	140.3421	45.37	-15.21	30.16	40.00	-9.84	QP
3	199.9856	35.04	-11.29	23.75	40.00	-16.25	QP
4	238.3102	40.69	-10.18	30.51	47.00	-16.49	QP
5	413.2706	29.16	-3.95	25.21	47.00	-21.79	QP
6	774.1584	29.19	0.32	29.51	47.00	-17.49	QP

TM6 / Polarization: Vertical

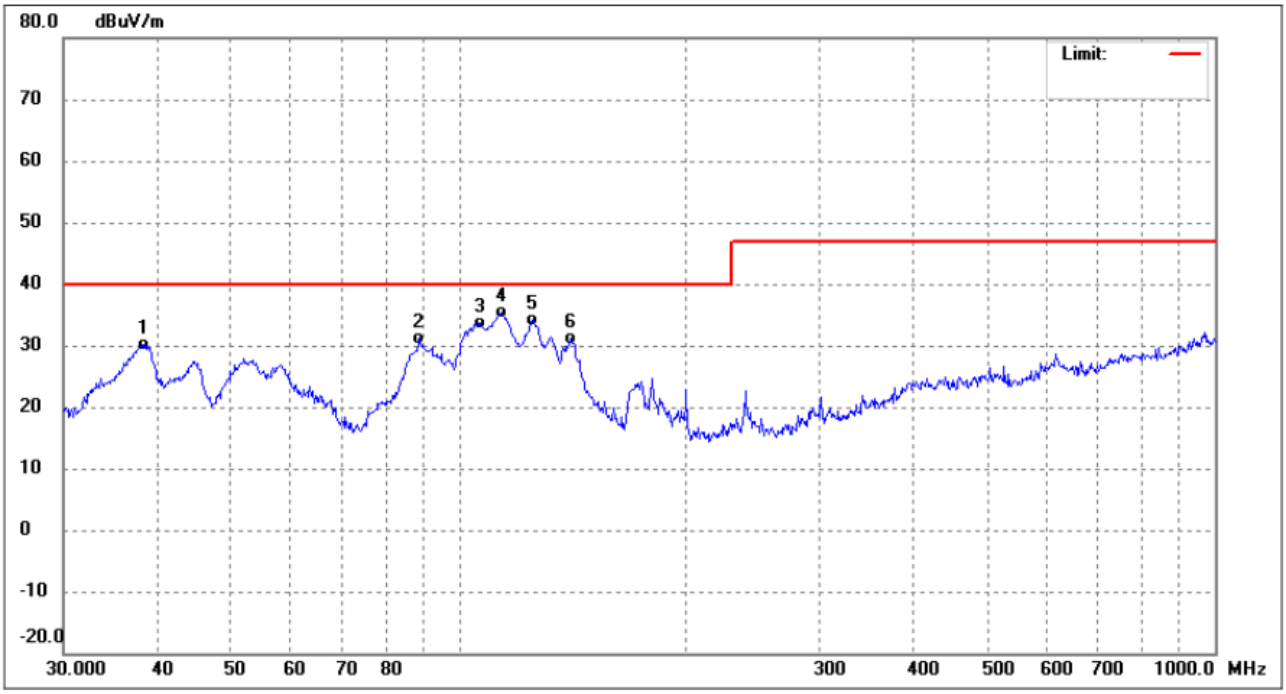

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	38.3462	41.76	-11.66	30.10	40.00	-9.90	QP
2	88.6524	45.24	-14.22	31.02	40.00	-8.98	QP
3	106.7587	45.81	-12.06	33.75	40.00	-6.25	QP
4	113.7143	48.20	-12.84	35.36	40.00	-4.64	QP
5	125.0066	48.60	-14.35	34.25	40.00	-5.75	QP
6	140.8351	46.35	-15.20	31.15	40.00	-8.85	QP

TM7 / Polarization: Horizontal

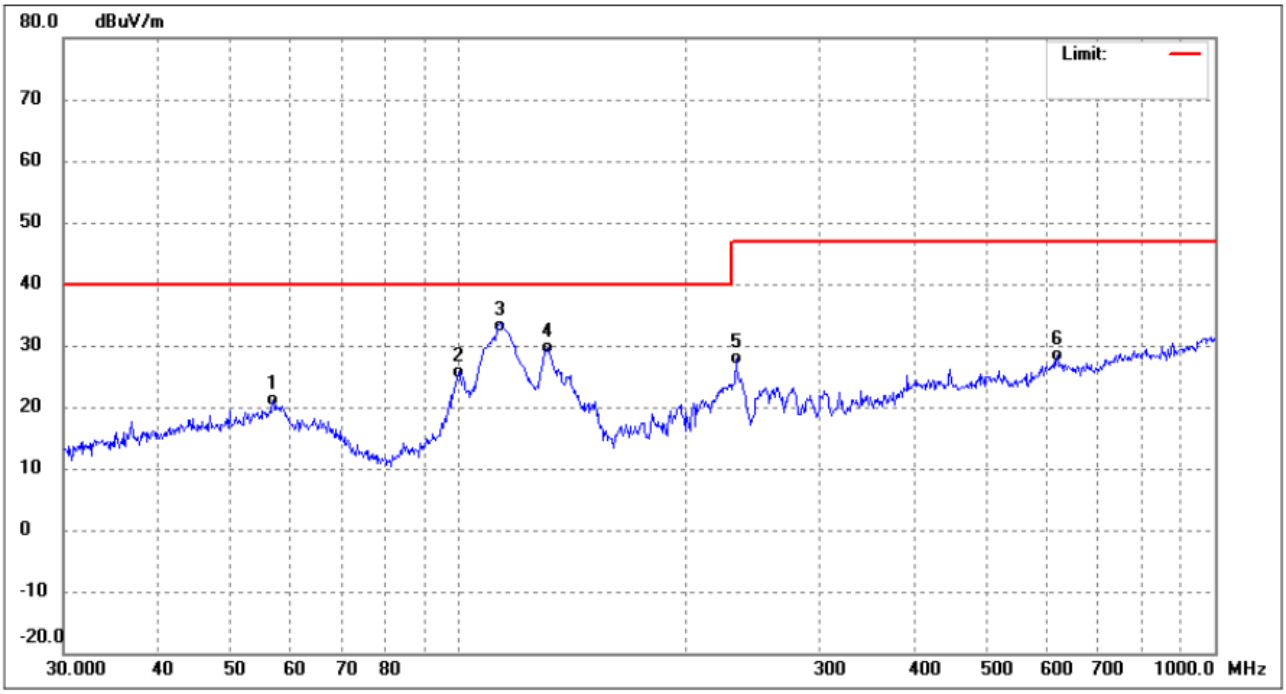

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	56.7917	31.49	-10.36	21.13	40.00	-18.87	QP
2	99.8777	37.56	-11.83	25.73	40.00	-14.27	QP
3	112.5244	45.69	-12.68	33.01	40.00	-6.99	QP
4	131.2965	44.46	-14.93	29.53	40.00	-10.47	QP
5	232.5318	38.38	-10.57	27.81	47.00	-19.19	QP
6	618.5369	29.44	-1.08	28.36	47.00	-18.64	QP

TM7 / Polarization: Vertical

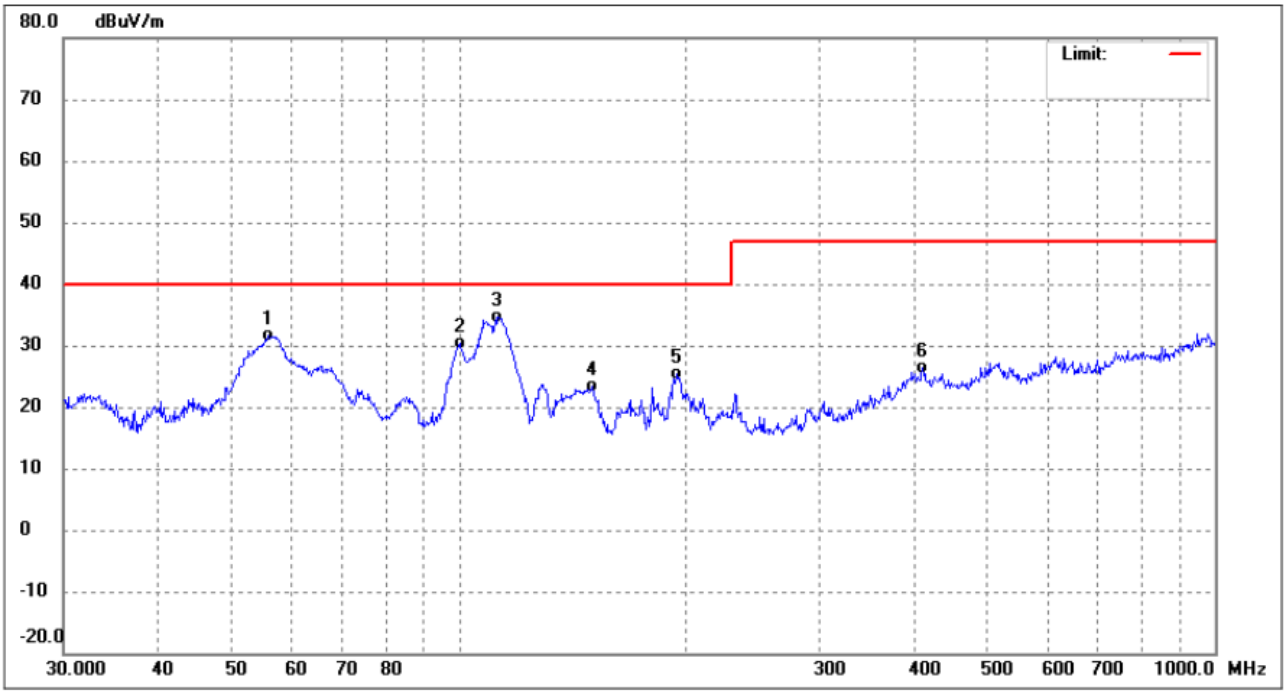

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	56.0007	41.84	-10.24	31.60	40.00	-8.40	QP
2	100.2286	42.18	-11.81	30.37	40.00	-9.63	QP
3	112.5244	47.39	-12.68	34.71	40.00	-5.29	QP
4	150.0108	38.62	-15.12	23.50	40.00	-16.50	QP
5	194.4534	36.58	-11.29	25.29	40.00	-14.71	QP
6	410.3825	30.47	-3.97	26.50	47.00	-20.50	QP

TM8 / Polarization: Horizontal

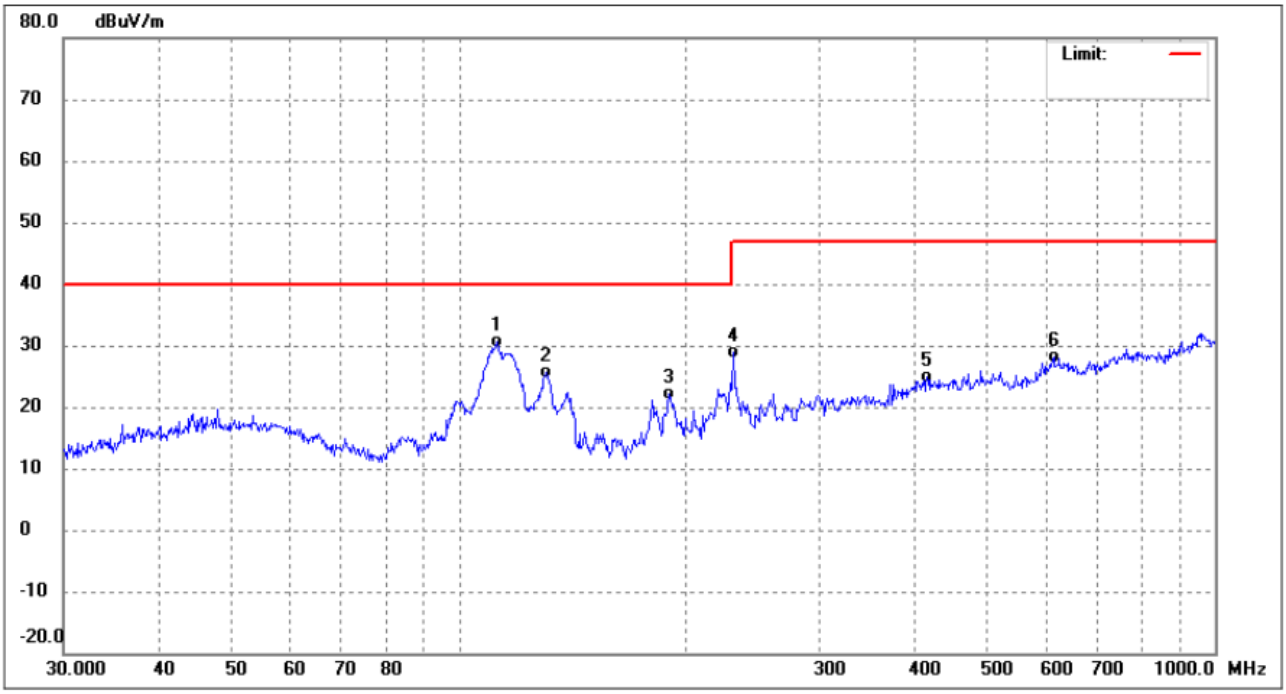

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	112.5244	43.35	-12.68	30.67	40.00	-9.33	QP
2	130.3789	40.42	-14.85	25.57	40.00	-14.43	QP
3	189.7385	33.93	-11.89	22.04	40.00	-17.96	QP
4	230.9068	39.60	-10.68	28.92	47.00	-18.08	QP
5	416.1791	28.83	-3.95	24.88	47.00	-22.12	QP
6	612.0642	29.11	-1.08	28.03	47.00	-18.97	QP

TM8 / Polarization: Vertical

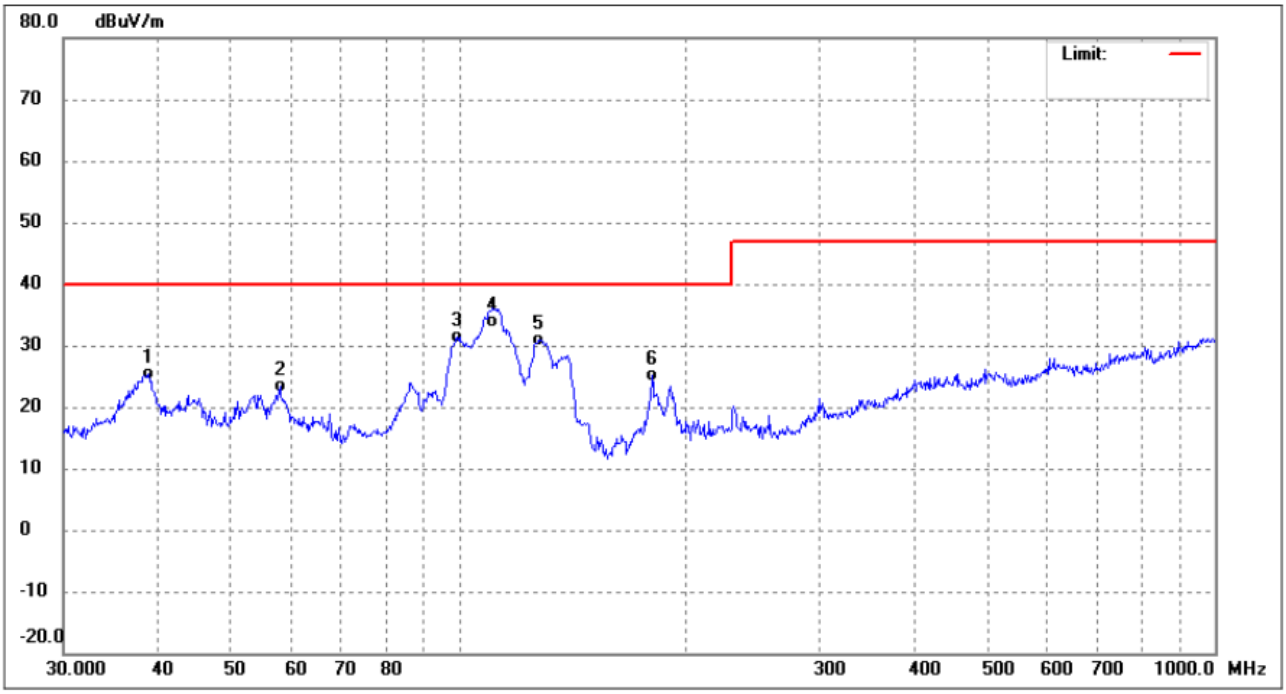

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	38.8878	36.91	-11.51	25.40	40.00	-14.60	QP
2	57.9992	33.83	-10.57	23.26	40.00	-16.74	QP
3	99.5281	43.31	-11.85	31.46	40.00	-8.54	QP
4	110.9570	46.37	-12.47	33.90	40.00	-6.10	QP
5	127.6645	45.55	-14.61	30.94	40.00	-9.06	QP
6	180.0164	38.32	-13.30	25.02	40.00	-14.98	QP

TM9 / Polarization: Horizontal

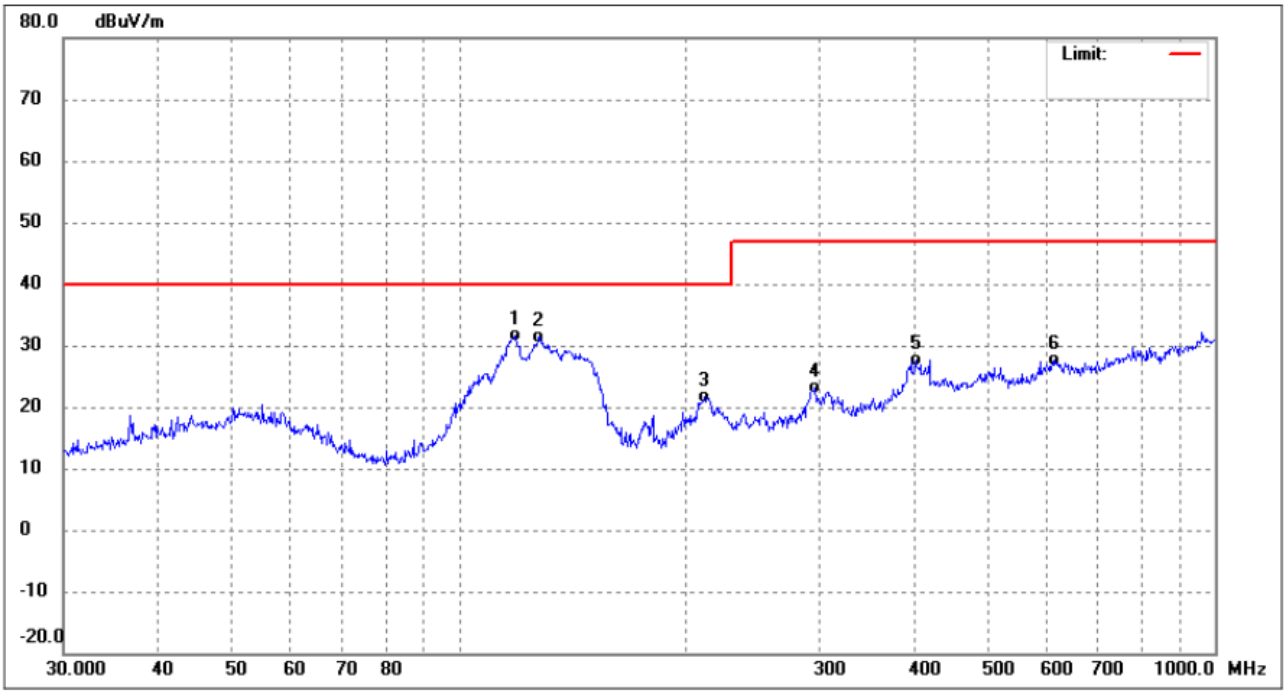

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	118.6014	45.05	-13.49	31.56	40.00	-8.44	QP
2	127.6645	45.92	-14.61	31.31	40.00	-8.69	QP
3	211.5265	33.70	-11.97	21.73	40.00	-18.27	QP
4	296.1836	32.26	-9.11	23.15	47.00	-23.85	QP
5	401.8385	31.81	-4.06	27.75	47.00	-19.25	QP
6	614.2142	28.71	-1.03	27.68	47.00	-19.32	QP

TM9 / Polarization: Vertical

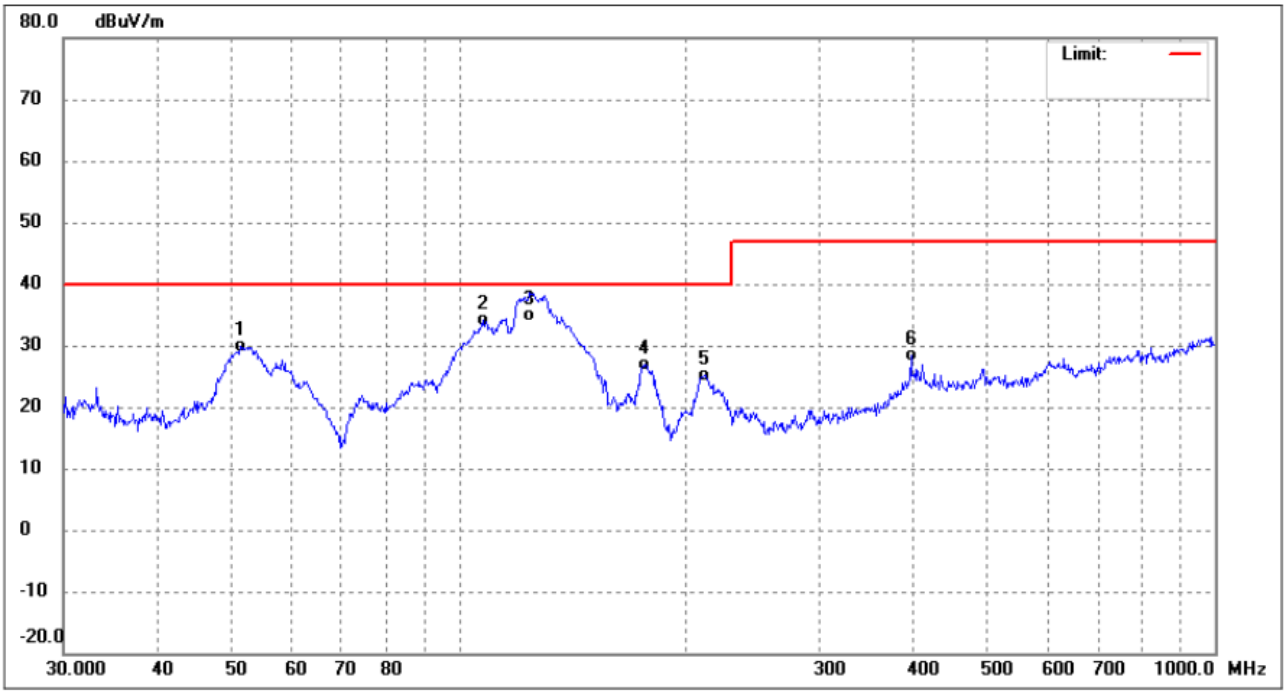

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	51.4807	39.64	-9.84	29.80	40.00	-10.20	QP
2	107.5101	46.31	-12.11	34.20	40.00	-5.80	QP
3	124.1330	49.24	-14.24	35.00	40.00	-5.00	QP
4	175.6516	40.40	-13.57	26.83	40.00	-13.17	QP
5	211.5265	37.05	-11.97	25.08	40.00	-14.92	QP
6	396.2415	32.69	-4.38	28.31	47.00	-18.69	QP

TM10 / Polarization: Horizontal

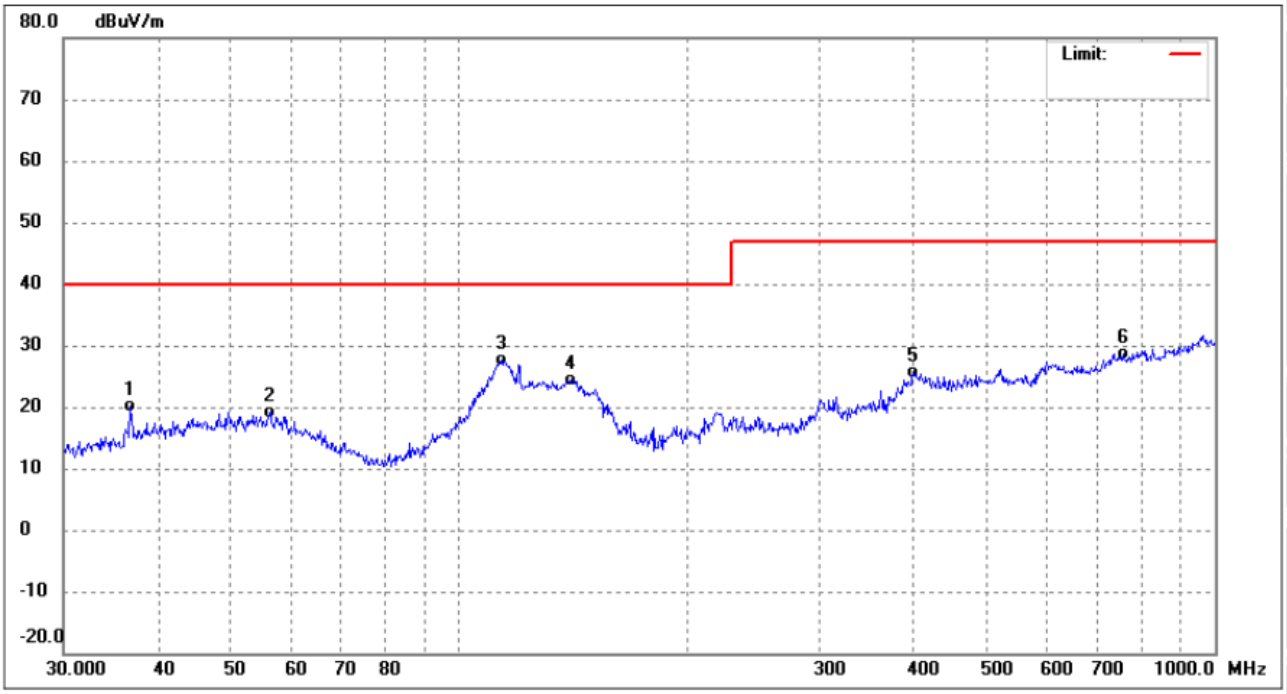

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	36.7662	32.21	-12.09	20.12	40.00	-19.88	QP
2	56.1974	29.52	-10.27	19.25	40.00	-20.75	QP
3	113.7143	40.55	-12.84	27.71	40.00	-12.29	QP
4	140.3421	39.64	-15.21	24.43	40.00	-15.57	QP
5	399.0302	29.83	-4.14	25.69	47.00	-21.31	QP
6	755.3873	28.43	0.13	28.56	47.00	-18.44	QP

TM10 / Polarization: Vertical

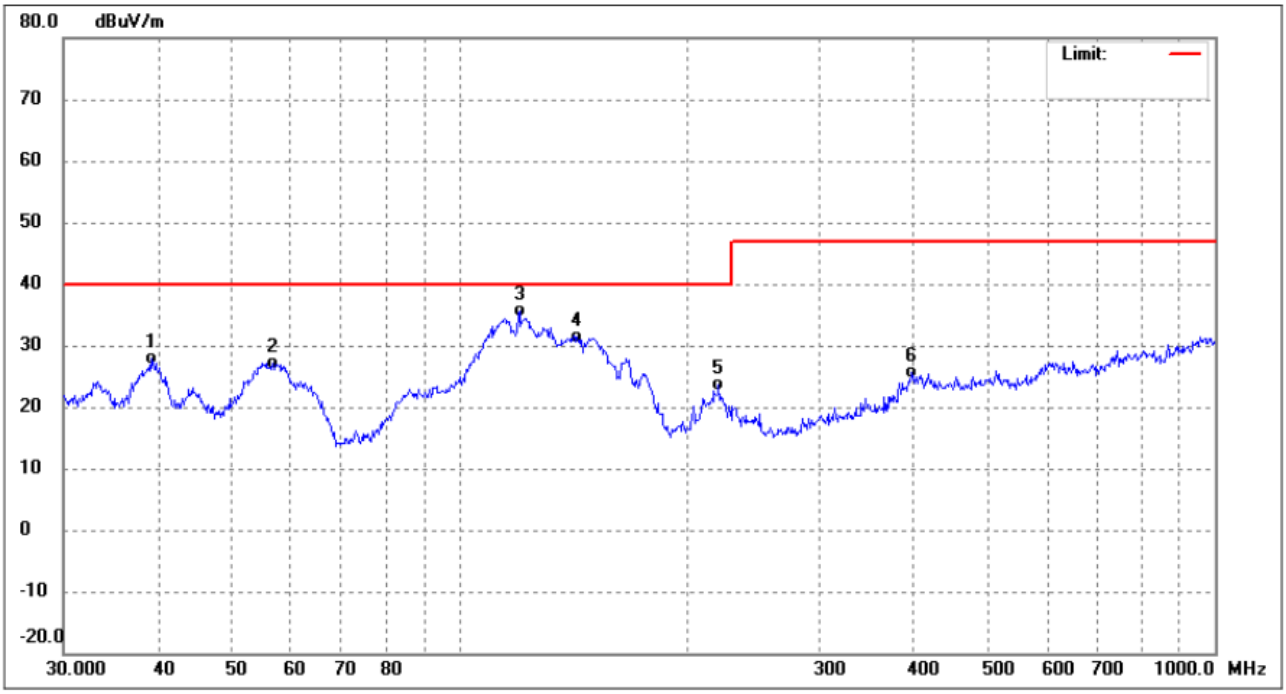

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	39.1616	39.18	-11.42	27.76	40.00	-12.24	QP
2	56.7917	37.61	-10.36	27.25	40.00	-12.75	QP
3	120.2766	49.25	-13.73	35.52	40.00	-4.48	QP
4	143.3261	46.62	-15.20	31.42	40.00	-8.58	QP
5	220.6171	34.96	-11.44	23.52	40.00	-16.48	QP
6	397.6334	29.99	-4.27	25.72	47.00	-21.28	QP

TM11 / Polarization: Horizontal

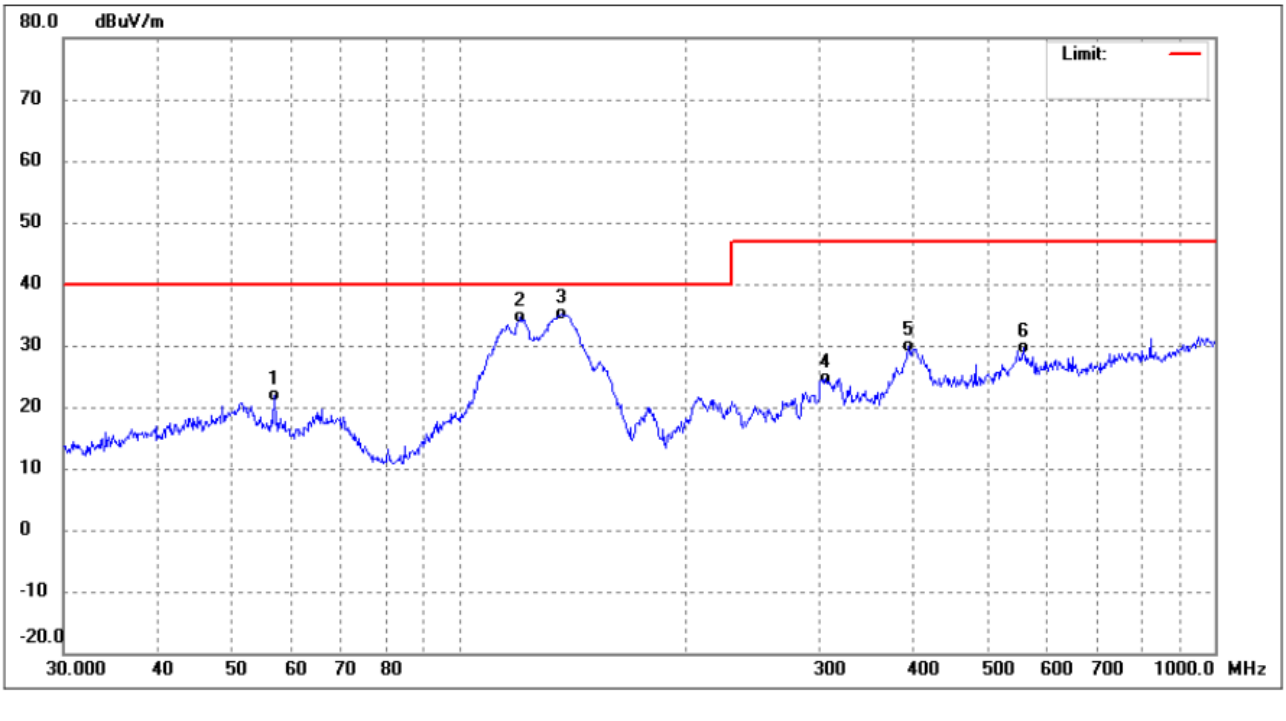

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	56.9912	32.40	-10.40	22.00	40.00	-18.00	QP
2	120.6991	48.37	-13.80	34.57	40.00	-5.43	QP
3	136.9391	50.19	-15.17	35.02	40.00	-4.98	QP
4	305.6800	33.57	-8.82	24.75	47.00	-22.25	QP
5	393.4723	34.41	-4.63	29.78	47.00	-17.22	QP
6	558.7302	33.34	-3.77	29.57	47.00	-17.43	QP

TM11 / Polarization: Vertical

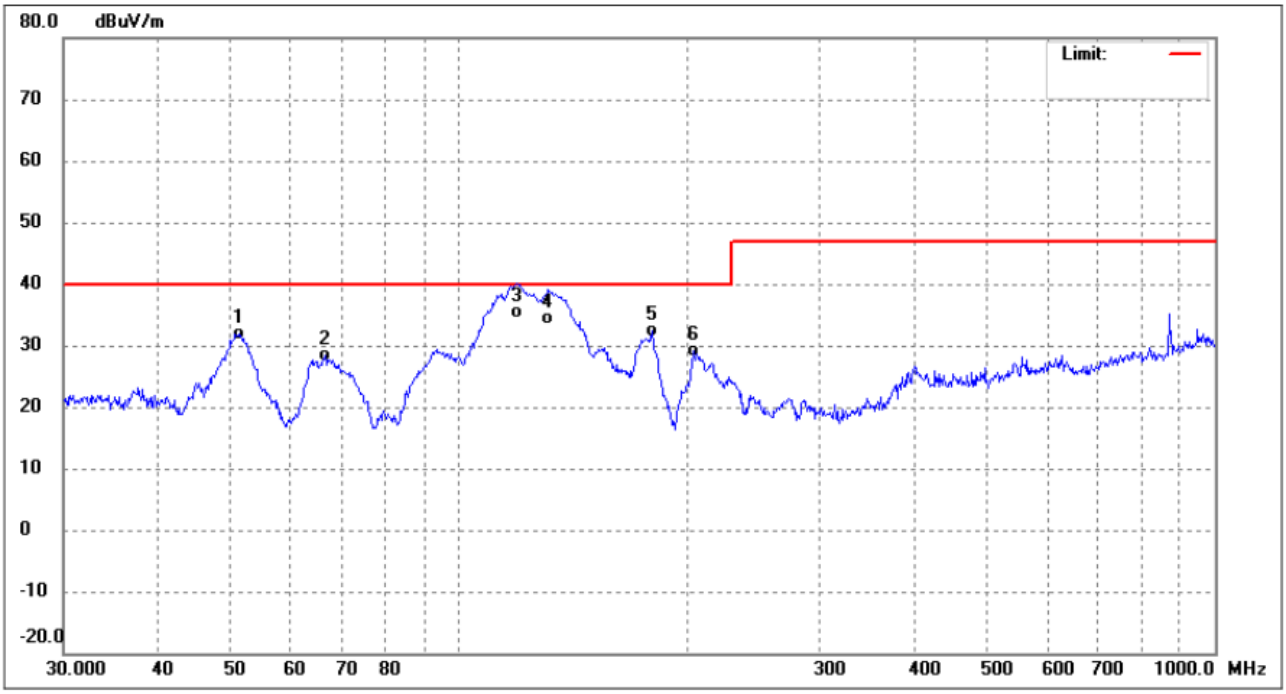

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	51.3005	41.74	-9.83	31.91	40.00	-8.09	QP
2	66.4989	41.18	-12.90	28.28	40.00	-11.72	QP
3	119.4361	48.91	-13.61	35.30	40.00	-4.70	QP
4	131.2965	49.43	-14.93	34.50	40.00	-5.50	QP
5	180.0165	45.76	-13.30	32.46	40.00	-7.54	QP
6	204.2377	40.93	-11.68	29.25	40.00	-10.75	QP

TM12 / Polarization: Horizontal

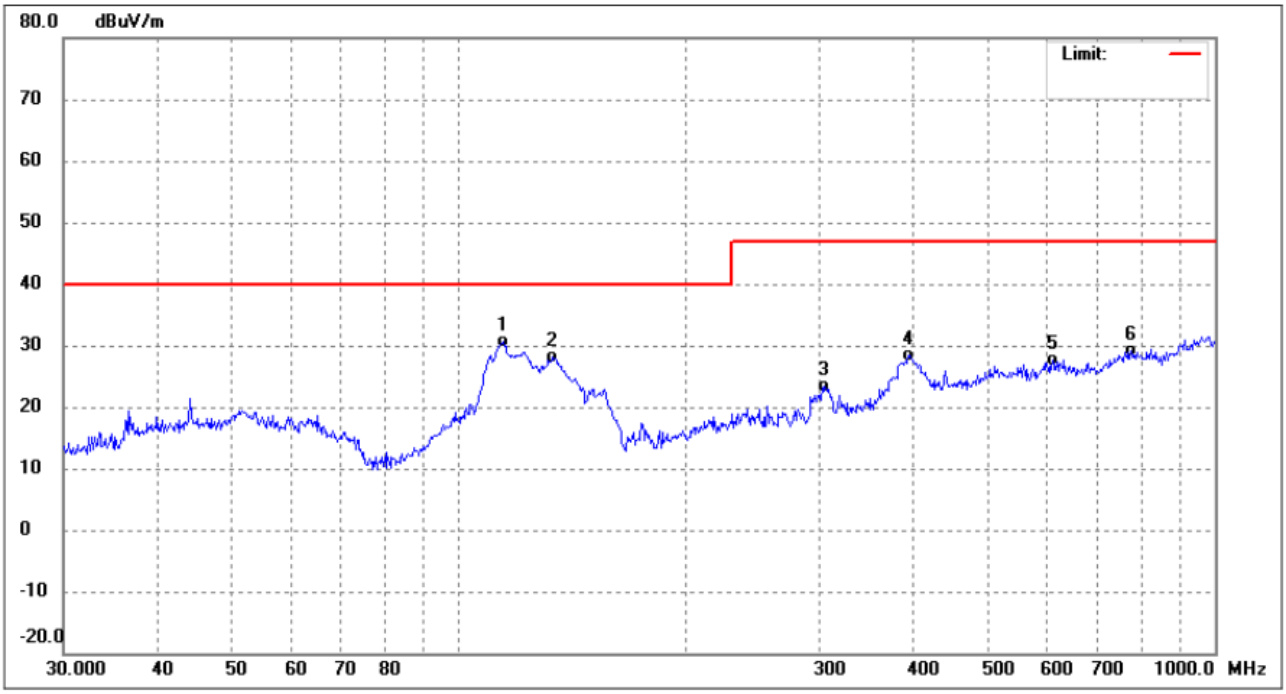

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	114.5146	43.69	-12.96	30.73	40.00	-9.27	QP
2	133.1511	43.14	-15.05	28.09	40.00	-11.91	QP
3	303.5437	32.23	-8.85	23.38	47.00	-23.62	QP
4	393.4723	33.03	-4.63	28.40	47.00	-18.60	QP
5	609.9217	28.66	-1.11	27.55	47.00	-19.45	QP
6	774.1584	28.69	0.32	29.01	47.00	-17.99	QP

TM12 / Polarization: Vertical

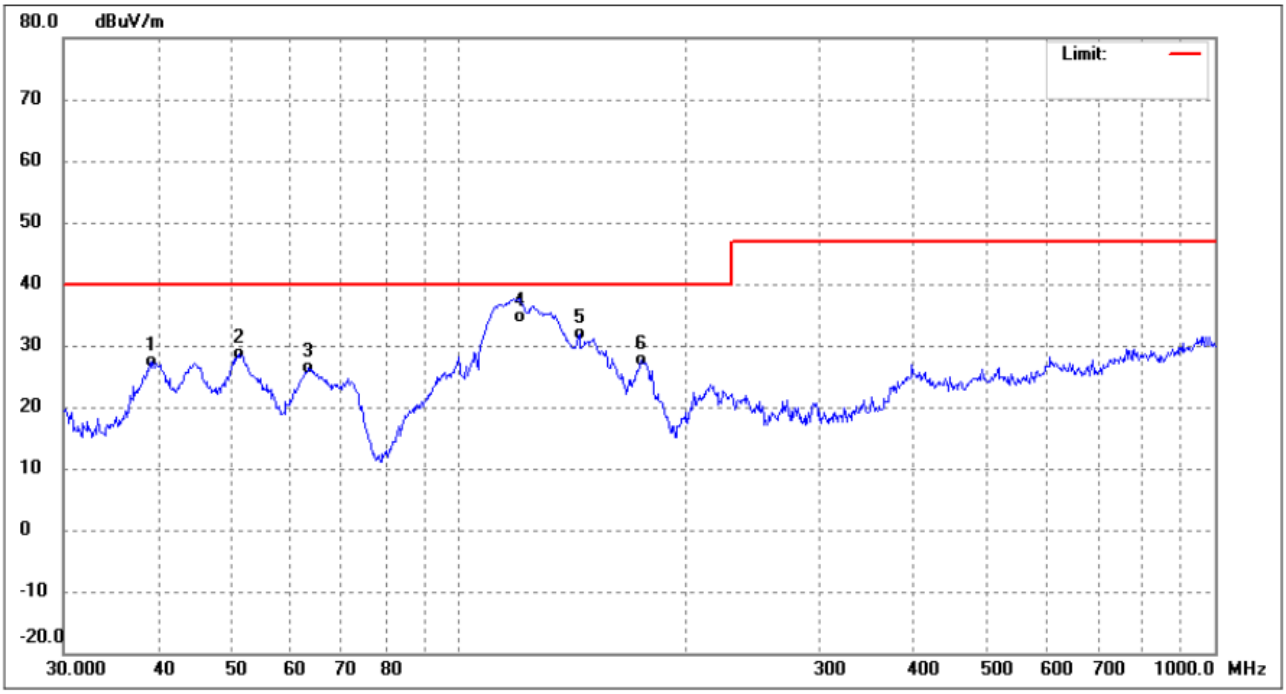

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	39.1616	38.76	-11.42	27.34	40.00	-12.66	QP
2	51.1209	38.54	-9.82	28.72	40.00	-11.28	QP
3	63.3132	38.28	-11.91	26.37	40.00	-13.63	QP
4	120.2766	48.33	-13.73	34.60	40.00	-5.40	QP
5	144.3348	46.97	-15.19	31.78	40.00	-8.22	QP
6	174.4241	41.15	-13.64	27.51	40.00	-12.49	QP

TM13 / Polarization: Horizontal

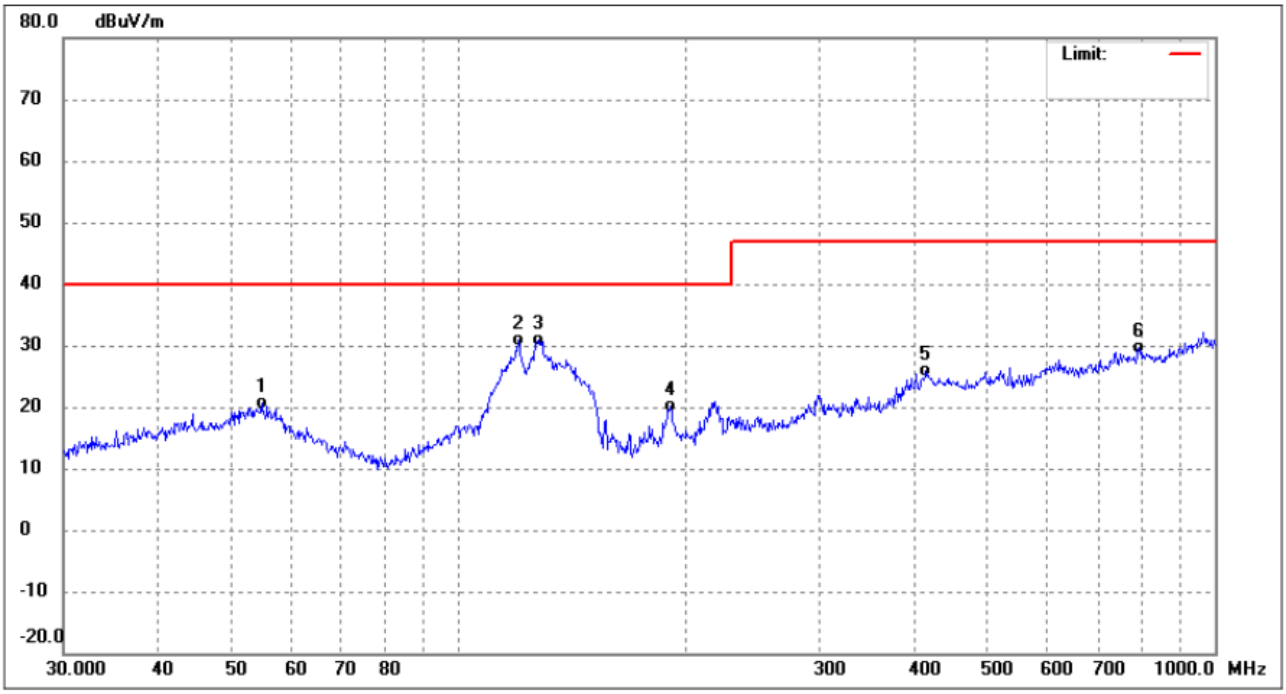

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	54.8348	30.61	-10.08	20.53	40.00	-19.47	QP
2	119.8556	44.65	-13.67	30.98	40.00	-9.02	QP
3	127.6645	45.57	-14.61	30.96	40.00	-9.04	QP
4	190.4050	31.81	-11.77	20.04	40.00	-19.96	QP
5	414.7223	29.73	-3.95	25.78	47.00	-21.22	QP
6	793.3960	28.99	0.67	29.66	47.00	-17.34	QP

TM13 / Polarization: Vertical

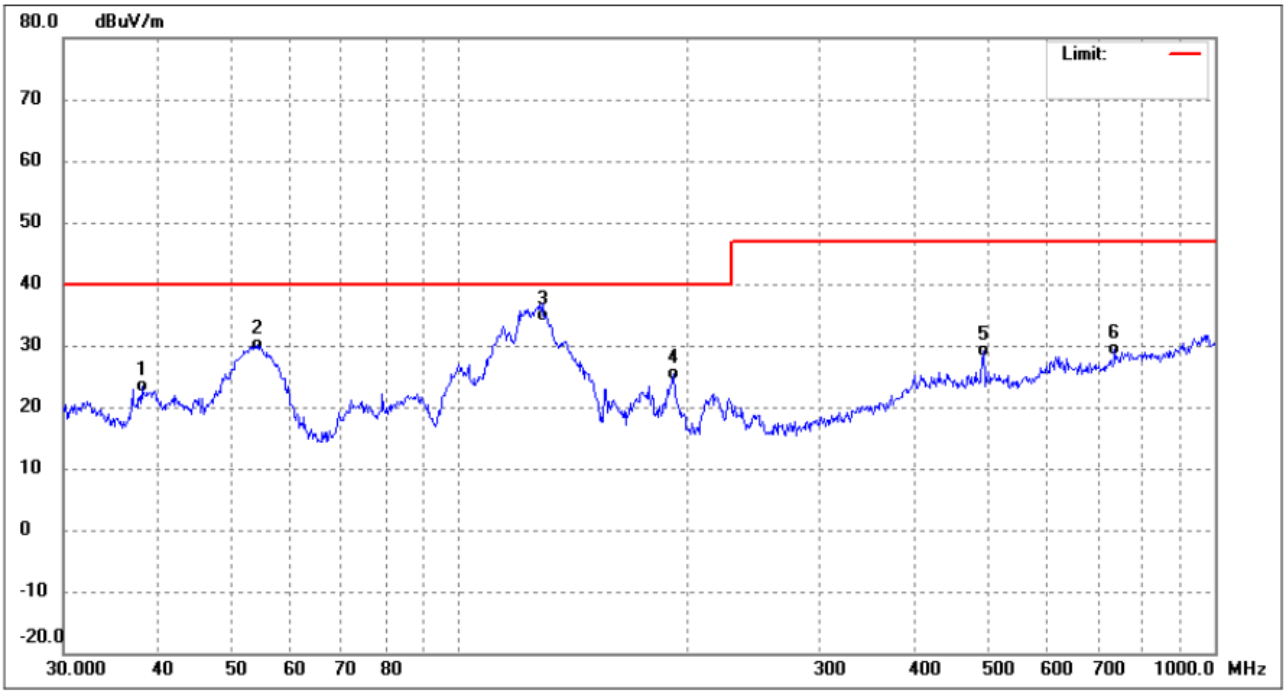

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	38.0783	35.01	-11.74	23.27	40.00	-16.73	QP
2	54.0711	40.15	-10.01	30.14	40.00	-9.86	QP
3	129.0146	49.54	-14.74	34.80	40.00	-5.20	QP
4	192.4186	36.74	-11.46	25.28	40.00	-14.72	QP
5	494.1984	32.72	-3.57	29.15	47.00	-17.85	QP
6	737.0714	29.54	-0.14	29.40	47.00	-17.60	QP

TM14 / Polarization: Horizontal

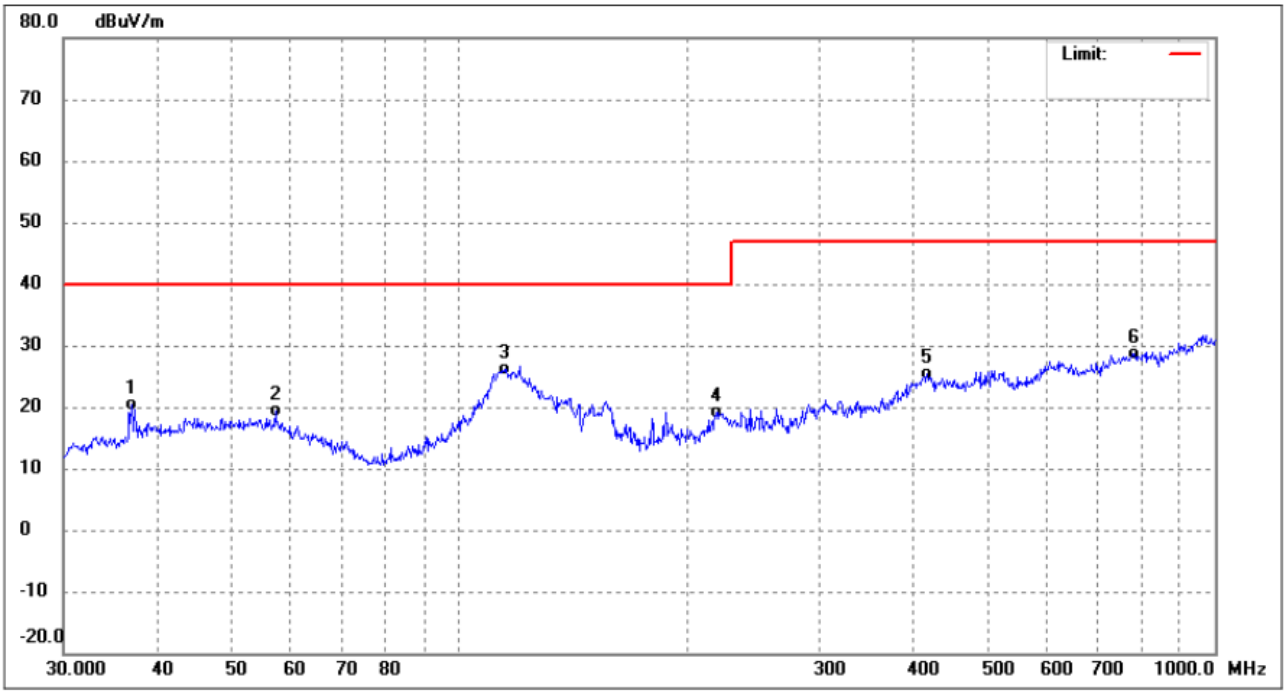

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	36.8953	32.48	-12.06	20.42	40.00	-19.58	QP
2	57.1914	29.91	-10.43	19.48	40.00	-20.52	QP
3	114.9169	39.16	-13.02	26.14	40.00	-13.86	QP
4	219.0753	30.79	-11.54	19.25	40.00	-20.75	QP
5	416.1791	29.21	-3.95	25.26	47.00	-21.74	QP
6	782.3453	28.14	0.50	28.64	47.00	-18.36	QP

TM14 / Polarization: Vertical

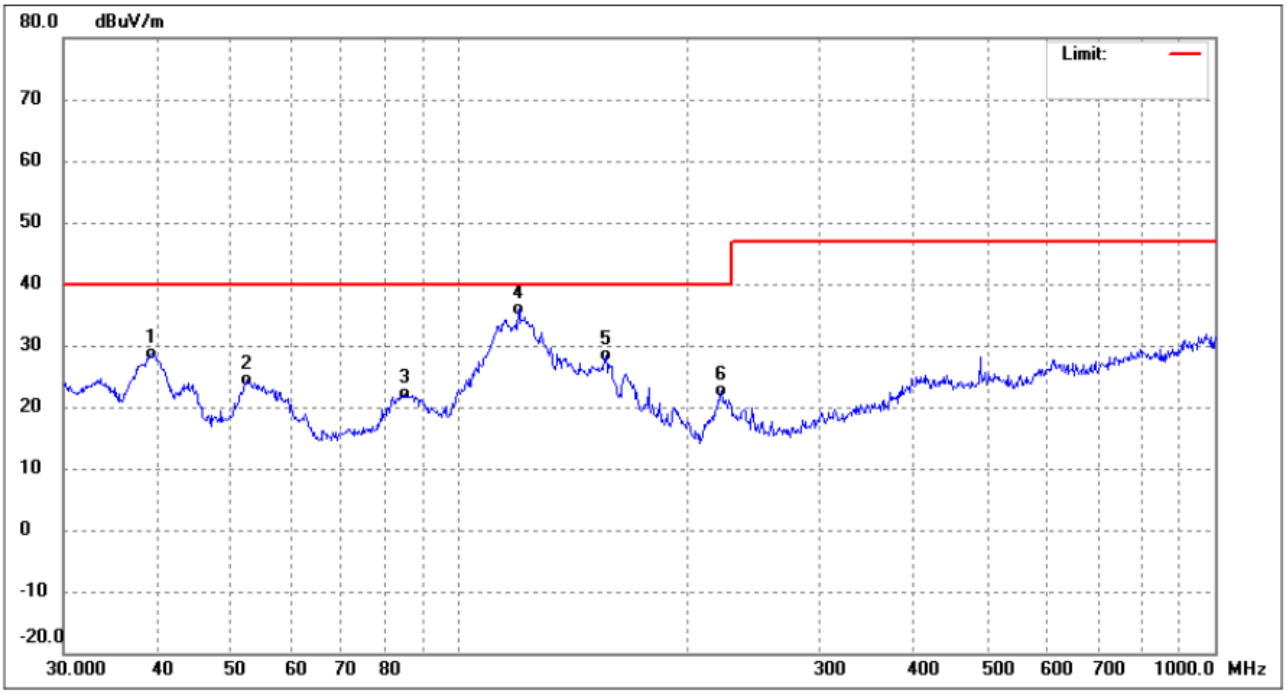

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	39.2991	39.96	-11.38	28.58	40.00	-11.42	QP
2	52.3912	34.29	-9.88	24.41	40.00	-15.59	QP
3	84.7019	37.46	-15.40	22.06	40.00	-17.94	QP
4	119.8556	49.56	-13.67	35.89	40.00	-4.11	QP
5	156.4578	43.00	-14.69	28.31	40.00	-11.69	QP
6	222.1698	33.93	-11.33	22.60	40.00	-17.40	QP

TM15 / Polarization: Horizontal

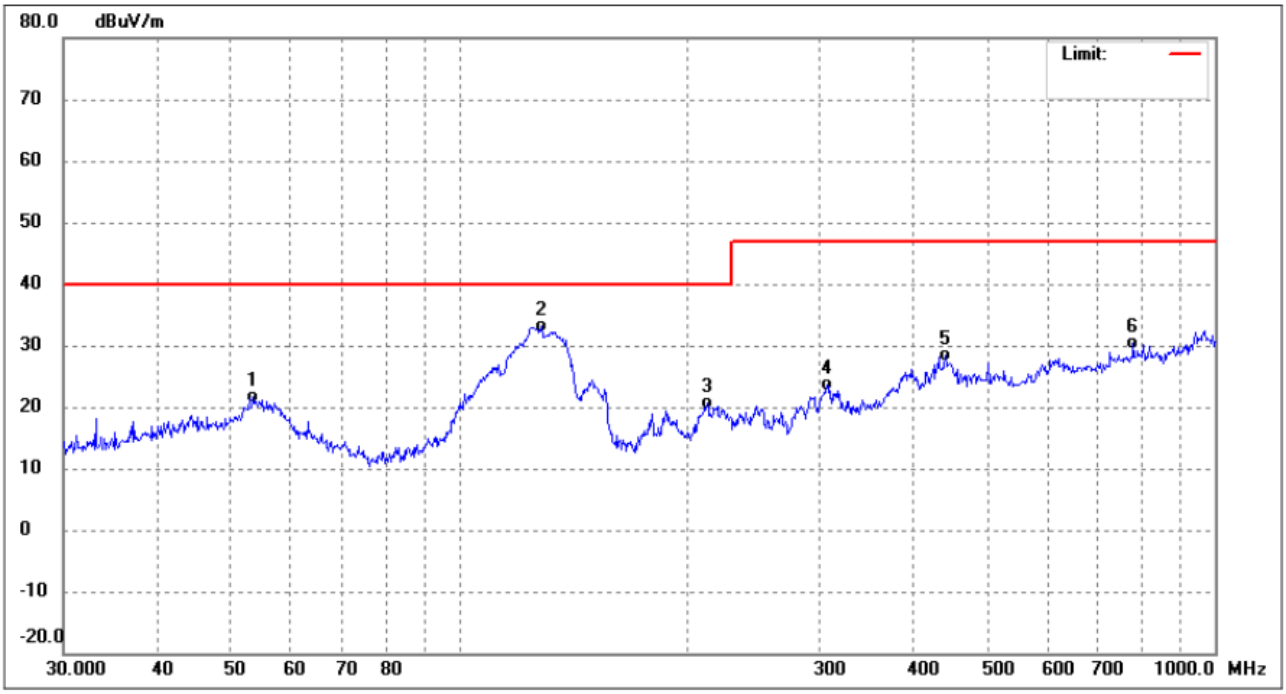

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	53.5052	31.54	-9.95	21.59	40.00	-18.41	QP
2	128.5630	47.71	-14.70	33.01	40.00	-6.99	QP
3	213.0151	32.45	-11.90	20.55	40.00	-19.45	QP
4	306.7537	32.48	-8.81	23.67	47.00	-23.33	QP
5	440.1963	32.23	-3.90	28.33	47.00	-18.67	QP
6	779.6068	29.97	0.41	30.38	47.00	-16.62	QP

TM15 / Polarization: Vertical

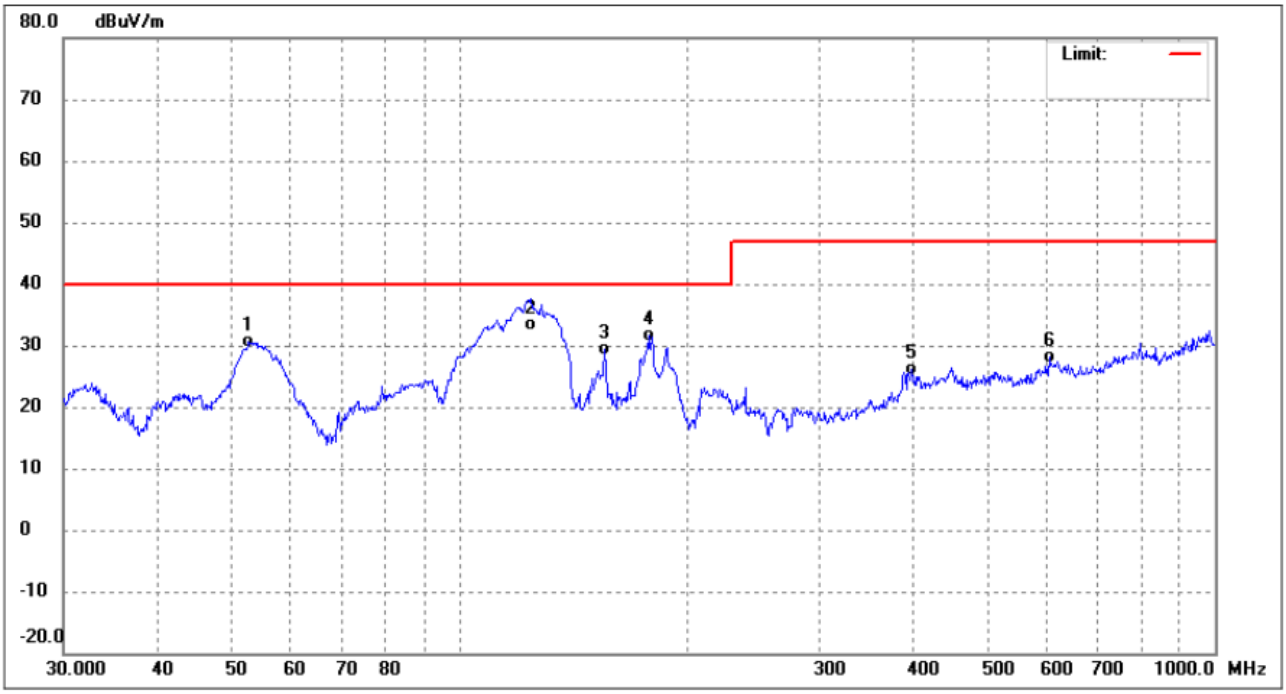

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	52.7600	40.41	-9.90	30.51	40.00	-9.49	QP
2	124.5690	47.79	-14.29	33.50	40.00	-6.50	QP
3	155.9101	44.09	-14.74	29.35	40.00	-10.65	QP
4	178.1327	45.17	-13.43	31.74	40.00	-8.26	QP
5	397.6334	30.45	-4.27	26.18	47.00	-20.82	QP
6	603.5392	29.44	-1.37	28.07	47.00	-18.93	QP

TM16 / Polarization: Horizontal

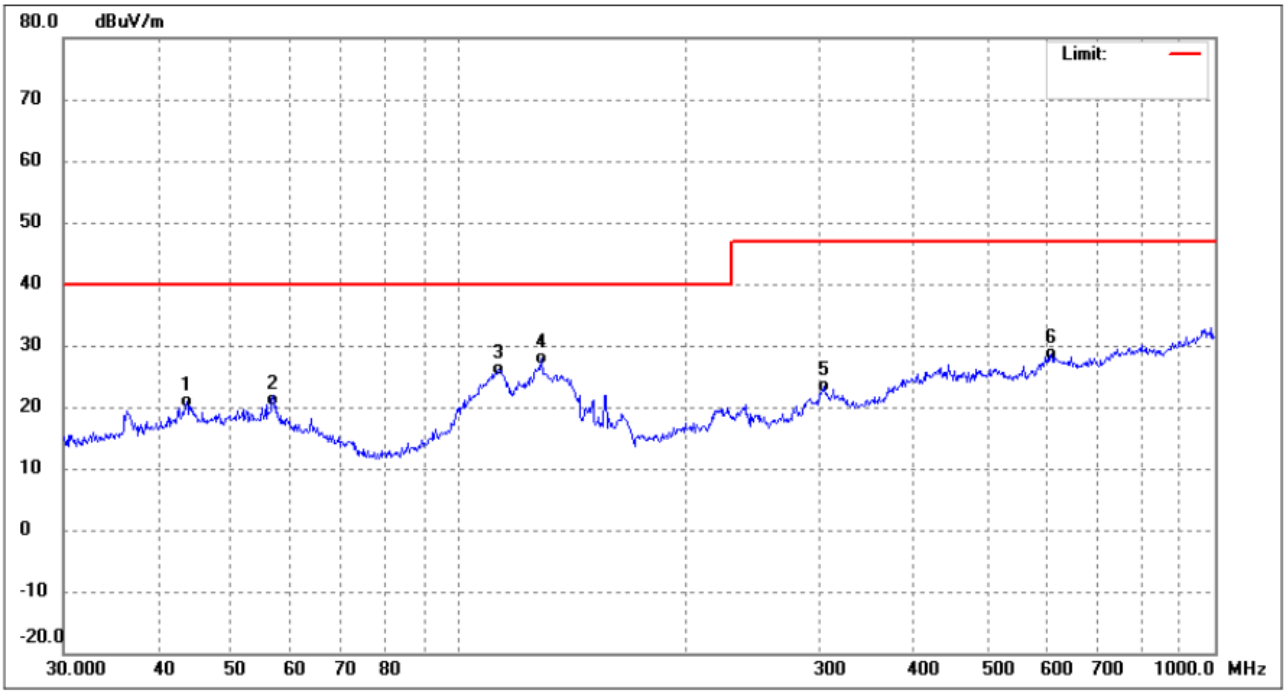

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	43.6584	31.03	-10.25	20.78	40.00	-19.22	QP
2	56.5929	31.49	-10.33	21.16	40.00	-18.84	QP
3	112.9196	38.77	-12.74	26.03	40.00	-13.97	QP
4	128.5630	42.50	-14.70	27.80	40.00	-12.20	QP
5	303.5437	32.20	-8.85	23.35	47.00	-23.65	QP
6	607.7867	29.71	-1.14	28.57	47.00	-18.43	QP

TM16 / Polarization: Vertical

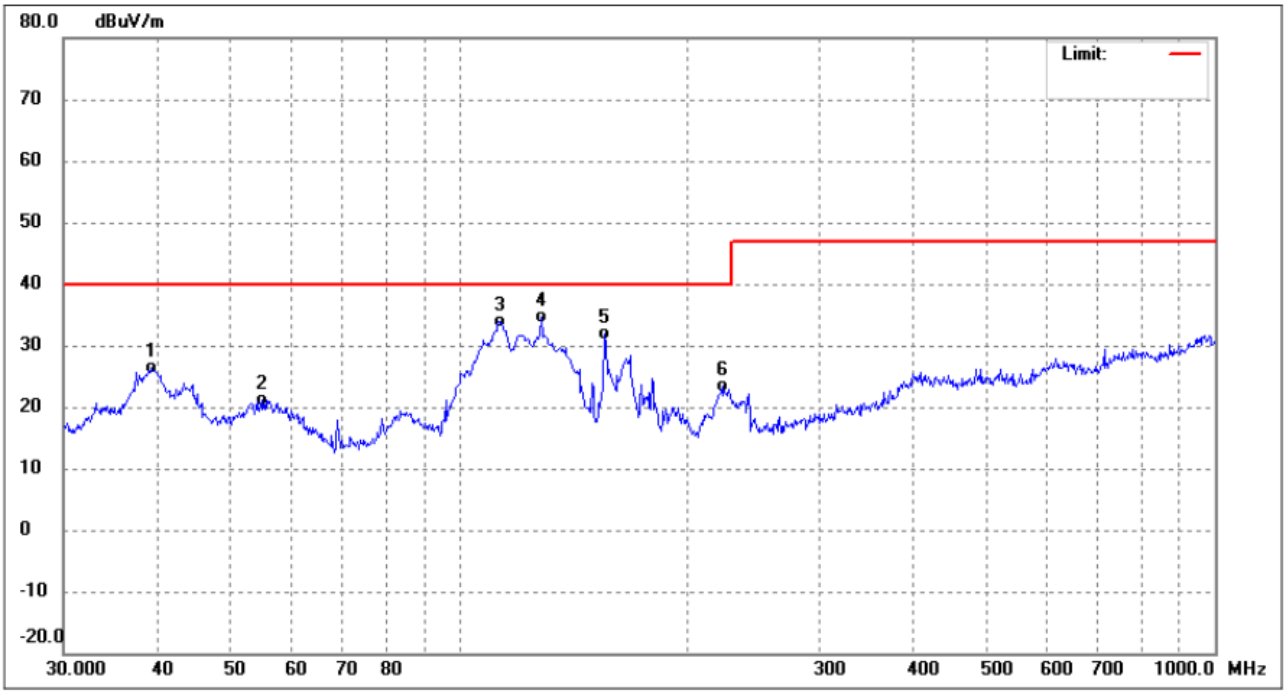

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	39.1616	37.74	-11.42	26.32	40.00	-13.68	QP
2	55.0274	31.32	-10.10	21.22	40.00	-18.78	QP
3	113.3163	46.66	-12.79	33.87	40.00	-6.13	QP
4	128.5630	49.31	-14.70	34.61	40.00	-5.39	QP
5	155.9101	46.66	-14.74	31.92	40.00	-8.08	QP
6	222.9502	34.57	-11.28	23.29	40.00	-16.71	QP

TM17 / Polarization: Horizontal

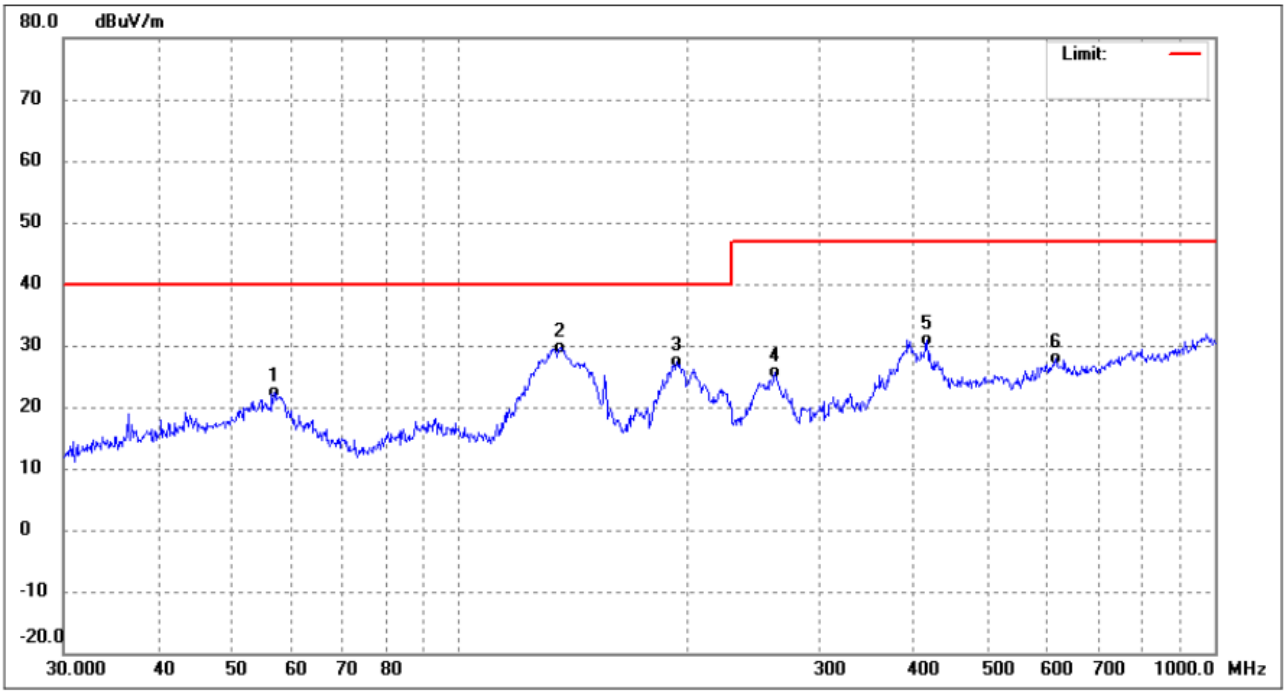

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	56.9912	32.74	-10.40	22.34	40.00	-17.66	QP
2	135.9822	44.76	-15.15	29.61	40.00	-10.39	QP
3	194.4534	38.55	-11.29	27.26	40.00	-12.74	QP
4	261.9753	36.75	-11.06	25.69	47.00	-21.31	QP
5	416.1791	34.85	-3.95	30.90	47.00	-16.10	QP
6	616.3718	28.93	-1.02	27.91	47.00	-19.09	QP

TM17 / Polarization: Vertical

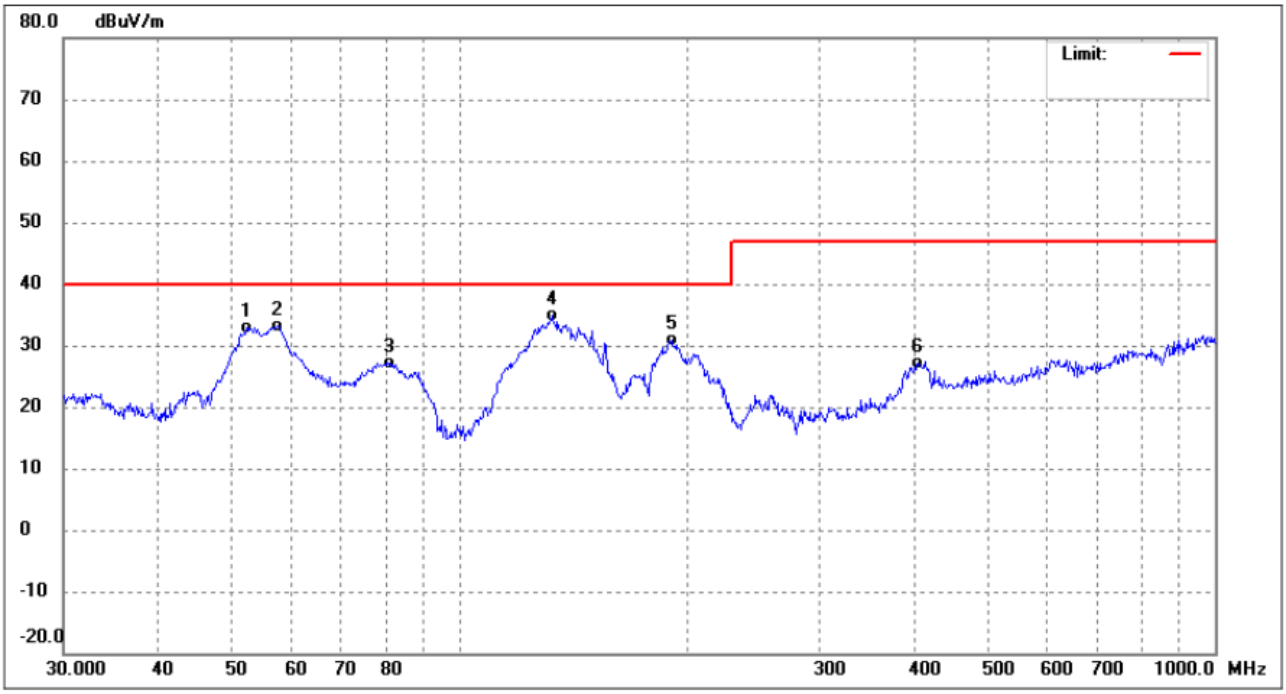

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	52.3912	42.85	-9.88	32.97	40.00	-7.03	QP
2	57.5939	43.71	-10.50	33.21	40.00	-6.79	QP
3	80.9275	43.25	-16.09	27.16	40.00	-12.84	QP
4	132.6850	49.89	-15.03	34.86	40.00	-5.14	QP
5	191.0738	42.43	-11.64	30.79	40.00	-9.21	QP
6	404.6665	31.14	-4.04	27.10	47.00	-19.90	QP

TM18 / Polarization: Horizontal

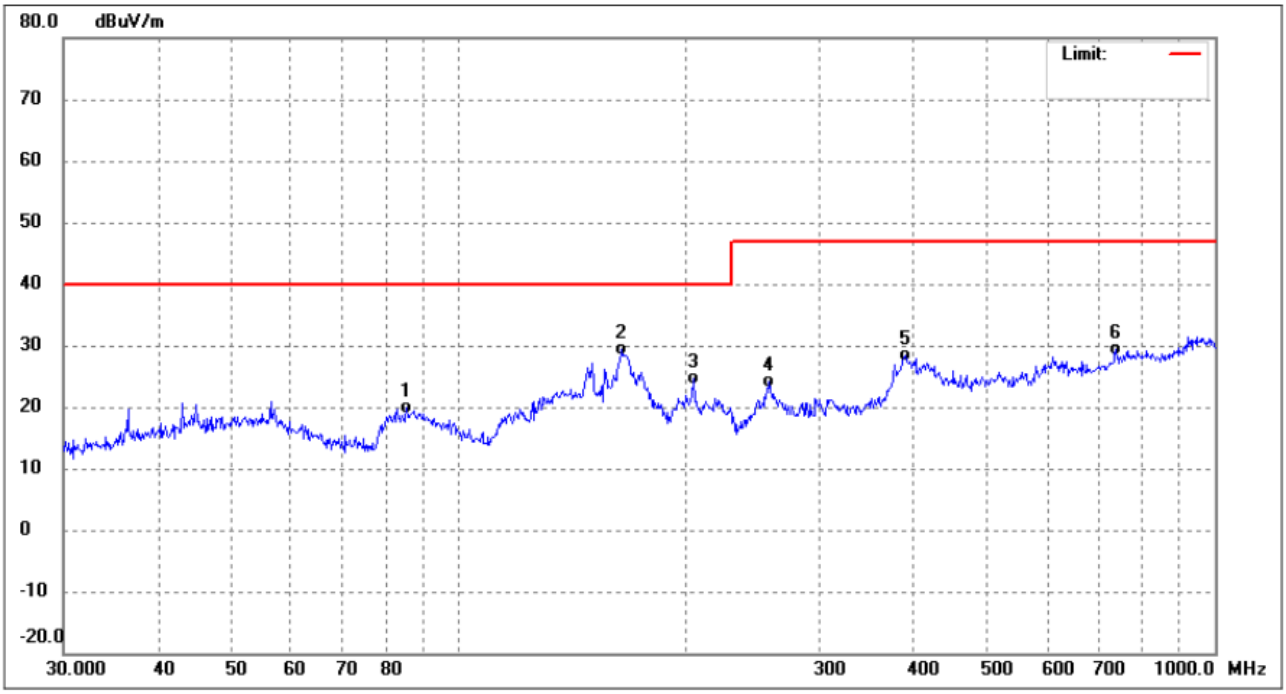

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	85.2980	35.10	-15.25	19.85	40.00	-20.15	QP
2	164.3301	43.60	-14.24	29.36	40.00	-10.64	QP
3	204.2377	36.38	-11.68	24.70	40.00	-15.30	QP
4	257.4222	35.03	-10.96	24.07	47.00	-22.93	QP
5	389.3549	33.43	-5.00	28.43	47.00	-18.57	QP
6	739.6604	29.59	-0.11	29.48	47.00	-17.52	QP

TM18 / Polarization: Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	39.9942	38.50	-11.18	27.32	40.00	-12.68	QP
2	55.0274	38.44	-10.10	28.34	40.00	-11.66	QP
3	82.0706	41.70	-15.97	25.73	40.00	-14.27	QP
4	113.3163	44.33	-12.79	31.54	40.00	-8.46	QP
5	155.9101	44.58	-14.74	29.84	40.00	-10.16	QP
6	195.1365	39.21	-11.26	27.95	40.00	-12.05	QP

TM19 / Polarization: Horizontal

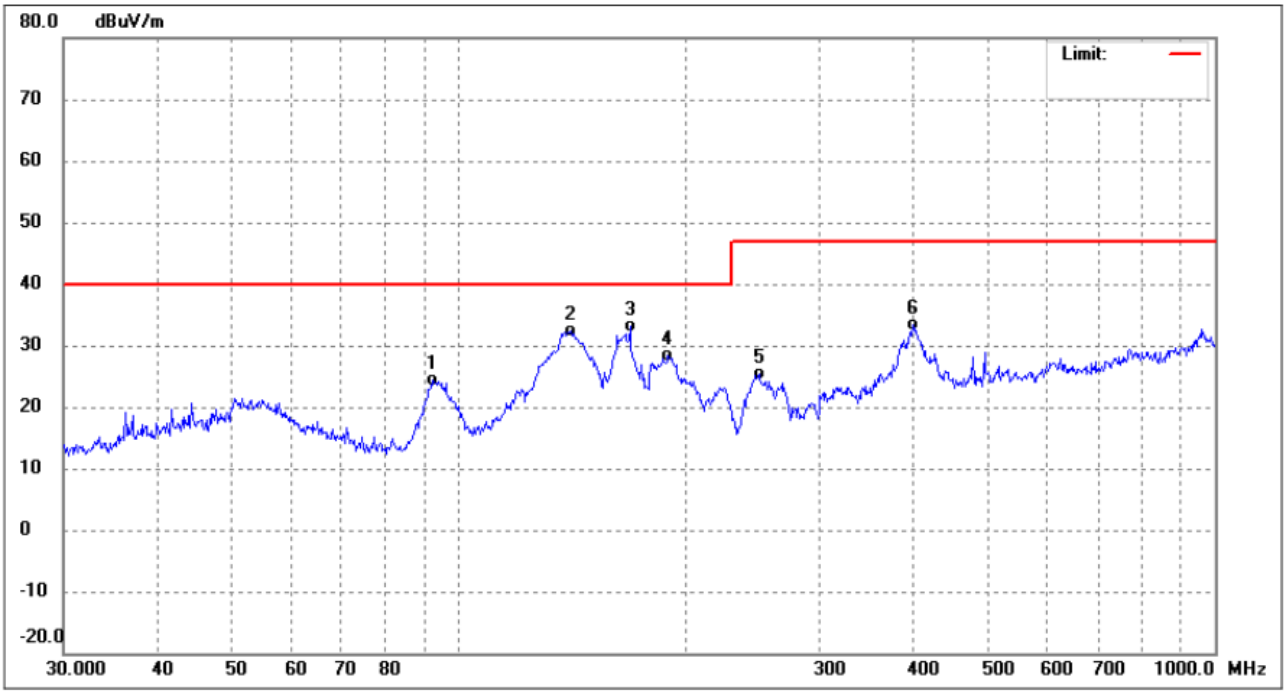

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	92.1388	37.66	-13.25	24.41	40.00	-15.59	QP
2	140.8351	47.54	-15.20	32.34	40.00	-7.66	QP
3	168.4138	47.20	-14.04	33.16	40.00	-6.84	QP
4	189.0743	40.41	-12.03	28.38	40.00	-11.62	QP
5	249.4250	35.82	-10.48	25.34	47.00	-21.66	QP
6	399.0302	37.57	-4.14	33.43	47.00	-13.57	QP

TM19 / Polarization: Vertical

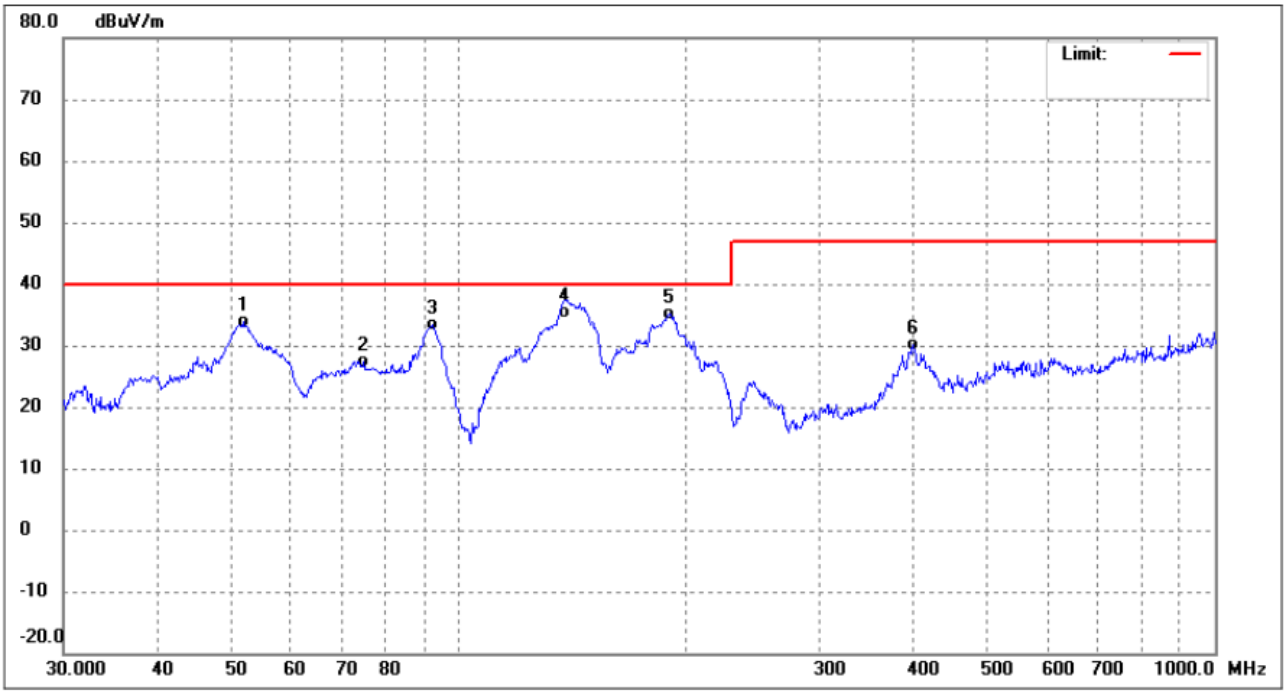

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	51.8430	43.86	-9.86	34.00	40.00	-6.00	QP
2	74.9191	43.05	-15.59	27.46	40.00	-12.54	QP
3	92.1388	46.68	-13.25	33.43	40.00	-6.57	QP
4	137.9028	50.59	-15.19	35.40	40.00	-4.60	QP
5	189.7385	46.93	-11.89	35.04	40.00	-4.96	QP
6	399.0302	34.15	-4.14	30.01	47.00	-16.99	QP

TM20 / Polarization: Horizontal

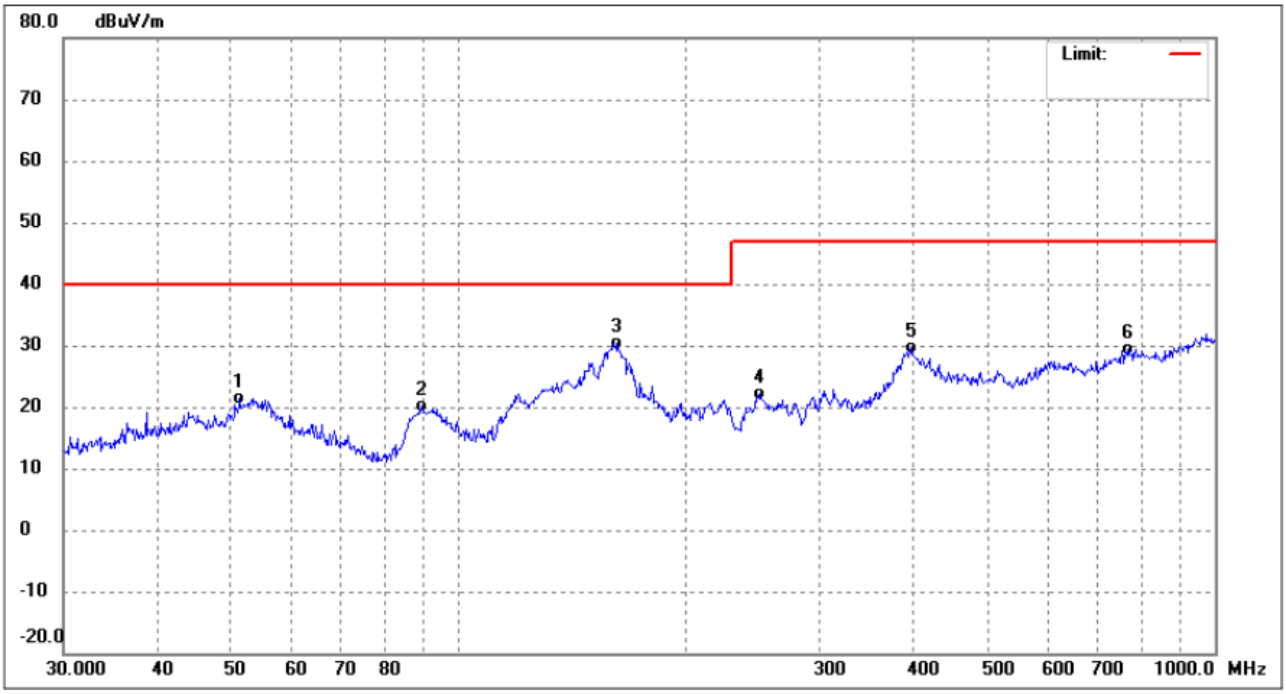

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	51.3005	31.27	-9.83	21.44	40.00	-18.56	QP
2	89.2764	34.22	-14.01	20.21	40.00	-19.79	QP
3	162.0414	44.75	-14.37	30.38	40.00	-9.62	QP
4	249.4250	32.53	-10.48	22.05	47.00	-24.95	QP
5	396.2415	34.04	-4.38	29.66	47.00	-17.34	QP
6	768.7481	29.08	0.34	29.42	47.00	-17.58	QP

TM20 / Polarization: Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	45.2166	37.47	-9.99	27.48	40.00	-12.52	QP
2	52.3912	42.83	-9.88	32.95	40.00	-7.05	QP
3	87.1117	38.92	-14.73	24.19	40.00	-15.81	QP
4	114.1138	45.44	-12.90	32.54	40.00	-7.46	QP
5	132.2206	45.96	-14.99	30.97	40.00	-9.03	QP
6	168.4138	43.47	-14.04	29.43	40.00	-10.57	QP

TM21 / Polarization: Horizontal

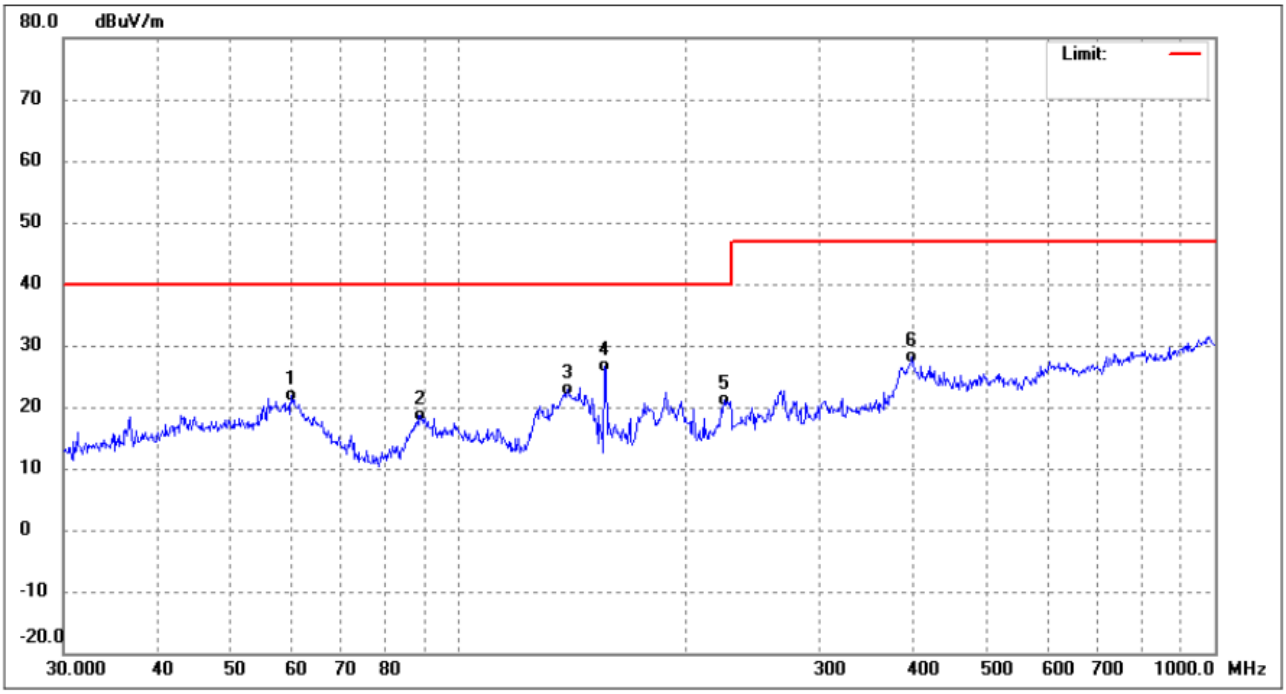

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	60.0691	32.88	-11.03	21.85	40.00	-18.15	QP
2	88.9639	32.70	-14.12	18.58	40.00	-21.42	QP
3	139.3613	38.01	-15.20	22.81	40.00	-17.19	QP
4	155.9101	41.39	-14.74	26.65	40.00	-13.35	QP
5	224.5193	32.24	-11.17	21.07	40.00	-18.93	QP
6	397.6334	32.43	-4.27	28.16	47.00	-18.84	QP

TM21 / Polarization: Vertical

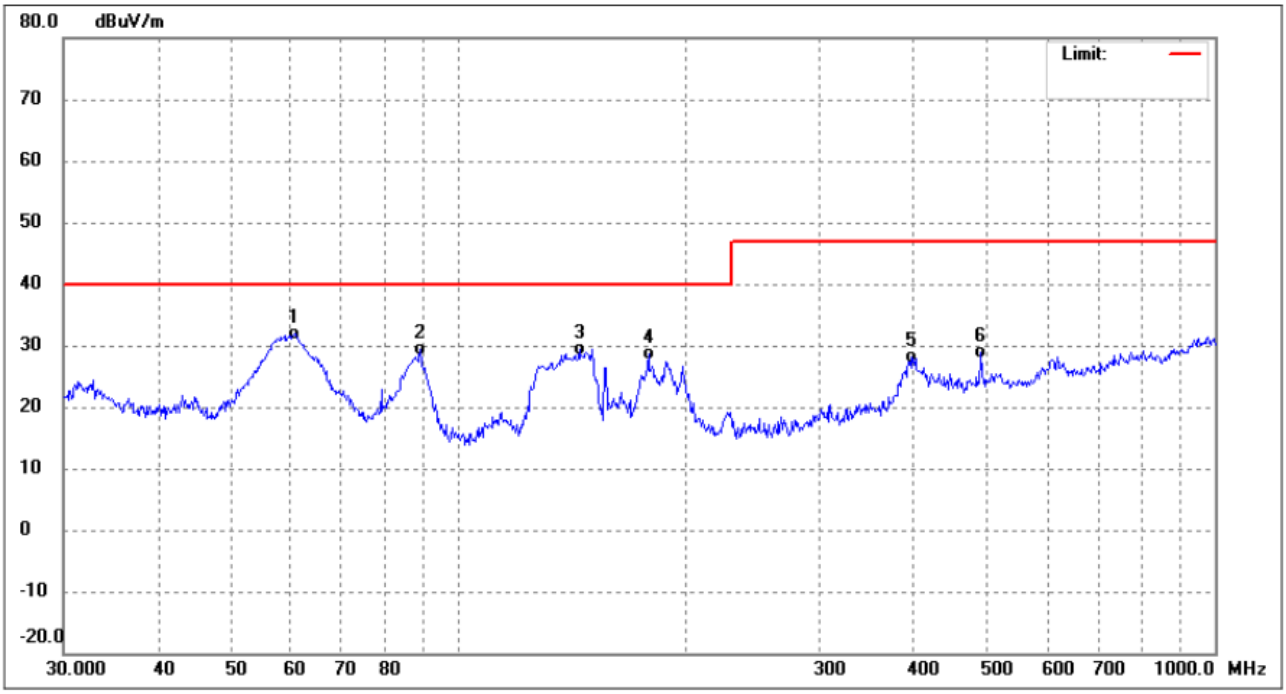

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	60.7044	43.06	-11.19	31.87	40.00	-8.13	QP
2	88.9639	43.47	-14.12	29.35	40.00	-10.65	QP
3	144.3348	44.57	-15.19	29.38	40.00	-10.62	QP
4	178.1327	42.18	-13.43	28.75	40.00	-11.25	QP
5	397.6334	32.46	-4.27	28.19	47.00	-18.81	QP
6	490.7447	32.31	-3.55	28.76	47.00	-18.24	QP

TM22 / Polarization: Horizontal

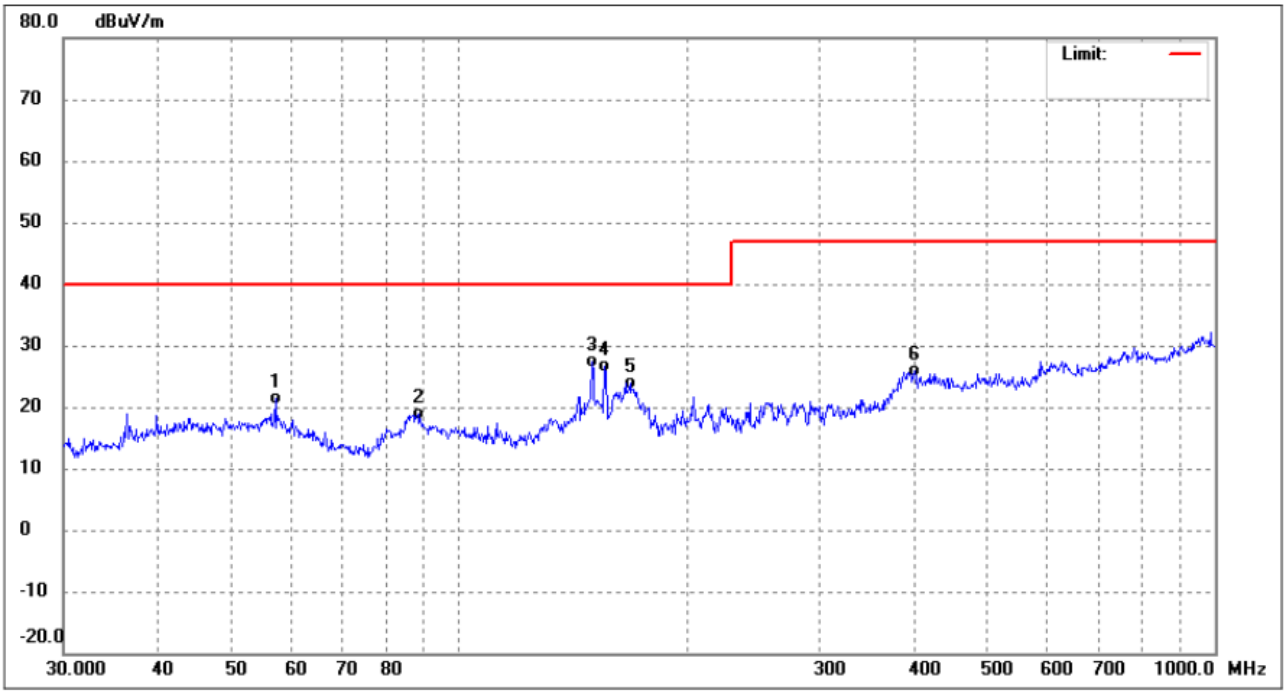

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	57.1914	31.83	-10.43	21.40	40.00	-18.60	QP
2	88.3421	33.29	-14.32	18.97	40.00	-21.03	QP
3	150.0108	42.39	-15.12	27.27	40.00	-12.73	QP
4	155.9101	41.25	-14.74	26.51	40.00	-13.49	QP
5	168.4138	37.94	-14.04	23.90	40.00	-16.10	QP
6	400.4319	29.92	-4.06	25.86	47.00	-21.14	QP

TM22 / Polarization: Vertical

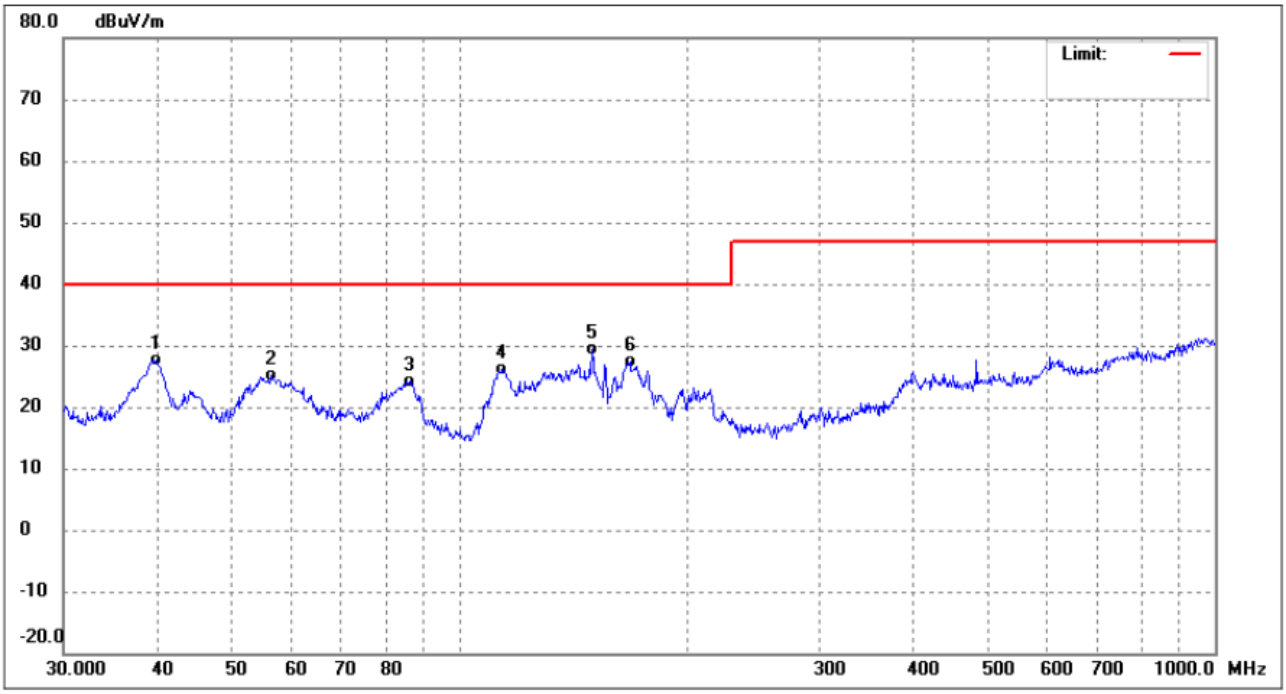

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	39.7146	39.01	-11.27	27.74	40.00	-12.26	QP
2	56.5929	35.49	-10.33	25.16	40.00	-14.84	QP
3	85.8984	39.23	-15.07	24.16	40.00	-15.84	QP
4	114.1138	39.07	-12.90	26.17	40.00	-13.83	QP
5	150.0108	44.38	-15.12	29.26	40.00	-10.74	QP
6	168.4138	41.49	-14.04	27.45	40.00	-12.55	QP

TM23 / Polarization: Horizontal

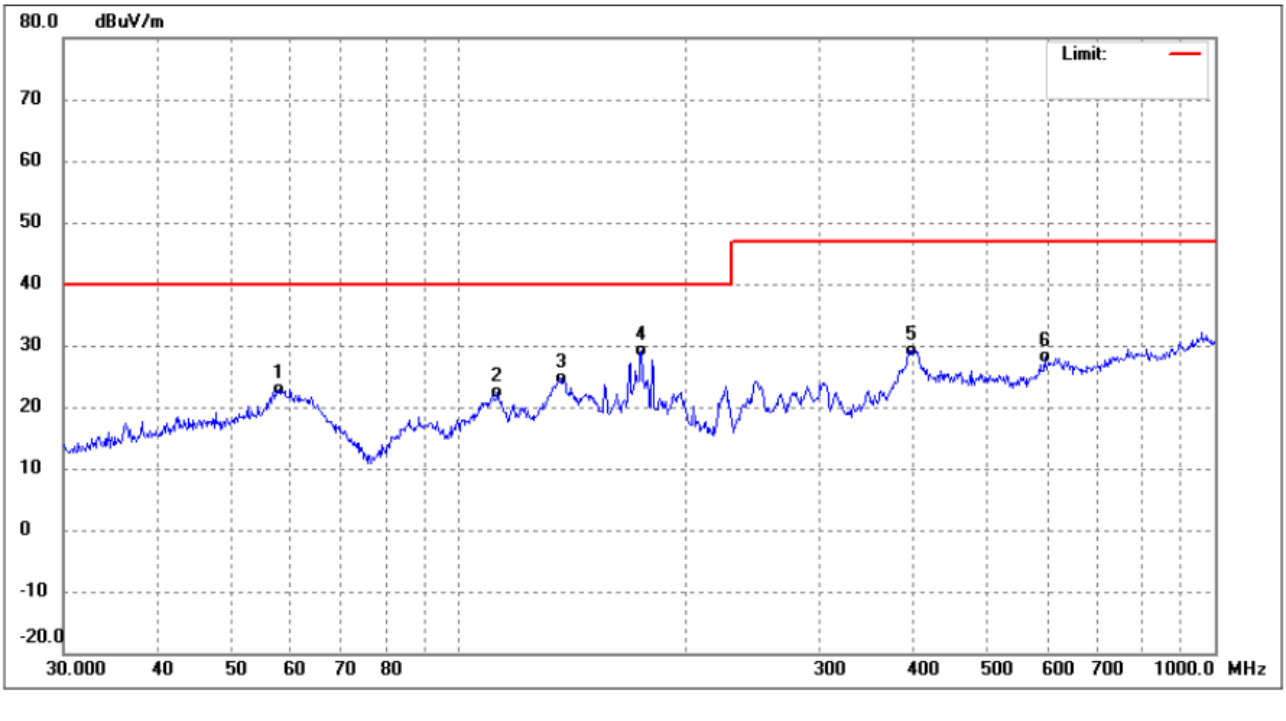

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	57.7962	33.52	-10.53	22.99	40.00	-17.01	QP
2	112.5244	35.02	-12.68	22.34	40.00	-17.66	QP
3	136.4598	39.72	-15.15	24.57	40.00	-15.43	QP
4	174.4241	42.69	-13.64	29.05	40.00	-10.95	QP
5	397.6334	33.52	-4.27	29.25	47.00	-17.75	QP
6	595.1329	30.05	-1.91	28.14	47.00	-18.86	QP

TM23 / Polarization: Vertical

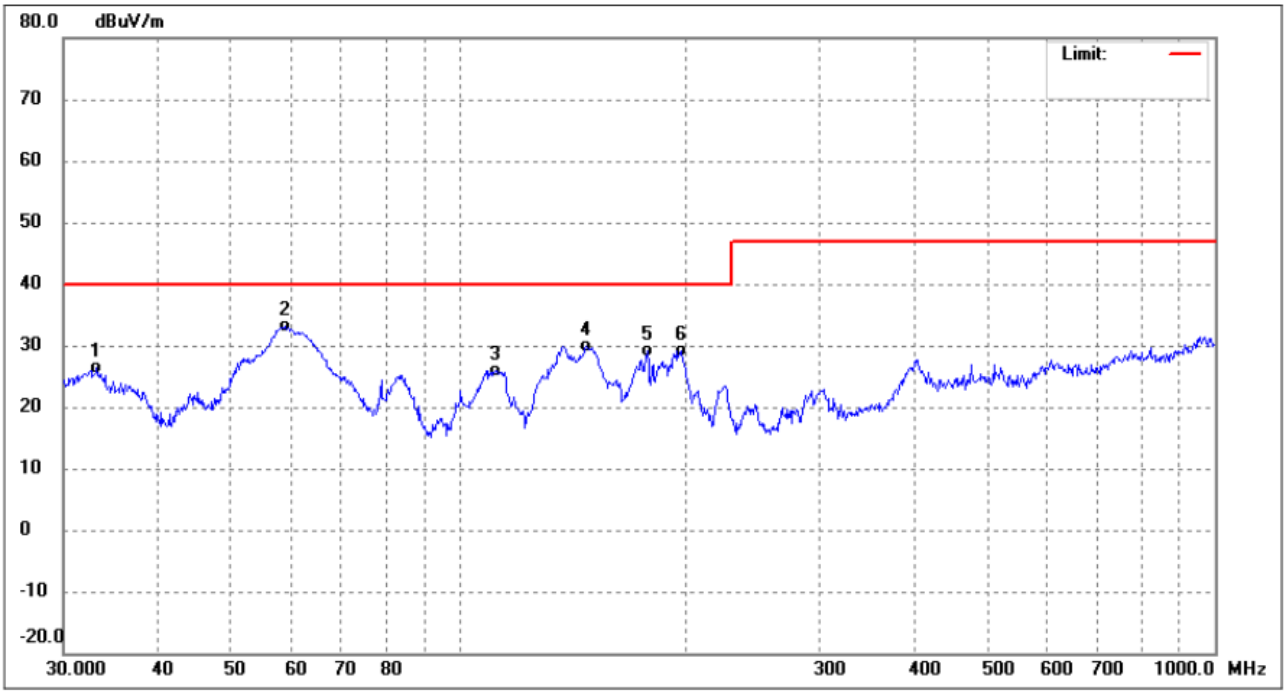

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	33.2112	39.53	-13.12	26.41	40.00	-13.59	QP
2	58.8185	43.80	-10.74	33.06	40.00	-6.94	QP
3	111.7380	38.58	-12.58	26.00	40.00	-14.00	QP
4	147.4036	45.11	-15.18	29.93	40.00	-10.07	QP
5	177.5092	42.48	-13.47	29.01	40.00	-10.99	QP
6	196.5098	40.44	-11.21	29.23	40.00	-10.77	QP

TM24 / Polarization: Horizontal

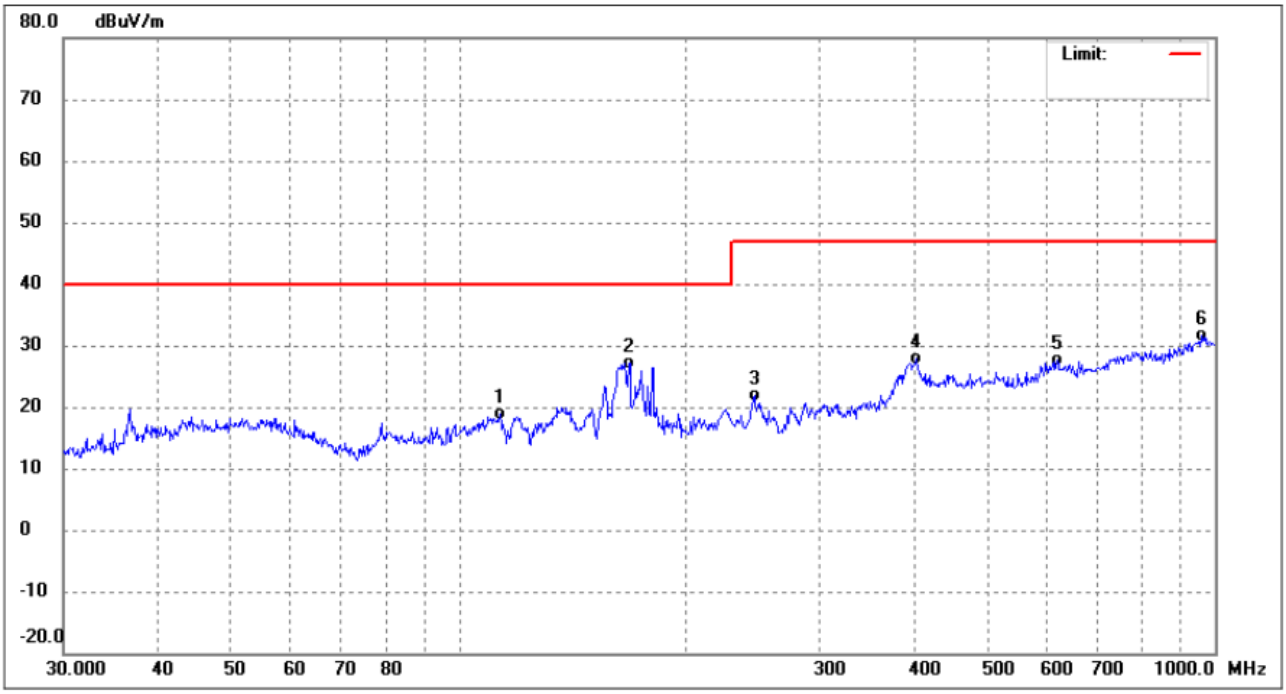

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	113.3163	31.67	-12.79	18.88	40.00	-21.12	QP
2	167.8243	41.20	-14.07	27.13	40.00	-12.87	QP
3	245.9509	32.27	-10.30	21.97	47.00	-25.03	QP
4	403.2500	31.85	-4.06	27.79	47.00	-19.21	QP
5	618.5369	28.59	-1.08	27.51	47.00	-19.49	QP
6	958.7943	28.03	3.50	31.53	47.00	-15.47	QP

TM24 / Polarization: Vertical

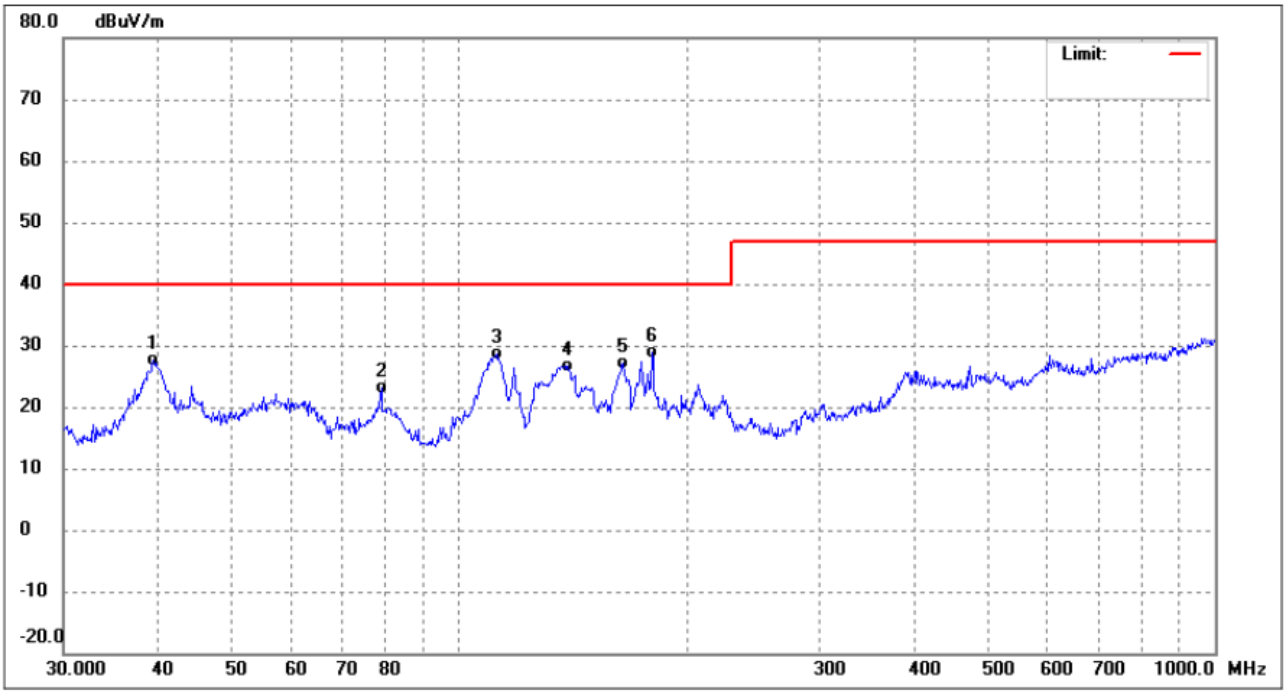

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	39.4371	38.96	-11.35	27.61	40.00	-12.39	QP
2	78.9652	39.29	-16.14	23.15	40.00	-16.85	QP
3	112.1305	41.32	-12.63	28.69	40.00	-11.31	QP
4	139.3613	41.90	-15.20	26.70	40.00	-13.30	QP
5	164.9075	41.26	-14.21	27.05	40.00	-12.95	QP
6	180.0165	42.21	-13.30	28.91	40.00	-11.09	QP

4.3 Voltage fluctuations and flicker

Test Limit:	EN 61000-3-3, Clause 5
Test Method:	EN 61000-3-3:2013+A1:2019+A2:2021

4.3.1 E.U.T. Operation

Environmental Conditions	
Temperature:	24.6 °C
Relative Humidity:	55 %
Atmospheric Pressure:	102 kPa
Test mode:	TM3, TM7, TM11, TM15, TM19, TM23

4.3.2 Basic Test Setup Block Diagram

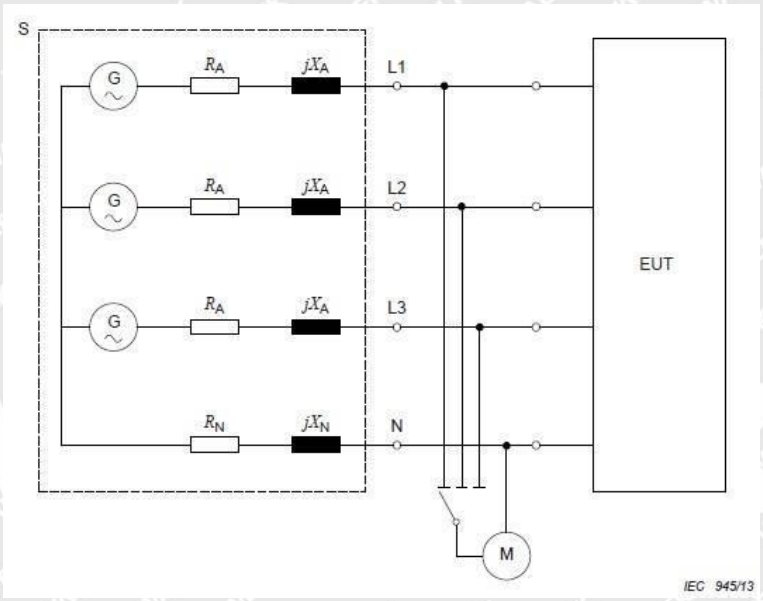

4.3.3 Summary of Test Results

Flicker Test Summary per IEC61000-3-3:2013+AMD2:2021 (Run time)

Comment: TM3

Customer: Customer information

Test Result: Pass **Status: Test Completed**

Pst_i and limit line **European Limits**

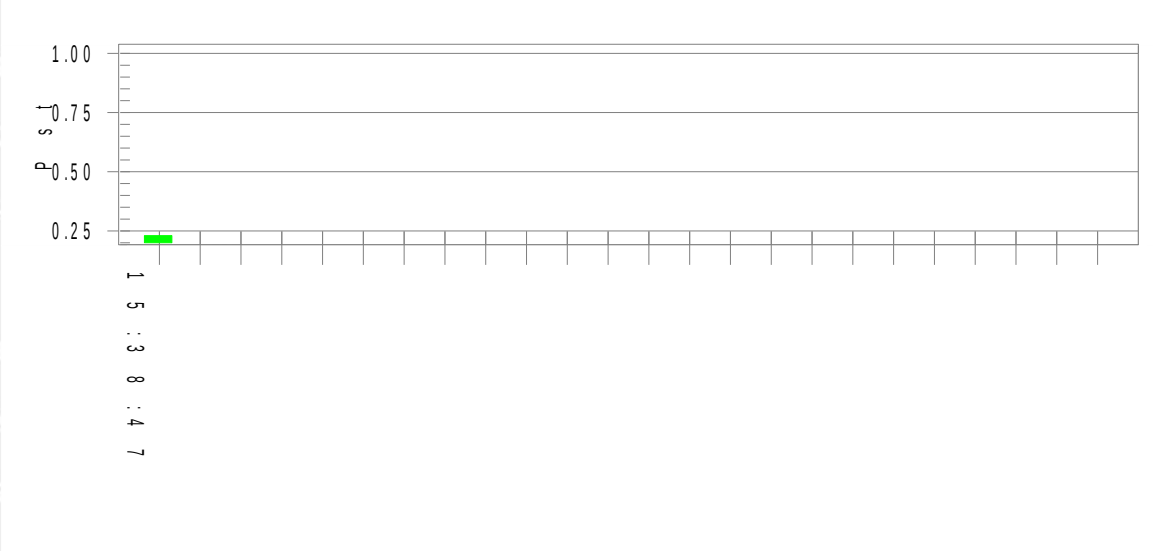

Plt and limit line

Parameter values recorded during the test:

Vrms at the end of test (Volt):	**229.62**			
T-max (mS):	**0**	**Test limit (mS):**	**500.0**	**Pass**
Highest dc (%):	**0.00**	**Test limit (%):**	**3.30**	**Pass**
Highest dmax (%):	**0.00**	**Test limit (%):**	**4.00**	**Pass**
Highest Pst (10 min. period):	**0.230**	**Test limit:**	**1.000**	**Pass**
Highest Plt (2 hr. period):	**0.101**	**Test limit:**	**0.650**	**Pass**

Flicker Test Summary per IEC61000-3-3:2013+AMD2:2021 (Run time)

Comment: TM7

Customer: Customer information

Test Result: Pass **Status: Test Completed**

Pst_i and limit line **European Limits**

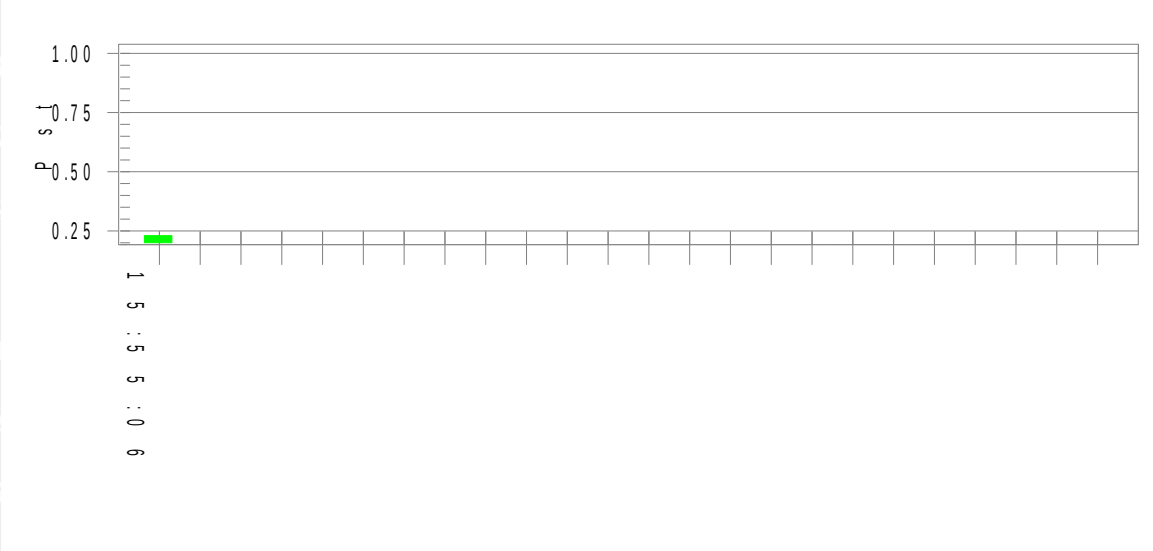

Plt and limit line

Parameter values recorded during the test:

Vrms at the end of test (Volt):	**229.56**			
T-max (mS):	**0**	**Test limit (mS):**	**500.0**	**Pass**
Highest dc (%):	**0.00**	**Test limit (%):**	**3.30**	**Pass**
Highest dmax (%):	**0.00**	**Test limit (%):**	**4.00**	**Pass**
Highest Pst (10 min. period):	**0.230**	**Test limit:**	**1.000**	**Pass**
Highest Plt (2 hr. period):	**0.101**	**Test limit:**	**0.650**	**Pass**

Flicker Test Summary per IEC61000-3-3:2013+AMD2:2021 (Run time)

Comment: TM11

Customer: Customer information

Test Result: Pass **Status: Test Completed**

Pst_i and limit line **European Limits**

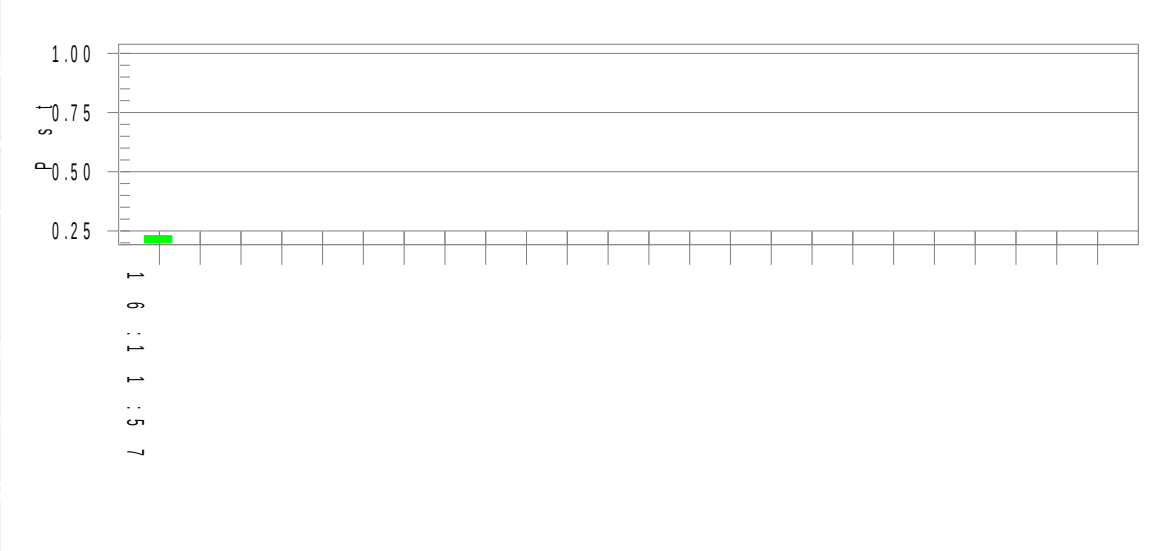

Plt and limit line

Parameter values recorded during the test:

Vrms at the end of test (Volt):	**229.55**			
T-max (mS):	**0**	**Test limit (mS):**	**500.0**	**Pass**
Highest dc (%):	**0.00**	**Test limit (%):**	**3.30**	**Pass**
Highest dmax (%):	**0.00**	**Test limit (%):**	**4.00**	**Pass**
Highest Pst (10 min. period):	**0.230**	**Test limit:**	**1.000**	**Pass**
Highest Plt (2 hr. period):	**0.101**	**Test limit:**	**0.650**	**Pass**

Flicker Test Summary per IEC61000-3-3:2013+AMD2:2021 (Run time)

Comment: TM15

Customer: Customer information

Test Result: Pass **Status: Test Completed**

Pst_i and limit line **European Limits**

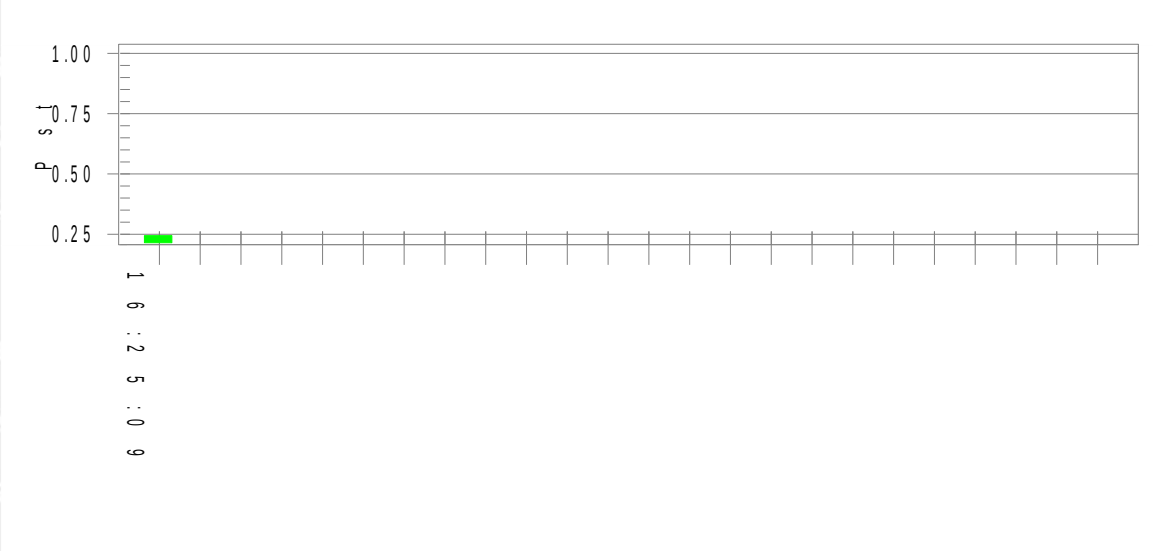

Plt and limit line

Parameter values recorded during the test:

Vrms at the end of test (Volt):	**229.57**			
T-max (mS):	**0**	**Test limit (mS):**	**500.0**	**Pass**
Highest dc (%):	**0.00**	**Test limit (%):**	**3.30**	**Pass**
Highest dmax (%):	**0.00**	**Test limit (%):**	**4.00**	**Pass**
Highest Pst (10 min. period):	**0.244**	**Test limit:**	**1.000**	**Pass**
Highest Plt (2 hr. period):	**0.107**	**Test limit:**	**0.650**	**Pass**

Flicker Test Summary per IEC61000-3-3:2013+AMD2:2021 (Run time)

Comment: TM19

Customer: Customer information

Test Result: Pass **Status: Test Completed**

Pst_i and limit line **European Limits**

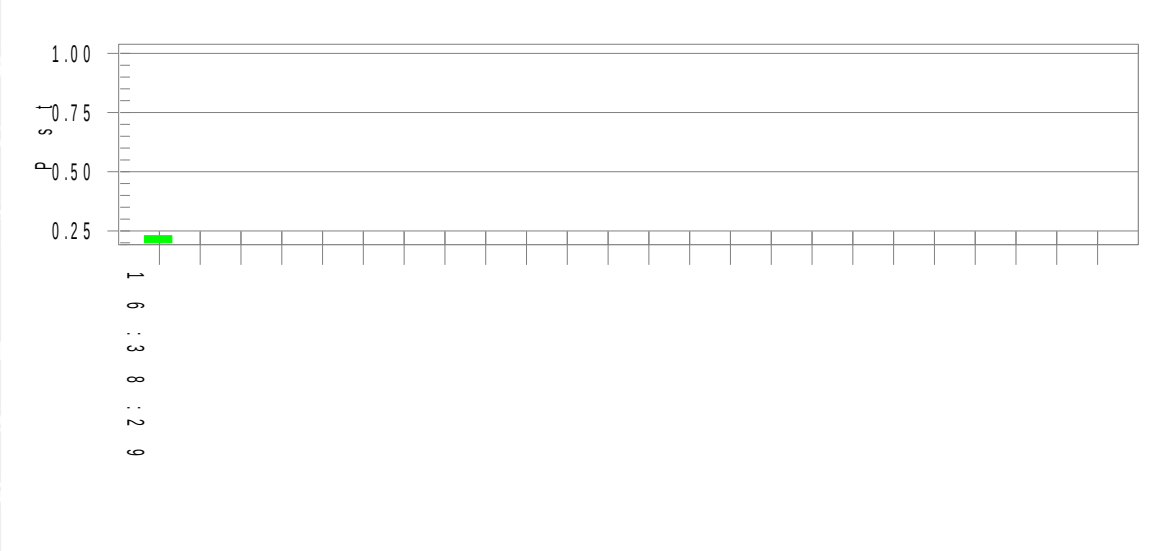

Plt and limit line

Parameter values recorded during the test:

Vrms at the end of test (Volt):	**229.58**			
T-max (mS):	**0**	**Test limit (mS):**	**500.0**	**Pass**
Highest dc (%):	**0.00**	**Test limit (%):**	**3.30**	**Pass**
Highest dmax (%):	**0.00**	**Test limit (%):**	**4.00**	**Pass**
Highest Pst (10 min. period):	**0.230**	**Test limit:**	**1.000**	**Pass**
Highest Plt (2 hr. period):	**0.101**	**Test limit:**	**0.650**	**Pass**

Flicker Test Summary per IEC61000-3-3:2013+AMD2:2021 (Run time)

Comment: TM23

Customer: Customer information

Test Result: Pass **Status: Test Completed**

Pst_i and limit line **European Limits**

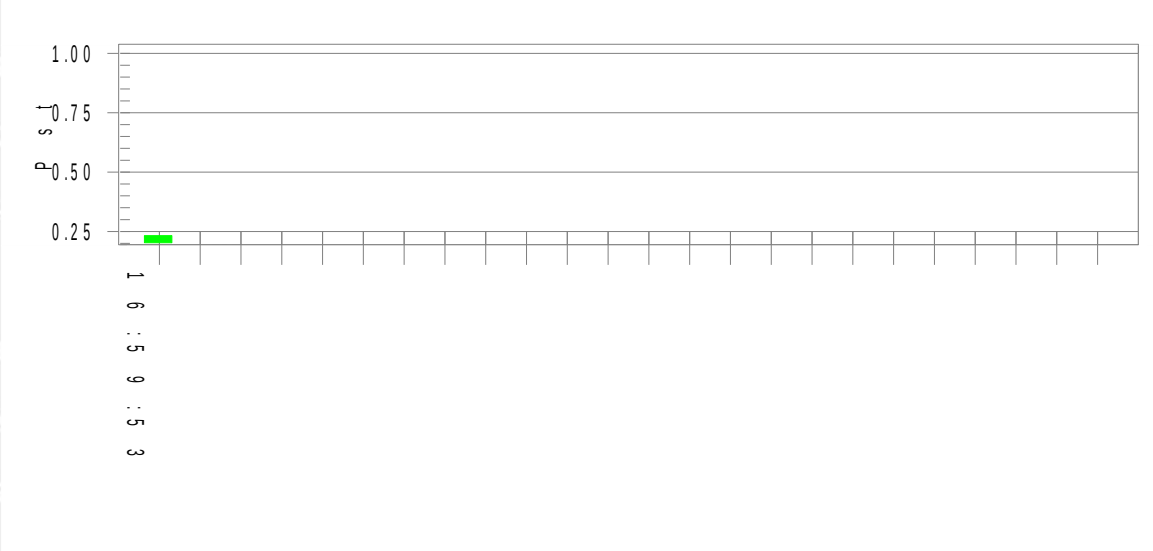

Plt and limit line

Parameter values recorded during the test:

Vrms at the end of test (Volt):	**229.59**			
T-max (mS):	**0**	**Test limit (mS):**	**500.0**	**Pass**
Highest dc (%):	**0.00**	**Test limit (%):**	**3.30**	**Pass**
Highest dmax (%):	**0.00**	**Test limit (%):**	**4.00**	**Pass**
Highest Pst (10 min. period):	**0.233**	**Test limit:**	**1.000**	**Pass**
Highest Plt (2 hr. period):	**0.102**	**Test limit:**	**0.650**	**Pass**

5. Immunity Test Results (EMS)

General Performance Criteria

Performance Criteria A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance Criteria B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended.

The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance Criteria C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer’s instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

5.1 Electrostatic discharges

Test Requirement:	Contact Discharge: +/- 4kV Air Discharge: +/- 8kV
Test Method:	EN 61000-4-2: 2009
Procedure:	Discharge Impedance: 330Ω/150pF Number of Discharge: Minimum 10 times at each test point Discharge Mode: Single Discharge Discharge Period: 1 second minimum
Performance Criteria:	B

5.1.1 E.U.T. Operation

Environmental Conditions	
Temperature:	24.6 °C
Relative Humidity:	55.7 %
Atmospheric Pressure:	102 kPa
Test mode:	TM3, TM7, TM11, TM15, TM19, TM23

5.1.2 Basic Test Setup Block Diagram

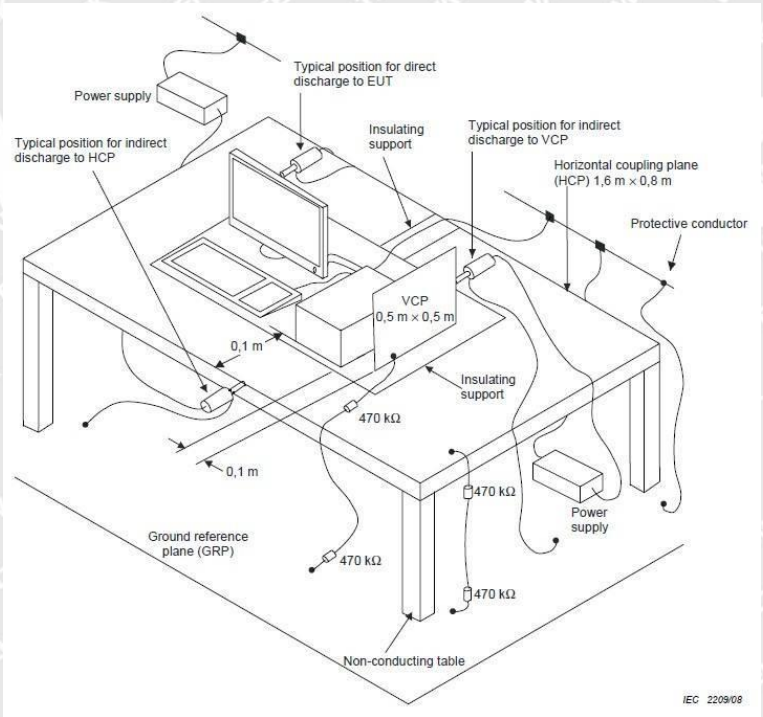

5.1.3 Summary of Test Results

Discharge type	Volt (kV)	Polarity	Test Point	Result/ Observations
Air discharge	2,4,8,15*,18*	+	1	A
Air discharge	2,4,8,15*,18*	-	1	A
Contact discharge	2,4,6*,8*,10*	+	2	A
Contact discharge	2,4,6*,8*,10*	-	2	A
Horizontal Coupling	2,4,6*,8*,10*	+	3	A
Horizontal Coupling	2,4,6*,8*,10*	-	3	A
Vertical Coupling	2,4,6*,8*,10*	+	3	A
Vertical Coupling	2,4,6*,8*,10*	-	3	A

Test Point: 1. All insulated enclosure and seams.

2. All accessible metal parts of the enclosure.

3. All side.

A: No degradation in the performance of the EUT was observed.

*: Testing in accordance with the stricter requirements of the customers.

5.2 RF electromagnetic field disturbances

Test Requirement:	3V/m, 80%, 1kHz Amp. Mod. 10V/m, 80%, 1kHz Amp. Mod.
Test Method:	EN IEC 61000-4-3: 2020
Procedure:	Frequency Range: 80MHz to 1GHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz Antenna Polarisation: Vertical and Horizontal Modulation: 1kHz,80% Amp. Mod,1% increment
Performance Criteria:	A

5.2.1 E.U.T. Operation

Environmental Conditions	
Temperature:	24.9 °C
Relative Humidity:	55.4 %
Atmospheric Pressure:	102 kPa
Test mode:	TM3, TM7, TM11, TM15, TM19, TM23

5.2.2 Basic Test Setup Block Diagram

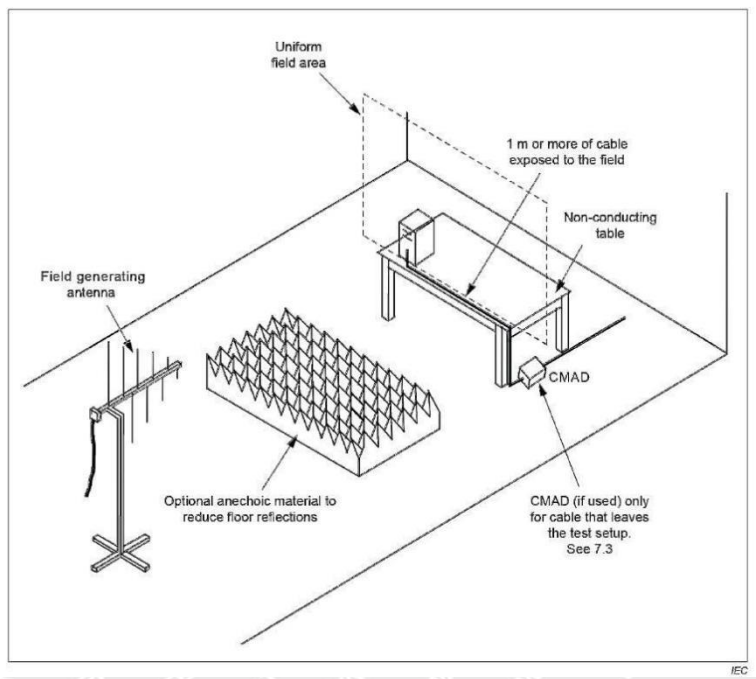

5.2.3 Summary of Test Results

Frequency	Field Strength (V/m)	EUT face	Dwell time	Result/ Observations
80MHz-1GHz	10*	Front	1s	A
80MHz-1GHz	10*	Back	1s	A
80MHz-1GHz	10*	Left	1s	A
80MHz-1GHz	10*	Right	1s	A
80MHz-1GHz	10*	Top	1s	A
80MHz-1GHz	10*	Bottom	1s	A
1800MHz	3	Front	1s	A
1800MHz	3	Back	1s	A
1800MHz	3	Left	1s	A
1800MHz	3	Right	1s	A
1800MHz	3	Top	1s	A
1800MHz	3	Bottom	1s	A
2600MHz	3	Front	1s	A
2600MHz	3	Back	1s	A
2600MHz	3	Left	1s	A
2600MHz	3	Right	1s	A
2600MHz	3	Top	1s	A
2600MHz	3	Bottom	1s	A
3500MHz	3	Front	1s	A
3500MHz	3	Back	1s	A
3500MHz	3	Left	1s	A
3500MHz	3	Right	1s	A
3500MHz	3	Top	1s	A
3500MHz	3	Bottom	1s	A
5000MHz	3	Front	1s	A
5000MHz	3	Back	1s	A
5000MHz	3	Left	1s	A
5000MHz	3	Right	1s	A
5000MHz	3	Top	1s	A
5000MHz	3	Bottom	1s	A

A: No degradation in the performance of the EUT was observed.

*: Testing in accordance with the stricter requirements of the customers.

5.3 Electrical fast transients / burst for AC mains power ports

Test Requirement:	1,2,4kV; 5/50ns Tr/Th; 5kHz Repetition Frequency
Test Method:	EN 61000-4-4: 2012
Procedure:	Repetition Frequency: 5kHz Burst Period: 300ms Test Duration: 2 minute per level polarity
Performance Criteria:	B

5.3.1 E.U.T. Operation

Environmental Conditions	
Temperature:	24.9 °C
Relative Humidity:	55.5 %
Atmospheric Pressure:	102 kPa
Test mode:	TM3, TM7, TM11, TM15, TM19, TM23

5.3.2 Basic Test Setup Block Diagram

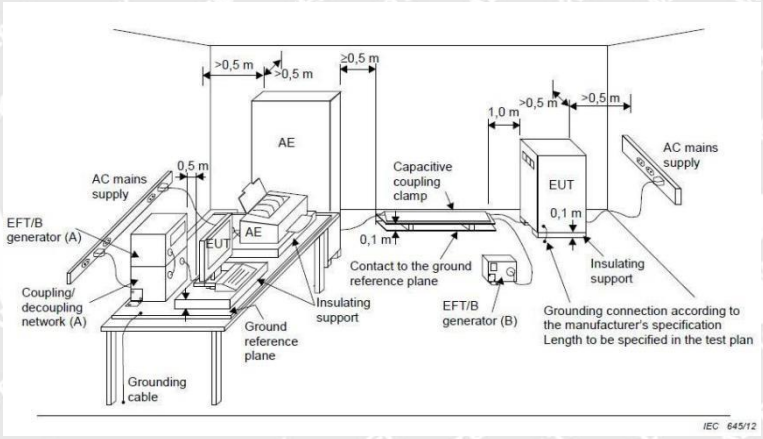

5.3.3 Summary of Test Results

Model: GTM96183-36PD-PPS-USB1C, GTM96183-18PD-PPS-USB1C, GTM96181-36PD-PPS-T2, GTM96181-18PD-PPS-T2

Port	Volt (kV)	Polarity	CDN/ Clamp	Result/ Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A
AC power port	2	+	CDN	A
AC power port	2	-	CDN	A
AC power port	4*	+	CDN	B
AC power port	4*	-	CDN	B

Model: GTM96181-36PD-PPS-T3, GTM96181-18PD-PPS-T3

Port	Volt (kV)	Polarity	CDN/ Clamp	Result/ Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A
AC power port	2	+	CDN	A
AC power port	2	-	CDN	A
AC power port	4*	+	CDN	B
AC power port	4*	-	CDN	B

B: During the test, the output voltage drops but it can automatically recover.

*: Testing in accordance with the stricter requirements of the customers.

5.4 Surges for AC mains power ports

Test Requirement:	1.2/50μs Tr/Td; 0.5,1kV Line to Line; 2,4kV Line to Ground
Test Method:	EN 61000-4-5: 2014 +A1: 2017
Procedure:	Interval: 60s between each surge No. of surges: 5 positive, 5 negative at 90°, 270°
Performance Criteria:	B

5.4.1 E.U.T. Operation

Environmental Conditions	
Temperature:	24.9 °C
Relative Humidity:	55.5 %
Atmospheric Pressure:	102 kPa
Test mode:	TM3, TM7, TM11, TM15, TM19, TM23

5.4.2 Basic Test Setup Block Diagram

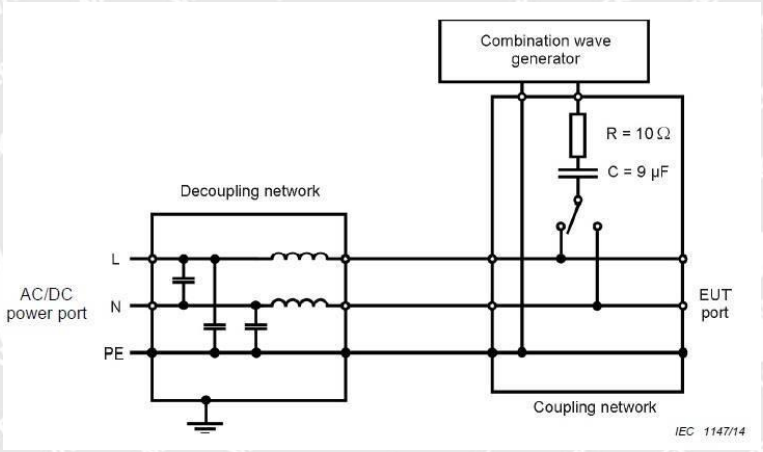

5.4.3 Summary of Test Results

Model: GTM96183-36PD-PPS-USB1C, GTM96183-18PD-PPS-USB1C, GTM96181-36PD-PPS-T2, GTM96181-18PD-PPS-T2

Port	Volt (kV)	Polarity	Phase(degree)	Result/ Observations
L-N	0.5	+	90°	A
L-N	0.5	-	270°	A
L-N	1	+	90°	A
L-N	1	-	270°	A
L-N	2	+	90°	A
L-N	2	-	270°	A

Model: GTM96181-36PD-PPS-T3, GTM96181-18PD-PPS-T3

Port	Volt (kV)	Polarity	Phase(degree)	Result/ Observations
L-N	0.5	+	90°	A
L-N	0.5	-	270°	A
L-N	1	+	90°	A
L-N	1	-	270°	A
L-N	2	+	90°	A
L-N	2	-	270°	A
L-PE	0.5	+	90°	A
L-PE	0.5	-	270°	A
L-PE	1	+	90°	A
L-PE	1	-	270°	A
L-PE	2	+	90°	A
L-PE	2	-	270°	A
N-PE	0.5	-	90°	A
N-PE	0.5	-	90°	A
N-PE	1	-	90°	A
N-PE	1	-	90°	A
N-PE	2	-	90°	A
N-PE	2	+	270°	A
N-PE	4*	-	90°	A
N-PE	4*	+	270°	A

A: No degradation in the performance of the EUT was observed.

*: Testing in accordance with the stricter requirements of the customers.

5.5 Continuous induced RF disturbances for AC mains power ports (150kHz-80MHz)

Test Requirement:	0,15 to 10MHz 3Vrms (emf), 10 to 30MHz 3V to 1Vrms(emf), 30 to 80MHz 1Vrms(emf), 80%,1kHz Amp. Mod.
Test Method:	EN 61000-4-6: 2014
Procedure:	Frequency Range: 0.15MHz to 80MHz Modulation: 80%, 1kHz Amplitude Modulation Step Size: 1%
Performance Criteria:	A

5.5.1 E.U.T. Operation

Environmental Conditions	
Temperature:	25.5 °C
Relative Humidity:	56 %
Atmospheric Pressure:	102 kPa
Test mode:	TM3, TM7, TM11, TM15, TM19, TM23

5.5.2 Basic Test Setup Block Diagram

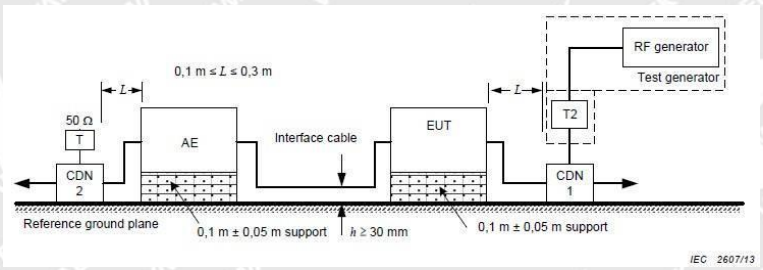

5.5.3 Summary of Test Results

Port	Strength (Vrms)	CDN/Clamp	Dwell time	Result/ Observations
AC power port	3(0.15MHz-10MHz)	CDN	1s	A
AC power port	3 to 1(10MHz-30MHz, Lines)	CDN	1s	A
AC power port	1(30MHz-80MHz)	CDN	1s	A

A: No degradation in the performance of the EUT was observed.

5.6 Power frequency magnetic field

Test Requirement:	50 or 60Hz, 1 A/m
Test Method:	EN 61000-4-8: 2010
Procedure:	50 or 60Hz, 1 A/m
Performance Criteria:	A

5.6.1 E.U.T. Operation

Environmental Conditions	
Temperature:	25.5 °C
Relative Humidity:	56 %
Atmospheric Pressure:	102 kPa
Test mode:	TM3, TM7, TM11, TM15, TM19, TM23

5.6.2 Basic Test Setup Block Diagram

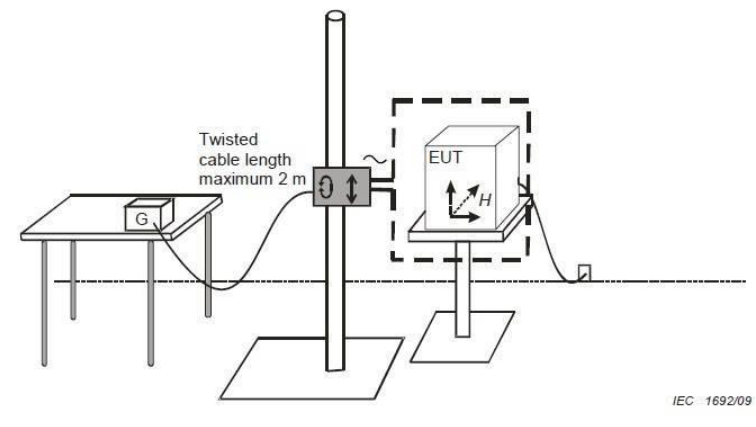

5.6.3 Summary of Test Results

Frequency	Strength (A/m)	Axial	Magnetic Field Type	Result/ Observations
50Hz/ 60Hz	1	X	Continuous filed	A
50Hz/ 60Hz	1	Y	Continuous filed	A
50Hz/ 60Hz	1	Z	Continuous filed	A

A: No degradation in the performance of the EUT was observed.

5.7 Voltage dips and interruptions

Test Requirement:	5% residual voltage for 0.5 periods 70% residual voltage: 25 periods for 50Hz, 30 periods for 60Hz 5% residual voltage: 250 periods for 50Hz, 300 periods for 60Hz
Test Method:	EN IEC 61000-4-11: 2020
Procedure:	5% residual voltage for 0.5 period 70% residual voltage: 25 periods for 50Hz, 30 periods for 60Hz 5% residual voltage: 250 periods for 50Hz, 300 periods for 60Hz No. of Dips / Interruptions: 3 per Level Time between dropout: 10s
Performance Criteria:	B, C, C

5.7.1 E.U.T. Operation

Environmental Conditions	
Temperature:	24.9 °C
Relative Humidity:	55.5 %
Atmospheric Pressure:	102 kPa
Test mode:	TM3, TM7, TM11, TM15, TM19, TM23

5.7.2 Basic Test Setup Block Diagram

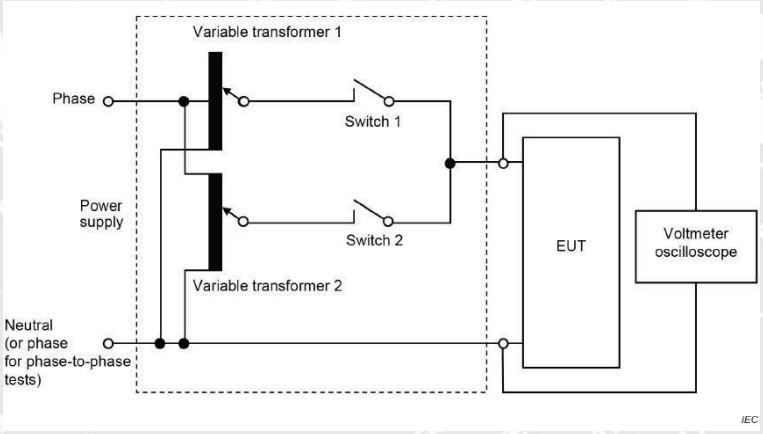

5.7.3 Summary of Test Results

Level %UT	Phase (degree)	Duration	No. of Dips/ Interruptions	Result/ Observations
0	0°	0.5 Cycles	3	A
0	0°	250 Cycles	3	A
70	0°	25 Cycles	3	B
0	0°	0.5 Cycles	3	B
0	0°	300 Cycles	3	B
70	0°	30 Cycles	3	B

6. EXHIBIT 1 - PRODUCT LABELING

6.1 Proposed Label Format

ICT/ITE Power Supply
Model: GTM96183-*PD*-USB1C*,
GTM96181-*PD***
Brand: GlobTek, Inc.
Importer Name: XXX
Importer Address: XXX
GlobTek, Inc.
186 Veterans Dr. Northvale, NJ 07647 USA

Specifications: Labeling is printed in indelible ink on a permanent adhesive backing or silk-screened or laser-marked onto the EUT. The color of the markings are black if a white adhesive backed label is used. The color of the markings are white if silk-screened or laser-marked. The markings shall be affixed to a conspicuous location on the EUT. The 'CE' marking must be affixed to the EUT or to its data plate. Where this is not possible or not warranted on account of the nature of the apparatus, it must be affixed to the packaging, if any, and to the accompanying documents. The 'CE' marking must have a height of at least 5 mm. If the 'CE' marking is reduced or enlarged the proportions given in the above graduated drawing must be respected. The Importer name, address and Manufacturer name and address should indicate on marking label or packaging or in a document accompanying.

6.2 Proposed Label Location of EUT

Label Location (GTM96183-36PD-PPS-USB1C)	

Label Location (GTM96183-18PD-PPS-USB1C)	Label Location
Label Location (GTM96181-36PD-PPS-T2)	Label Location

Label Location **(GTM96181-18PD-PPS-T2)**	Label Location 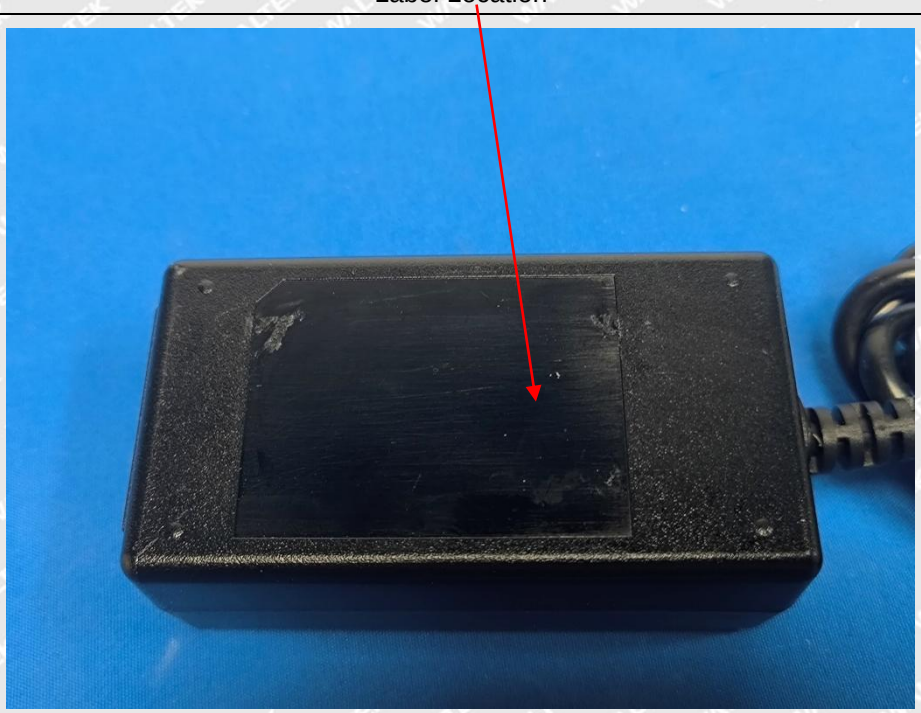
Label Location **(GTM96181-36PD-PPS-T3)**	Label Location

Label Location **(GTM96181-18PD-PPS-T3)**	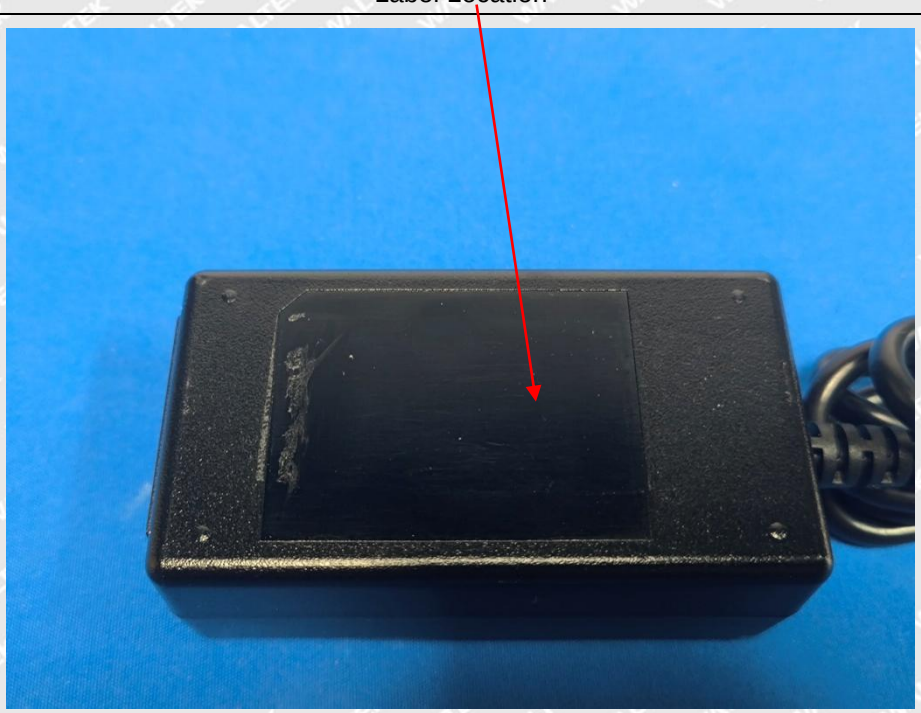

7. EXHIBIT 2 - EUT PHOTOGRAPHS

External

GTM96183-36PD-PPS-USB1C

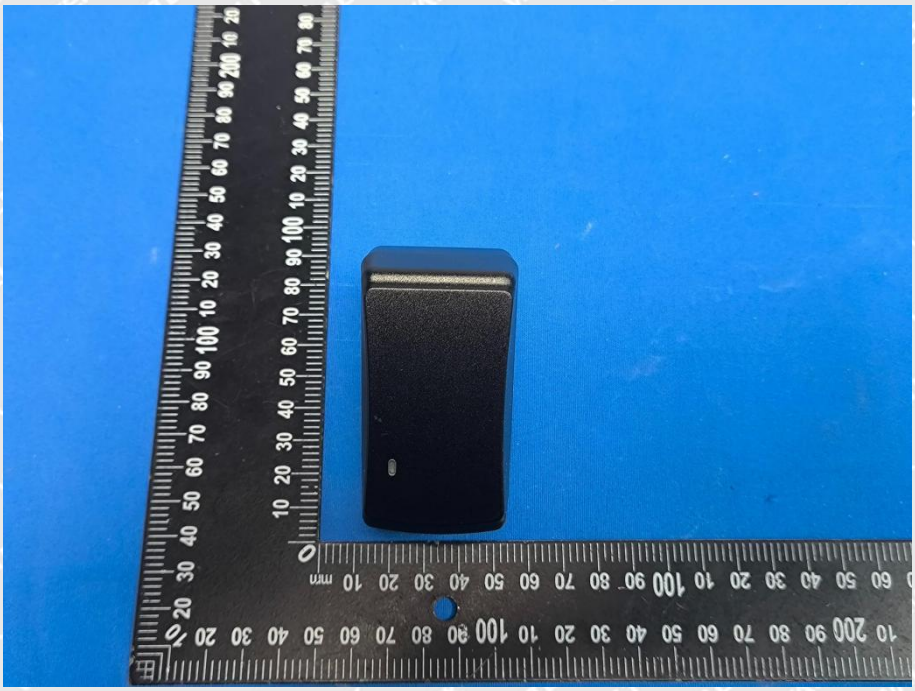

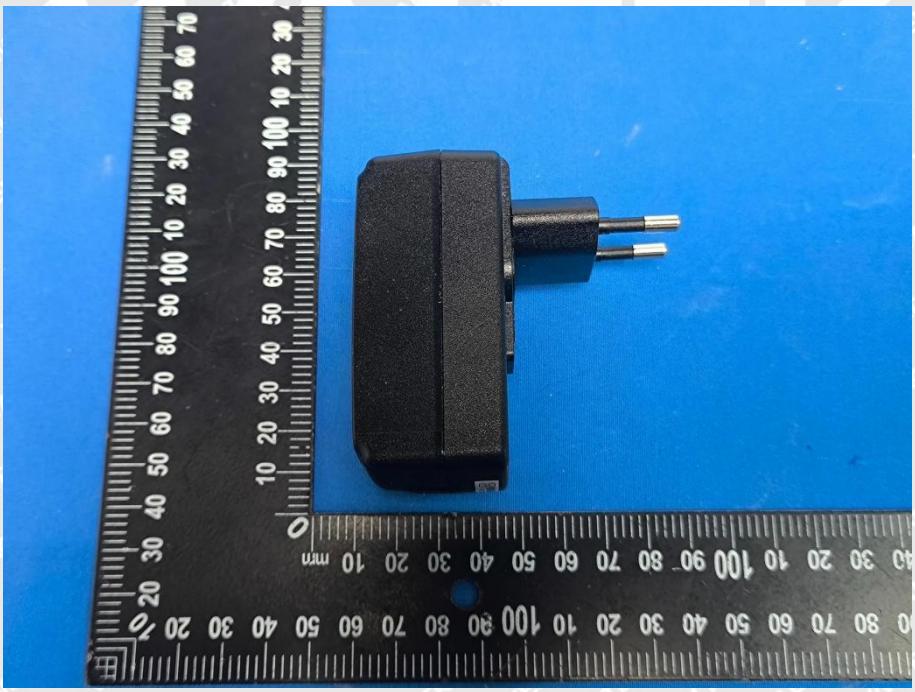

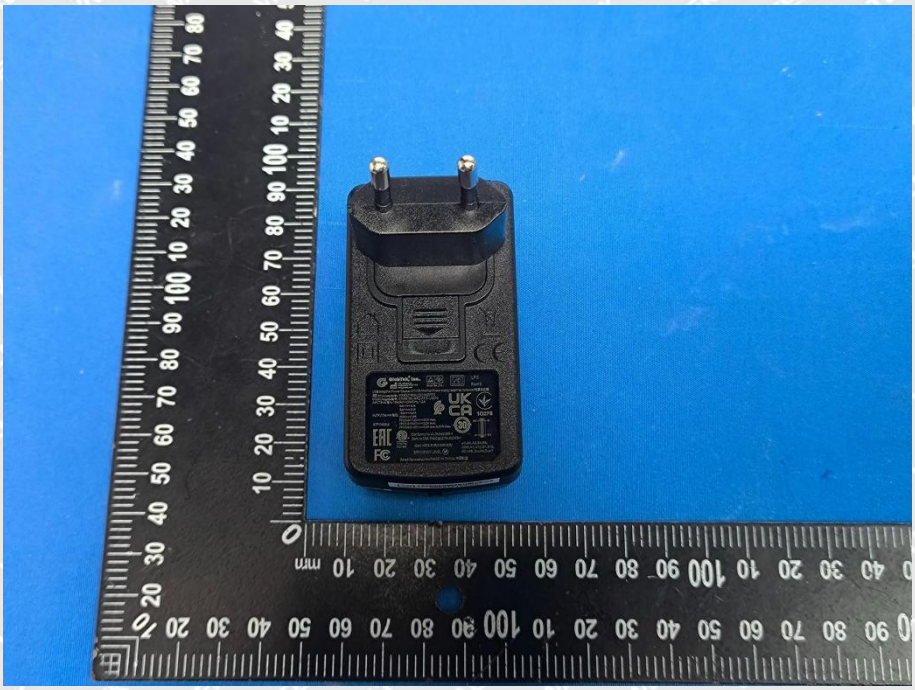

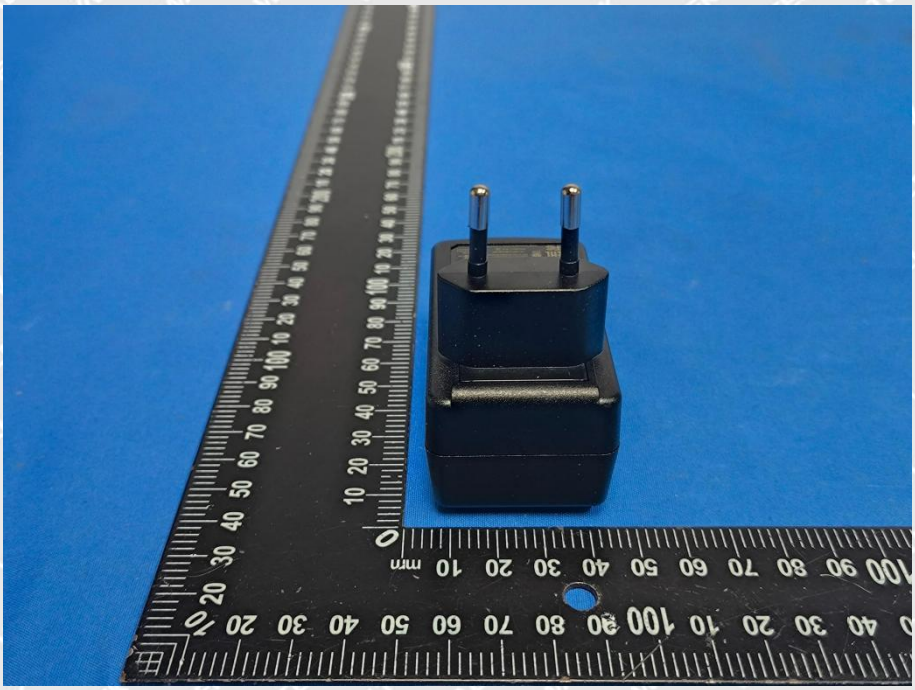

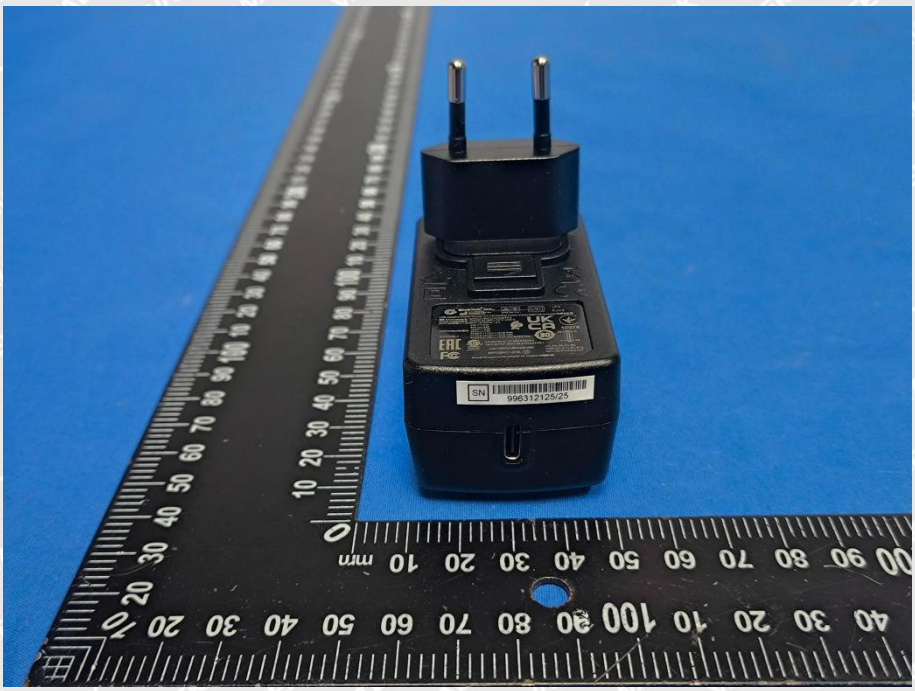
SN
996312125/25

GTM96183-18PD-PPS-USB1C

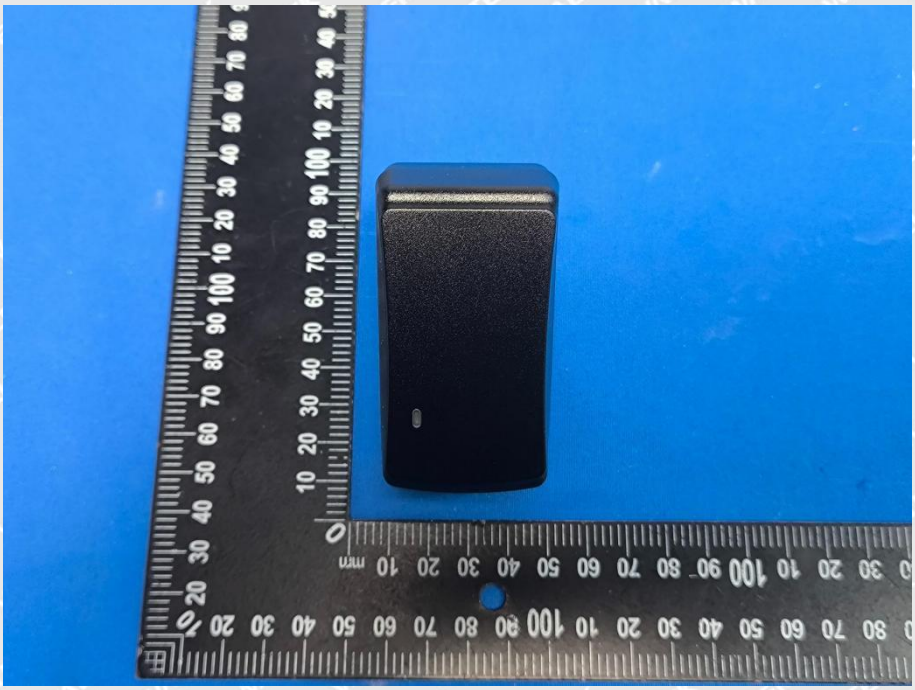

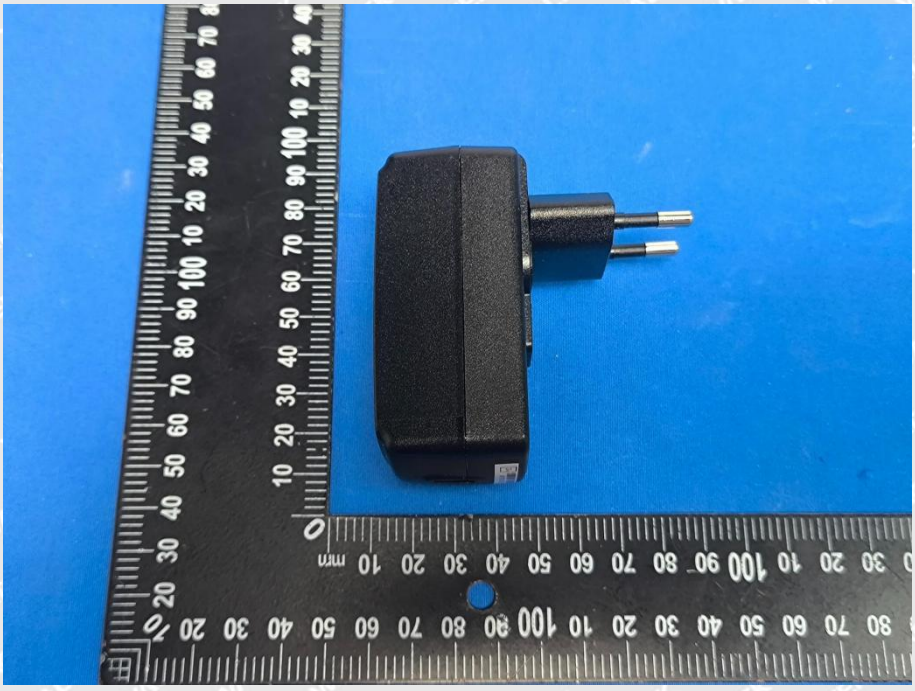

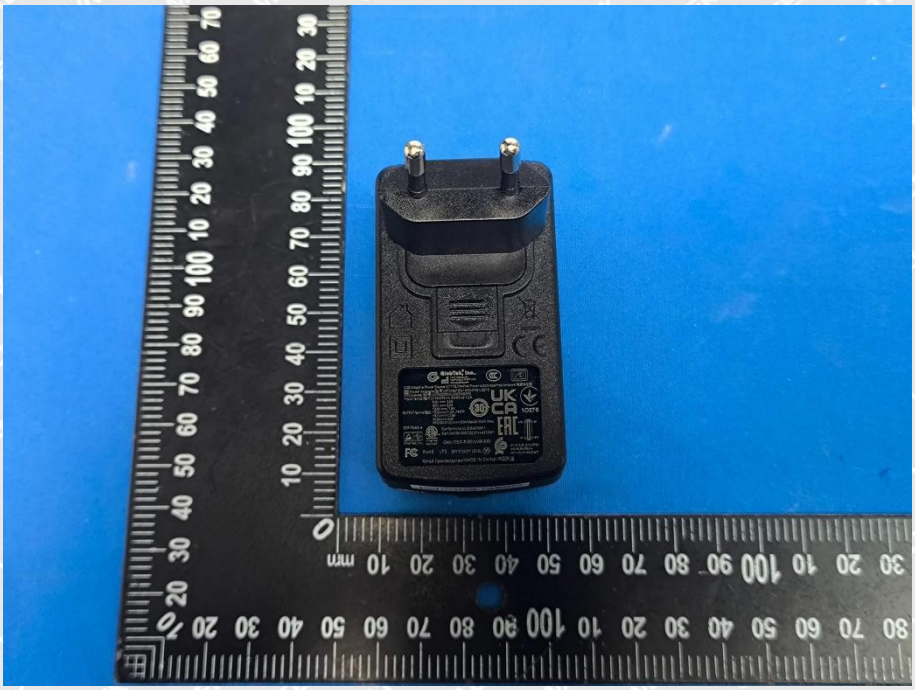

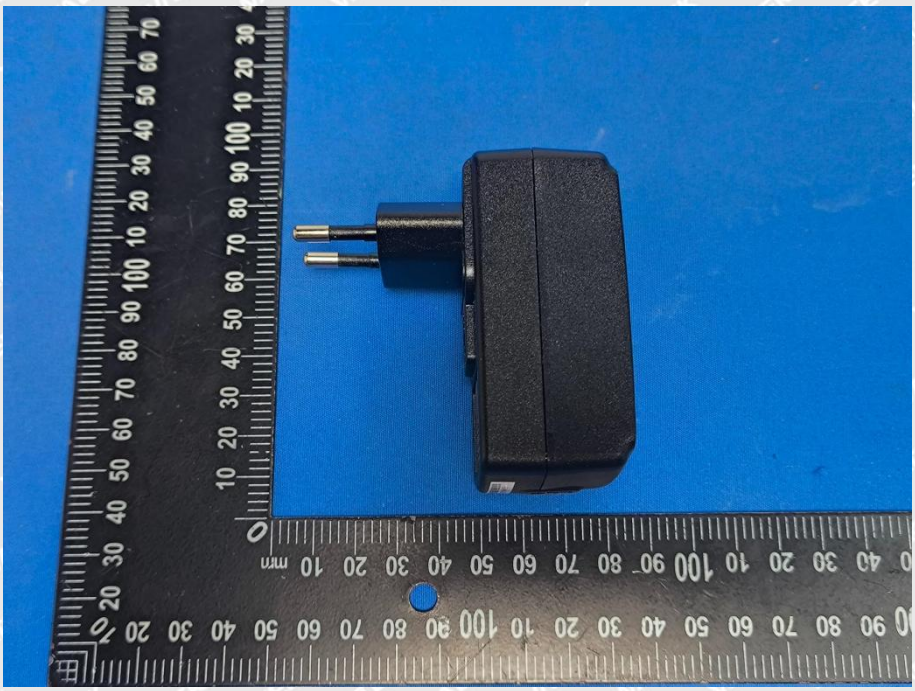

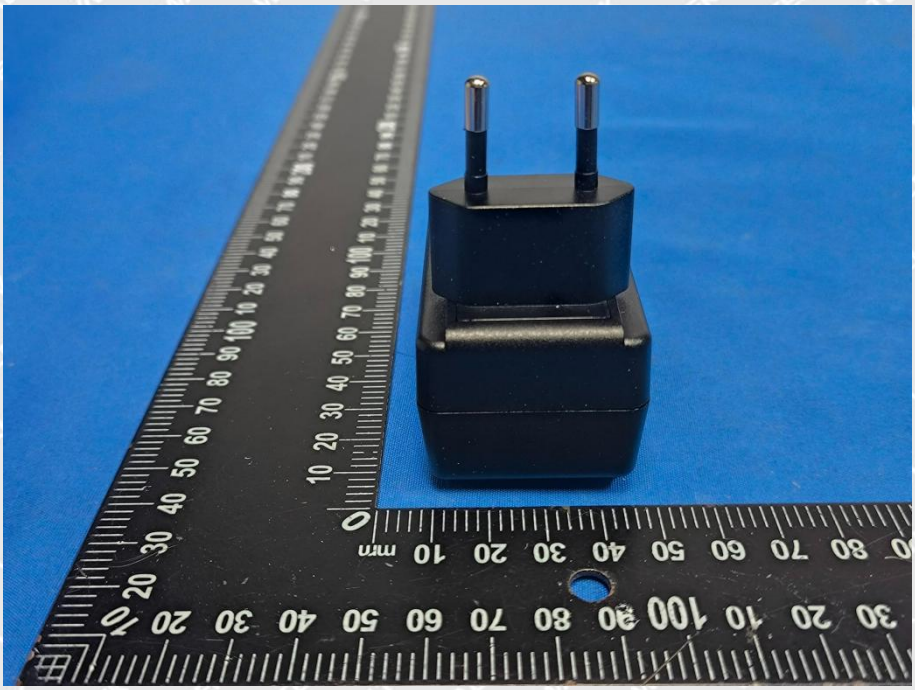

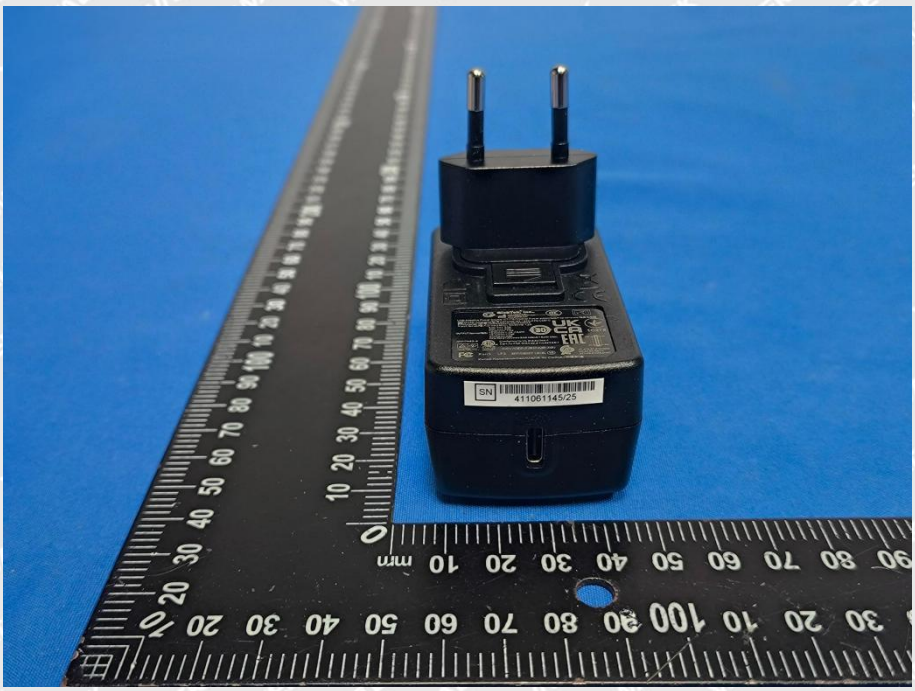
SN
41106145/25

GTM96181-36PD-PPS-T2

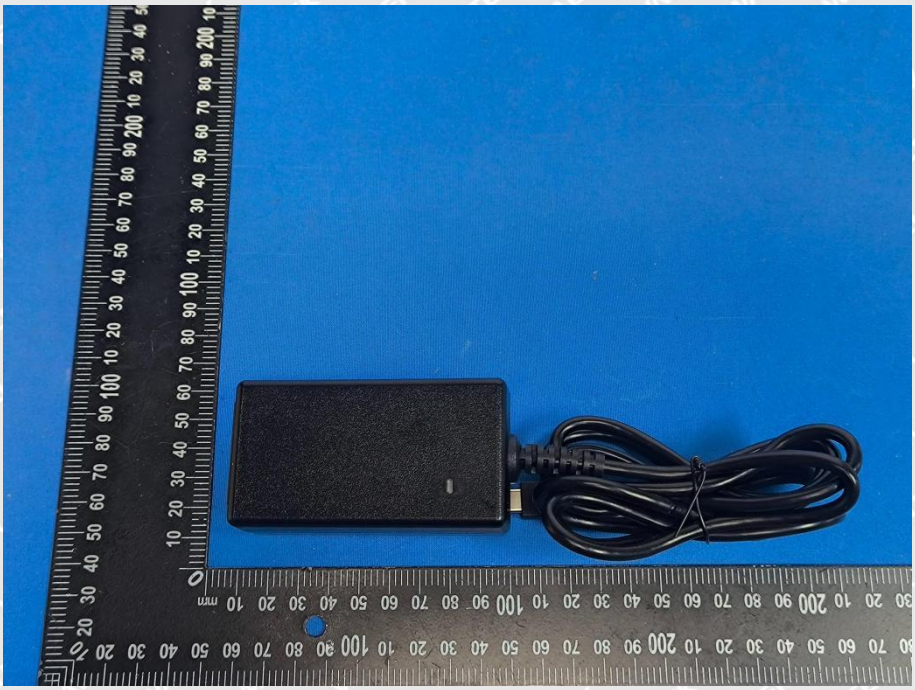

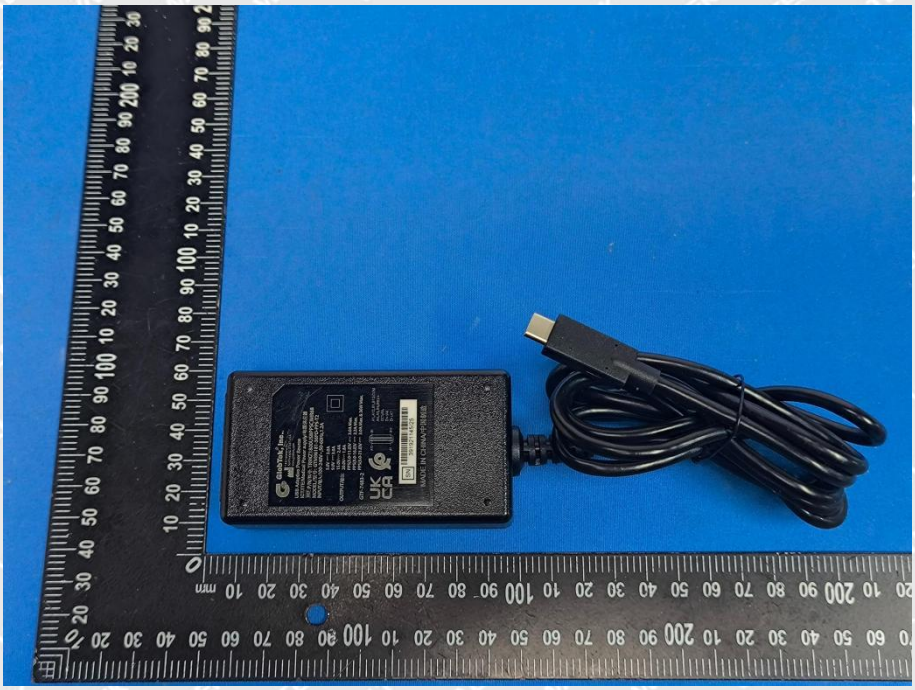

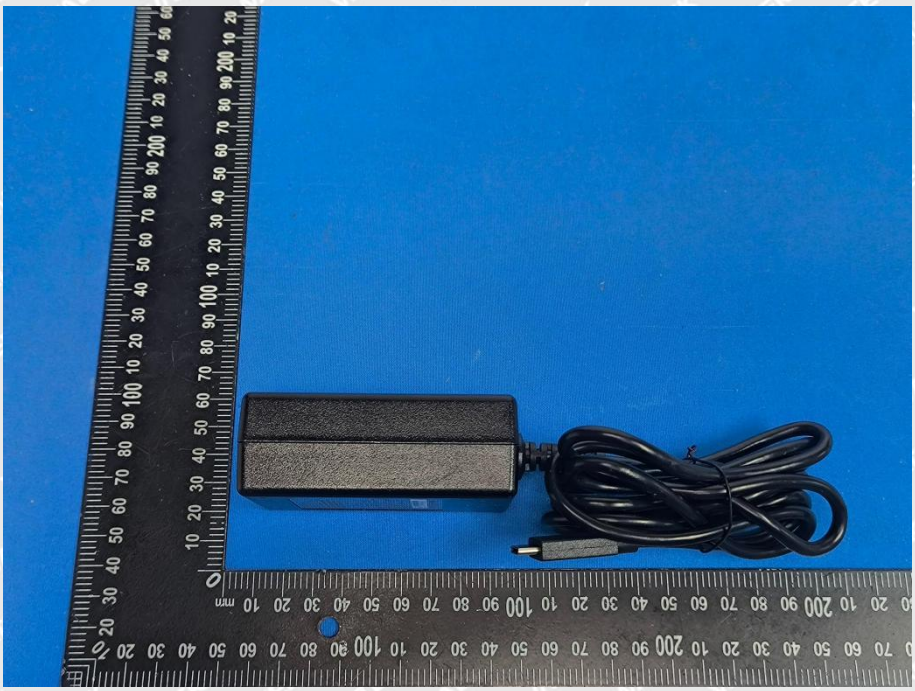

GTM96181-18PD-PPS-T2

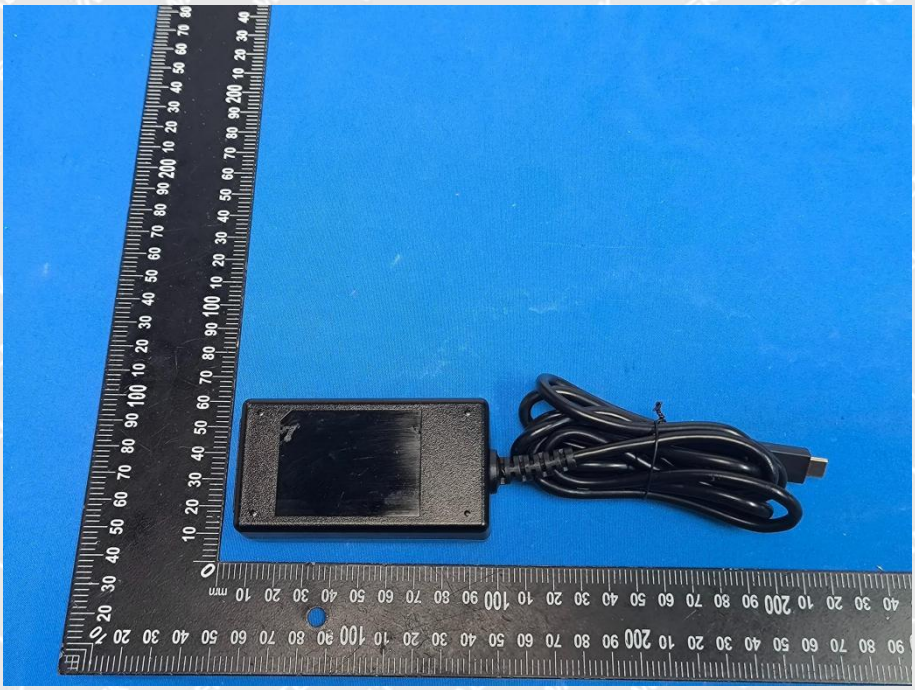

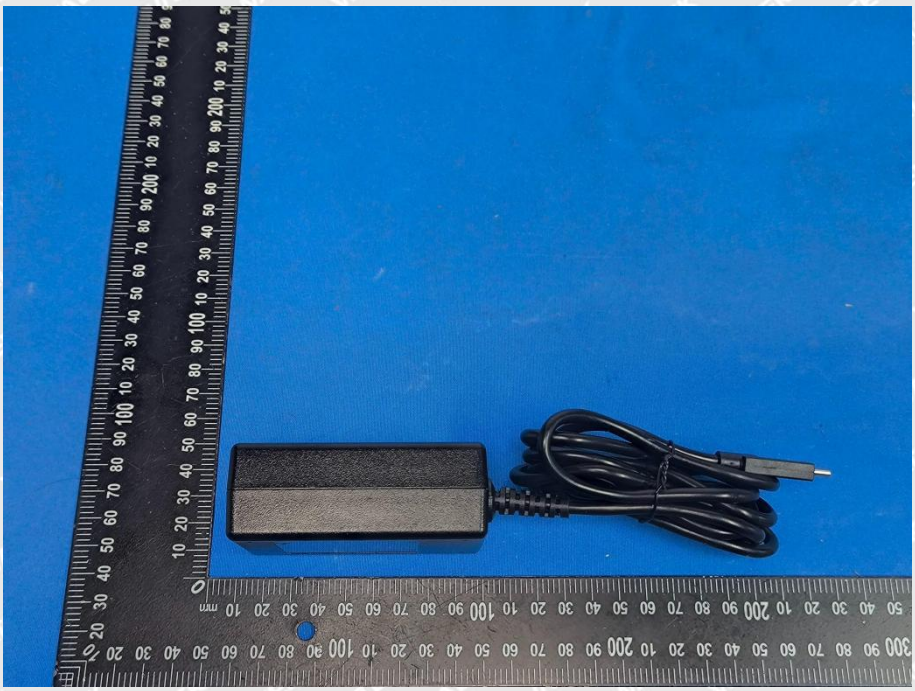

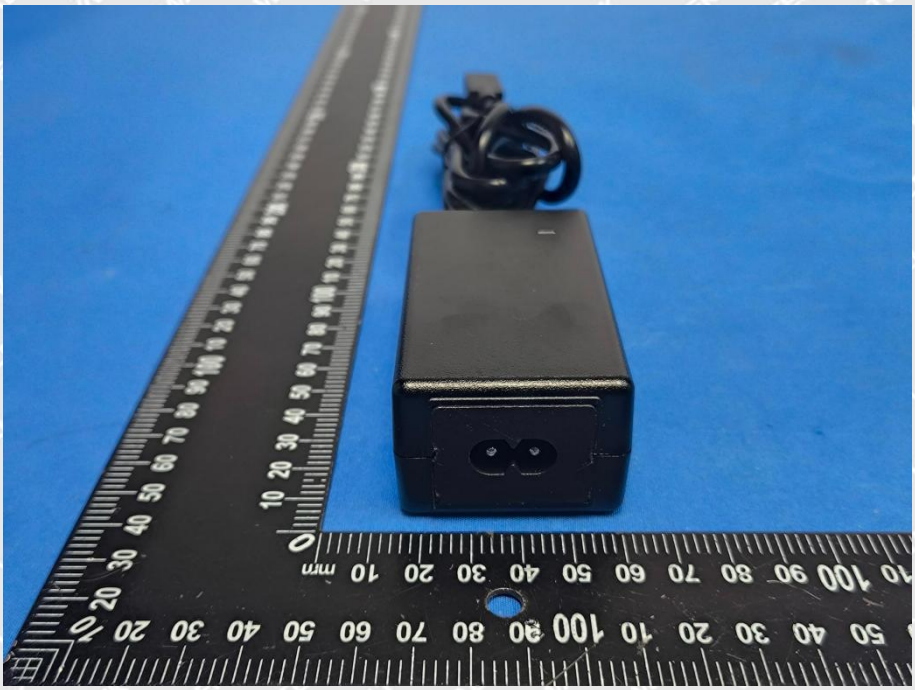

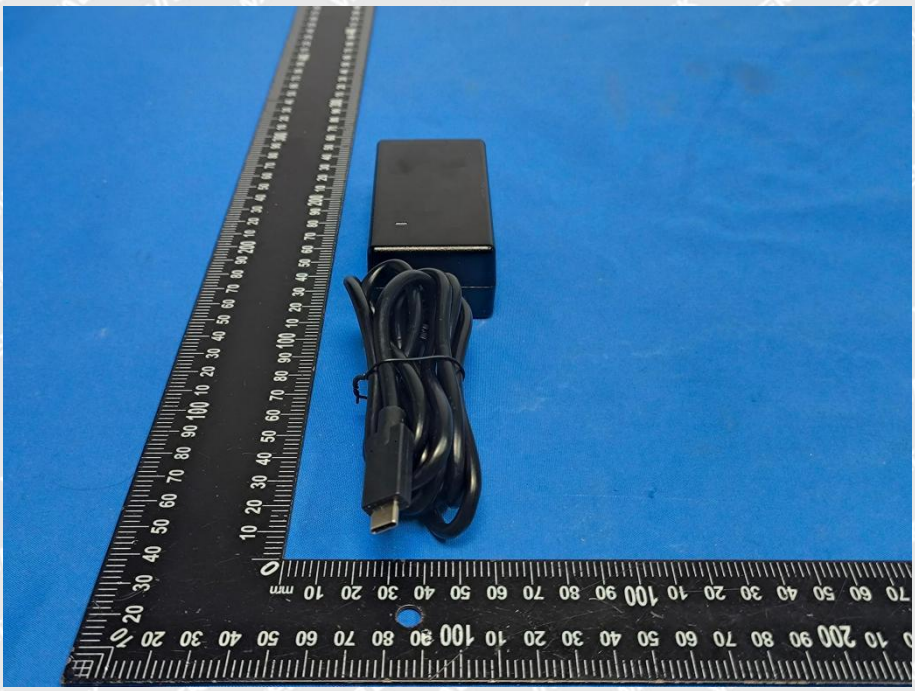

GTM96181-36PD-PPS-T3

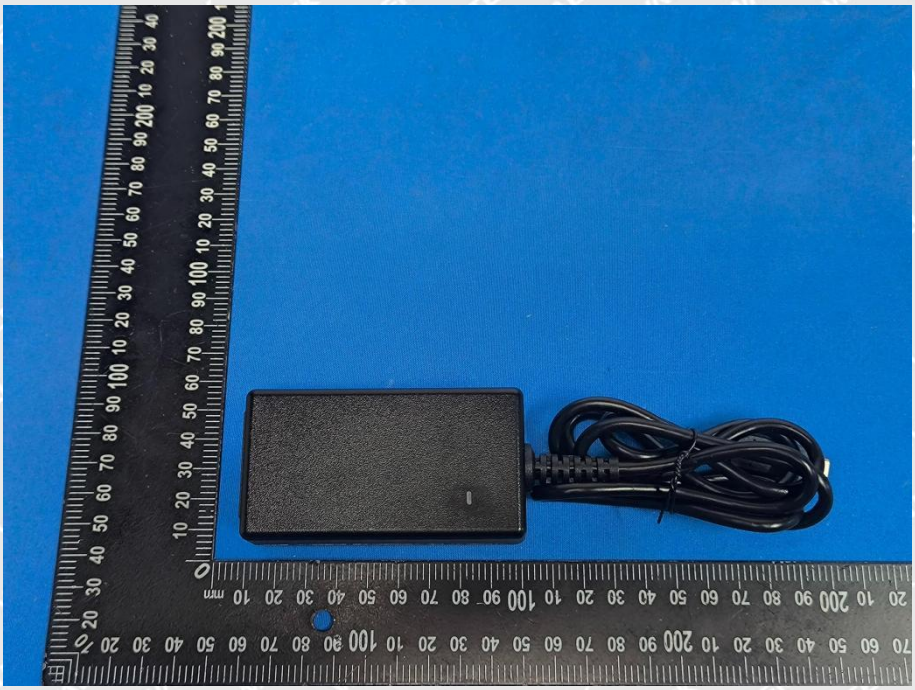

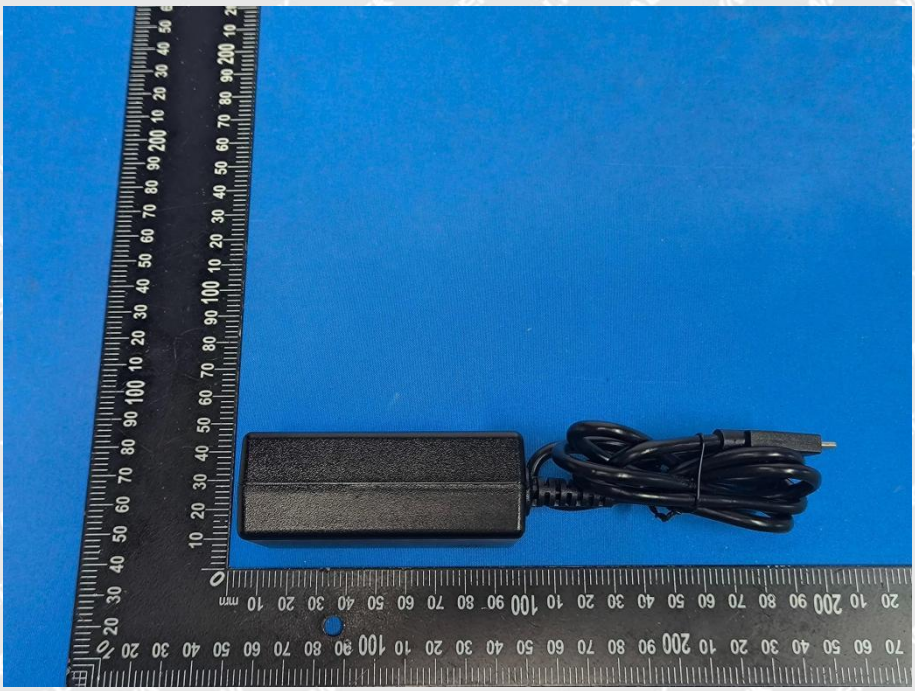

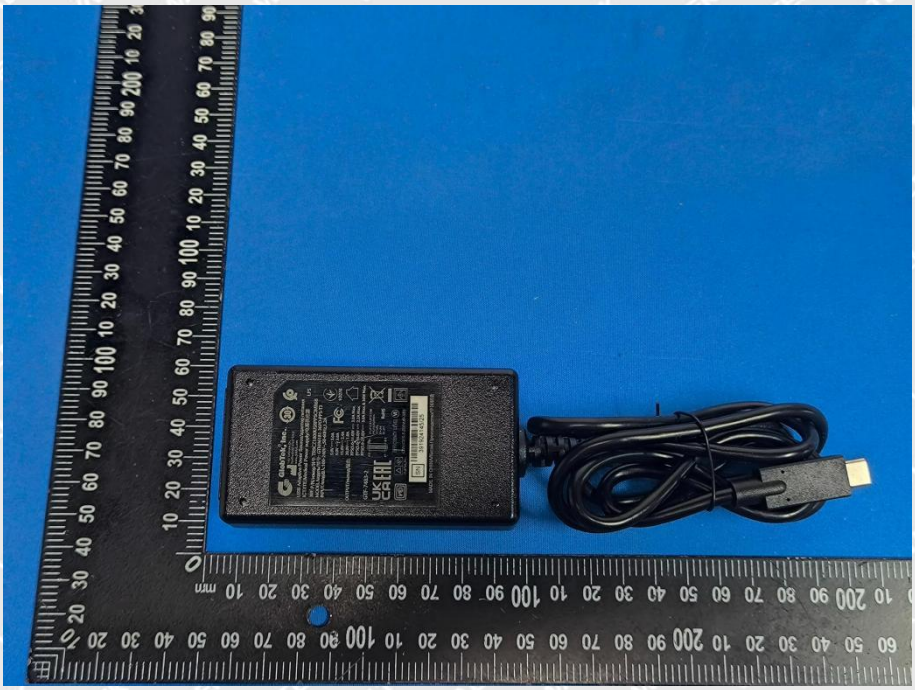

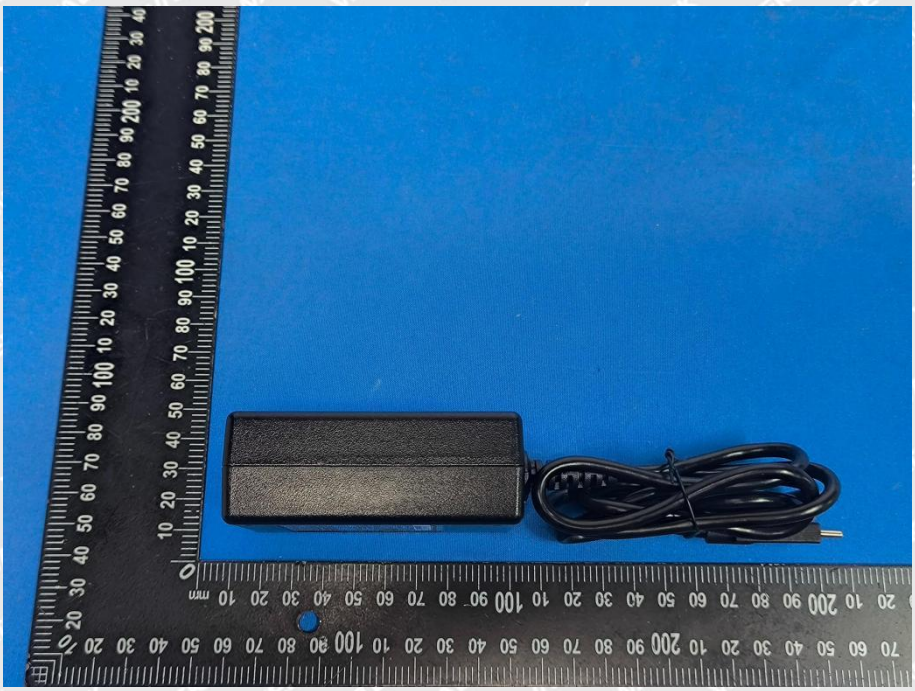

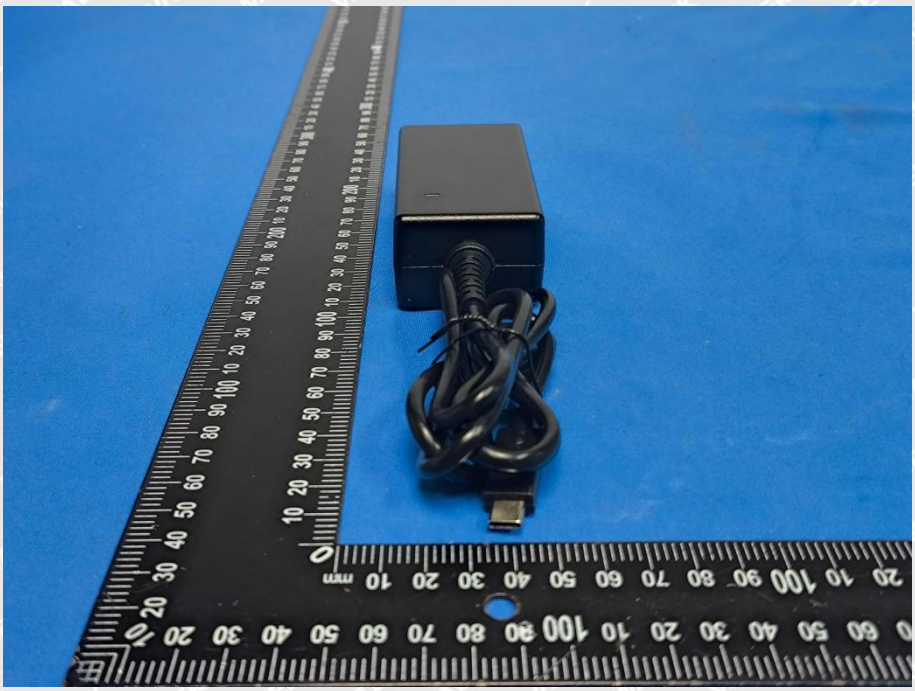

GTM96181-18PD-PPS-T3

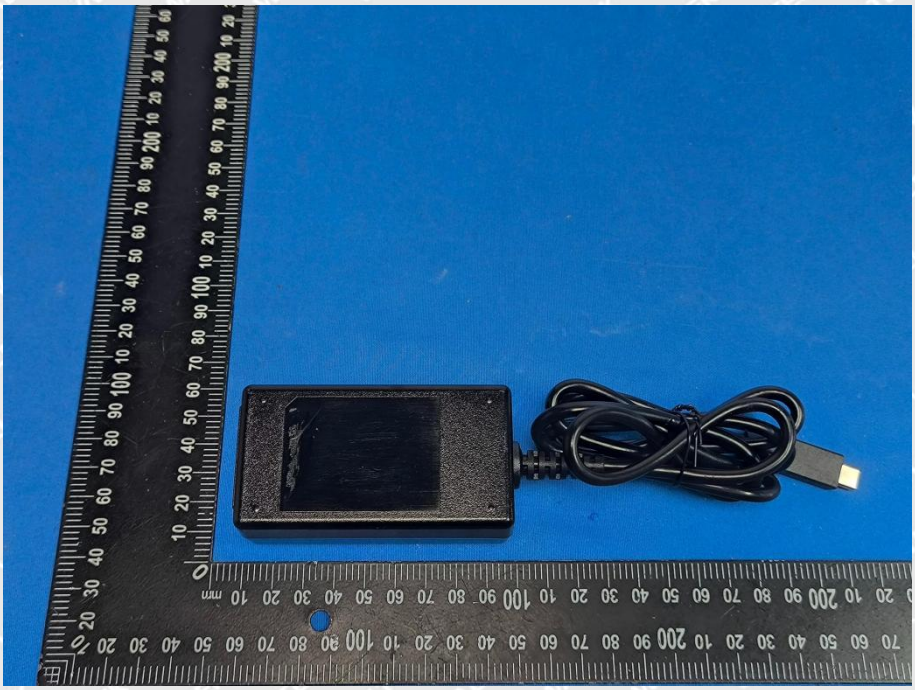

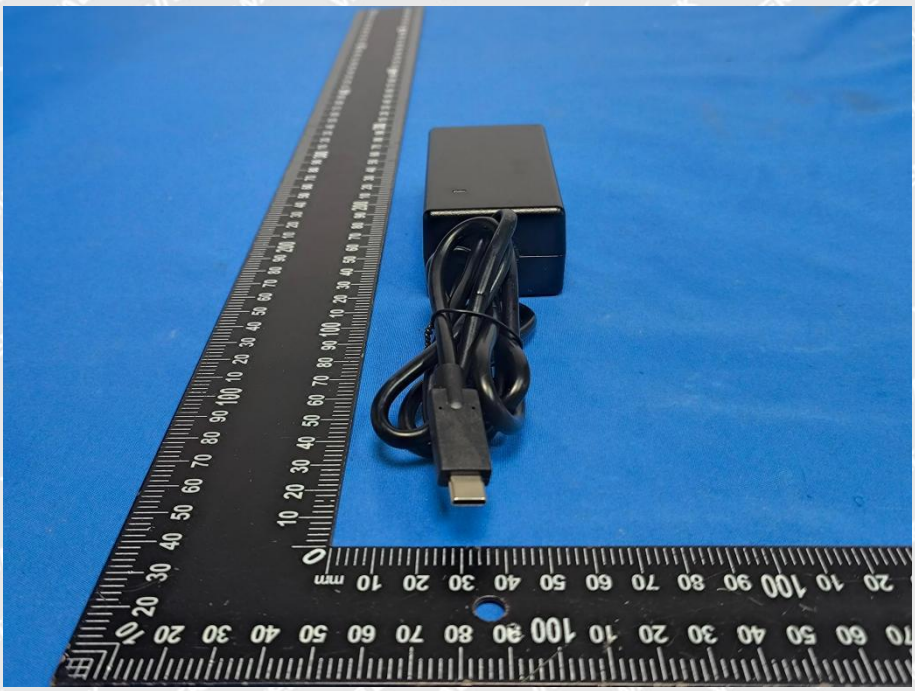

Internal

GTM96183-36PD-PPS-USB1C

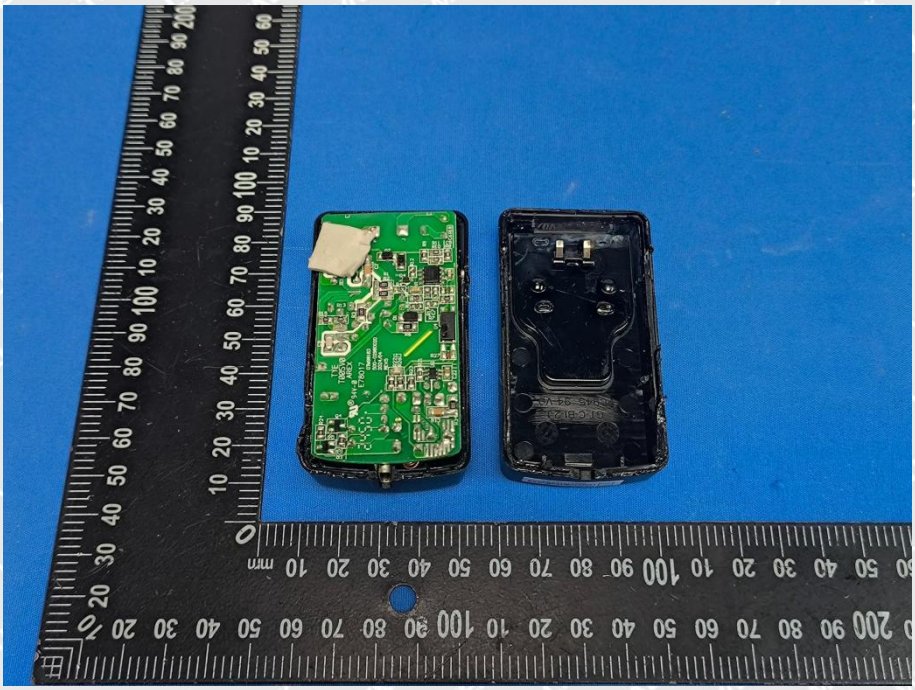

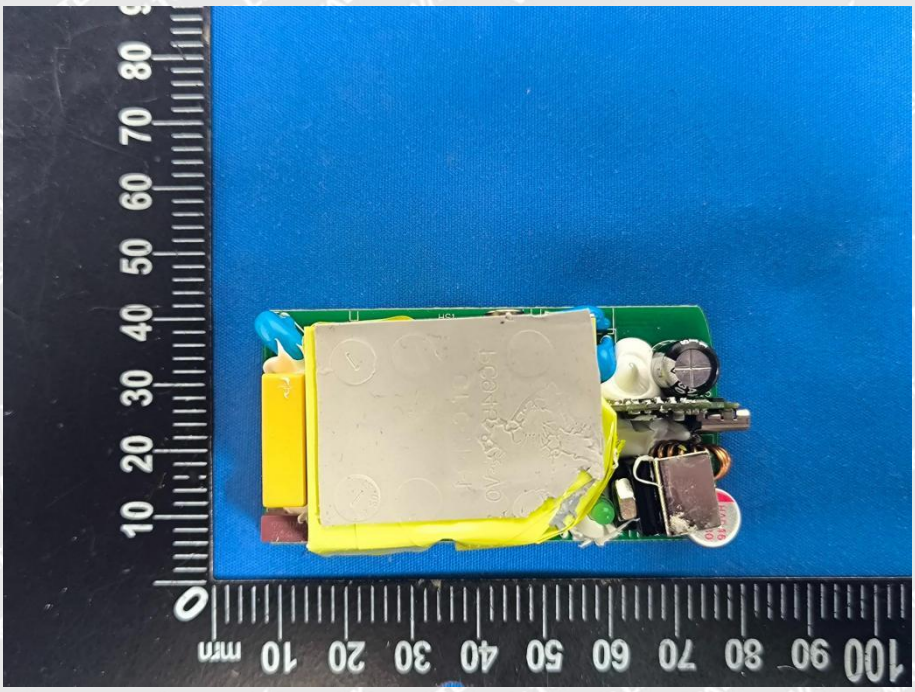

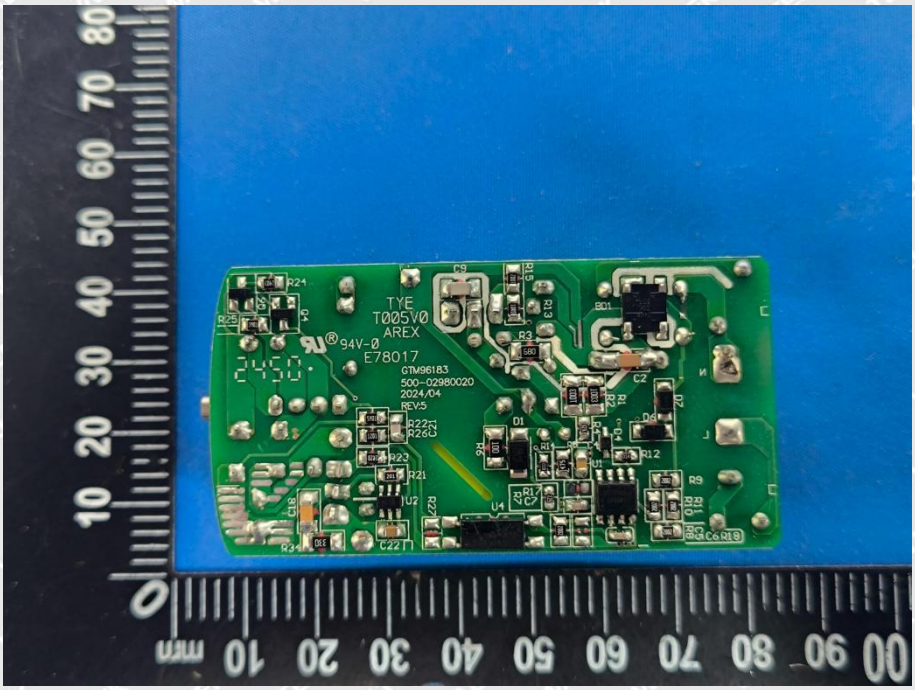

GTM96183-18PD-PPS-USB1C

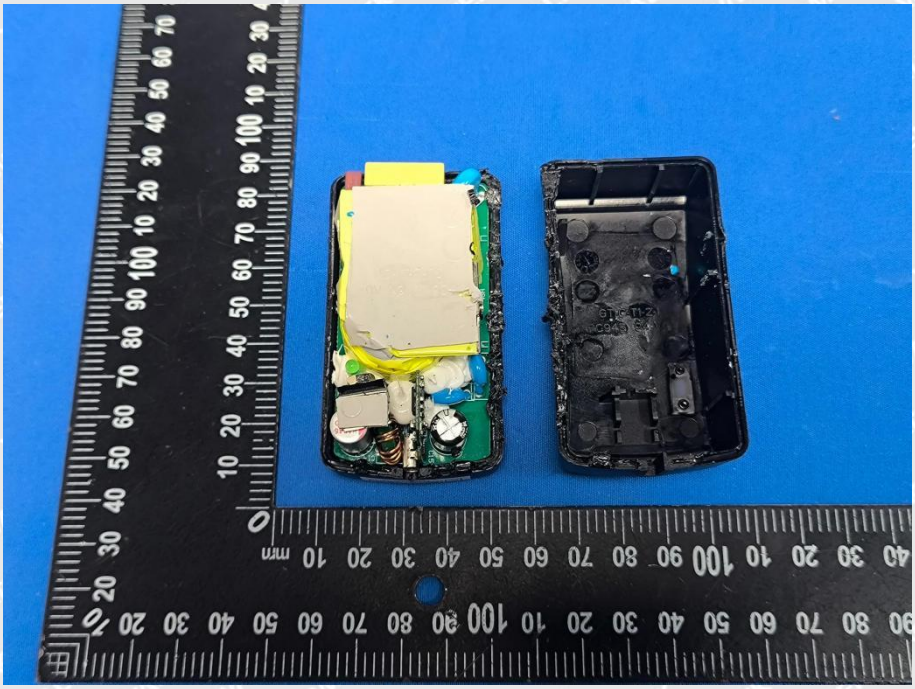

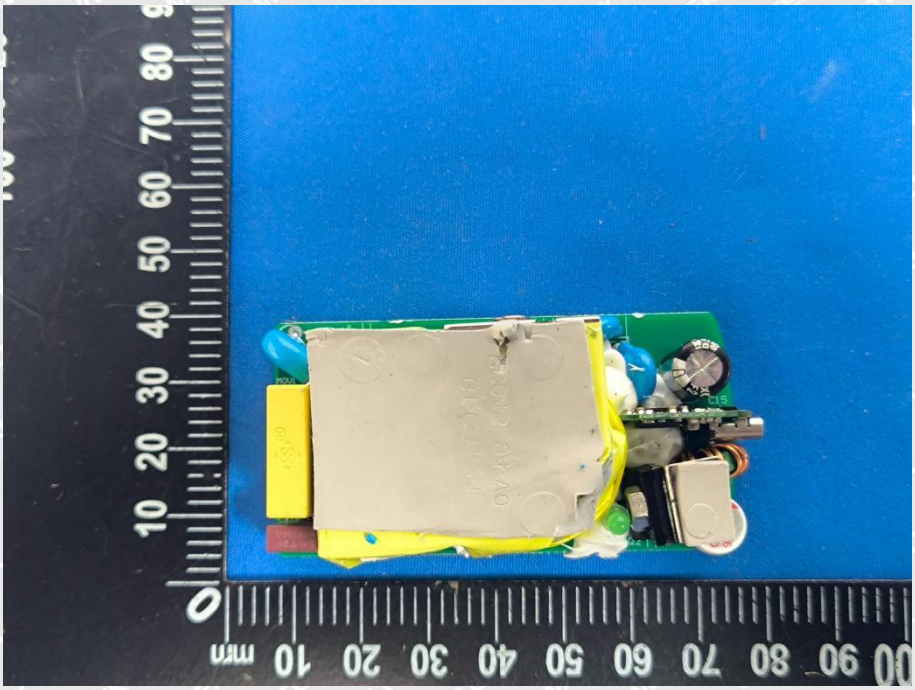

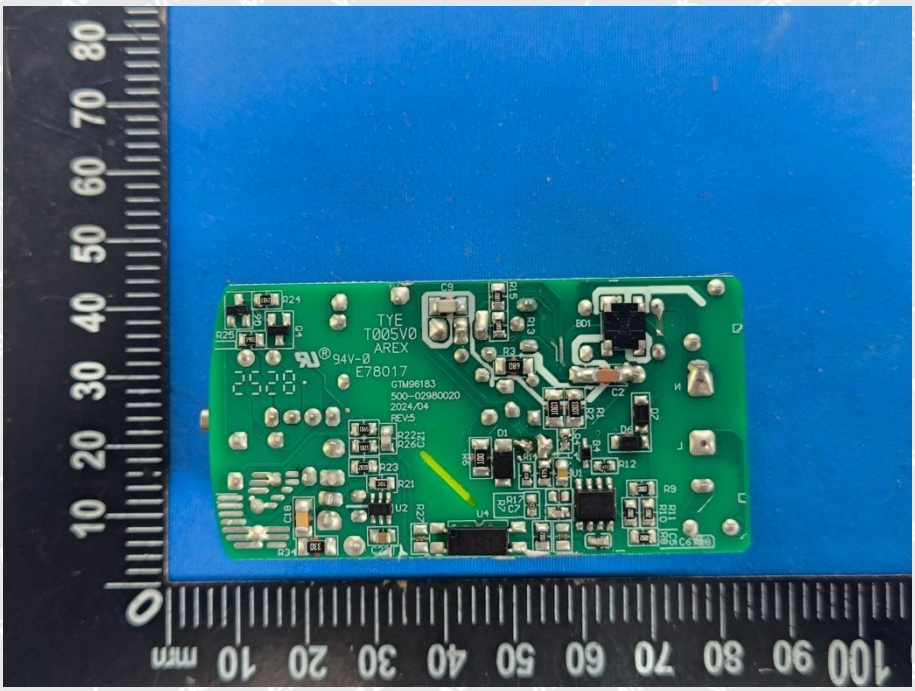
TYE
T005V0
AREX
94V-0
E78017
GTM96183
500-02980020
2024/04
REV:5

GTM96181-36PD-PPS-T2

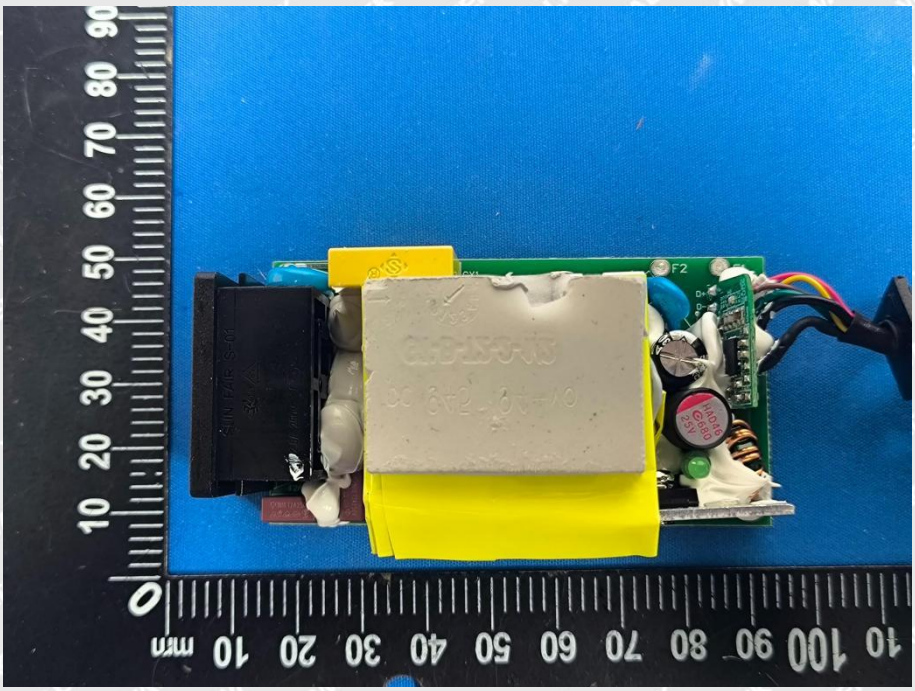

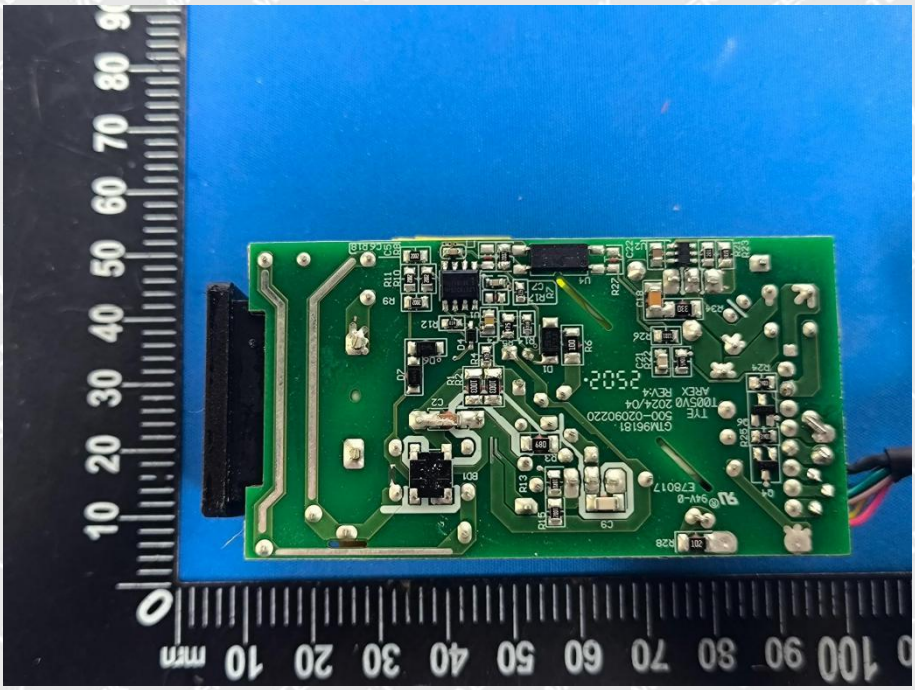

GTM96181-18PD-PPS-T2

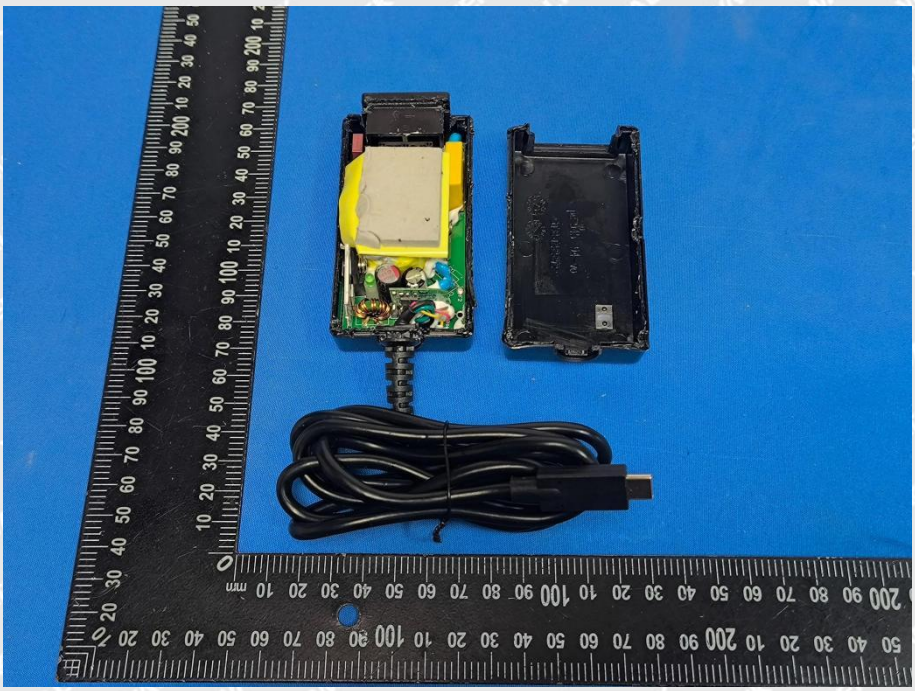

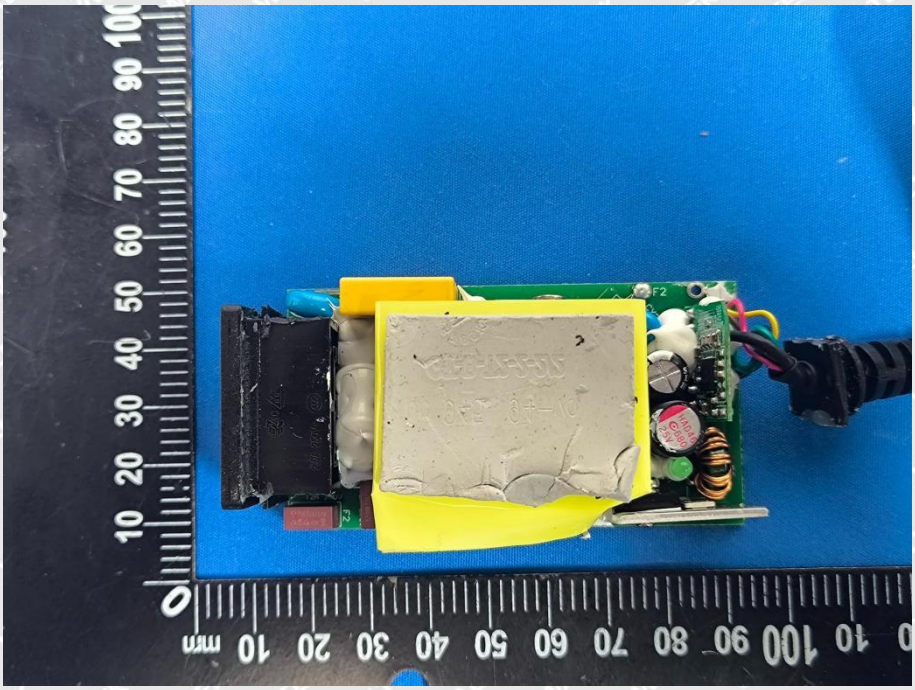

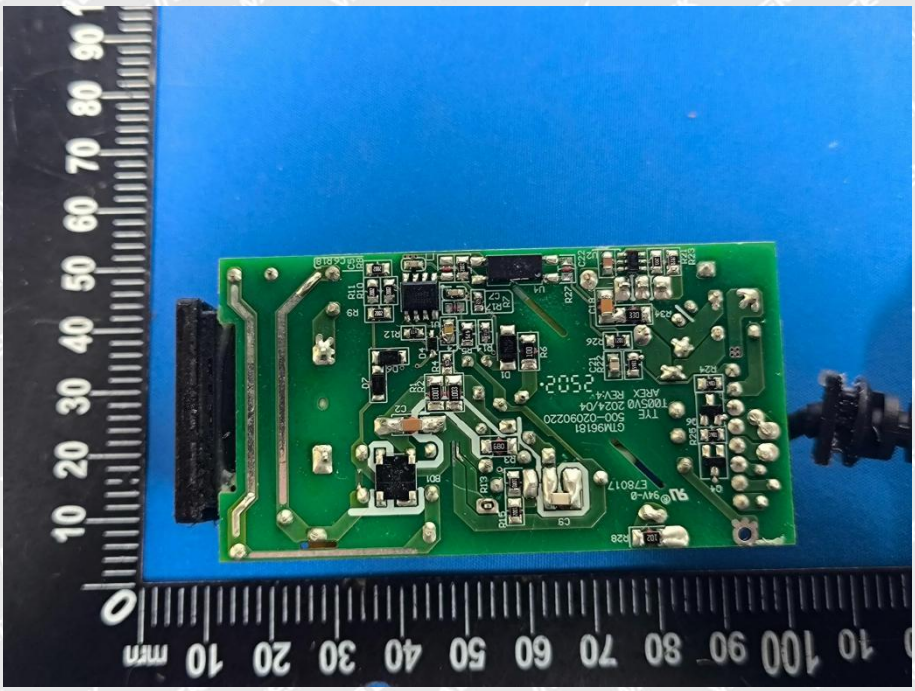

GTM96181-36PD-PPS-T3

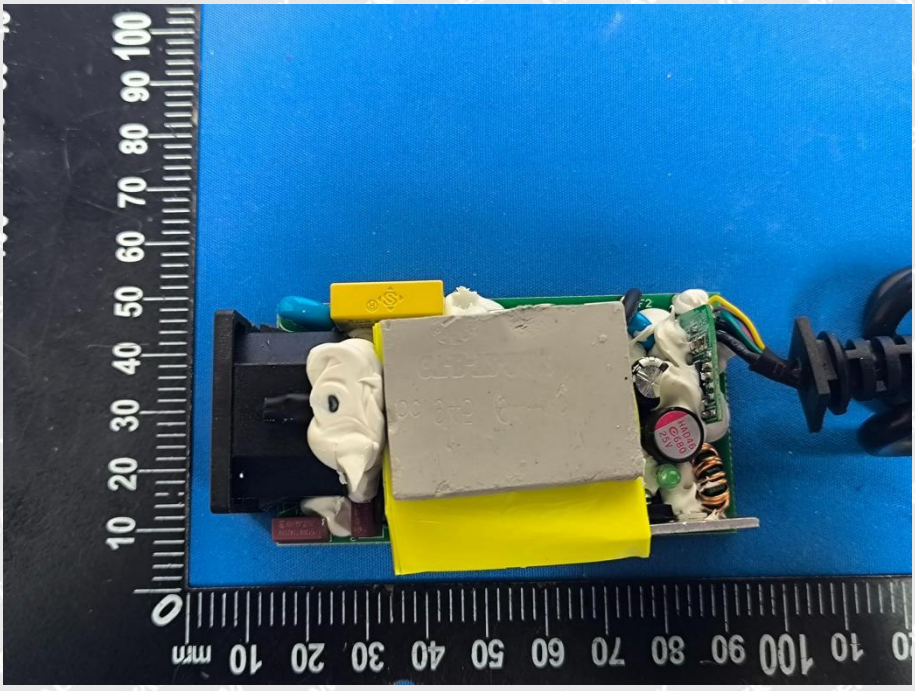

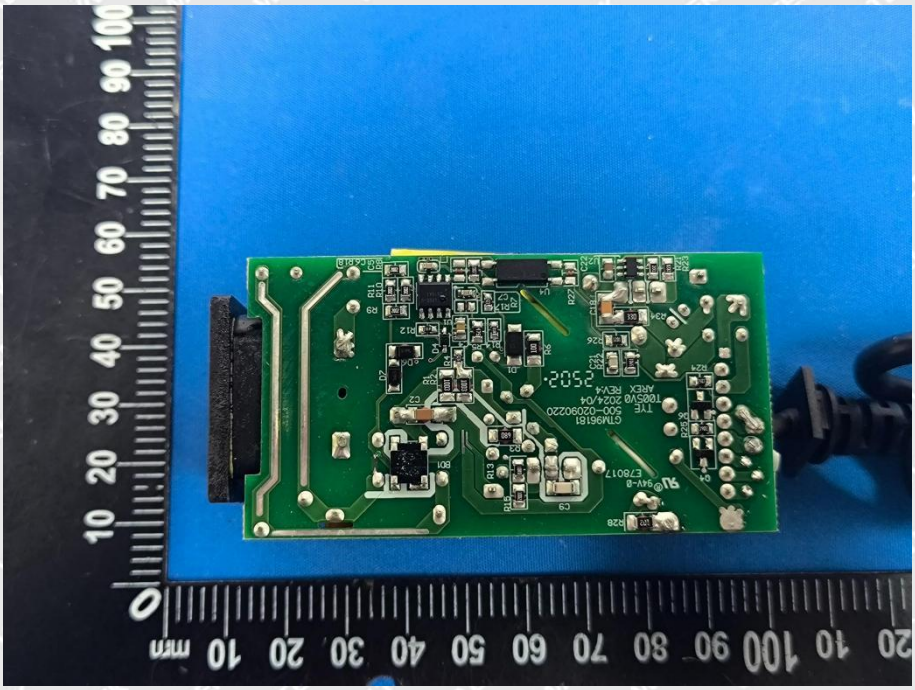

GTM96181-18PD-PPS-T3

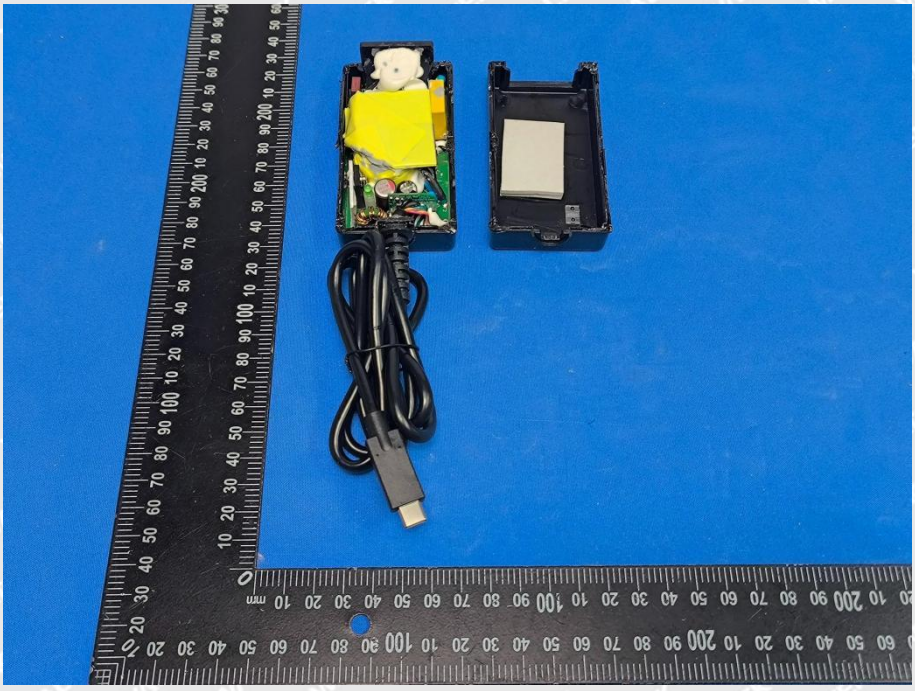

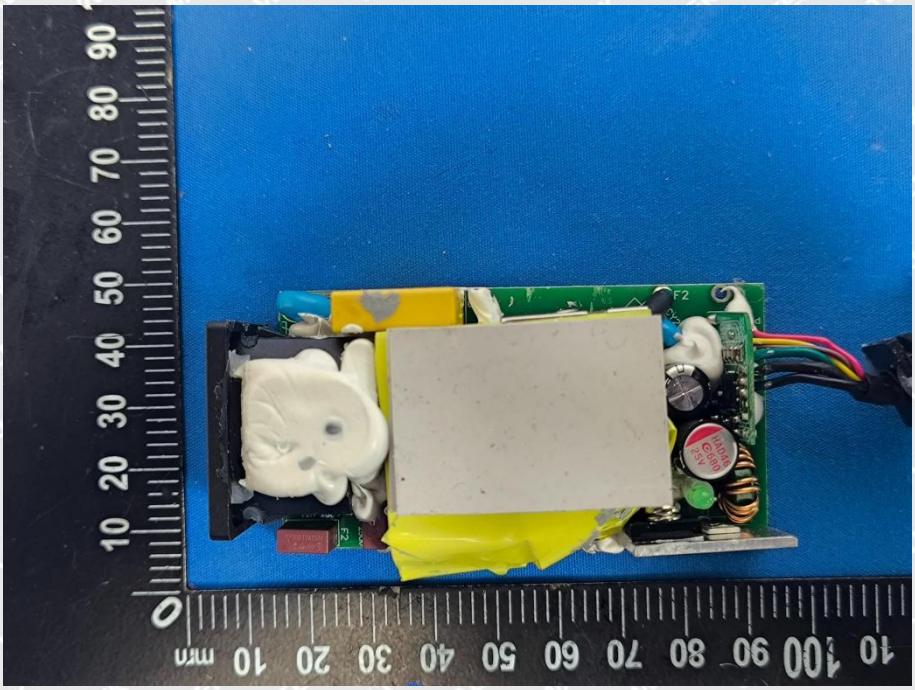

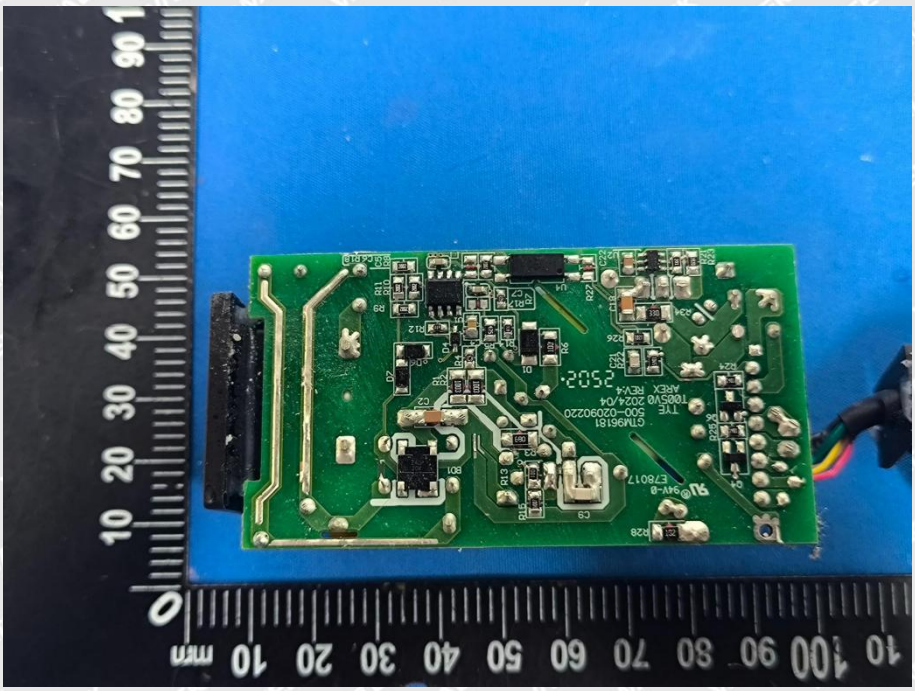

8. EXHIBIT 3 - TEST SETUP PHOTOGRAPHS

Conducted emissions from AC mains power ports (150kHz-30MHz)

Radiated emissions (30MHz-1GHz)

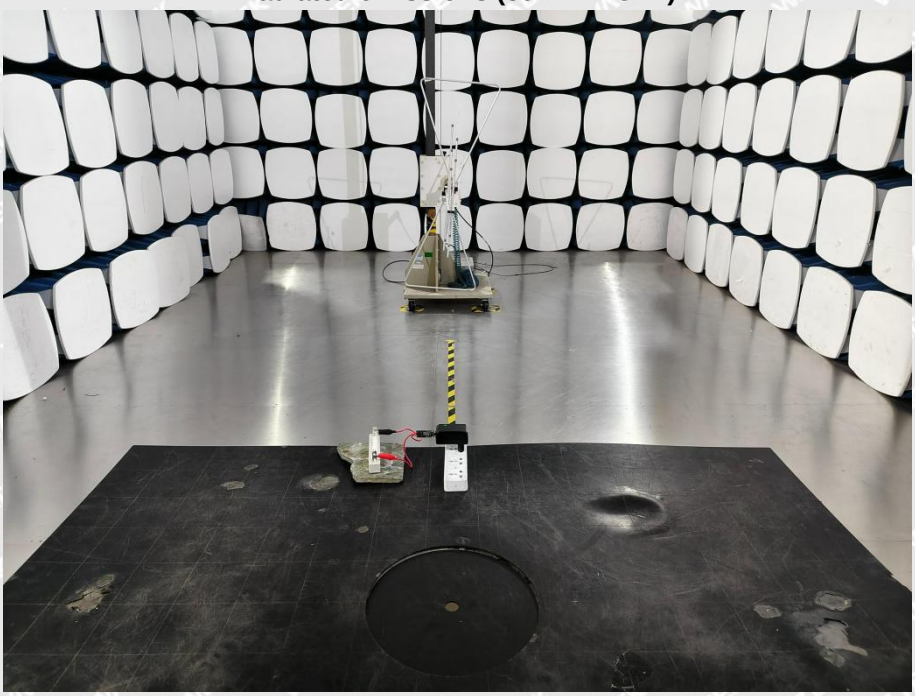

Voltage fluctuations and flicker

Electrostatic discharges

RF electromagnetic field disturbances

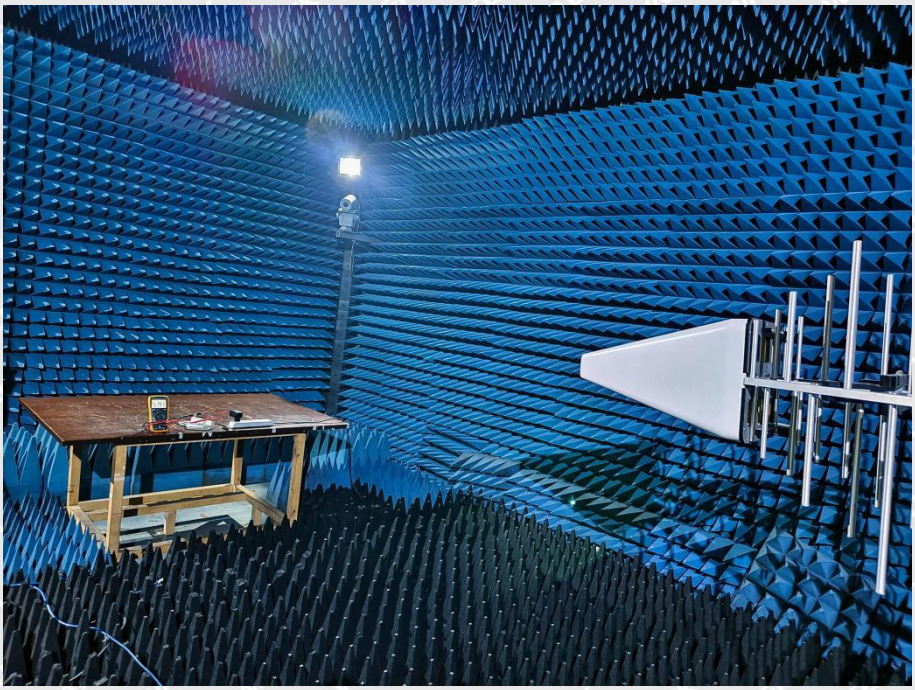

Electrical fast transients / burst for AC mains power ports

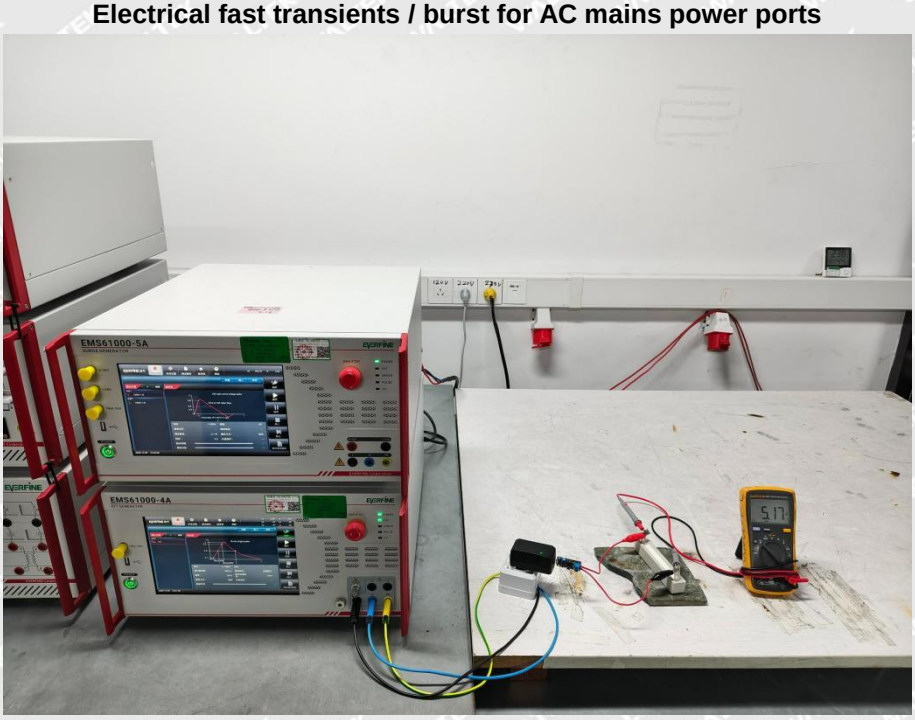

Surges for AC mains power ports

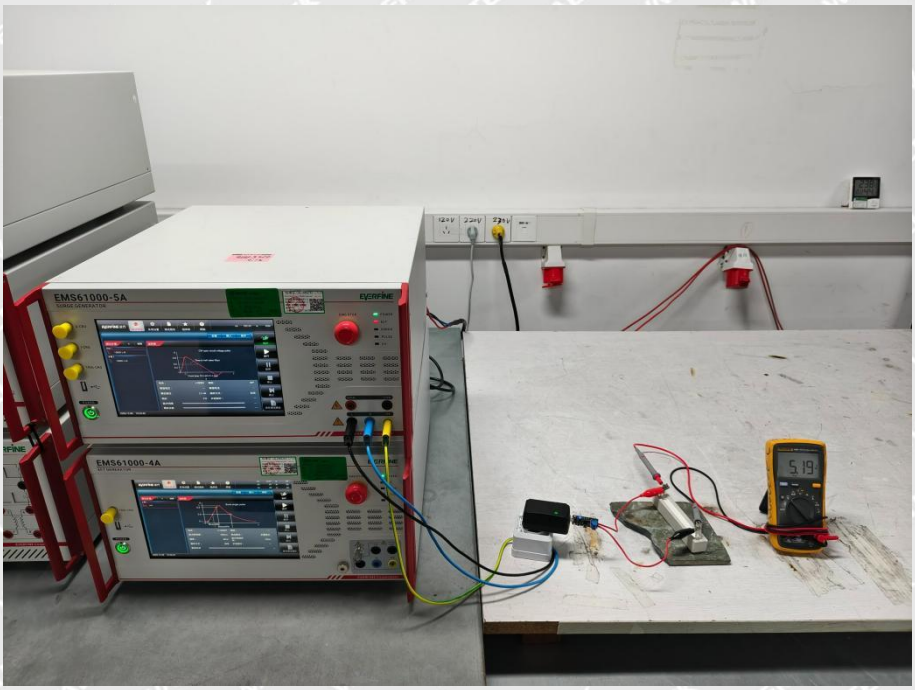

Continuous induced RF disturbances for AC mains power ports (150kHz-80MHz)

Power frequency magnetic field

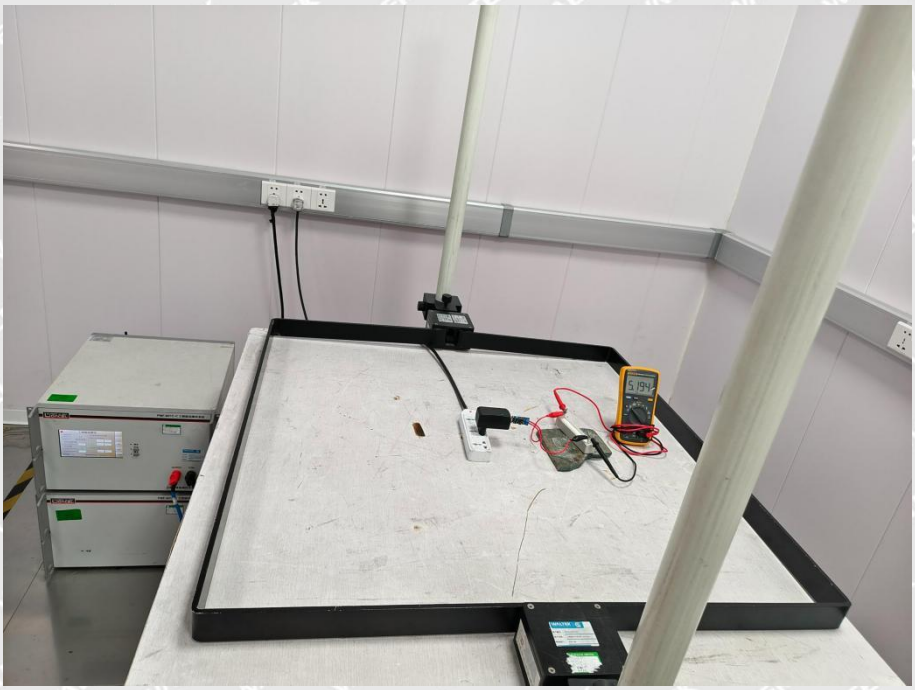

Voltage dips and interruptions

******* END OF REPORT *******