

DOC No. : SC23EPF06503 C-45, SECTOR-65, Noida, Gautam Buddha Nagar,
Telephone : +91 9810285868 Uttar Pradesh, India - 201301
FAX : -
E-Mail : classiclab@gmail.com
BO Code : NA

Test REPORT AS PER : IS 13252 : Part 1 (2010)**QR Code/Barcode : 145340CRS****REPORT NO : SC23EPF06503_1**

DATE : 02 Jun, 2023

PART A. PARTICULARS OF SAMPLE SUBMITTED

a) Customer Name & Address : Globtek (Suzhou) Co.,Ltd
NO.76 JINLING EAST ROAD, SUZHOU INDUSTRIAL
PARK, CHINA, NA, China - 0

b) Nature of sample : -

c) Grade/Variety/Type/Class Size etc : NA

d) Declare values, if any : -

e) Batch No. & Date of Manufacture : /

f) Quantity : 4

g) Date of Receipt : 21 Apr, 2023

h) BIS Seal : Verified by Sample Cell

i) IO's Signature : Verified by Sample Cell

j) Any other Information / Expiry Date, If any : /

k) Date of Commencement of Testing : 21 Apr, 2023

l) Date of Completion of Testing : 02 Jun, 2023

m) Section Code : 23E53AFN

n) Section Report No. : 23E53AFN_1

o) Report Type : New

p) Reference Report No. :

q) Remarks : ATTACHED REPORT

Surbhi Jain
OIC SAMPLE CELL
(Authorized Signatory)
Authorized on: 02 Jun, 2023 18:38 PM

1. Classic Instrumentation Pvt. Ltd.

This is a Computer Generated Report.

PART B. SUPPLEMENTARY INFORMATION

- | | |
|--|----------------|
| 1. Reference to sampling procedure, wherever applicable. | Not Applicable |
| 2. Supporting documents for the measurements taken and results derived like graphs, table sketches and or photographs as appropriate to test report, if any. | Yes |
| 3. Deviation from the test methods as prescribed in relevant ISS/Work instruction, if any. | No |
| 3. NABL Report required ? | No |

Surender kumar
OIC Electrical
(Authorized Signatory)
Authorized on: 02 Jun, 2023 18:36 PM

This is a Computer Generated Report.

PART C. TEST RESULT

S.No.	Clause No Table No. Sl. No	Parameter - Method of test	Test Description	Min Limit	Max Limit	Unit	Result/ Observation
1	7.4	Insulation between primary circuits and cable distribution systems	Insulation between primary circuits and cable distribution systems	-	-	-	Test Not Applicable
2	7.3	Protection of equipment users from overvoltages on the cable distribution system	Protection of equipment users from overvoltages on the cable distribution system	-	-	-	Test Not Applicable
3	7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment	-	-	-	Test Not Applicable
4	7.1	General	Connection to cable distribution systems	-	-	-	Test Not Applicable
5	6.3	Protection of the telecommunication wiring system from overheating	Protection of the telecommunication wiring system from overheating	-	-	-	Test Not Applicable
6	6.2	Protection of equipment users from overvoltages on networks telecommunication	Protection of equipment users from overvoltages on networks telecommunication	-	-	-	Test Not Applicable
7	6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment	-	-	-	Test Not Applicable
8	5.3	Abnormal operating and fault conditions	Abnormal operating and fault conditions test	-	-	-	Satisfactory
9	5.2	Electric strength	To Check Insulation as per Clause 5.2, 5.2.1, 5.2.2	-	-	-	Satisfactory
10	5.1	Touch current and protective conductor current	Cl. 5.1	-	-	-	Satisfactory
11	4.7	Resistance to fire	Clause 4.7, 4.7.1, 4.7.2, 4.7.2.1, 4.7.2.2, 4.7.3, 4.7.3.1	-	-	-	Satisfactory
12	4.6	Openings in enclosures	Openings in enclosures	-	-	-	No such opening in enclosure
13	4.5	Thermal requirements	Temperature rise measurement Test	-	-	-	Satisfactory
14	4.4	Protection against hazardous moving parts	Protection against hazardous moving parts	-	-	-	No hazardous moving part
15	4.3	Design and construction	Design and construction	-	-	-	Satisfactory
16	4.2	Mechanical strength	Mechanical Strength Test	-	-	-	Satisfactory

17	4.1	Stability	Clause 4.1 Stability	-	-	-	Mass of equipment is less than 7 kg
18	3.5	Interconnection of equipment	Clause 3.5, 3.5.1, 3.5.2, 3.5.4	-	-	-	Satisfactory
19	3.4	Disconnection from the mains supply	Appliance inlet is considered as disconnect device	-	-	-	Satisfactory
20	3.3	Wiring terminals for connection of external conductors	Wiring terminals for connection of external conductors	-	-	-	No such construction used
21	3.2	Connection to a mains supply	Clause 3.2: Connection to a mains supply	-	-	-	Satisfactory
22	3.1	General	Clause 3.0, 3.1.1, 3.1.2, 3.1.3	-	-	-	Satisfactory
23	2.10	Clearances, creepage distances and distances through insulation	Clause 2.10, 2.10.1.2, 2.10.1.3, 2.10.3, 2.10.3.4	-	-	-	Satisfactory
24	2.9	Electrical insulation	Clause 2.9 Electrical insulation	-	-	-	Satisfactory
25	2.8	Safety interlocks	Clause 2.8 Safety Interlocks-	-	-	-	No safety interlock used
26	2.7	Overcurrent and earth fault protection in primary circuits	Certified Fuse is provided for protection against short - circuits and overcurrent. The building installation consider as short-circuit backup protection.	-	-	-	Satisfactory
27	2.6	Provisions for earthing and bonding	Clause 2.6 Provisions for earthing and bonding	-	-	-	Satisfactory
28	2.5	Limited power sources .	Limited power sources test perform on Secondary Li-ion battery pack	-	-	-	Satisfactory
29	2.4	Limited current circuits	Limited current circuits	-	-	-	Satisfactory
30	2.3	TNV circuits	TNV circuits	-	-	-	No TNV circuits within the equipment
31	2.2	SELV circuits	Clause 2.2: SELV circuits	-	-	-	Satisfactory
32	2.1	Protection from electric shock and energy hazards	Clause 2.1: Protection from electric shock and energy hazards	-	-	-	Satisfactory
33	1.7	Markings and instructions	Clause: 1.7.11 (Durability) Rubbing the marking by hand for 15s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with petroleum spirit.	-	-	-	Satisfactory
34	1.6	Power interface .	Input current Measurement	-	-	-	Satisfactory

Surender kumar
OIC Electrical
 (Authorized Signatory)
 Authorized on: 02 Jun, 2023 18:36 PM

This is a Computer Generated Report.

.....
PART D. REMARKS

General remarks (If any): 1. The test results presented in this report relate only to the object tested. 2. This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory. 3. The Testing Standards/Instruments used are maintained in accordance with IS/ISO/IEC 17025 and are traceable to National and International standards.

Surender kumar
OIC Electrical
(Authorized Signatory)
Authorized on: 02 Jun, 2023 18:36 PM

This is a Computer Generated Report.

**DISCIPLINE: ELECTRONICS****GROUP: IT Equipment****ULR No.: TC509923200000540F****SUMMARY OF TEST REPORT****TEST REPORT NO...SC23EPF06503_1...DATED...02.06.2023****(Number of pages in test report: page no. 1 to 106)****TEST FORMAT AS PER IS 13252 (Part 1): 2010 + A1: 2013+ A2:2015 / IEC 60950-1: 2005 + A1: 2009 +A2:2013**

1. Name of Manufacturer: **Globtek (Suzhou) Co.,Ltd**
NO.76 JINLING EAST ROAD, SUZHOU INDUSTRIAL PARK, CHINA
2. Product: **ITE Power Supply (Power Adaptors for IT Equipments)**
3. Model(s) : (**Lead Model:** GTM96300-3648-R3A ; **Series Models:** GTM96300-2307.5-2.5-R3A, GTM96300-2307.5-1.55-R3A, GTM96300-2307.5-R3A, GTM96300-3010.5-1.5-R3A, GTM96300-3014.5-2.5-R3A, GTM96300-2007.5-2.5-R3A, GTM96300-3019.5-4.5-R3A, GTM96300-3619.5-4.5-R3A, GTM96300-3624-R3A) with brand:  **GlobTek, Inc.**
4. Model differences provided (if applicable) : Yes
5. Model differences verified as per MEITY Guidelines for series formulation : Yes
6. Test Results : See below

PART A : GENERAL

SL. NO.	TEST REQUIREMENT	CLAUSE	VERDICT
1.	Components	1.5	P
2.	Power Interface	1.6	P
3.	Markings and Instructions	1.7	P

PART B : PROTECTION FROM HAZARDS

SL. NO.	TEST REQUIREMENT	CLAUSE	VERDICT
1.	Protection from electric shock and energy hazards	2.1	P
2.	SELV circuits	2.2	P
3.	TNV circuits	2.3	N/A
4.	Limited current circuits	2.4	P
5.	Limited power sources	2.5	P
6.	Provisions for earthing and bonding	2.6	P
7.	Over current for earth fault protection in primary circuits	2.7	P
8.	Safety interlocks	2.8	N/A
9.	Electrical insulation	2.9	P
10.	Clearances, creepage distances and distances through insulation	2.10	P

PART C: WIRING, CONNECTIONS AND PHYSICAL REQUIREMENTS

SL. NO.	TEST REQUIREMENT	CLAUSE	VERDICT
1	Wiring, connections and supply	3.0	P
2	Connection to a mains supply	3.2	P
3	Wiring terminals for connection of external conductors	3.3	N/A





4	Disconnection from the mains supply	3.4	P
5	Interconnection of equipment	3.5	P
6.	Stability	4.1	N/A
7	Mechanical strength	4.2	P
8	Design and construction	4.3	P
9	Protection against hazardous moving parts	4.4	N/A
10	Thermal requirements	4.5	P
11	Openings in enclosures	4.6	N/A
12	Resistance to fire	4.7	P

PART D: ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS

SL. NO.	TEST REQUIREMENT	CLAUSE	VERDICT
1	Touch current and protective conductor current	5.1	P
2	Electric strength	5.2	P
3	Abnormal operating and fault conditions	5.3	P

PART E: CONNECTION TO TELECOM AND CABLED DISTRIBUTION SYSTEM

SL. NO.	TEST REQUIREMENT	CLAUSE	VERDICT
1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment	6.1	N/A
2	Protection of equipment users from over voltages on telecommunication networks	6.2	N/A
3	Protection of the telecommunication wiring system from overheating	6.3	N/A
4	Connection to cable distribution systems - General	7.1	N/A
5	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment	7.2	N/A
6	Protection of equipment users from over voltages on the cable distribution system	7.3	N/A
7	Insulation between primary circuits and cable distribution systems	7.4	N/A

General Information:

The conformity certificates of critical components are verified to ensure complete testing of apparatus under test and details regarding harmonized IEC standards (where IEC standards are not available) are also provided in the list of critical component.

CONCLUSION:

Sample meets all relevant requirements of IS 13252 (Part 1): 2010 + A1: 2013+ A2:2015 / IEC 60950-1: 2005 + A1: 2009 +A2:2013



I, hereby, undertake that the verdict stated in the test reports for all the tests matches with the test results. The sample meets all relevant requirements of IS 13252 (Part 1): 2010 + A1: 2013+ A2:2015 / IEC 60950-1: 2005 + A1: 2009 +A2:2013. If any deviation is found, suitable punitive action may be taken by BIS.

.....
(Signature of Authorized person with Stamp)





Test Report No.:	SC23EPF06503_1	Discipline: ELECTRONICS	Page 1 of 106
ULR No.:	TC509923200000540F	GROUP: IT Equipment	Issue Date: 02/06/2023

Manufacturer:	Globtek (Suzhou) Co.,Ltd NO.76 JINLING EAST ROAD, SUZHOU INDISTRIAL PARK, CHINA		
Test item:	ITE Power Supply (Power Adaptors for IT Equipments)		
Identification:	Lead Model: GTM96300-3648-R3A Series Models: GTM96300-2307.5-2.5-R3A, GTM96300-2307.5-1.55-R3A, GTM96300-2307.5-R3A, GTM96300-3010.5-1.5-R3A, GTM96300-3014.5-2.5-R3A, GTM96300-2007.5-2.5-R3A, GTM96300-3019.5-4.5-R3A, GTM96300-3619.5-4.5-R3A, GTM96300-3624-R3A		Serial No.: Nil
Receipt No.:	SC23EPF06503		
Testing laboratory and its address:	CLASSIC INSTRUMENTATION PVT.LTD. C-45,Sector-65,Noida-201307(U.P.)		
Test specification:	IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 / IEC 60950-1: 2005 + A1: 2009 + A2 : 2013		
Test Result:	The test item passed the test specification(s).		
Other Aspects:	<p>1. This report consists of 106 pages including one attachment.</p> <p>2. Equipment under test (EUT) is an ITE Power Supply model: GTM96300-3648-R3A with brand:  GlobTek®, Inc. has been tested as per IS 13252 (Part 1): 2010 + A1: 2013 + A2: 2015 / IEC 60950-1: 2005 + A1: 2009 + A2: 2013 complies with all applicable parameters.</p> <p>3. Series models: GTM96300-2307.5-2.5-R3A, GTM96300-2307.5-1.55-R3A, GTM96300-2307.5-R3A, GTM96300-3010.5-1.5-R3A, GTM96300-3014.5-2.5-R3A, GTM96300-2007.5-2.5-R3A, GTM96300-3019.5-4.5-R3A, GTM96300-3619.5-4.5-R3A, GTM96300-3624-R3A with brand:  GlobTek®, Inc. are in the same product family and can be undertaken in series with lead model: GTM96300-3648-R3A. All the tests have been performed on lead model: GTM96300-3648-R3A (Worst case).</p> <p><i>This test report relates to the test sample submitted and list of documents attached.</i></p>		

Tested by:	Approved by / Authorized Signatory:	Issued by:
		
Asst. Technical Manager (Jeetendra Singh Thapa)	Laboratory Head (Diksha Sharma)	Laboratory Head (Diksha Sharma)
Dated: 02/06/2023	Dated: 02/06/2023	Dated: 02/06/2023



**TEST REPORT**

IS 13252 (Part 1): 2010 + A1: 2013+ A2: 2015 /

IEC 60950-1: 2005 + A1: 2009 + A2: 2013

Information technology equipment – Safety –

Part 1: General requirements

"Power Adaptor for IT Equipment"

Report Reference No. : SC23EPF06503_1

Date of issue : 02/06/2023

Total number of pages..... : 106

Testing Laboratory : CLASSIC INSTRUMENTATION PVT.LTD.

Address : C-45,Sector-65,Noida-201307(U.P.)

Manufacturer's name : Globtek (Suzhou) Co.,Ltd

Address : NO.76 JINLING EAST ROAD, SUZHOU INDUSTRIAL PARK, CHINA

Test specification:Standard : IS 13252 (Part 1): 2010 + A1: 2013+ A2:2015 /
IEC 60950-1: 2005 + A1: 2009 +A2:2013

Test procedure : Compliance Report


Non-standard test method..... : N/A

Test Report Form No. : BIS_IT/PA_IS13252_V1.3

Test Report Form(s) Originator..... : Bureau of Indian Standards

Master TRF : 03/06/2016

Test item description : ITE Power Supply (Power Adaptors for IT Equipments)

Trade Mark..... :  **GlobTek, Inc.**Model/Type reference..... : **Lead Model:** GTM96300-3648-R3A**Series Models:** GTM96300-2307.5-2.5-R3A, GTM96300-2307.5-1.55-R3A,
GTM96300-2307.5-R3A, GTM96300-3010.5-1.5-R3A, GTM96300-3014.5-2.5-R3A,
GTM96300-2007.5-2.5-R3A, GTM96300-3019.5-4.5-R3A, GTM96300-3619.5-4.5-R3A,
GTM96300-3624-R3ARatings : **Input:** 100-240V~ 50/60Hz 1.0A**Output :** 48.0V  0.75A, 36.0W

(for series models rating see copy of marking plate at page no. 6 - 8)

Other Documents submitted..... : Please refer to Table – List of Attachments at Page No. 9

Tested by:	Approved by / Authorized Signatory:	Issued by:
		
Asst. Technical Manager (Jeetendra Singh Thapa)	Laboratory Head (Diksha Sharma)	Laboratory Head (Diksha Sharma)
Dated: 02/06/2023	Dated: 02/06/2023	Dated: 02/06/2023





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 3 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Test Code	Description	Measurement/ testing	Total No. of tests	Total no. of applicable tests/ Req.	No. of tests/ Req. passed	Page No.
EL 2100	General Requirements	Components (Cl.1.5)	18	10	10	12-13
EL 2101	General Requirements	Power interface (Cl.1.6)	05	04	04	14-14
EL 2102	Marking Requirements	Marking & instructions(Cl.1.7)	39	19	19	15-16
EL 2103	Electrical safety	Protection from electric shock and energy hazards (Cl.2.1)	14	05	05	17-17
EL 2104	Electrical safety	SELV Circuits (Cl.2.2)	04	04	04	18-18
EL 2105	Electrical safety	TNV Circuits (Cl.2.3)	12	00	N/A	19-19
EL 2106	Electrical safety	Limited current circuits (Cl.2.4)	04	03	03	20-20
EL 2107	Electrical safety	Limited Power sources (Cl.2.5)	07	02	02	21-21
EL 2108	Electrical safety	Provisions for earthing and bonding (Cl.2.6)	19	09	09	22-23
EL 2109	Electrical safety	Overcurrent and earth fault protection in primary circuits (Cl.2.7)	07	04	04	24-24
EL 2110	Electrical safety	Safety Interlocks (Cl.2.8)	13	00	N/A	25-25
EL 2111	Electrical safety	Electrical Insulation (Cl.2.9)	05	05	05	26-26
EL 2112	Electrical safety	Clearances, Creepage distances and distances through insulation (Cl.2.10)	63	28	28	27-29
EL 2113	Wiring	Wiring, connections and supply (Cl.3)	11	05	05	30-30
EL 2114	Wiring	Connection to a main supply (Cl.3.2)	14	06	06	31-32
EL 2115	Wiring	Wiring terminals for connection of external conductors (Cl.3.3)	09	00	N/A	33-33
EL 2116	Wiring	Disconnection for the main supply (Cl.3.4)	12	05	05	34-34
EL 2117	Wiring	Interconnection of equipment (Cl.3.5)	05	03	03	35-35
EL 2118	Mechanical properties	Stability (Cl.4.1)	05	00	N/A	36-36
EL 2119	Mechanical properties	Mechanical strength (Cl.4.2)	13	06	06	37-37
EL 2120	Mechanical properties	Design and construction (Cl.4.3)	25	04	04	38-39
EL 2121	Mechanical properties	Protection against hazardous moving parts (Cl.4.4)	14	00	N/A	40-40
EL 2122	Thermal Properties	Thermal requirements (Cl.4.5)	06	05	05	41-41
EL 2123	Mechanical properties	Openings in Enclosures (Cl.4.6)	18	00	N/A	42-43
EL 2124	Fire Safety	Resistance to fire (Cl.4.7)	25	08	08	44-47
EL 2125	Insulating properties	Electrical requirements and simulated abnormal conditions(Cl.5),5.1	20	10	10	48-49
EL 2126	Insulating properties	Electric Strength (Cl.5.2)	03	03	03	50-50

TRF No. BIS_IT/PA_IS13252_V1.3





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 4 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

EL 2127	Insulating properties	Abnormal operating and fault conditions (Cl.5.3)	11	07	07	51-51
EL 2128	Communicating connection	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment(Cl.6.1)	04	00	N/A	52-52
EL 2129	Communicating connection	Protection of equipment users from overvoltages on telecommunication networks (Cl.6.2)	06	00	N/A	53-53
EL 2130	Communicating connection	Protection of the telecommunication wiring system from overheating (Cl.6.3)	05	00	N/A	54-54
EL 2131	Connection to cable distribution systems	Connection to cable distribution systems(Cl.7)	08	00	N/A	55-55
EL 2132	Fire safety	Tests for resistance to heat and fire (Annex A)	20	00	N/A	56-57
EL 2133	Insulating properties	Motor tests under abnormal conditions (Annex B)	19	00	N/A	58-59
EL 2134	Electrical Safety	Transformers (Annex C)	03	03	03	60-60
EL 2135	Insulating properties	Measuring Instruments For Touch-Current Tests (Annex D)	03	02	02	61-61
EL 2136	Thermal Properties	Temperature Rise Of A Winding(Annex E)	01	00	N/A	62-62
EL 2137	Electrical safety	Measurement Of Clearances And Creepage Distances (Annex F)	01	01	01	63-63
EL 2138	Electrical safety	Alternative Method For Determining Minimum Clearances (Annex G)	17	00	N/A	64-64
EL 2139	Radiation Safety	Ionizing Radiation(Annex H)	01	00	N/A	65-65
EL 2140	Electrical Safety	Table of electrochemical potentials (Annex J)	01	00	N/A	66-66
EL 2141	General Requirements	Thermal controls (Annex K)	07	00	N/A	67-67
EL 2142	General Requirements	Normal load conditions for some types of electrical business equipment (Annex L)	08	02	02	68-68
EL 2143	Electrical Safety	Criteria for telephone ringing signals (Annex M)	13	00	N/A	69-69
EL 2144	Electrical safety	Impulse Test Generators(Annex N)	03	00	N/A	70-70
EL 2145	General Requirements	Normative References(Annex P)	01	01	01	71-71
EL 2146	General Requirements	Voltage dependent resistors (VDRs) (Annex Q)	03	00	N/A	72-72
EL 2147	General Requirements	Examples Of Requirements For Quality Control Programmes(Annex R)	03	00	N/A	73-73
EL 2148	General Requirements	Procedure For Impulse Testing (Annex S)	04	00	N/A	74-74
EL 2149	Protection against Ingress of water	Guidance On Protection Against Ingress Of Water (Annex T)	01	00	N/A	75-75
EL 2150	Wiring	Insulated Winding Wires For Use Without Interleaved Insulation (Annex U)	17	00	N/A	76-76





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 5 of 106


Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

EL 2151	Electrical Safety	Ac Power Distribution Systems (Annex V)	05	03	03	77-77
EL 2152	Electrical Safety	Summation Of Touch Currents (Annex W)	08	00	N/A	78-78
EL 2153	Electrical Safety	Maximum Heating Effect In Transformer Tests (Annex X)	03	03	03	79-79
EL 2154	Radiation safety	Ultraviolet light conditioning test (Annex Y)	05	00	N/A	80-80
EL 2155	Electrical Safety	Overvoltage Categories (Annex Z)	01	01	01	81-81
EL 2156	Mechanical properties	Mandrel Test (Annex AA)	01	00	N/A	82-82
EL 2157	Electrical Safety	Changes In The Second Edition(Annex BB)	--	--	--	--
EL 2158	Electrical Safety	Evaluation Of Integrated Circuit (IC) Current Limiters (Annex CC)	06	00	N/A	83-83
EL 2159	Mechanical properties	Requirements For The Mounting Means Of Rack-Mounted Equipment (Annex DD)	04	00	N/A	84-84
EL 2160	Electrical Safety	Household And Home/Office Document/Media Shredders (Annex EE)	06	00	N/A	85-85

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.




 (Approving Authority)







Copy of marking plate: Lead model

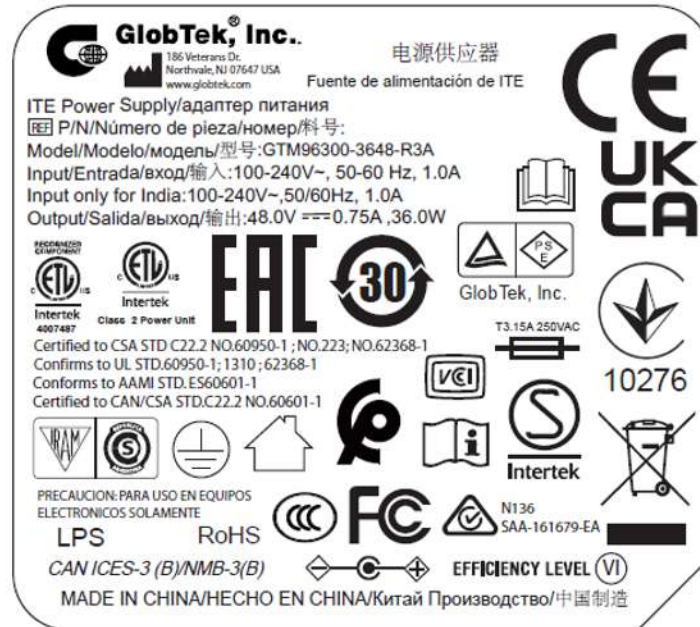

Copy of Trade mark:



Marking of Series Models:

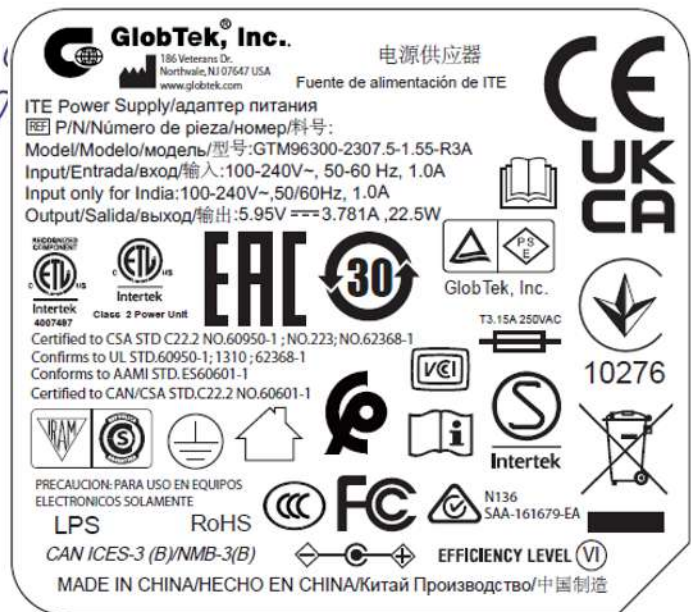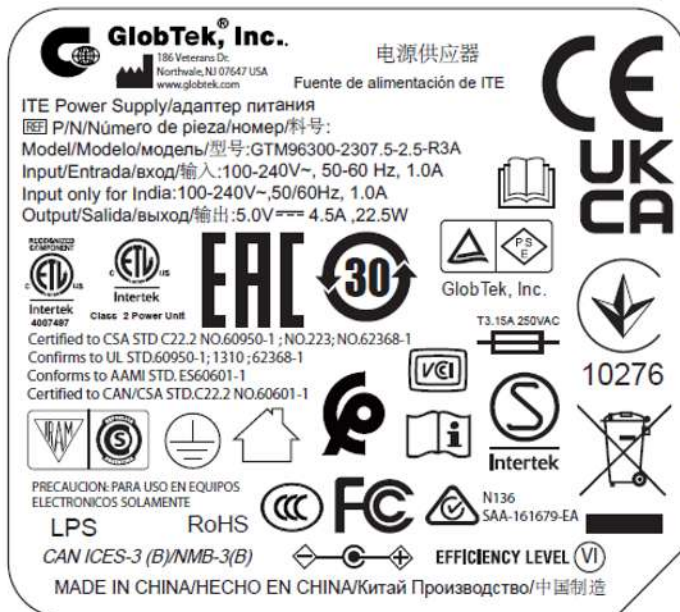



GlobTek, Inc.
186 Veterans Dr.
Northvale, NJ 07647 USA
www.globtek.com

电源供应器
Fuente de alimentación de ITE

ITE Power Supply/адаптер питания
P/N/Número de pieza/номер/料号:
Model/Modelo/модель/型号: GTM96300-2307.5-R3A
Input/Entrada/вход/输入: 100-240V~, 50-60 Hz, 1.0A
Input only for India: 100-240V~, 50/60Hz, 1.0A
Output/Salida/выход/输出: 7.5V === 3.0A, 22.5W

CE UK CA
EAC 30
Glob Tek, Inc.
T3.15A 250VAC
10276
Intertek
N136 SAA-161679-EA
LPS RoHS FC
CAN ICES-3 (B)/NMB-3(B) EFFICIENCY LEVEL VI
MADE IN CHINA/HECHO EN CHINA/Китай Производство/中国制造

GlobTek, Inc.
186 Veterans Dr.
Northvale, NJ 07647 USA
www.globtek.com

电源供应器
Fuente de alimentación de ITE

ITE Power Supply/адаптер питания
P/N/Número de pieza/номер/料号:
Model/Modelo/модель/型号: GTM96300-3010.5-1.5-R3A
Input/Entrada/вход/输入: 100-240V~, 50-60 Hz, 1.0A
Input only for India: 100-240V~, 50/60Hz, 1.0A
Output/Salida/выход/输出: 9.0V === 3.33A, 30.0W

CE UK CA
EAC 30
Glob Tek, Inc.
T3.15A 250VAC
10276
Intertek
N136 SAA-161679-EA
LPS RoHS FC
CAN ICES-3 (B)/NMB-3(B) EFFICIENCY LEVEL VI
MADE IN CHINA/HECHO EN CHINA/Китай Производство/中国制造

GlobTek, Inc.
186 Veterans Dr.
Northvale, NJ 07647 USA
www.globtek.com

电源供应器
Fuente de alimentación de ITE

ITE Power Supply/адаптер питания
P/N/Número de pieza/номер/料号:
Model/Modelo/модель/型号: GTM96300-3014.5-2.5-R3A
Input/Entrada/вход/输入: 100-240V~, 50-60 Hz, 1.0A
Input only for India: 100-240V~, 50/60Hz, 1.0A
Output/Salida/выход/输出: 12.0V === 2.5A, 30.0W

CE UK CA
EAC 30
Glob Tek, Inc.
T3.15A 250VAC
10276
Intertek
N136 SAA-161679-EA
LPS RoHS FC
CAN ICES-3 (B)/NMB-3(B) EFFICIENCY LEVEL VI
MADE IN CHINA/HECHO EN CHINA/Китай Производство/中国制造

GlobTek, Inc.
186 Veterans Dr.
Northvale, NJ 07647 USA
www.globtek.com

电源供应器
Fuente de alimentación de ITE

ITE Power Supply/адаптер питания
P/N/Número de pieza/номер/料号:
Model/Modelo/модель/型号: GTM96300-2007.5-2.5-R3A
Input/Entrada/вход/输入: 100-240V~, 50-60 Hz, 1.0A
Input only for India: 100-240V~, 50/60Hz, 1.0A
Output/Salida/выход/输出: 5.0V === 4.0A, 20.0W

CE UK CA
EAC 30
Glob Tek, Inc.
T3.15A 250VAC
10276
Intertek
N136 SAA-161679-EA
LPS RoHS FC
CAN ICES-3 (B)/NMB-3(B) EFFICIENCY LEVEL VI
MADE IN CHINA/HECHO EN CHINA/Китай Производство/中国制造



GlobTek, Inc.
186 Veterans Dr.
Northvale, NJ 07647 USA
www.globtek.com

电源供应器
Fuente de alimentación de ITE

ITE Power Supply/адаптер питания
P/N/Número de pieza/номер/料号:
Model/Modelo/модель/型号: GTM96300-3019.5-4.5-R3A
Input/Entrada/вход/输入: 100-240V~, 50-60 Hz, 1.0A
Input only for India: 100-240V~, 50/60Hz, 1.0A
Output/Salida/выход/输出: 15.0V === 2.0A, 30.0W

CE UK CA
EAC 30
Glob Tek, Inc.
T3.15A 250VAC
10276
Intertek
N136
SAA-161679-EA

PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE
LPS RoHS FC N136 SAA-161679-EA
CAN ICES-3 (B)/NMB-3(B) EFFICIENCY LEVEL VI
MADE IN CHINA/HECHO EN CHINA/Китай Производство/中国制造

GlobTek, Inc.
186 Veterans Dr.
Northvale, NJ 07647 USA
www.globtek.com

电源供应器
Fuente de alimentación de ITE

ITE Power Supply/адаптер питания
P/N/Número de pieza/номер/料号:
Model/Modelo/модель/型号: GTM96300-3619.5-4.5-R3A
Input/Entrada/вход/输入: 100-240V~, 50-60 Hz, 1.0A
Input only for India: 100-240V~, 50/60Hz, 1.0A
Output/Salida/выход/输出: 15.0V === 2.4A, 36.0W

CE UK CA
EAC 30
Glob Tek, Inc.
T3.15A 250VAC
10276
Intertek
N136
SAA-161679-EA

PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE
LPS RoHS FC N136 SAA-161679-EA
CAN ICES-3 (B)/NMB-3(B) EFFICIENCY LEVEL VI
MADE IN CHINA/HECHO EN CHINA/Китай Производство/中国制造

GlobTek, Inc.
186 Veterans Dr.
Northvale, NJ 07647 USA
www.globtek.com

电源供应器
Fuente de alimentación de ITE

ITE Power Supply/адаптер питания
P/N/Número de pieza/номер/料号:
Model/Modelo/модель/型号: GTM96300-3624-R3A
Input/Entrada/вход/输入: 100-240V~, 50-60 Hz, 1.0A
Input only for India: 100-240V~, 50/60Hz, 1.0A
Output/Salida/выход/输出: 24.0V === 1.5A, 36.0W

CE UK CA
EAC 30
Glob Tek, Inc.
T3.15A 250VAC
10276
Intertek
N136
SAA-161679-EA

PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE
LPS RoHS FC N136 SAA-161679-EA
CAN ICES-3 (B)/NMB-3(B) EFFICIENCY LEVEL VI
MADE IN CHINA/HECHO EN CHINA/Китай Производство/中国制造



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 9 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Table – List of Attachments

Attachment No.	Attachment Description	No. of pages in Attachment
Attachment – 1	Photo Documents	01 (Page no. 106)

General remarks:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Possible test case verdicts:

- test case does not apply to the test object	N/A (Not Applicable)
- test object does meet the requirement	P (Pass)
- test object does not meet the requirement	F (Fail)

Testing

Date of receipt of test item.....: 21/04/2023

Date(s) of performance of tests.....: 21/04/2023 to 02/06/2023

Laboratory conditions

Ambient Temperature: (25±4)°C

Ambient Humidity: (55±10)%



**Test item particulars**.....:

Equipment mobility

Connection to the mains

Operating condition

Access location

Over voltage category (OVC)

Mains supply tolerance (%) or absolute mains supply values

Class of equipment

Considered current rating of protective device as a part of the building installation (A)

Pollution degree (PD)

IP protection class

Altitude during operation (m)

Altitude of test laboratory (m)

Mass of equipment (kg)

ITE Power Supply (Power Adaptors for IT Equipments)☒ movable ☐ hand-held ☒ transportable
☐ stationary ☐ for building-in ☐ direct plug-in☒ pluggable equipment ☒ type A ☐ type B
☐ permanent connection
☒ detachable power supply cord
☐ non-detachable power supply cord
☐ not directly connected to the mains☒ continuous
☐ rated operating / resting time:☒ operator accessible
☐ restricted access location☐ OVC I ☒ OVC II ☐ OVC III ☐ OVC IV
☐ other:

Mains supply tolerance : -10%, +6%

☒ Class I ☐ Class II ☐ Class III
☐ Not classified

16A (for India)

☐ PD 1 ☒ PD 2 ☐ PD 3

IPX0

Up to 2000

< 1000

0.168 kg

Abbreviations that may be used throughout this test report:

PE/PB.....: protective earth/protective bonding

CB.....: circuit breaker

(SW)PS.....: (switching) power supply

HV.....: high voltage

PCB.....: printed circuit (wiring) board

TIW.....: triple insulated wire

B/I.....: built-in application (compliance shall be guarantee in host equipment)

F/B/S/R : Functional/Basic/Supplementary/Reinforced Insulation

Pri.....: primary

sec.....: secondary

gnd.....: ground

I/O.....: input/output

ii.....: installation instruction

PSU.....: Power Supply Unit





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 11 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

General product information:**1) Application details / Description of the product:**

The equipment is a **ITE Power Supply (Power Adaptors for IT Equipment)** intended for general office/home use with Information Technology equipment as per scope of this standard.

Item: **ITE Power Supply (Power Adaptor for IT Equipment)**

Brand Name: **GlobTek, Inc.**

Model: **Lead Model: GTM96300-3648-R3A**

Series Models: GTM96300-2307.5-2.5-R3A, GTM96300-2307.5-1.55-R3A, GTM96300-2307.5-R3A, GTM96300-3010.5-1.5-R3A, GTM96300-3014.5-2.5-R3A, GTM96300-2007.5-2.5-R3A, GTM96300-3019.5-4.5-R3A, GTM96300-3619.5-4.5-R3A, GTM96300-3624-R3A

Rating: **Input: 100-240V~ 50/60Hz 1.0A**
Output : 48.0V 0.75A, 36.0W

Dimensions: L= 101.83mm W= 45.67mm H= 36.69mm

Weight: 0.168kg

Max. specified ambient temperature (°C) : 40°C

Laser classification : N/A

2) Similarities between model: Yes

Similarities: same rated input voltage, same class of construction, same mains PCB design and layout and transformer

Differences between the models: Yes

Differences: Model no., output current & power

Model No. tested with-in the family series: GTM96300-3648-R3A (Lead model)(worst case)

3)Options:

The equipment was tested without any optional accessory installed. Hence, this report does not cover parameters that are influenced by the installation of optional accessory that might affect safety in the meaning of this standard.





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 12 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to General Requirements

EL 2100 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
1.5	Components*	EL 2100-00	Verification of approvals with due correlation between the components used and the approval certificates submitted (See table 1.5.1)	P
1.5.1	General:	EL 2100-01	See below	P
	Components shall be complying with IEC 60950-1 or relevant component standard.		Verification of approvals with due correlation between the components used and the approval certificates submitted (See the table 1.5.1)	P
	Components and subassemblies approved for IEC 62368-1 can be considered as complying with this standard		Certified components used as per IEC 62368-1 (See the table 1.5.1)	P
1.5.2	Evaluation and testing of components	EL 2100-02	Components certified with IEC or their harmonized standards are used within their ratings (See table 1.5.1)	P
1.5.3	Thermal controls	EL 2100-03	No thermal control	N/A
1.5.4	Transformers	EL 2100-04	Transformer Tested with in appliance (See Annex C and table C.2)	P
1.5.5	Interconnecting cables*	EL 2100-05	Interconnecting cables used	P
1.5.6	Capacitors bridging insulation *	EL 2100-06	Capacitors used in accordance with their rating and complied with subclasses of IEC 60384-14 (see table 1.5.1)	P
1.5.7	Resistors bridging insulation	EL 2100-07	No such component used	N/A
1.5.7.1	Resistors bridging functional, basic or supplementary insulation*	EL 2100-08	As above	N/A
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits	EL 2100-09	As above	N/A
1.5.7.3	Resistors bridging double insulation or reinforced insulation between the a.c. mains supply and circuits connected to an antenna or coaxial cable	EL 2100-10	No such circuits	N/A
1.5.8	Components in equipment for IT power distribution systems*	EL 2100-11	TN power distribution system used	N/A
1.5.9	Surge suppressors	EL 2100-12	Certified Varistor used and Complies with Annex Q	P
1.5.9.1	General*	EL 2100-13	See above cl. no. 1.5.9	P
1.5.9.2	Protection of VDRs*	EL 2100-14	Certified fuse is used for this purpose	P
1.5.9.3	Bridging of functional insulation by a VDR*	EL 2100-15	Varistor bridging functional insulation only	P
1.5.9.4	Bridging of basic insulation by a VDR*	EL 2100-16	VDR not used for bridging basic insulation	N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR*	EL 2100-17	VDR not used for this purpose	N/A





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 13 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

*- Total number of Requirements to be observed / inspected = 10

Total No of applicable Requirement = 06

No of Requirements for which the sample passed= 06

Total number of tests to be conducted = 08

Total No of applicable Tests = 04

No. of tests for which the sample passed= 04

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 14 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2101 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
1.6	Power interface*	EL 2101-00	See below	P
1.6.1	AC power distribution systems*	EL 2101-01	TN-S power distribution system	P
1.6.2	Input current	EL 2101-02	See table 1.6.2	P
1.6.3	Voltage limit of hand-held equipment*	EL 2101-03	Not a hand-held equipment	N/A
1.6.4	Neutral conductor *	EL 2101-04	The neutral conductor is insulated from the body throughout the equipment	P

*- Total number of Requirements to be observed / inspected = 04

Total No of applicable Requirement = 03

No of Requirements for which the sample passed= 03

Total number of tests to be conducted = 01

Total No of applicable Tests = 01

No. of tests for which the sample passed= 01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 15 of 106


Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Marking Requirements

EL 2102 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
1.7	Marking and instructions*	EL 2102-00	Satisfactory	P
1.7.1	Power rating and identification markings		See below	P
1.7.1.1	Power rating marking*	EL 2102-01	See copy of marking plate	P
	Rated voltage(s) or voltage ranges(s) (V)*	EL 2102-02	100-240V~	P
	Multiple mains supply connections*	EL 2102-03	No such type of supply connection	N/A
	Symbol for nature of supply, for d.c. only*	EL 2102-04	AC supplied	N/A
	Rated frequency or rated frequency range (Hz) *	EL 2102-05	50/60Hz	P
	Rated current (mA or A)*	EL 2102-06	1.0A	P
1.7.1.2	Identification markings*	EL 2102-07	See below	P
	Manufacturer's name or trade-mark or identification mark *	EL 2102-08	 GlobTek, Inc.	P
	Model identification or type reference *	EL 2102-09	GTM96300-3648-R3A	P
	Symbol for Class II equipment only*	EL 2102-10	Class I equipments	N/A
	Other markings and symbols*	EL 2102-11	Other Markings or symbol do not give rise to misunderstanding	P
1.7.1.3	Use of graphical symbols*	EL 2102-12	AC symbol is used as graphical symbol	P
1.7.2	Safety instructions and marking*	EL 2102-13	See below	P
1.7.2.1	General	EL 2102-14	In-compliance	P
1.7.2.2	Disconnect devices*	EL 2102-15	Appliance Inlet is considered as disconnet device	P
1.7.2.3	Overcurrent protective devices*	EL 2102-16	Pluggable equipment type A	N/A
1.7.2.4	IT power distribution systems*	EL 2102-17	No such system available	N/A
1.7.2.5	Operator access with a tool*	EL 2102-18	No such construction used	N/A
1.7.2.6	Ozone*	EL 2102-19	Device does not produce ozone	N/A
1.7.3	Short duty cycles*	EL 2102-20	The EUT is continuous operating type	N/A
1.7.4	Supply voltage adjustment*	EL 2102-21	No voltage adjustment	N/A
1.7.5	Power outlets on the equipment*	EL 2102-22	No such power outlet found within EUT	N/A
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference) Fuse(s) shall clearly and adequately marked with fuse number and rating*.	EL 2102-23	Certified fuse (F1 & F2) used (See table 1.5.1)	P
1.7.7	Wiring terminals	EL 2102-24	See below	P
1.7.7.1	Protective earthing and bonding terminals*	EL 2102-25	In-compliance	P
1.7.7.2	Terminals for a.c. mains supply conductors*	EL 2102-26	Certified Appliance Inlet is used	N/A





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 16 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

1.7.7.3	Terminals for d.c. mains supply conductors*	EL 2102-27	See above Cl. 1.7.7.2	N/A
1.7.8	Controls and indicators	EL 2102-28	See below	P
1.7.8.1	Identification, location and marking *:	EL 2102-29	No such control or indicator used to affect safety	N/A
1.7.8.2	Colours*	EL 2102-30	Colour is used for functional indication only	P
1.7.8.3	Symbols according to IEC 60417*:	EL 2102-31	No such symbol used according to IEC 60417	N/A
1.7.8.4	Markings using figures* :	EL 2102-32	No such construction used	N/A
1.7.9	Isolation of multiple power sources*	EL 2102-33	No multiple power sources	N/A
1.7.10	Thermostats and other regulating devices*	EL 2102-34	No such device within the EUT	N/A
1.7.11	Durability	EL 2102-35	Marking is durable and legible after the test	P
1.7.12	Removable parts*	EL 2102-36	No such removable parts	N/A
1.7.13	Replaceable batteries*	EL 2102-37	No such replaceable battery used	N/A
	Language(s)		See above Cl. 1.7.13	N/A
1.7.14	Equipment for restricted access locations*	EL 2102-38	Equipment not intended to be installed in restricted access locations	N/A

*- Total number of Requirements to be observed / inspected = 35

Total No of applicable Requirement = 15

No of Requirements for which the sample passed=15

Total number of tests to be conducted = 04

Total No of applicable Tests = 04

No. of tests for which the sample passed= 04

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.



 (Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 17 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2103 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.1	Protection from electric shock and energy hazards*	EL 2103-00	See below	P
2.1.1	Protection in operator access areas*	EL 2103-01	In-compliance	P
2.1.1.1	Access to energized parts	EL 2103-02	Adequate protection against contact in operator access area	P
	Test by inspection :		No hazardous bare parts in operator access area	P
	Test with test finger (Figure 2A)		No access with test finger to any parts at hazardous voltage in access area	P
	Test with test pin (Figure 2B):		The test pin does not touch bare hazardous parts in operator access area	P
	Test with test probe (Figure 2C)		No TNV circuit within the EUT	N/A
2.1.1.2	Battery compartments *	EL 2103-03	No TNV circuit within the EUT	N/A
2.1.1.3	Access to ELV wiring	EL 2103-04	No access to ELV wiring	N/A
	Working voltage (V _{peak} or V _{rms}); minimum distance through insulation (mm)		See above cl. No. 2.1.1.3	N/A
2.1.1.4	Access to hazardous voltage circuit wiring	EL 2103-05	No accessible hazardous voltage wiring	N/A
2.1.1.5	Energy hazards :	EL 2103-06	Satisfactory Refer table 2.1.1.5	P
2.1.1.6	Manual controls	EL 2103-07	No manual controls	N/A
2.1.1.7	Discharge of capacitors in equipment		See below	P
	Measured voltage (V); time-constant (s):	EL 2103-08	Satisfactory Refer table 2.1.1.7	P
2.1.1.8	Energy hazards – d.c. mains supply		Equipment is supplied on AC mains only	N/A
	a) Capacitor connected to the d.c. mains supply :	EL 2103-09	Refer Cl. 2.1.1.8	N/A
	b) Internal battery connected to the d.c. mains supply :	EL 2103-10	Refer Cl. 2.1.1.8	N/A
2.1.1.9	Audio amplifiers to be tested according to IEC 60065, cl. 9.1.1.:	EL 2103-11	No such audio amplifier used	N/A
2.1.2	Protection in service access areas	EL 2103-12	No possibilities of unintentional contact to hazardous voltage bare parts while servicing	N/A
2.1.3	Protection in restricted access locations	EL 2103-13	Not for restricted access location	N/A

*- Total number of Requirements to be observed / inspected = 03

Total No of applicable Requirement = 02

No. of Requirements for which the sample passed=02

Total number of tests to be conducted = 11

Total No of applicable Tests = 03

No. of tests for which the sample passed=03

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.

.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 18 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2104 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.2	SELV circuits*	EL 2104-00	Satisfactory	P
2.2.2	Voltages under normal conditions	EL 2104-01	Between any SELV circuit 42.4V peak or 60V DC are not exceeded (See table 2.2.2)	P
2.2.3	Voltages under fault conditions	EL 2104-02	Between any SELV circuit; 71V peak not exceeded for multiple pulse and 120 V peak not exceeded for single pulse (See table 2.2.3)	P
2.2.4	Connection of SELV circuits to other circuits* :	EL 2104-03	SELV circuits are connected to SELV circuit only	P

*- Total number of Requirements to be observed / inspected = 02

Total No of applicable Requirement = 02

No of Requirements for which the sample passed=02

Total number of tests to be conducted = 02

Total No of applicable Tests = 02

No. of tests for which the sample passed=02

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 19 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2105 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.3	TNV circuits*	EL 2105-00	No TNV circuits within the equipment	N/A
2.3.1	Type of TNV circuits: TNV-1 / TNV-2 / TNV-3	EL 2105-01	Refer Cl.2.3	N/A
	a) Limits of TNV-1:	EL 2105-02	Refer Cl.2.3	N/A
	b) Limits of TNV-2 or TNV-3: Continuous voltages, combination of AC and DC values, are such that : $\frac{U_{ac}}{71} + \frac{U_{dc}}{120} \leq 1$	EL 2105-03	Refer Cl.2.3	N/A
2.3.2	Separation from other circuits and from accessible parts*	EL 2105-04	Refer Cl.2.3	N/A
2.3.2.1	General Requirements	EL 2105-05	Refer Cl.2.3	N/A
2.3.2.2	Protection by basic insulation	EL 2105-06	Refer Cl.2.3	N/A
2.3.2.3	Protection by earthing	EL 2105-07	Refer Cl.2.3	N/A
2.3.2.4	Protection by other constructions :	EL 2105-08	Refer Cl.2.3	N/A
2.3.3	Separation from hazardous voltages	EL 2105-09	Refer Cl.2.3	N/A
2.3.4	Connection of TNV circuits to other circuits	EL 2105-10	Refer Cl.2.3	N/A
2.3.5	Test for operating voltages generated externally	EL 2105-11	Refer Cl.2.3	N/A

*- Total number of Requirements to be observed / inspected = 02

Total No of applicable Requirement = 00

No of Requirements for which the sample passed=N/A

Total number of tests to be conducted = 10

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

.....

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 20 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2106 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.4	Limited current circuits *	EL 2106-00	See below	P
2.4.1	General requirements *	EL 2106-01	See table 2.4.2	P
2.4.2	Limit values	EL 2106-02	Measured value not exceeding 0.7mA peak	P
2.4.3	Connection of limited current circuits to other circuits*	EL 2106-03	SELV to SELV connection only	N/A

*- Total number of Requirements to be observed / inspected = 03

Total No of applicable Requirement = 02

No of Requirements for which the sample passed=02

Total number of tests to be conducted = 01

Total No of applicable Tests = 01

No. of tests for which the sample passed= 01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 21 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2107 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.5	Limited power sources *	EL 2107-00	See below	P
	a) Inherently limited output	EL 2107-01	No such inherently limited output	N/A
	b) Impedance limited output	EL 2107-02	No such Impedance limited output	N/A
	c) Regulating network limited output under normal operating and single fault condition Use of integrated circuit (IC) current limiters	EL 2107-03	Satisfactory (Refer table 2.5)	P
	d) Overcurrent protective device limited output	EL 2107-04	No such over current protective device	N/A
	Max. output voltage (V), Max. output current (A), Max. apparent power (VA)	EL 2107-05	See above 2.5 d)	N/A
	Current rating of overcurrent protective device (A)	EL 2107-06	See above 2.5 d)	N/A

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 01

No of Requirements for which the sample passed=01

Total number of tests to be conducted = 06

Total No of applicable Tests = 01

No. of tests for which the sample passed=01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.



 (Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 22 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2108 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.6	Provisions for earthing and bonding*	EL 2108-00	See below	P
2.6.1	Protective earthing	EL 2108-01	Accessible conducting parts are reliably connected to protective earthing	P
2.6.2	Functional earthing : The Functional earthing either separated from hazardous voltages by double- or reinforced insulation or safely connected to Protective Bonding Conductor.*	EL 2108-02	The Functional earthing is separated from hazardous voltages by double or reinforced insulation or basic insulation for protective earthing	P
	Use of symbol for functional earthing:*	EL 2108-03	No such symbol used	N/A
2.6.3	Protective earthing and protective bonding conductors*	EL 2108-04	See below cl. No. 2.6.3.2 to 2.6.3.5	P
2.6.3.2	Size of protective earthing conductors	EL 2108-05	See below	P
	Rated current (A), cross-sectional area (mm ²), AWG		16A, 1.5 sqmm, 16AWG	P
2.6.3.3	Size of protective bonding conductors	EL 2108-06	Protective bonding not used	N/A
	Rated current (A), cross-sectional area (mm ²), AWG		See above Cl. 2.6.3.3	N/A
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min):	EL 2108-07	Resistance not exceeding 0.1 Ω : Test time: 2 minutes See table 2.6.3.4	P
2.6.3.5	Colour of insulation*:	EL 2108-08	Yellow green insulation is used for earthing conductor	P
2.6.4	Terminals		Appliance inlet considered as a protective earthing terminal	P
2.6.4.2	Protective earthing and bonding terminals : Rated current(A), Type, Nominal thread diameter (mm)	EL 2108-09	No screw used	N/A
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors*	EL 2108-10	See above Cl. 2.6.4.2	N/A
2.6.5	Integrity of protective earthing*		See below	P
2.6.5.1	Interconnection of equipment*	EL 2108-11	No such equipment	N/A
2.6.5.2	Components in protective earthing conductors and protective bonding conductors*	EL 2108-12	No switches or fuse in protective earthing conductors and protective bonding conductors	P
2.6.5.3	Disconnection of protective earth*	EL 2108-13	Protective earthing terminal of Appliance Inlet is disconnected after supply mains	P
2.6.5.4	Parts that can be removed by an operator*	EL 2108-14	No such construction used	N/A
2.6.5.5	Parts removed during servicing*	EL 2108-15	See above Cl. 2.6.5.4	N/A
2.6.5.6	Corrosion resistance*	EL 2108-16	See above Cl. 2.6.5.4	N/A
2.6.5.7	Screws for protective bonding*	EL 2108-17	No screw used	N/A
2.6.5.8	Reliance on telecommunication network or cable distribution system*	EL 2108-18	No telecommunication network or cable distribution system	N/A





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 23 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

*- Total number of Requirements to be observed / inspected = 14

Total No of applicable Requirement = 06


No of Requirements for which the sample passed= 06

Total number of tests to be conducted = 05

Total No of applicable Tests = 03

No. of tests for which the sample passed= 03

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 24 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2109 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.7	Overcurrent and earth fault protection in primary circuits*	EL 2109-00	See below	P
2.7.1	Basic requirements: Protection in primary circuits against overcurrents, short-circuits and earth faults shall be provided, either as an integral part of the equipment or as part of building installation.	EL 2109-01	The equipment relies on fuse Build-in fuses provided as an over current protection device	P
	If pluggable equipment Type B or permanently connected equipment relies on protective device external to the equipment for protection, the equipment installation Instructions shall so state and shall also specify the requirements for short-circuit protection or overcurrent protection or, where necessary, for both.		Pluggable equipment Type A	N/A
2.7.2	Faults not simulated in 5.3.7* need not be fitted as an integral part of the equipment	EL 2109-02	Protection from faults not covered in Cl. 5.3 is provided by installation	N/A
2.7.3	Short-circuit backup protection	EL 2109-03	The equipment is pluggable type A. The building installation is considered as providing short-circuit backup protection.	P
2.7.4	Number and location of protective devices :	EL 2109-04	Over current protection by a built in fuse (F1 & F2)	P
2.7.5	Protection by several devices*	EL 2109-05	Protection by single device	N/A
2.7.6	Warning to service personnel* :	EL 2109-06	No such warning required	N/A

*- Total number of Requirements to be observed / inspected = 04

Total No of applicable Requirement = 01

No of Requirements for which the sample passed= 01

Total number of tests to be conducted = 03

Total No of applicable Tests = 03

No. of tests for which the sample passed=03

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 25 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2110 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.8	Safety Interlocks*	EL 2110-00	No such safety interlock used	N/A
2.8.1	General principles*	EL 2110-01	See above Cl. 2.8	N/A
2.8.2	Protection requirements	EL 2110-02	See above Cl. 2.8	N/A
2.8.3	Inadvertent reactivation	EL 2110-03	See above Cl. 2.8	N/A
2.8.4	Fail-safe operation	EL 2110-04	See above Cl. 2.8	N/A
2.8.5	Moving parts	EL 2110-05	See above Cl. 2.8	N/A
2.8.6	Overriding*	EL 2110-06	See above Cl. 2.8	N/A
2.8.7	Switches, relays and their related circuits	EL 2110-07	See above Cl. 2.8	N/A
2.8.7.1	Separation distances for contact gaps and their related circuits`	EL 2110-08	See above Cl. 2.8	N/A
2.8.7.2	Overload test	EL 2110-09	See above Cl. 2.8	N/A
2.8.7.3	Endurance test	EL 2110-10	See above Cl. 2.8	N/A
2.8.7.4	Electric strength test	EL 2110-11	See above Cl. 2.8	N/A
2.8.8	Mechanical actuators	EL 2110-12	See above Cl. 2.8	N/A

*- Total number of Requirements to be observed / inspected = 03

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 10

Total No of applicable Tests = 00

No. of tests for which the sample passed=N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing~~/Failing in the requirement tested.

(These tests/requirements are not applicable)


 (Approving Authority)




Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 26 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2111 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.9	Electrical insulation*	EL 2111-00	Satisfactory	P
2.9.1	Properties of insulating materials*	EL 2111-01	Natural rubber, Hygroscopic materials are not used as insulation	P
2.9.2	Humidity conditioning	EL 2111-02	Satisfactory (Components or subassembly not energized)	P
	Relative Humidity : 93 ±3 %, Temperature: t at 40 ± 2°C Duration : 120 hours		93 % 40 °C 120 hours	P
2.9.3	Grade of insulation*	EL 2111-03	Insulation considered is to be functional and reinforced/double insulation	P
2.9.4	Separation from hazardous voltages*	EL 2111-04	Separation provided through double/reinforced insulation	P
	Method(s) used		Method 1 used	P

*- Total number of Requirements to be observed / inspected = 04

Total No of applicable Requirement = 04

No of Requirements for which the sample passed= 04

Total number of tests to be conducted = 01

Total No of applicable Tests = 01

No. of tests for which the sample passed= 01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.



 (Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 27 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2112 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
2.10	Clearances, creepage distances and distances through Insulation*	EL 2112-00	See below	P
2.10.1.1	Frequency *	EL 2112-01	50/60Hz	P
2.10.1.2	Pollution degrees*	EL 2112-02	Pollution degree 2	P
2.10.1.3	Reduced values for functional insulation	EL 2112-03	Complied with cl. No. 5.3.4 c)	P
2.10.1.4	Intervening unconnected conductive parts	EL 2112-04	No such construction used	N/A
2.10.1.5	Insulation with varying dimensions	EL 2112-05	No such construction used	N/A
2.10.1.6	Special separation requirements	EL 2112-06	Special Separation is not required	N/A
2.10.1.7	Insulation in circuits generating starting pulses	EL 2112-07	No such circuit	N/A
2.10.2	Determination of working voltage	EL 2112-08	Refer table 2.10.2	P
2.10.2.2	RMS working voltage	EL 2112-09	See above cl. No. 2.10.2	P
2.10.2.3	Peak working voltage	EL 2112-10	See above cl. No. 2.10.2	P
2.10.3	Clearances	EL 2112-11	See below	P
2.10.3.1	General	EL 2112-12	Satisfactory	P
2.10.3.2	Mains transient voltages*		See below	P
	a) AC mains supply * :	EL 2112-13	Overvoltage category II, mains transient voltage 2500Vpeak	P
	b) Earthed d.c. mains supplies* :	EL 2112-14	Not connected to dc mains	N/A
	c) Unearthed d.c. mains supplies* :	EL 2112-15	No unearthed d.c. mains supplies	N/A
	d) Battery operation* :	EL 2112-16	The Equipment is not intended to be supplied by Battery	N/A
2.10.3.3	Clearances in primary circuits	EL 2112-17	See appended table 2.10.3 and 2.10.4	P
2.10.3.4	Clearances in secondary circuits	EL 2112-18	As above Cl. 2.10.3.3	P
2.10.3.5	Clearances in circuits having starting pulses	EL 2112-19	No such circuit used	N/A
2.10.3.6	Transients from a.c. mains supply :	EL 2112-20	Satisfactory	P
2.10.3.7	Transients from d.c. mains supply :	EL 2112-21	Not connected to dc mains	N/A
2.10.3.8	Transients from telecommunication networks and cable distribution systems	EL 2112-22	No telecommunication networks and cable distribution system	N/A
2.10.3.9	Measurement of transient voltage levels		No such construction used	N/A
	a) Transients from a mains supply	EL 2112-23	No such construction used	N/A
	For an a.c. mains supply		No such construction used	N/A
	For a d.c. mains supply		No such construction used	N/A
	b) Transients from a telecommunication network	EL 2112-24	No telecommunication networks and cable distribution system	N/A
2.10.4	Creepage distances*	EL 2112-25	See below	P
2.10.4.1	General	EL 2112-26	Satisfactory (See appended table 2.10.3 & 2.10.4)	P





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 28 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

2.10.4.2	Material group and comparative tracking index : CTI tests*	EL 2112-27	Material Group IIIb assumed to be used	P
2.10.4.3	Minimum creepage distances	EL 2112-28	(See appended table 2.10.3 & 2.10.4)	P
2.10.5	Solid insulation	EL 2112-29	See below	P
2.10.5.1	General	EL 2112-30	Satisfactory (See table 2.10.5)	P
2.10.5.2	Distances through insulation	EL 2112-31	(See table 2.10.5)	P
2.10.5.3	Insulating compound as solid insulation	EL 2112-32	(See table 2.10.5)	P
2.10.5.4	Semiconductor devices	EL 2112-33	Certified component used (See table 1.5.1)	P
2.10.5.5	Cemented joints	EL 2112-34	No cemented joints	N/A
2.10.5.6	Thin sheet material – General	EL 2112-35	Satisfactory	P
2.10.5.7	Separable thin sheet material	EL 2112-36	Plastic enclosure is used as a insulation sheet	P
2.10.5.8	Non-separable thin sheet material	EL 2112-37	No such non-separable thin sheet material used	N/A
2.10.5.9	Thin sheet material – standard test procedure	EL 2112-38	See above cl. No. 2.10.5.6	N/A
	Electric strength test as per Cl.5.2.2		See above cl. No. 2.10.5.6	N/A
2.10.5.10	Thin sheet material – alternative test procedure	EL 2112-39	See below	P
	Electric strength test as per Cl.5.2.2		See table 5.2	P
2.10.5.11	Insulation in wound components	EL 2112-40	No such construction used	N/A
2.10.5.12	Wire in wound components		Approved triple insulation wire used	P
	If Peak Working voltage >71 V		See table 2.10.2	P
	a) Basic insulation not under stress	EL 2112-41	No such construction	N/A
	b) Basic, supplementary, reinforced insulation	EL 2112-42	Reinforced insulation	P
	c) Compliance with Annex U	EL 2112-43	Approved triple insulation wire used	N/A
	d) Where two winding wires in contact inside wound component; angle between 45° and 90°	EL 2112-44	The insulation tape and bobbin are provide to protect against mechanical stress	P
2.10.5.13	Wire with solvent-based enamel in wound components		No such construction used	N/A
	a) Electric strength test (Type test as per Cl.5.2.2)	EL 2112-45	See above cl. No. 2.10.5.13	N/A
	b) Electric Strength test (Routine test as per Cl.5.2.2)	EL 2112-46	See above cl. No. 2.10.5.13	N/A
2.10.5.14	Additional insulation in wound components		See above cl. No. 2.10.5.13	N/A
	If Peak Working Voltage >71V		See above cl. No. 2.10.5.13	N/A
	a) Basic insulation not under stress	EL 2112-47	See above cl. No. 2.10.5.13	N/A
	b) Supplementary, reinforced insulation	EL 2112-48	See above cl. No. 2.10.5.13	N/A
2.10.6	Construction of printed boards*		See below	P
2.10.6.1	Uncoated printed boards	EL 2112-49	Refer Cl. 2.10.3 & Cl. 2.10.4	P
2.10.6.2	Coated printed boards	EL 2112-50	No such coated board used	N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board	EL 2112-51	No such construction	N/A





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 29 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

2.10.6.4	Insulation between conductors on different layers of a printed board*		Not used to provide supplementary or double reinforced insulation	N/A
	a) Minimum Thickness of insulation: 0.4mm or	EL 2112-52	See above Cl. 2.10.6.4	N/A
	b) Confirm with one of the specification and pass the relevant tests as per Table 2R	EL 2112-53	See above Cl. 2.10.6.4	N/A
2.10.7	Component external terminations	EL 2112-54	No such construction used	N/A
2.10.8	Tests on coated printed boards and coated components		Approved PCB material used	N/A
2.10.8.1	Sample preparation and preliminary inspection*	EL 2112-55	Refer Cl.2.10.8	N/A
2.10.8.2	Thermal conditioning	EL 2112-56	Refer Cl.2.10.8	N/A
2.10.8.3	Electric strength test	EL 2112-57	Refer Cl.2.10.8	N/A
2.10.8.4	Abrasion resistance test	EL 2112-58	Refer Cl.2.10.8	N/A
2.10.9	Thermal cycling	EL 2112-59	No such construction used	N/A
2.10.10	Test for Pollution Degree 1 environment and for insulating compound	EL 2112-60	Pollution Degree 2	N/A
2.10.11	Tests for semiconductor devices and for cemented joints	EL 2112-61	No such cemented joint used	N/A
2.10.12	Enclosed and sealed parts	EL 2112-62	No such components used	N/A

*- Total number of Requirements to be observed / inspected = 10

Total No of applicable Requirement = 06

No of Requirements for which the sample passed= 06

Total number of tests to be conducted = 53

Total No of applicable Tests = 22

No. of tests for which the sample passed=22

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.



 (Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 30 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Wiring

EL 2113 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
3.0	Wiring, connections and supply*	EL 2113-00	See below	P
3.1.1	Current rating and overcurrent protection	EL 2113-01	The internal wires are suitable to carry the intended current of the equipment	P
3.1.2	Protection against mechanical damage*	EL 2113-02	The wires are smooth and free from sharp edges	P
3.1.3	Securing of internal wiring*	EL 2113-03	No excessive strain on wire and on terminal connections and no loosening of terminal connections and no damage of conductor insulation	P
3.1.4	Insulation of conductors	EL 2113-04	All conductor are insulated	P
3.1.5	Beads and ceramic insulators	EL 2113-05	No such insulators	N/A
3.1.6	Screws for electrical contact pressure*	EL 2113-06	No such construction	N/A
3.1.7	Insulating materials in electrical connections*	EL 2113-07	See above Cl. 3.1.6	N/A
3.1.8	Self-tapping and spaced thread screws*	EL 2113-08	No Self-tapping and spaced thread screws used	N/A
3.1.9	Termination of conductors : 10 N pull test	EL 2113-09	No such external conductor used	N/A
3.1.10	Sleeving on wiring*	EL 2113-10	No sleeving on wiring used	N/A

*- Total number of Requirements to be observed / inspected = 07

Total No of applicable Requirement = 03

No of Requirements for which the sample passed=03

Total number of tests to be conducted = 04

Total No of applicable Tests =02

No. of tests for which the sample passed=02

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.



 (Approving Authority)




Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 31 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Wiring

EL 2114 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
3.2	Connection to a mains supply*	EL 2114-00	Satisfactory	P
3.2.1	Means of connection		See below	P
3.2.1.1	Connection to an a.c. mains supply*	EL 2114-01	Detachable power supply cord for connection to the mains supply by means of a plug	P
3.2.1.2	Connection to a d.c. mains supply*	EL 2114-02	Not connected to dc mains	N/A
3.2.2	Multiple supply connections	EL 2114-03	No multiple supply connections	N/A
3.2.3	Permanently connected equipment	EL 2114-04	Not a permanently connected equipment	N/A
3.2.4	Appliance inlets: Are so Located that parts at hazardous voltage are not accessible during insertion or removal of the connector, connector can be inserted without difficulty and after insertion of the connector, the equipment is not supported by the connector for any position of normal use on a flat surface (Appliance inlets complying with IEC 60309 or IEC 60320 considered to comply with this requirement.	EL 2114-05	Safety certified Appliance Inlet used (See table 1.5.1)	P
3.2.5	Power supply cords		See below	P
3.2.5.1	AC power supply cords*	EL 2114-06	Safety certified power supply cord used (See table 1.5.1)	P
	Rated current (A), cross-sectional area (mm ²), AWG		10A, 0.75sqmm, 18AWG	P
3.2.5.2	DC power supply cords*	EL 2114-07	Not connected to dc mains	N/A
3.2.6	Cord anchorages and strain relief		Detachable power cord used	N/A
	Mass of the equipment: Pull Force (N):	EL 2114-08	As above Cl. 3.2.6	N/A
	b) Longitudinal displacement: 2 mm (Max)	EL 2114-09	As above Cl. 3.2.6	N/A
3.2.7	Protection against mechanical damage	EL 2114-10	No sharp point or cutting edge that may damage the supply cord	P
3.2.8	Cord guards		No such cord guard used	N/A
	Diameter or minor dimension D (mm) : Test mass (g) :	EL 2114-11	See above cl.no.3.2.8	N/A
	b) Radius of curvature of cord : 1.5 D (Min)	EL 2114-12	See above cl.no.3.2.8	N/A
3.2.9	Supply wiring space	EL 2114-13	In compliance	P





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 32 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

*- Total number of Requirements to be observed / inspected = 05

Total No of applicable Requirement = 03

No of Requirements for which the sample passed =03

Total number of tests to be conducted = 09

Total No of applicable Tests = 03

No. of tests for which the sample passed=03

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 33 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Wiring

EL 2115 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
3.3	Wiring terminals for connection of external conductors*	EL 2115-00	No such wiring terminal used	N/A
3.3.1	Wiring terminals*	EL 2115-01	See above cl.no.3.3	N/A
3.3.2	Connection of non-detachable power supply cords	EL 2115-02	See above cl.no.3.3	N/A
3.3.3	Screw terminals*	EL 2115-03	See above cl.no.3.3	N/A
3.3.4	Conductor sizes to be connected	EL 2115-04	See above cl.no.3.3	N/A
	Rated current (A), cord/cable type, cross-sectional area (mm ²)		See above cl.no.3.3	N/A
3.3.5	Wiring terminal sizes	EL 2115-05	See above cl.no.3.3	N/A
	Rated current (A), type, nominal thread diameter (mm)		See above cl.no.3.3	N/A
3.3.6	Wiring terminal design	EL 2115-06	See above cl.no.3.3	N/A
3.3.7	Grouping of wiring terminals*	EL 2115-07	See above cl.no.3.3	N/A
3.3.8	Stranded wire	EL 2115-08	See above cl.no.3.3	N/A

*- Total number of Requirements to be observed / inspected = 04

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 05

Total No of applicable Tests = 00

No. of tests for which the sample passed=N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


 (Approving Authority)




Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 34 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Wiring

EL 2116 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
3.4	Disconnection from the mains supply*	EL 2116-00	Disconnect devices provided to disconnect the equipment from mains for servicing	P
3.4.1	General Requirement A disconnect device or devices shall be provided to disconnect the equipment from the mains supply for servicing.	EL 2116-01	See below	P
3.4.2	Disconnect devices*	EL 2116-02	Appliance Inlet is used as disconnect device	P
3.4.3	Permanently connected equipment*	EL 2116-03	Not a permanently connected equipment	N/A
3.4.4	Parts which remain energized*	EL 2116-04	No parts remain energized	N/A
3.4.5	Switches in flexible cords*	EL 2116-05	No switches in flexible cords	N/A
3.4.6	Number of poles – single-phase and d.c. equipment*	EL 2116-06	Disconnect device disconnect both poles simultaneously	P
3.4.7	Number of poles – three-phase equipment*	EL 2116-07	Single phase equipment	N/A
3.4.8	Switches as disconnect devices*	EL 2116-08	No such switch is used in construction	N/A
3.4.9	Plugs as disconnect devices*	EL 2116-09	Plug on power cord is also used as a disconnect device	P
3.4.10	Interconnected equipment*	EL 2116-10	No such interconnected equipment	N/A
3.4.11	Multiple power sources*	EL 2116-11	No multiple power sources	N/A

*- Total number of Requirements to be observed / inspected = 11

Total No of applicable Requirement = 04

No of Requirements for which the sample passed= 04

Total number of tests to be conducted = 01

Total No of applicable Tests = 01

No. of tests for which the sample passed= 01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.



 (Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 35 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Wiring

EL 2117 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
3.5	Interconnection of equipment*	EL 2117-00	See below	P
3.5.1	General requirements*	EL 2117-01	Interconnection of SELV circuit complies with Cl. 2.2	P
3.5.2	Types of interconnection circuits*	EL 2117-02	SELV interconnection circuit	P
3.5.3	ELV circuits as interconnection circuits *	EL 2117-03	No ELV interconnection circuit in EUT	N/A
3.5.4	Data ports for additional equipment	EL 2117-04	No such data ports used	N/A

*- Total number of Requirements to be observed / inspected = 04

Total No of applicable Requirement = 03

No of Requirements for which the sample passed= 03

Total number of tests to be conducted = 01

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 36 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Mechanical Properties

EL 2118 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
4	PHYSICAL REQUIREMENTS*	EL 2118-00	Refer Cl. No 4.1 – 4.7	P
4.1	Stability	EL 2118-01	See below	N/A
	a) A unit having a mass of 7 kg or more shall not fall over when tilted to an angle of 10° from its normal upright position. Alternatively, the unit is placed in its intended position of use on a plane, inclined at an angle of 10° to the horizontal, and then rotated slowly through an angle of 360° about its normal vertical axis.	EL 2118-02	Mass of EUT is not exceeding 7kg	N/A
	b) A floor-standing unit having a mass of 25 kg or more shall not fall over when a force equal to 20 % of the weight of the unit, but not more than 250 N, is applied in any direction except upwards, at a height not exceeding 2 m from the floor.	EL 2118-03	Mass not exceeding 25kg	N/A
	c) A floor-standing unit shall not fall over when a constant downward force of 800 N is applied at the point of maximum moment to any horizontal surface of at least 125 mm by at least 200 mm, at a height up to 1 m from the floor.	EL 2118-04	As above	N/A

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 01

No of Requirements for which the sample passed= 01

Total number of tests to be conducted = 04

Total No of applicable Tests = 00

No. of tests for which the sample passed=N/A

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 37 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Mechanical Properties

EL 2119 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
4.2	Mechanical Strength	EL 2119-00	See below	P
4.2.1	General	EL 2119-01	Adequate mechanical strength with no hazards when subjected to unexpected handling	P
4.2.2	Steady force test, 10 N	EL 2119-02	10N force applied on components and parts serving as enclosure, No hazard occurred	P
4.2.3	Steady force test, 30 N	EL 2119-03	No such type of construction	N/A
4.2.4	Steady force test, 250 N	EL 2119-04	250N force applied on external enclosure, No hazard occurred	P
4.2.5	Impact test	EL 2119-05	See below	N/A
	a) Fall test as per Fig. 4A	EL 2119-06	EUT is a transportable equipments	N/A
	b) Swing test as per Fig. 4A	EL 2119-07	As above	N/A
4.2.6	Drop test; height (mm) :	EL 2119-08	After drop test from 1000mm, product complies with the requirements of the standard	P
4.2.7	Stress relief test	EL 2119-09	After 7h at 70°C and cooled down to room ambient, no shrinkage, distortion or loosening of enclosure parts was noticed on the enclosure.	P
4.2.8	Cathode Ray Tubes	EL 2119-10	No cathode ray tube	N/A
4.2.9	High Pressure Lamps*	EL 2119-11	No high pressure lamps	N/A
4.2.10	Wall or ceiling mounted equipment; force(N)	EL 2119-12	Not a wall or ceiling mounted equipment	N/A

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 12

Total No of applicable Tests = 06

No. of tests for which the sample passed= 06

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.



 (Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 38 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Mechanical Properties

EL 2120 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
4.3	Design and Construction*	EL 2120-00	See below	P
4.3.1	Edges and corners*	EL 2120-01	Edges and corners of the enclosure are well rounded	P
4.3.2	Handles and manual controls; force (N)	EL 2120-02	No handles and manual controls used	N/A
4.3.3	Adjustable controls	EL 2120-03	No safety relevant adjustable controls provided	N/A
4.3.4	Securing of parts	EL 2120-04	All parts are secured	P
4.3.5	Connections by Plugs and Sockets*	EL 2120-05	Approved plug and Appliance Inlet is used	P
4.3.6	Direct plug-in equipment	EL 2120-06	Not a direct plug-in equipment	N/A
	Torque	EL 2120-07	See above clause no. 4.3.6	N/A
	Compliance with the relevant mains plug standard	EL 2120-08	See above clause no. 4.3.6	N/A
4.3.7	Heating elements in earthed equipment*	EL 2120-09	No heating elements	N/A
4.3.8	Batteries: Portable secondary sealed cells and batteries (Other than button) containing alkaline or other non-acid electrolyte Comply with IEC 62133.		No such battery used in construction	N/A
	a) Overcharging of a rechargeable battery	EL 2120-10	See above clause no. 4.3.8	N/A
	b) Unintentional charging of a non-rechargeable battery	EL 2120-11	See above clause no. 4.3.8	N/A
	c) Reverse charging of a rechargeable battery	EL 2120-12	See above clause no. 4.3.8	N/A
	d) Excessive discharging rate for any battery	EL 2120-13	See above clause no. 4.3.8	N/A
	e) Electric strength as per Cl.5.3.9.2	EL 2120-14	See above clause no. 4.3.8	N/A
4.3.9	Oil & grease*	EL 2120-15	No Oil & Grease	N/A
4.3.10	Dust, powders, liquids and gases	EL 2120-16	Equipment does not produce dust, powder, liquids and gases	N/A
4.3.11	Containers for liquids or gases	EL 2120-17	No such containers for liquids or gases	N/A
4.3.12	Flammable liquids	EL 2120-18	No such flammable liquids used	N/A
4.3.13	Radiation		See below	N/A
4.3.13.2	Ionizing radiation	EL 2120-19	No ionizing radiation	N/A
4.3.13.3	Effect of ultraviolet (UV) radiation on materials	EL 2120-20	No UV radiation	N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation	EL 2120-21	No UV radiation	N/A
4.3.13.5	Lasers (including laser diodes) and LED's:		See below	N/A
4.3.13.5.1	Lasers (including laser diodes) For laser see IEC 60825-1, respective part as applicable.	EL 2120-22	No laser used	N/A
	Laser class		As above Cl. 4.3.13.5.1	N/A





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 39 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

4.3.13.5.2	Light emitting diodes (LED's)	EL 2120-23	Low power LED used for functional indication only	N/A
4.3.13.6	Other types*	EL 2120-24	No other type of radiation	N/A

*- Total number of Requirements to be observed / inspected = 06

Total No of applicable Requirement = 03

No of Requirements for which the sample passed= 03

Total number of tests to be conducted = 19

Total No of applicable Tests = 01

No. of tests for which the sample passed= 01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.

.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 40 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Mechanical Properties

EL 2121 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
4.4	Protection against hazardous moving parts	EL 2121-00	No such hazardous moving parts in operator access area	N/A
4.4.1	General	EL 2121-01	See above Cl. 4.4	N/A
4.4.2	Protection in operator access areas	EL 2121-02	See above Cl. 4.4	N/A
4.4.3	Protection in restricted access locations *	EL 2121-03	See above Cl. 4.4	N/A
4.4.4	Protection in service access areas*	EL 2121-04	See above Cl. 4.4	N/A
4.4.5	Protection against moving fan blades	EL 2121-05	See above Cl. 4.4	N/A
4.4.5.1	General*	EL 2121-06	See above Cl. 4.4	N/A
	Not considered likely to cause pain or injury. A).....:	EL 2121-07	See above Cl. 4.4	N/A
	Is considered likely to cause pain, not injury. B)	EL 2121-08	See above Cl. 4.4	N/A
	Considered likely to cause injury. C).....:	EL 2121-09	See above Cl. 4.4	N/A
4.4.5.2	Protection for users*	EL 2121-10	See above Cl. 4.4	N/A
	Use of symbol or warning*	EL 2121-11	See above Cl. 4.4	N/A
4.4.5.3	Protection for service persons*	EL 2121-12	See above Cl. 4.4	N/A
	Use of symbol or warning *	EL 2121-13	See above Cl. 4.4	N/A

*- Total number of Requirements to be observed / inspected = 07

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 07

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

.....

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 41 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Thermal Properties

EL 2122 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
4.5	Thermal Requirements*	EL 2122-00	See below	P
4.5.1	General	EL 2122-01	Satisfactory (See table 4.5)	P
4.5.2	Temperature tests under normal load condition as per Cl.1.4.5	EL 2122-02	Operating the EUT under normal load condition until obtaining the steady state condition (See table 4.5)	P
4.5.3	Temperature limits for materials*	EL 2122-03	Temperature rise of different parts is still complying the relevant requirement of this standard (See table 4.5)	P
4.5.4	Touch temperature limits*	EL 2122-04	Touch temperature limits is still complying the relevant requirement of this standard (See table 4.5)	P
4.5.5	Resistance to abnormal heat	EL 2122-05	Certified Appliance inlet used (See table 1.5.1)	N/A

*- Total number of Requirements to be observed / inspected = 03

Total No of applicable Requirement = 03

No of Requirements for which the sample passed= 03

Total number of tests to be conducted = 03

Total No of applicable Tests = 02

No. of tests for which the sample passed= 02

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 42 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Mechanical Properties

EL 2123 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
4.6	Openings in enclosures*	EL 2123-00	No such opening used	N/A
4.6.1	Top and side openings	EL 2123-01	See above Cl.4.6	N/A
	Dimensions (mm) :		See above Cl.4.6	N/A
4.6.2	Bottoms of fire enclosures :	EL 2123-02	See above Cl.4.6	N/A
	Construction of the bottom, dimensions (mm) :		See above Cl.4.6	N/A
4.6.3	Doors or covers in fire enclosures*	EL 2123-03	See above Cl.4.6	N/A
4.6.4	Openings in transportable equipment	EL 2123-04	See above Cl.4.6	N/A
4.6.4.1	Constructional design measures	EL 2123-05	See above Cl.4.6	N/A
	Dimensions (mm)		See above Cl.4.6	N/A
4.6.4.2	Evaluation measures for larger openings	EL 2123-06	See above Cl.4.6	N/A
4.6.4.3	Use of etalized parts	EL 2123-07	See above Cl.4.6	N/A
4.6.5	Adhesives for constructional purposes: Compliance is checked by examination of the construction and of the available data. If such data is not available, compliance is checked by the following tests.	EL 2123-08	See above Cl.4.6	N/A
	a) Temperature Conditioning at : 100 °C ± 2 °C for one week; or 90 °C ± 2 °C for three weeks; or 82 °C ± 2 °C for eight weeks.	EL 2123-09	See above Cl.4.6	N/A
	After temperature conditioning b) Leave the sample between 20°C to 30°C for 1 hour	EL 2123-10	See above Cl.4.6	N/A
	c) Place the sample at – 40°C±2°C for 4 hours	EL 2123-11	See above Cl.4.6	N/A
	d) Remove and allow the sample to come to any convenient temperature between 20 °C and 30 °C for 8 h;	EL 2123-12	See above Cl.4.6	N/A
	e) Place the sample in a cabinet at 91 % to 95 % relative humidity for 72 h;	EL 2123-13	See above Cl.4.6	N/A
	f) Remove the sample and leave it at any convenient temperature between 20 °C and 30 °C for 1 h;	EL 2123-14	See above Cl.4.6	N/A
	g) Place the sample in an oven at the temperature used for the temperature conditioning for 4 h;	EL 2123-15	See above Cl.4.6	N/A
	h) Remove the sample and allow it to reach any convenient temperature between 20 °C; and 30 °C for 8 h.	EL 2123-16	See above Cl.4.6	N/A
	i) The sample is then immediately subjected to the tests of Cl.4.2 as applicable.	EL 2123-17	See above Cl.4.6	N/A

22





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 43 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

*- Total number of Requirements to be observed / inspected = 02

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 16

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

.....
(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 44 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Fire Safety

EL 2124 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
4.7	Resistance to fire*	EL 2124-00	See below	P
4.7.1	Reducing the risk of ignition and spread of flame		Components and material have adequate flammability classification (See table 1.5.1)	P
	Method 1, selection and application of components wiring and materials OR	EL 2124-01	Selection and application of components and materials that reduce the possibility of ignition and spread of flame and use of fire enclosure	P
	Method 2, application of all of simulated fault condition tests	EL 2124-02	Method 2 not used	N/A
4.7.2	Conditions for a fire enclosure*		See below	P
4.7.2.1	Parts requiring a fire enclosure*	EL 2124-03	All parts cover inside fire enclosure	P
4.7.2.2	Parts not requiring a fire enclosure	EL 2124-04	All parts cover inside fire enclosure	N/A
4.7.3	Materials*	EL 2124-05	See below	P
4.7.3.1	General*	EL 2124-06	See below	P
	a) Class of material used*	EL 2124-07	Components and materials have adequate flammability classes (See table 1.5.1)	P
	b) Where HB40 CLASS MATERIAL, HB75 CLASS MATERIAL or HBF CLASS FOAMED MATERIAL, is required, material passing the glow-wire test at 550 °C according to IEC 60695-2-11 is acceptable as an alternative.	EL 2124-08	No such material used	N/A
	c) Where it is not practical to protect components against overheating under fault conditions, the components shall be mounted on V-1 CLASS MATERIAL. Additionally, such components shall be separated from material of a class lower than V-1 CLASS MATERIAL by at least 13 mm of air, or by a solid barrier of V-1 CLASS MATERIAL.	EL 2124-09	Certified material used (See table 1.5.1)	P
4.7.3.2	Materials for fire enclosures		See below	N/A
	a) For MOVABLE EQUIPMENT having a total mass not exceeding 18 kg, the material of a FIRE ENCLOSURE, in the thinnest significant wall thickness used, shall be of V-1 CLASS MATERIAL or shall pass the test of Clause A.2.	EL 2124-10	Certified material used (See table 1.5.1)	N/A
	b) For MOVABLE EQUIPMENT having a total mass exceeding 18 kg and for all STATIONARY EQUIPMENT, the material of a FIRE ENCLOSURE, in the thinnest significant wall thickness used, shall be of 5VB CLASS MATERIAL or shall pass the test of Clause A.1.	EL 2124-11	Equipment having total mass not exceeding 18kg	N/A





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 45 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

	c) Materials for components that fill an opening in a FIRE ENCLOSURE, and that are intended to be mounted in this opening shall : be of V-1 CLASS MATERIAL; or pass the tests of Clause A.2; or comply with the flammability requirements of the relevant IEC component standard	EL 2124-12	See above Cl.4.7.3.2	N/A
	d) Plastic materials of a FIRE ENCLOSURE shall be located more than 13 mm through air from arcing parts such as unenclosed commutators and unenclosed switch contacts.	EL 2124-13	See above Cl.4.7.3.2	N/A
	e) Plastic materials of a FIRE ENCLOSURE located less than 13mm through air from non-arcing parts which, under any condition of normal or abnormal operation, could attain a temperature sufficient to ignite the material, shall be capable of passing the test of IEC 60695-2-20	EL 2124-14	See above Cl.4.7.3.2	N/A
4.7.3.3	Materials for components and other parts outside fire enclosures *		No parts outside of fire enclosure	N/A
	a) Materials shall be of : – HB75 CLASS MATERIAL if the thinnest significant thickness of this material is < 3 mm, or – HB40 CLASS MATERIAL if the thinnest significant thickness of this material is ≥ 3 mm, or – HBF CLASS FOAMED MATERIAL.*	EL 2124-15	See above Cl.4.7.3.3	N/A
	b) Connectors shall comply with one of the following: – be made of V-2 CLASS MATERIAL; or – pass the tests of Clause A.2; or – comply with the flammability requirements of the relevant IEC component standard; or – be mounted on V-1 CLASS MATERIAL and be of a small size; or – be located in a SECONDARY CIRCUIT supplied by a power source that is limited to a maximum of 15 VA (see 1.4.11) under normal operating conditions and after a single fault in the equipment (see 1.4.14).	EL 2124-16	See above Cl.4.7.3.3	N/A
4.7.3.4	Materials for components and other parts inside fire enclosures		Satisfactory	P



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 46 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

	a) Inside FIRE ENCLOSURES, materials for components and other parts shall comply with one of the following: – be of V-2 CLASS MATERIAL or HF-2 CLASS FOAMED MATERIAL; or – pass the flammability test described in Clause A.2; or – meet the flammability requirements of a relevant IEC component standard that includes such requirements.	EL 2124-17	All components are mounted on approved class of material (See table 1.5.1)	P
	Requirements for voltage dependent resistors (VDR's) are in Annex Q.*	EL 2124-18	Certified Varistor used	N/A
4.7.3.5	Materials for air filter assemblies : Air filter assemblies shall be constructed of V-2 CLASS MATERIAL, or HF-2 CLASS FOAMED MATERIAL.	EL 2124-19	No air filter assemblies	N/A
4.7.3.6	Materials used in high-voltage components		No high voltage components	N/A
	a) High-voltage components operating at peak-to-peak voltages exceeding 4 kV shall either be of V-2 CLASS MATERIAL, or HF-2 CLASS FOAMED MATERIAL, or comply with 14.4 of IEC 60065 or pass the needle flame test according to IEC 60695-11-5.	EL 2124-20	Voltage not exceeding 4kV	N/A
	b) Compliance is checked by inspection of the equipment and material data sheets and, if necessary, by – the tests for V-2 CLASS MATERIAL or HF-2 CLASS FOAMED MATERIAL; or – the test described in 14.4 of IEC 60065; or – the needle flame test according to IEC 60695-11-5.	EL 2124-21	See above Cl.4.7.3.6	N/A
	c) In addition to above, the following details apply, referring to clauses of IEC 60695-11-5: Clause 7 - Severities	EL 2124-22	See above Cl.4.7.3.6	N/A
	Clause 8 – Conditioning	EL 2124-23	See above Cl.4.7.3.6	N/A
	Clause 11 – Evaluation of test results	EL 2124-24	See above Cl.4.7.3.6	N/A



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 47 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

*- Total number of Requirements to be observed / inspected = 07

Total No of applicable Requirement = 05

No of Requirements for which the sample passed= 05

Total number of tests to be conducted = 18

Total No of applicable Tests = 03

No. of tests for which the sample passed= 03

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 48 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Insulating Properties

EL 2125 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
5.0	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS*	EL 2125-00	See below	P
5.1	Touch current and protective conductor current*	EL 2125-01	Satisfactory	P
5.1.2	Configuration of equipment under test (EUT)*	EL 2125-02	See below	P
5.1.2.1	Single connection to an a.c. mains supply*	EL 2125-03	Equipment has only single a.c. mains connection	P
5.1.2.2	Redundant multiple connections to an a.c. mains supply*	EL 2125-04	No multiple power sources	N/A
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply	EL 2125-05	No multiple power sources	N/A
5.1.3	Test circuit	EL 2125-06	See below	P
5.1.4	Application of measuring instrument	EL 2125-07	Testing using D-1 measuring instrument	P
5.1.5	Test procedure	EL 2125-08	Applied	P
5.1.6	Test measurements		See table 5.1.6	P
	a) Value of voltage, U ₂ measured using the instrument as per Fig. D.1	EL 2125-09	See table 5.1.6	P
	b) Measured touch current (mA):	EL 2125-10	See table 5.1.6	P
	c) Calculated value of TOUCH CURRENT (mA) = U ₂ / 500	EL 2125-11	See table 5.1.6	P
	d) Measured protective conductor current (mA)	EL 2125-12	No such protective conductor current	N/A
	e) Max. protective conductor current = 5% of Input current	EL 2125-13	No such protective conductor current	N/A
5.1.7	Equipment with touch current exceeding 3.5 mA	EL 2125-14	The touch current not exceeded 3.5 mA	N/A
5.1.7.1	General	EL 2125-15	See below	N/A
5.1.7.2	Simultaneous multiple connections to the supply	EL 2125-16	No such equipment	N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks	EL 2125-17	No connection to the telecommunication network or cable distribution system	N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system	EL 2125-18	Refer above Cl. No.5.1.8	N/A
	Supply voltage (V)		Refer above Cl. No.5.1.8	N/A
	Measured touch current (mA)		Refer above Cl. No.5.1.8	N/A
	Max. allowed touch current (mA)		Refer above Cl. No.5.1.8	N/A
5.1.8.2	Summation of touch currents from telecommunication networks	EL 2125-19	No connection to the telecommunication network or distribution	N/A
	a) EUT with earthed telecommunication ports :		Refer above Cl. No.5.1.8.2	N/A
	b) EUT whose telecommunication ports have no reference to protective earth		Refer above Cl. No.5.1.8.2	N/A





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 49 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

*- Total number of Requirements to be observed / inspected = 05

Total No of applicable Requirement = 04

No of Requirements for which the sample passed= 04

Total number of tests to be conducted = 15

Total No of applicable Tests = 06

No. of tests for which the sample passed= 06

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 50 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Insulating Properties

EL 2126 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
5.2	Electric strength*	EL 2126-00	See below	P
5.2.1	General*	EL 2126-01	See appended table 5.2	P
5.2.2	Test procedure		Table 5B Used	P
	a) The test voltages for electric strength for the appropriate grade of insulation [FUNCTIONAL INSULATION if required by 5.3.4 b), BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION] are as specified in either: – Table 5B using the PEAK WORKING VOLTAGE (U), as determined in 2.10.2; or – Table 5C using the REQUIRED WITHSTAND VOLTAGE, as determined in G.4.	EL 2126-02	No breakdown observed during the test, performance found satisfactory after the test.	P

*- Total number of Requirements to be observed / inspected = 02

Total No of applicable Requirement = 02

No of Requirements for which the sample passed= 02

Total number of tests to be conducted = 01

Total No of applicable Tests = 01

No. of tests for which the sample passed= 01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 51 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Insulating Properties

EL 2127 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
5.3	Abnormal operating and fault conditions	EL 2127-00	See below	P
5.3.1	Protection against overload and abnormal operation	EL 2127-01	See appended table 5.3	P
5.3.2	Motors	EL 2127-02	No such motor used	N/A
5.3.3	Transformers	EL 2127-03	Tested within Appliance (See appended Annex C & table C.2)	P
5.3.4	Functional insulation:	EL 2127-04	Functional insulation complied with 5.3.4 (C)	P
5.3.5	Electromechanical components	EL 2127-05	No such components	N/A
5.3.6	Audio amplifiers in ITE :	EL 2127-06	No such audio amplifier used within the EUT	N/A
5.3.7	Simulation of faults	EL 2127-07	See appended table 5.3	P
5.3.8	Unattended equipment	EL 2127-08	No such equipment	N/A
5.3.9	Compliance criteria for abnormal operating and fault conditions*		See below	P
5.3.9.1	During the tests	EL 2127-09	No fire occurred, No molten metal was emitted	P
5.3.9.2	After the tests	EL 2127-10	After test, the EUT still complies with the relevant requirements of this standard.	P

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 11

Total No of applicable Tests = 07

No. of tests for which the sample passed= 07

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.



 (Approving Authority)




Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 52 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Communicating Connection

EL 2128 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment	EL 2128-00	No connection to telecommunication networks	N/A
6.1.1	Protection from hazardous voltages	EL 2128-01	See above cl. No 6.1	N/A
6.1.2	Separation of the telecommunication network from earth*		See above cl. No 6.1	N/A
6.1.2.1	<p>Requirements:</p> <p>Surge suppressors that bridge the insulation shall have a minimum rated operating voltage U_{op} of</p> $U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$ <p>Where U_{peak} is 360V or 180V</p> <p>ΔU_{sp} is the maximum increase of the rated operating voltage due to variations in component production (If not specified by the manufacturer, shall be taken as 10% of the rated operating voltage of the component)</p> <p>ΔU_{sa} is the maximum increase of the rated operating voltage due to the component ageing over the expected life of the equipment (If not specified by the manufacturer, shall be taken as 10% of the rated operating voltage of the component)</p> <p>-Insulation is subjected to electric strength test according to 5.2.2. The a.c test voltage is 1.5kV or 1.0kV</p> <p>- Components bridging the insulation that are left in place during electric strength testing shall not be damaged. There shall be no breakdown of insulation during electric strength testing.</p>	EL 2128-02	See above cl. No 6.1	N/A
6.1.2.2	Exclusions	EL 2128-03	See above cl. No 6.1	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 04

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


 (Approving Authority)




Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 53 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Communicating Connection

EL 2129 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
6.2	Protection of equipment users from overvoltages on telecommunication networks*	EL 2129-00	No connection to telecommunication networks	N/A
6.2.1	Separation requirements	EL 2129-01	See above cl. No. 6.2	N/A
6.2.2	Electric strength test procedure	EL 2129-02	See above cl. No. 6.2	N/A
6.2.2.1	Impulse test	EL 2129-03	See above cl. No. 6.2	N/A
6.2.2.2	Steady-state test	EL 2129-04	See above cl. No. 6.2	N/A
6.2.2.3	Compliance criteria	EL 2129-05	See above cl. No. 6.2	N/A

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 05

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 54 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Communicating Connection

EL 2130 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
6.3	Protection of the telecommunication wiring system from overheating	EL 2130-00	No connection to telecommunication networks	N/A
	a) If current limiting is due to the inherent impedance of the power source, the output current into any resistive load, including a short-circuit, is measured. The current limit shall not be exceeded after 60 s of test. Max. output current (A) :	EL 2130-01	See above 6.3	N/A
	b) If current limiting is provided by an overcurrent protective device having a specified time/current characteristic: – the time/current characteristic shall show that a current equal to 110 % of the current limit will be interrupted within 60 min; and	EL 2130-02	See above 6.3	N/A
	c) the output current into any resistive load, including a short-circuit, with the overcurrent protective device bypassed, measured after 60 s of test, shall not exceed 1 000/U, where U is the output voltage measured in accordance with 1.4.5 with all load circuits disconnected.	EL 2130-03	See above 6.3	N/A
	d) If current limiting is provided by an overcurrent protective device that does not have a specified time/current characteristic: – the output current into any resistive load, including a short-circuit, shall not exceed the current limit after 60 s of test; and – the output current into any resistive load, including a short-circuit, with the overcurrent protective device bypassed, measured after 60 s of test, shall not exceed 1 000/U, where U is the output voltage measured in accordance with 1.4.5 with all load circuits Disconnected.	EL 2130-04	See above 6.3	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 05

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)



 (Approving Authority)




Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 55 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Connection to cable distribution system

EL 2131 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
7	Connection to cable distribution systems*	EL 2131-00	No connection to cable distribution system	N/A
7.1	General requirements*	EL 2131-01	See above Cl. 7	N/A
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment	EL 2131-02	See above Cl. 7	N/A
7.3	Protection of equipment users from overvoltages on the cable distribution system	EL 2131-03	See above Cl. 7	N/A
7.4	Insulation between primary circuits and cable distribution systems	EL 2131-04	See above Cl. 7	N/A
7.4.1	General	EL 2131-05	See above Cl. 7	N/A
7.4.2	Voltage surge test	EL 2131-06	See above Cl. 7	N/A
7.4.3	Impulse test	EL 2131-07	See above Cl. 7	N/A

*- Total number of Requirements to be observed / inspected = 02

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 06

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 56 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Fire Safety

EL 2132 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE	EL 2132-00	See below	N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)	EL 2132-01	Mass not exceeding 18kg	N/A
A.1.1	Samples:	EL 2132-02	See above A.1	N/A
	Wall thickness (mm):		See above A.1	N/A
A.1.2	Conditioning of samples; temperature (°C) :	EL 2132-03	See above A.1	N/A
A.1.3	Mounting of samples :	EL 2132-04	See above A.1	N/A
A.1.4	Test flame (see IEC 60695-11-3)	EL 2132-05	See above A.1	N/A
	Flame A, B, C or D :		See above A.1	N/A
A.1.5	Test procedure	EL 2132-06	See above A.1	N/A
A.1.6	Compliance criteria	EL 2132-07	See above A.1	N/A
	Sample 1 burning time (s):		See above A.1	N/A
	Sample 2 burning time (s):		See above A.1	N/A
	Sample 3 burning time (s):		See above A.1	N/A
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)	EL 2132-08	Certified material used (See table 1.5.1)	N/A
A.2.1	Samples, material:	EL 2132-09	See above A.2	N/A
	Wall thickness (mm):		See above A.2	N/A
A.2.2	Conditioning of samples; temperature (°C) :	EL 2132-10	See above A.2	N/A
A.2.3	Mounting of samples :	EL 2132-11	See above A.2	N/A
A.2.4	Test flame (see IEC 60695-11-4)	EL 2132-12	See above A.2	N/A
	Flame A, B or C :		See above A.2	N/A
A.2.5	Test procedure	EL 2132-13	See above A.2	N/A
A.2.6	Compliance criteria	EL 2132-14	See above A.2	N/A
	Sample 1 burning time (s):		See above A.2	N/A
	Sample 2 burning time (s):		See above A.2	N/A
	Sample 3 burning time (s):		See above A.2	N/A
A.2.7	Alternative test acc. To IEC 60695-11-5, cl. 5 and 9	EL 2132-15	See above A.2	N/A
	Sample 1 burning time (s):		See above A.2	N/A
	Sample 2 burning time (s):		See above A.2	N/A
	Sample 3 burning time (s):		See above A.2	N/A





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 57 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

A.3	Hot flaming oil test (see 4.6.2)	EL 2132-16	No such openings	N/A
A.3.1	Mounting of samples	EL 2132-17	See above A.3	N/A
A.3.2	Test procedure	EL 2132-18	See above A.3	N/A
A.3.3	Compliance criterion	EL 2132-19	See above A.3	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 20

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 58 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Insulating Properties

EL 2133 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)	EL 2133-00	See below	N/A
B.1	General requirements	EL 2133-01	No such motor used	N/A
	Position :		See above B.1	N/A
	Manufacturer :		See above B.1	N/A
	Type :		See above B.1	N/A
	Rated values :		See above B.1	N/A
B.2	Test conditions	EL 2133-02	See above B.1	N/A
B.3	Maximum temperatures	EL 2133-03	See above B.1	N/A
B.4	Running overload test	EL 2133-04	See above B.1	N/A
B.5	Locked-rotor overload test	EL 2133-05	See above B.1	N/A
	Test duration (days):		See above B.1	N/A
	Electric strength test: test voltage (V) :		See above B.1	N/A
B.6	Running overload test for d.c. motors in secondary circuits	EL 2133-06	See above B.1	N/A
B.6.1	General	EL 2133-07	See above B.1	N/A
B.6.2	Test procedure	EL 2133-08	See above B.1	N/A
B.6.3	Alternative test procedure	EL 2133-09	See above B.1	N/A
B.6.4	Electric strength test; test voltage (V):	EL 2133-10	See above B.1	N/A
B.7	Locked-rotor overload test for d.c. motors in secondary circuits	EL 2133-11	See above B.1	N/A
B.7.1	General	EL 2133-12	See above B.1	N/A
B.7.2	Test procedure	EL 2133-13	See above B.1	N/A
B.7.3	Alternative test procedure	EL 2133-14	See above B.1	N/A
B.7.4	Electric strength test; test voltage (V) :	EL 2133-15	See above B.1	N/A
B.8	Test for motors with capacitors	EL 2133-16	See above B.1	N/A
B.9	Test for three-phase motors	EL 2133-17	See above B.1	N/A
B.10	Test for series motors	EL 2133-18	See above B.1	N/A
	Operating voltage (V) :		See above B.1	N/A





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 59 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 19

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 60 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2134 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)*	EL 2134-00	Satisfactory	P
	Position :		Transformer mounted on the approved PCB	P
	Manufacturer :		See table 1.5.1	P
	Type :		See table 1.5.1	P
	Rated values :		See table 1.5.1	P
	Method of protection:		Overcurrent protection by circuit design	P
C.1	Overload test	EL 2134-01	See table 5.3	P
C.2	Insulation	EL 2134-02	Insulation fulfill the requirement for Cl. 2.10 and Cl. 5.2 (See table 2.10.2 & table 5.2)	P
	Protection from displacement of windings:		Windings are twisted and soldered on pins and Approved Triple insulated wire used	P

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 01

No of Requirements for which the sample passed= 01

Total number of tests to be conducted = 02

Total No of applicable Tests = 02

No. of tests for which the sample passed= 02

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 61 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Insulating Properties

EL 2135 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)	EL 2135-00	Satisfactory (See Clause 5.1.4)	P
D.1	Measuring instrument	EL 2135-01	Satisfactory (D-1 network used)	P
D.2	Alternative measuring instrument	EL 2135-02	Alternative not used	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00


No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 03

Total No of applicable Tests = 02

No. of tests for which the sample passed= 02

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 62 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Thermal Properties

EL 2136- V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)	EL2136-00	Resistance method not used (Refer table 4.5)	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 01

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 63 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2137 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)	EL2137-00	Satisfactory (See above Cl. 2.10)	P

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 01

Total No of applicable Tests = 01

No. of tests for which the sample passed= 01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 64 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical safety

EL 2138 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES	EL 2138-00	Alternate method not used	N/A
G.1	Clearances	EL 2138-01	See above G	N/A
G.1.1	General	EL 2138-02	See above G	N/A
G.1.2	Summary of the procedure for determining minimum clearances	EL 2138-03	See above G	N/A
G.2	Determination of mains transient voltage (V)	EL 2138-04	See above G	N/A
G.2.1	AC Mains supply	EL 2138-05	See above G	N/A
G.2.2	Earthed d.c. mains supplies	EL 2138-06	See above G	N/A
G.2.3	Unearthed d.c. mains supplies	EL 2138-07	See above G	N/A
G.2.4	Battery operation	EL 2138-08	See above G	N/A
G.3	Determination of telecommunication network transient voltage (V)	EL 2138-09	See above G	N/A
G.4	Determination of required withstand voltage (V)	EL 2138-10	See above G	N/A
G.4.1	Mains transients and internal repetitive peaks	EL 2138-11	See above G	N/A
G.4.2	Transients from telecommunication networks:	EL 2138-12	See above G	N/A
G.4.3	Combination of transients	EL 2138-13	See above G	N/A
G.4.4	Transients from cable distribution systems	EL 2138-14	See above G	N/A
G.5	Measurement of transient voltages (V)	EL 2138-15	See above G	N/A
	a) Transients from a mains supply		See above G	N/A
	For an a.c. mains supply		See above G	N/A
	For a d.c. mains supply		See above G	N/A
	b) Transients from a telecommunication network		See above G	N/A
G.6	Determination of minimum clearances	EL 2138-16	See above G	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 17

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)



 (Approving Authority)

TRF No. BIS_IT/PA_IS13252_V1.3





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 65 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Radiation Safety

EL 2139 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
H	ANNEX H, IONIZING RADIATION (see 4.3.13)	EL 2139-00	Equipment does not produce ionizing radiation	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 01

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


.....
(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 66 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2140 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)*	EL 2140-00	Appliance Inlet is used	N/A
	Metal(s) used :		See above J	N/A

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 00

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


.....
(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 67 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to General Requirement

EL 2141 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)*	EL 2141-00	No thermal control inside the equipment	N/A
K.1	Making and breaking capacity	EL 2141-01	See above K	N/A
K.2	Thermostat reliability; operating voltage (V) :	EL 2141-02	See above K	N/A
K.3	Thermostat endurance test; operating voltage (V) :	EL 2141-03	See above K	N/A
K.4	Temperature limiter endurance; operating voltage (V) :	EL 2141-04	See above K	N/A
K.5	Thermal cut-out reliability	EL 2141-05	See above K	N/A
K.6	Stability of operation	EL 2141-06	See above K	N/A

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 06

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


.....
(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 68 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to General Requirement

EL 2142 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)*	EL 2142-00	Satisfactory	P
L.1	Typewriters*	EL 2142-01	No typewriters used	N/A
L.2	Adding machines and cash registers*	EL 2142-02	No adding machines and cash registers used	N/A
L.3	Erasers*	EL 2142-03	No erasers used	N/A
L.4	Pencil sharpeners*	EL 2142-04	No pencil sharpeners used	N/A
L.5	Duplicators and copy machines*	EL 2142-05	No duplicators and copy machines used	N/A
L.6	Motor-operated files*	EL 2142-06	No motor operated files used	N/A
L.7	Other business equipment*	EL 2142-07	Equipment is operated at normal operating instructions	P

*- Total number of Requirements to be observed / inspected = 08

Total No of applicable Requirement = 02

No of Requirements for which the sample passed= 02

Total number of tests to be conducted = 00

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 69 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2143 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)	EL 2143-00	See below	N/A
M.1	Introduction*	EL 2143-01	No telephone ringing signals	N/A
M.2	Method A	EL 2143-02	See above M.1	N/A
M.3	Method B	EL 2143-03	See above M.1	N/A
M.3.1	Ringling signal	EL 2143-04	See above M.1	N/A
M.3.1.1	Frequency (Hz)	EL 2143-05	See above M.1	N/A
M.3.1.2	Voltage (V)	EL 2143-06	See above M.1	N/A
M.3.1.3	Cadence; time (s), voltage (V)	EL 2143-07	See above M.1	N/A
M.3.1.4	Single fault current (mA)	EL 2143-08	See above M.1	N/A
M.3.2	Tripping device and monitoring voltage	EL 2143-09	See above M.1	N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage	EL 2143-10	See above M.1	N/A
M.3.2.2	Tripping device	EL 2143-11	See above M.1	N/A
M.3.2.3	Monitoring voltage (V)	EL 2143-12	See above M.1	N/A

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted =12

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

.....

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 70 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical safety

EL 2144 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
N	ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)	EL 2144-00	No such equipment	N/A
N.1	ITU-T impulse test generators	EL 2144-01	See above N	N/A
N.2	IEC 60065 impulse test generator	EL 2144-02	See above N	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 03

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


.....
(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 71 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to General Requirements

EL 2145- V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
P	ANNEX P, NORMATIVE REFERENCES	EL 2145-00	In-Compliance	P

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 01

Total No of applicable Tests = 01

No. of tests for which the sample passed= 01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 72 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to General Requirements

EL 2146 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
Q	ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)	EL 2146-00	Certified Varistor used	N/A
	A VDR shall comply with iec 61051-2, whether a fire enclosure is provided or not, taking into account all of the following:		See above Q	N/A
	a) Preferred climatic categories Lower category temperature: -10°C Upper category temperature: +85°C Duration of damp Test, steady state test: 21 days		See above Q	N/A
	b) Maximum continuous voltage: Atleast 1,25 times the rated voltage of the equipment or Atleast 1,25 times the upper voltage of the rated voltage range		See above Q	N/A
	c) Combined pulse :	EL 2146-01	See above Q	N/A
	d) Body of the VDR shall comply with Needle flame test according to IEC 60695-11-5 with the following test severities: duration of application of the test flame: 10 s after flame time: 5s [This test is not required if VDR complies with V-1 CLASS MATERIAL]	EL 2146-02	See above Q	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 03

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)



 (Approving Authority)




Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 73 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to General Requirement

EL 2147- V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
R	ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES*	EL 2147-00	See below	N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)*	EL 2147-01	No such coated printed board used	N/A
R.2	Reduced clearances (see 2.10.3)*	EL 2147-02	See above Annex R.1	N/A

*- Total number of Requirements to be observed / inspected = 03

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 00

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~p-passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


.....
(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 74 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to General Requirement

EL 2148 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)*	EL 2148-00	No such equipment	N/A
S.1	Test equipment*	EL 2148-01	See above S	N/A
S.2	Test procedure*	EL 2148-02	See above S	N/A
S.3	Examples of waveforms during impulse testing*	EL 2148-03	See above S	N/A

*- Total number of Requirements to be observed / inspected = 04

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 00

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


.....
(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 75 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Protection against Ingress of water

EL 2149 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)*	EL 2149-00	IP protection class is IPX0	N/A

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 00

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 76 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Wiring

EL 2150 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)	EL2150-00	Approved triple insulation wire used (See table 1.5.1)	N/A
U.1	GENERAL	EL2150-01	See above U	N/A
U.2	TYPE TESTS	EL2150-02	See above U	N/A
U.2.1	GENERAL	EL2150-03	See above U	N/A
U.2.2	ELECTRIC STRENGTH	EL2150-04	See above U	N/A
U.2.2.1	SOLID ROUND WINDING WIRE AND STRANDED WINDING WIRES	EL2150-05	See above U	N/A
U.2.2.1.1	WIRES WITH NOMINAL CONDUCTOR DIAMETER UPTO AND INCLUDING 0.100MM	EL2150-06	See above U	N/A
U.2.2.1.2	WIRES WITH NOMINAL CONDUCTOR DIAMETER OVER 0.100MM AND INCLUDING 2.500MM	EL2150-07	See above U	N/A
U.2.2.1.3	WIRES WITH NOMINAL CONDUCTOR DIAMETER OVER 2.500MM	EL2150-08	See above U	N/A
U.2.2.2	SQUARE OR RECTANGULAR WIRES	EL2150-09	See above U	N/A
U.2.3	FLEXIBILITY AND ADHERENCE	EL2150-10	See above U	N/A
U.2.4	HEAT SHOCK	EL2150-11	See above U	N/A
U.2.5	RETENTION OF ELECTRIC STRENGTH AFTER BENDING	EL2150-12	See above U	N/A
U.3	TESTING DURING MANUFACTURING	EL2150-13	See above U	N/A
U.3.1	GENERAL	EL2150-14	See above U	N/A
U.3.2	ROUTINE TESTS	EL2150-15	See above U	N/A
U.3.3	SAMPLING TEST	EL2150-16	See above U	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 17

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 77 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2151 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1) *	EL 2151-00	See below	P
V.1	Introduction*	EL 2151-01	Satisfactory	P
V.2	TN power distribution systems	EL 2151-02	Single-phase TN power system considered and used for testing.	p
V.3	TT Power Distribution systems	EL 2151-03	No TT Power Distribution systems	N/A
V.4	IT Power Distribution systems	EL 2151-04	No IT Power Distribution systems	N/A

*- Total number of Requirements to be observed / inspected = 02

Total No of applicable Requirement = 02

No of Requirements for which the sample passed= 02

Total number of tests to be conducted = 03

Total No of applicable Tests = 01

No. of tests for which the sample passed= 01

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 78 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2152 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
W	ANNEX W, SUMMATION OF TOUCH CURRENTS *	EL 2152-00	No connection to the telecommunication network or cable distribution	N/A
W.1	Touch current from electronic circuits*	EL 2152-01	See above W	N/A
W.1.1	Floating circuits*	EL 2152-02	See above W	N/A
W.1.2	Earthed circuits*	EL 2152-03	See above W	N/A
W.2	Interconnection of several equipments*	EL 2152-04	See above W	N/A
W.2.1	Isolation*	EL 2152-05	See above W	N/A
W.2.2	Common return, isolated from earth*	EL 2152-06	See above W	N/A
W.2.3	Common return, connected to protective earth*	EL 2152-07	See above W	N/A

*- Total number of Requirements to be observed / inspected = 08

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 00

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


 (Approving Authority)




Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 79 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2153- V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)*	EL 2153-00	Refer Clause C.1	P
X.1	Determination of maximum input current*	EL 2153-01	Refer table 1.6.2	P
X.2	Overload test procedure*	EL 2153-02	Complies	P

*- Total number of Requirements to be observed / inspected = 03

Total No of applicable Requirement = 03

No of Requirements for which the sample passed= 03

Total number of tests to be conducted = 00

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


(Approving Authority)



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 80 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Radiation Safety

EL 2154- V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)	EL 2154-00	No ultraviolet light	N/A
Y.1	Test apparatus	EL 2154-01	See above Y	N/A
Y.2	Mounting of test samples	EL 2154-02	See above Y	N/A
Y.3	Carbon-arc light-exposure apparatus	EL 2154-03	See above Y	N/A
Y.4	Xenon-arc light exposure apparatus	EL 2154-04	See above Y	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 05

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 81 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2155- V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
Z	ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)*	EL 2155-00	Complies with Cl. 2.10.3.2	P

*- Total number of Requirements to be observed / inspected = 01

Total No of applicable Requirement = 01

No of Requirements for which the sample passed= 01

Total number of tests to be conducted = 00

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be passing in the requirement tested.


.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 82 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Mechanical Properties

EL 2156 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
AA	ANNEX AA, MANDREL TEST (see 2.10.5.8)	EL 2156-00	No such construction	N/A

*- Total number of Requirements to be observed / inspected = 00

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 01

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~p-passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 83 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Electrical Safety

EL 2158 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
CC	Evaluation of integrated circuit (IC) current limiters*	EL 2158-00	Integrated circuit current limiters is not used	N/A
CC.1	Integrated circuit (IC) current limiters*	EL 2158-01	See above CC	N/A
CC.2	Test program 1	EL 2158-02	See above CC	N/A
CC.3	Test program 2	EL 2158-03	See above CC	N/A
CC.4	Test program 3	EL 2158-04	See above CC	N/A
CC.5	Compliance	EL 2158-05	See above CC	N/A

*- Total number of Requirements to be observed / inspected = 02

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 04

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 84 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Mechanical Properties

EL 2159 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
DD	Requirements for the mounting means of rack-mounted equipment*	EL 2159-00	No rack-mounted equipment	N/A
DD.1	General		See above DD	N/A
DD.2	Mechanical strength test, variable N.....:	EL 2159-01	See above DD	N/A
DD.3	Mechanical strength test, 250N, including end stops.....:	EL 2159-02	See above DD	N/A
DD.4	Compliance*.....:	EL 2159-03	See above DD	N/A

*- Total number of Requirements to be observed / inspected = 02

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 02

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 85 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Tests relating to Mechanical Properties

EL 2160 – V1.4

Cl. No.	Test / Requirement name	Test Code	Test result/ observation	Verdict
EE	ANNEX EE, Household and home/office document/media shredders	EL 2160-00	The equipment is not a household and home/office document/media shredders.	N/A
EE.1	General		See above EE	N/A
EE.2	Markings and instructions*	EL 2160-01	See above EE	N/A
	Use of markings or symbols*		See above EE	N/A
	Information of user instructions, maintenance and/or servicing instructions*		See above EE	N/A
EE.3	Inadvertent reactivation test.....	EL 2160-02	See above EE	N/A
EE.4	Disconnection of power to hazardous moving parts*	EL 2160-03	See above EE	N/A
	Use of markings or symbols*		See above EE	N/A
EE.5	Protection against hazardous moving parts		See above EE	N/A
	Test with test finger (Figure 2A)	EL 2160-04	See above EE	N/A
	Test with wedge probe (Figure EE1 and EE2)	EL 2160-05	See above EE	N/A

*- Total number of Requirements to be observed / inspected = 02

Total No of applicable Requirement = 00

No of Requirements for which the sample passed= N/A

Total number of tests to be conducted = 04

Total No of applicable Tests = 00

No. of tests for which the sample passed= N/A

Certificate: It is certified that the above tests were performed and found to be ~~passing/failing~~ in the requirement tested.

(These tests/requirements are not applicable)

.....
(Approving Authority)





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 86 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

1.5.1	List of components					P
Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity ¹ .	
Power Plug	Longwell Company Song Gang Factory	LP67	10A, 250V~	IS 1293 : 2005	BIS CM/L no.: 4009947	
Alternate	U.K.B. Electronics Pvt. Ltd (Unit-1)	3 Pin Plug	6A, 250V~	IS 1293 : 2019	BIS CM/L no.: 8746803	
Alternate	I-Sheng Electronics (KunShan) Co. Ltd	SP-81A	10A, 250V~	IS 1293 : 2005	BIS CM/L no.: 4035847	
Alternate	Volex Cable Assembly (Shenzhen) Co. Ltd.	IA6A3	10A, 250V~	IS 1293 : 2005	BIS CM/L no.: 4100003853	
Power Cord	Longwell Company Song Gang Factory	PVC insulated Cable	3C x 0.75sqmm, 1100V	IS 694 : 2010	BIS CM/L no.: 4009846	
Alternate	U.K.B. ELECTRONICS PVT LTD, (UNIT-II)	PVC insulated Cable	3C x 0.75sqmm, 1100V	IS 694 : 2010	BIS CM/L no.: 3043841	
Alternate	I-Sheng Electronics (KunShan) Co. Ltd	PVC insulated Cable	3C x 0.75sqmm, 1100V	IS 694 : 2010	BIS CM/L no.: 4035746	
Alternate	Longwell Company Song Gang Factory	PVC insulated Cable	3C x 0.75sqmm, 1100V	IS 694 : 2010	BIS CM/L no.: 4009947	
Connector	Longwell Company	LS-18	2.5A, 250V~	IEC 60320-1	VDE 40028166	
Alternate	Longwell Company	LS-13	10A, 250V~	IEC 60320-1	VDE 40013742	
Alternate	Longwell Company	LS-13L	10A, 250V~	IEC 60320-1	VDE 40013739	
Alternate	Longwell Company	LS-60	10A, 250V~	IEC 60320-1	VDE 40029578	
Alternate	Longwell Company	LS-60L	10A, 250V~	IEC 60320-1	VDE 40029815	
Alternate	Volex	V1625A	10A, 250V~	IEC 60320-1	IEC Certi. No: DE1-60443	
Alternate	I-Sheng Electric Wire & Cable Co., Ltd.	IS-14	10A, 250V~	IEC 60320-1	VDE 40037879	
Appliance Inlet (CON1)	LECI Electronics Co., Ltd	DB-6	2.5A, 250V~	UL 60320-1 IEC 60320-1	UL E302229 VDE 40032465	
		DB-6-Serie(s)				
Alternate	Rich Bay Co., Ltd.	R-30790	2.5A, 250V~	UL 60320-1 IEC 60320-1	UL E184638 VDE 40030381	
Alternate	Sun Fair Electric Wire & Cable (HK) Co. Ltd.	S-02	2.5A, 250V~	IEC 60320-1	VDE 40034448	





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 87 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Alternate	Rong Feng Industrial Co., Ltd.	RF-190	2.5A, 250V~	UL 60320-1 IEC 60320-1	UL E102641 VDE 40030379
		RF-190-Serie(s)			
Alternate	INALWAYS ELECTRONICS INC	0724	2.5A, 250V~	UL 60320-1 IEC/EN 60320-1	UL E94191 ENEC Licence no: ENEC16/FI/21/1 0009
		0724 series			
Alternate	Zhe Jiang Bei Er Jia Electronic Co., Ltd.	ST-A04-002	2.5A, 250V~	UL 60320-1 IEC 60320-1	UL E225980 VDE 40016045
Plastic Enclosure	SABIC INNOVATIVE PLASTICS B V	SE1X	V-1, 110°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E45329
Alternate	SABIC INNOVATIVE PLASTICS B V	SE1	V-1, 110°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E45329
Alternate	SABIC INNOVATIVE PLASTICS B V	SE100	V-1, 95°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E45329
Alternate	SABIC INNOVATIVE PLASTICS B V	C2950	V-0, 85°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E45329
Alternate	SABIC INNOVATIVE PLASTICS B V	CX7211	V-0, 90°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E45329
Alternate	SABIC INNOVATIVE PLASTICS B V	945	V-0, 130°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E45329
Alternate	SABIC INNOVATIVE PLASTICS B V	HF500R	V-0, 130°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E45329
Alternate	SABIC JAPAN L L C	SE1X, SE1	V-1, 110°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E207780
Alternate	SABIC JAPAN L L C	SE100	V-1, 95°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E207780
Alternate	SABIC JAPAN L L C	C2950	V-0, 85°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E207780





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 88 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Alternate	SABIC JAPAN L L C	CX7211	V-0, 90°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E207780
Alternate	SABIC JAPAN L L C	945	V-0, 130°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E207780
Alternate	TEIJIN LIMITED RESIN AND PLASTIC	LN-1250G	V-0, 125°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E50075
Alternate	CHI MEI CORPORATION	PA-765A, PC-540	V-0, 85°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E56070
PCB	Dafeng Arex Electronics Technology Co Ltd	04V0	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E186016
Alternate	Dafeng Arex Electronics Technology Co Ltd	02V0, 03V0	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E186016
Alternate	WALEX ELECTRONIC (WUXI) CO LTD	T2, T2A, T2B, T4	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E154355
Alternate	Guangdong Hetong Technology Co Ltd	CEM1, 2V0, FR4	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E243157
Alternate	CHEERFUL PLASTIC ELECTRONIC PRODUCTS	02, 03, 03A	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E199724
Alternate	DONGGUAN DAYSUN ELECTRONIC CO LTD	DS2	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E251754
Alternate	SUZHOU CITY YILIHUA ELECTRONICS CO LTD	YLH-1	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E251781
Alternate	KUOTIANG ENT LTD	C-2, C-2A	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E227299
Alternate	SHENZHEN TONGCHUANGXIN ELECTRONICS CO LTD	TCX	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E250336





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 89 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Alternate	PACIFIC WIN ELECTRONIC PRODUCTS LTD	PW-02, PW-03	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E228070
Alternate	YUANMAN PRINTED CIRCUIT CO LTD	1V0	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E74757
Alternate	GUANGDE XINKE ELECTRONICS CO LTD	XK-2, XK-3	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E231590
Alternate	GUANGDE XINKE ELECTRONICS CO LTD	XK-1	V-1, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E231590
Alternate	JIANGSU DIFEIDA ELECTRONICS CO LTD	DFD-1	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E213009
Alternate	Nantong Haizhou Electronical Technology Co Ltd	HZ-S, HZ-D	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E480201
Alternate	Shanghai H-FAST Electronics Co Ltd	211001, 411001	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E337862
Alternate	Jiangxi ZHONG XIN HUA Electronics Industry Co Ltd	ZXH-1, ZXH-2, ZXH-3	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E331298
Alternate	KUNSHAN CITY QIANDENG WUQIAO ELECTRICAL APPLIANCE FACTORY	WQ-A, WQ-B, WQ-C	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E492425
Alternate	Shenzhen Jia Li Chuang Technology Development Co LTD	JLC-2	V-0, 130°C	UL 796, UL 94 (Flammability test equivalent to IEC60695 -11-10)	UL E479892
Heat-shrinkable tubing	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR-H	600V, 125°C	UL 224 (No equivalent IEC standard)	UL E203950
Alternate	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR, RSFR-HPF	600V, 125°C	UL 224 (No equivalent IEC standard)	UL E203950
Alternate	QIFURUI ELECTRONICS CO	QFR-h	600V, 125°C	UL 224 (No equivalent IEC standard)	UL E225897





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 90 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Alternate	DONGGUAN SALIPT CO LTD	SALIPT S-901-300	300V, 125°C	UL 224 (No equivalent IEC standard)	UL E209436
Alternate	DONGGUAN SALIPT CO LTD	SALIPT S-901-600	600V, 125°C	UL 224 (No equivalent IEC standard)	UL E209436
Alternate	GUANGZHOU KAIHENG ENTERPRISE GROUP	K-2 (CB)	300V, 125°C	UL 224 (No equivalent IEC standard)	UL E214175
Alternate	GUANGZHOU KAIHENG ENTERPRISE GROUP	K-2	600V, 125°C	UL 224 (No equivalent IEC standard)	UL E214175
Alternate	CHANGYUAN ELECTRONICS GROUP CO LTD	CB-HFT	600V, 125°C	UL 224 (No equivalent IEC standard)	UL E180908
Fuse (F1)	Conquer Electronics Co., Ltd.	MST	3.15A, 250Vac	UL 248-1 UL 248-14 IEC 60127-1 IEC 60127-3	UL E82636 VDE 40017118
Alternate	SUZHOU WALTER ELECTRONIC CO LTD	2010	3.15A, 250Vac	UL 248-1 UL 248-14 (No equivalent IEC standard)	UL E56092
Alternate	Bel Fuse Ltd.	RST	3.15A, 250Vac	UL 248-1 UL 248-14 IEC 60127-1 IEC 60127-3	UL E20624 VDE 40011144
Alternate	Cooper Bussmann LLC	SS-5	3.15A, 250Vac	UL 248-1 UL 248-14 IEC 60127-1 IEC 60127-3	UL E19180 VDE 40015513
Alternate	Shenzhen Lanson Electronics Co. Ltd.	SMT	3.15A, 250Vac	UL 248-1 UL 248-14 IEC 60127-1 IEC 60127-3	UL E221465 VDE 40012592
		SMT T3,15A250V			
Alternate	Dongguan Better Electronics Technology Co., Ltd.	932	3.15A, 250Vac	IEC 60127-1 IEC/EN 60127-1	UL E300003 VDE 40033369
Alternate	HOLLYLAND CO LTD	5ET	3.15A, 250Vac	UL 248-1 UL 248-14 IEC 60127-1 IEC 60127-3	UL E156471 VDE 40015669
	Hollyland Company Limited				
Alternate	Sunny East Enterprise Co. Ltd.	CFD	3.15A, 250Vac	IEC 60127-1 IEC 60127-3	VDE 40030246
Alternate	Conquer Electronics Co., Ltd.	MET	3.15A, 250Vac	UL 248-1 UL 248-14 IEC 60127-1 IEC 60127-3	UL E82636 VDE 40017157





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 91 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Alternate	Zhongshan Lanbao Electrical Appliances Co., Ltd.	RTI-10 Serie(s)	3.15A, 250Vac	IEC 60127-1 IEC 60127-3	VDE 40017009
Fuse (F2)	Suzhou Walter Electronic Co. Ltd.	ICP	3.15A, 250Vac	IEC 60127-1 IEC 60127-3	VDE 40012824
Y-Capacitor (CY1, CY2)	Success Electronics Co., Ltd.	SE	Max. 2200pF, min. 250VAC, 125°C	UL 60384-14 IEC 60384-14	UL E114280 VDE 40037211 VDE 40020002
Alternate	TDK Corporation	CD	Max. 2200pF, min. 250VAC, 125°C	UL 60384-14 IEC 60384-14	UL E37861 VDE 40029780
Alternate	Success Electronics Co., Ltd.	SB	Max. 2200pF, min. 250VAC, 125°C	UL 60384-14 IEC 60384-14	UL E114280 VDE 40037221 VDE 40020001
Alternate	Murata Mfg. Co., Ltd.	KX	Max. 2200pF, min. 250VAC, 125°C	UL 60384-14 IEC 60384-14	UL E37921 VDE 40002831
Alternate	Walsin Technology Corp.	AH Series	Max. 2200pF, min. 250VAC, 125°C	UL 60384-14 IEC 60384-14	UL E146544 VDE 40001804
		AH			
Alternate	JYA-NAY CO LTD	JN	Max. 2200pF, min. 250VAC, 125°C	UL 60384-14 (No equivalent IEC standard available)	UL E201384
Alternate	Haohua Electronic Co.	CT7	Max. 2200pF, min. 250VAC, 125°C	UL 60384-14 IEC 60384-14	UL E233106 VDE 40003902
Alternate	Jyh Chung Electronic Co., Ltd.	JD	Max. 2200pF, 400VAC, 125°C	UL 60384-14 IEC 60384-14	UL E187963 VDE 137027
Alternate	Welson Industrial Co., Ltd.	WD	Max. 2200pF, min. 250VAC, 125°C	IEC 60384-14	VDE 40016157
X-Capacitor (CX1)	Ultra Tech Xiphi Enterprise Co. Ltd.	HQX	Max. 0.33μf, 110°C, Min. 250VAC	UL 60384-14 IEC 60384-14	UL E183780 VDE 40056261
Alternate	Cheng Tung Industrial Co., Ltd.	CTX	Max. 0.33μf, 110°C, Min. 300VAC	UL 60384-14 IEC/EN 60384-14	UL E193049 ENEC Licence no: ENEC-02738
		CTX series			
Alternate	Tenta Electric Industrial Co. Ltd.	MEX	Max. 0.33μf, 110°C, Min. 250VAC	UL 60384-14 IEC 60384-14	UL E222911 VDE 119119
Alternate	Joey Electronics (Dong Guan) Co., Ltd.	MPX	Max. 0.33μf, 110°C, Min. 275VAC	UL 60384-14 IEC 60384-14	UL E216807 VDE 40032481
Alternate	Yuon Yu Electronics Co. Ltd.	MPX Series	Max. 0.33μf, 110°C, Min. 275VAC	UL 60384-14 IEC 60384-14	UL E200119 VDE 40032392
		MPX			



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 92 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Alternate	Sinhua Electronics (Huzhou) Co., Ltd	MPX	Max. 0.33μf, 110°C, 300VAC	UL 60384-14 IEC 60384-14	UL E237560 VDE 40014686
Alternate	Jiangsu Xinghua Huayu Electronics Co., Ltd.	MPX	Max. 0.33μf, 110°C, Min. 275VAC	UL 60384-14 IEC 60384-14	UL E311166 VDE 40022417
		MPX - Series			
Alternate	Dain Electronics Co., Ltd.	MPX, MEX	Max. 0.33μf, 110°C, 275VAC	UL 60384-14 IEC 60384-14	UL E147776 VDE 40018798
Alternate	Shenzhen Jinghao Capacitor Co., Ltd.	CBB62B	Max. 0.33μf, 110°C, Min. 250VAC	UL 60384-14 IEC 60384-14	UL E252286 VDE 40018690
Alternate	Foshan Shunde Chuang Ge Electronic Industrial Co., Ltd.	MKP-X2	Max. 0.33μf, 110°C, 275VAC	IEC 60384-14	VDE 40008922
Alternate	OKAYA ELECTRIC INDUSTRIES CO., LTD.	RE Series	Max. 0.33μf, 110°C, 275VAC	UL 60384-14 IEC 60384-14	UL E47474 VDE 40028657
		RE-Series			
Alternate	Vishay Electrónica Portugal, Lda	F 1772 Serie(s)	Max. 0.33μf, 110°C, 440VAC	IEC 60384-14	VDE 40005095
Alternate	WINDAY ELECTRONIC (DONG GUAN) CO., LTD	MPX Serie(s)	Max. 0.33μf, 110°C, Min. 250VAC	IEC 60384-14	VDE 40018071
Alternate	Hongzhi Enterprises Ltd.	MPX (X2)	Max. 0.33μf, 110°C, 250VAC	UL 60384-14 IEC 60384-14	UL E192572 VDE 40023936
Opto coupler (U3)	Everlight Electronics Co., Ltd.	EL817	Dti≥0.4 mm, Int. dcr≥7.6 mm, Ext. dcr≥7.6 mm, min. 110°C	UL 1577 IEC/EN 60747-5-5	UL E214129 VDE 132249
Alternate	COSMO Electronics Corporation	K1010/KP1010	Dti≥0.6 mm, Int. dcr≥4.0 mm, Ext. dcr≥5.0 mm, min. 115°C	UL 1577 IEC/EN 60747-5-5	UL E169586 VDE 101347
Alternate	Lite-On Technology Corporation	LTV-817	Dti≥0.4 mm, Int. dcr≥7.0 mm, Ext. dcr≥7.0 mm, min. 115°C	UL 1577 IEC/EN 60747-5-5	UL E113898 VDE 40015248
Alternate	FAIRCHILD SEMICONDUCTOR CORP	H11A817B, FOD817B	Dti≥0.4 mm, Int. dcr≥7.0 mm, Ext. dcr≥7.0 mm, min. 110°C	UL 1577 IEC/EN 60747-5-5	UL E90700 VDE 40026857
	Fairchild Semiconductor Pte Ltd				
Alternate	Sharp Corporation	PC817	Dti≥0.4 mm, Int. dcr≥7.62 mm, Ext. dcr≥7.62 mm, min. 100°C	UL 1577 (No equivalent IEC standard available)	UL E64380





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 93 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Alternate	Bright Led Electronics Corp.	BPC-817 (A; B; C; D; L), BPC-817 M, BPC-817 S	Dti≥0.4 mm, Int. dcr≥7.6 mm, Ext. dcr≥7.6 mm, min. 110°C	IEC 60747-5-5	VDE 40007240
Alternate	BRIGHT LED ELECTRONICS CORP	BPC-817XXXXXX*	Dti≥0.4 mm, Int. dcr≥7.6 mm, Ext. dcr≥7.6 mm, min. 110°C	UL 1577 (No equivalent IEC standard available)	UL E236324
Alternate	Toshiba Electronic Devices & Storage Corporation	TLP781F	Dti≥0.4 mm, Int. dcr≥8.0 mm, Ext. dcr≥8.0 mm, min. 110°C	UL 1577 IEC/EN 60747-5-5	UL E67349 VDE 40021173
Varistor (MOV1)	Success Electronics Co., Ltd.	SVR10D471K	Min. 300Vac, 85°C	UL 1449 IEC 61051-1	UL E330256 VDE 40030401
Alternate	Success Electronics Co., Ltd.	SVR14D471K	Min. 300Vac, 85°C	UL 1449 IEC 61051-1	UL E330256 VDE 40030401
Alternate	Thinking Electronic Industrial Co., Ltd.	TVR10471, TVR14471	Min. 300Vac, 85°C	UL 1449 IEC 61051-1	UL E314979 VDE 005944
Alternate	Centra Science Corp.	CNR-10D471K, CNR-14D471K	Min. 300Vac, 85°C	UL 1449 IEC 61051-1	UL E316325 VDE 4008220
Alternate	Walsin Technology Corp.	VZ10D471K, VZ14D471K	Min. 300Vac, 85°C	UL 1449 IEC 61051-1	UL E309297 VDE 40010090
Alternate	BestBright Electronics Co. Ltd	14D471K, 10D471K	Min. 300Vac, 85°C	UL 1449 IEC 61051-1	UL E315524 VDE 40005858
Alternate	Ceramate Techn. Co., Ltd.	GNR10D471K-P@, GNR14D471K-P@	Min. 300Vac, 85°C	UL 1449 (No equivalent IEC standard available)	UL E315429
Alternate	Ceramate Techn. Co., Ltd.	10D471K, 14D471K	Min. 300Vac, 85°C	IEC 61051-1	VDE 40031745
Alternate	BestBright Electronics Co. Ltd	14D471K, 10D471K	Min. 300Vac, 85°C	UL 1449 IEC 61051-1	UL E327997 VDE 40027827
Alternate	Joyin Co., Ltd.	10N471K, 14N471K	Min. 300Vac, 85°C	UL 1449 IEC 61051-1	UL E325508 VDE 005937
Transformer (T1)	GlobTek (Suzhou) Co. Ltd.	TF041	Class B	IS 13252(Part1):2010+ A1:2013+A2:2015/ IEC 60950-1:2005 +A1:2009+A2:2013	Tested within Appliance
Transformer (T1) (Alternate)	GlobTek (Suzhou) Co. Ltd.	TF038	Class B	IS 13252(Part1):2010+ A1:2013+A2:2015/ IEC 60950-1:2005 +A1:2009+A2:2013	Tested within Appliance
Transformer (T1) (Alternate)	GlobTek (Suzhou) Co. Ltd.	TF039	Class B	IS 13252(Part1):2010+ A1:2013+A2:2015/ IEC 60950-1:2005 +A1:2009+A2:2013	Tested within Appliance





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 94 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Transformer (T1) (Alternate)	GlobTek (Suzhou) Co. Ltd.	TF040	Class B	IS 13252(Part1):2010+ A1:2013+A2:2015/ IEC 60950-1:2005 +A1:2009+A2:2013	Tested within Appliance
Transformer (T1) (Alternate)	GlobTek (Suzhou) Co. Ltd.	TF057	Class B	IS 13252(Part1):2010+ A1:2013+A2:2015/ IEC 60950-1:2005 +A1:2009+A2:2013	Tested within Appliance
Bobbin	CHANG CHUN PLASTICS CO LTD	T375J	V-0, 150°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E59481
Alternate	CHANG CHUN PLASTICS CO LTD	T375HF	V-0, 150°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E59481
Alternate	CHANG CHUN PLASTICS CO LTD	4130	V-0, 140°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E59481
Alternate	SUMITOMO BAKELITE CO LTD	PM-9820, PM-9630	V-0, 150°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E41429
Alternate	Resonac Techno Service Corporation	CP-J-8800	V-0, 150°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E514814
Triple insulation wire	Great Leoflon Industrial Co., Ltd.	TRW(B)	130°C	UL 2353 IEC 62368-1	UL E211989 VDE 136581
		TRW(B) Serie(s)			
Alternate	KBI COSMOLINK CO., LTD.	TIW-M	130°C	UL 2353 IEC 62368-1	UL E213764 VDE 138053
Alternate	Furukawa Electric Co., Ltd.	TEX-E	130°C	UL 2353 IEC 62368-1	UL E206440 VDE 006735
Alternate	TOTOKU INC.	TIW-2X\$+	130°C	UL 2353 IEC 62368-1	UL E166483 VDE 40044910
		TIW-2 xx yy			
Alternate	E&B Technology Co., Ltd.	E&B-XXXB, E&B-XXXB-1	130°C	UL 2353 IEC 62368-1	UL E315265 VDE 40023473
Alternate	SHENZHEN JIUDING NEW MATERIAL CO., LTD.	DTIW-B	130°C	UL 2353 IEC 62368-1	UL E357999 VDE 40037495
Magnet wire	PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD	UEWN/U@	155°C	UL 1446 (No equivalent IEC standard available)	UL E201757
Alternate	PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD	UEWS/U	130°C	UL 1446 (No equivalent IEC standard available)	UL E201757





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 95 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Alternate	JUNG SHING WIRE CO LTD	UEW-4@, UEY-2@	130°C	UL 1446 (No equivalent IEC standard available)	UL E174837
Alternate	JIANGSU HONGLIU MAGNET WIRE TECHNOLOGY CO LTD	2UEW/130	130°C	UL 1446 (No equivalent IEC standard available)	UL E335065
Alternate	NINGBO JINTIAN NEW MATERIAL CO LTD	2UEW/130	130°C	UL 1446 (No equivalent IEC standard available)	UL E227047
Alternate	WUXI JUFENG COMPOUND LINE CO LTD	2UEWB	130°C	UL 1446 (No equivalent IEC standard available)	UL E206882
Alternate	JIANGSU DARTONG M & E CO LTD	UEW	155°C	UL 1446 (No equivalent IEC standard available)	UL E237377
Alternate	SHANDONG SAINT ELECTRIC CO LTD	UEW/130	130°C	UL 1446 (No equivalent IEC standard available)	UL E194410
Alternate	ZHEJIANG LANGLI ELECTRIC EQUIPMENTS CO LTD	UEW	180°C	UL 1446 (No equivalent IEC standard available)	UL E222214
Insulation Tape	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	CT-280B	130°C	UL 510A (No equivalent IEC standard available)	UL E165111
Alternate	3M COMPANY	1350F-1 (b), 1350T-1 (b), 44 (a)	130°C	UL 510A (No equivalent IEC standard available)	UL E17385
Alternate	BONDTEC PACIFIC CO LTD	370S	130°C	UL 510A (No equivalent IEC standard available)	UL E175868
Alternate	JINGJIANG FUWEI ADHESIVE PRODUCT CO LTD	PZ* (b), CT* (c)(g), WF* (c)(h)	130°C	UL 510A (No equivalent IEC standard available)	UL E165111
Alternate	JINGJIANG JINGYI ADHESIVE PRODUCT CO LTD	JY25-A (b)	130°C	UL 510A (No equivalent IEC standard available)	UL E246950
Alternate	CHANG SHU LIANG YI TAPE INDUSTRY CO LTD	LY-XX*	130°C	UL 510A (No equivalent IEC standard available)	UL E246820
Tube	GREAT HOLDING INDUSTRIAL CO LTD	TFT	300V, 200°C	UL 224 (No equivalent IEC standard available)	UL E156256
Alternate	GREAT HOLDING INDUSTRIAL CO LTD	TFS	600V, 200°C	UL 224 (No equivalent IEC standard available)	UL E156256
Alternate	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	WF	600V, 200°C	UL 224 (No equivalent IEC standard available)	UL E203950





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 96 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Alternate	CHANGYUAN ELECTRONICS GROUP CO LTD	CB-TT-T	300V, 200°C	UL 224 (No equivalent IEC standard available)	UL E180908
Alternate	CHANGYUAN ELECTRONICS GROUP CO LTD	CB-TT-S	600V, 200°C	UL 224 (No equivalent IEC standard available)	UL E180908
Line Filter (LF1)	SUZHOU HEJIA ELECTRONIC CO.,LTD	LF007	130°C	IS 13252(Part1):2010+ A1:2013+A2:2015/ IEC 60950-1:2005 +A1:2009+A2:2013	Tested within Appliance
Bobbin	CHANG CHUN PLASTICS CO LTD	T375HF	V-0, 150°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E59481
Magnet wire	NINGBO JINTIAN NEW MATERIAL CO LTD	xUEW/130	130°C	UL 1446 (No equivalent IEC standard available)	UL E227047
Insulation Tape	SUZHOU MAILADUONA ELECTRIC MATERIAL CO LTD	JY313#	130°C	UL 510A (No equivalent IEC standard available)	UL E188295
Line Filter (LF2)	WUXI HAOPUWEI ELECTRONICS CO.,LTD	321-02392002(R)	130°C	IS 13252(Part1):2010+ A1:2013+A2:2015/ IEC 60950-1:2005 +A1:2009+A2:2013	Tested within Appliance
Bobbin	SUMITOMO BAKELITE CO LTD	PM-9820	V-0, 150°C	UL 94 (Flammability test equivalent to IEC 60695 -11-10)	UL E41429
Magnet wire	NINGBO JINTIAN NEW MATERIAL CO LTD	xUEW/130	130°C	UL 1446 (No equivalent IEC standard available)	UL E227047
Internal Wire (Earth Wire)	Guangdong Zhongde Cable Co. Ltd.	PVC	250VAC, 16AWG	IS 694:2010	BIS CM/L- 4100022756
Output Wire	Guangdong Zhongde Cable Co. Ltd.	PVC	250VAC, 18AWG	IS 694:2010	BIS CM/L- 4100022756
Mylar Sheet	Sichuan Longhua Film Co Ltd	PP-(i)(j)	V-0, 105°C, min. thickness 0.4mm	UL 94 (No equivalent IEC standard available)	UL E254551

Supplementary information:

1. Evidence have been evaluated and checked for the agreed level of compliance as per the referred standard.



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 97 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

1.5.2 / 4.3.6	Table: Plug Dimensions					N/A
Type of Plug: <input type="checkbox"/> Two pin <input type="checkbox"/> Three pin						
Reference points	Ratings					
	<input type="checkbox"/> 2.5A		<input type="checkbox"/> 6A/10A		<input type="checkbox"/> 16A	
	Limits	Measured	Limits	Measured	Limits	Measured
A	--	--	22.05-22.35	--	28.45-28.75	--
B	19.10 ± 0.15	--	19.1 ± 0.15	--	25.4 ± 0.15	--
C	--	--	7.06 +0.025 -0.050	--	8.71 +0.025 -0.050	--
D	5.08 +0.025 -0.050	--	5.08 +0.025 -0.050	--	7.06 +0.025 -0.050	--
E	15.9 +1.04 -0.13	--	15.9 +1.04 -0.13	--	20.6 +1.04 -0.13	--
F	--	--	20.6 +1.04 -0.13	--	28.6 +1.04 -0.13	--
G	7.94 (min.)	--	7.94 (min.)	--	9.52 (min.)	--
Supplementary information: Above dimensional limits are as per IS 1293:2019 in mm (EUT is not a direct plug in equipment)						





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 98 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

1.6.2	TABLE: Electrical data (in normal conditions)					P
U (V) (AC)	I (A)	I rated (A)	P (W)	Fuse #	I fuse (A)	Condition/status
90	0.73	--	41.37	F1, F2	0.73	Maximum Normal load at 50 Hz (for Output: 48Vdc, 0.75A)
100	0.65	1.0	40.83	F1, F2	0.65	
240	0.31	1.0	39.57	F1, F2	0.31	
254.4	0.28	--	39.51	F1, F2	0.28	
Supplementary information:						

2.1.1.5	TABLE: Energy hazard measurement				P
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)	
48.0	0.75	47.4	0.85	40.29	
Supplementary information:					

2.1.1.7	TABLE: Discharge test				P
Condition	τ calculated (s)	τ measured (s)	t u→ 0V (s)	Comments	
Line to neutral (Fuse IN)	--	0.31	--	--	
Supplementary information:					

2.2.2	TABLE: SELV measurement (under normal conditions)				P
Transformer	Location	Voltage (max.) (V)		Voltage Limitation Component	
		V peak	V d.c.		
--	Electrolytic Capacitor (C5)	--	47.4	--	
--	Electrolytic Capacitor (C4)	--	47.4	--	
--	SMD Capacitor (C12)	--	47.5	--	
Supplementary information:					

2.2.3	TABLE: SELV measurement (under fault conditions)		P
Location		Voltage (max.) (V)	Comments
Electrolytic Capacitor (C5) (S-C)		0	EUT Shutdown immediately
Supplementary information: "S-C=Short-Circuit"			





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 99 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

2.4.2	TABLE: Limited current circuit measurement					P
Location	Voltage (V)	Current (mA)	Freq. (kHz)	Limit (mA)	Comments	
Y1-Capacitor (CY1)	0.007	0.019	0.05	0.7	Measured current value not exceeding the limit value	
Supplementary information:						

2.5	TABLE: Limited power source measurement			P
		Limits	Measured	Verdict
According to Table 2B/2C (normal condition)(At Output)(Uoc= 47.4Vdc)				
current (in A)	≤8		0.85	P
apparent power (in VA)	≤100		40.29	P
According to Table 2B/2C (single fault condition : At Output) (Short-circuit) Uoc=0Vdc				
current (in A)	≤8		0	P
apparent power (in VA)	≤100		0	P
Supplementary information:				

2.6.3.4	TABLE: Resistance of earthing measurement		P
Location		Resistance measured (mΩ)	Comments
Earthing pin to Output metal part		21.5	Voltage drop=0.69V
Supplementary information: Tested current 32A			

<OR>

2.6.3.4	TABLE: Resistance of earthing measurement		N/A
Location		Voltage drop (V)	Comments
---		---	---
Supplementary information: Tested current 40A			





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 100 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

2.10.2	Table: Working voltage measurement			P
Location		RMS voltage (V)	Peak voltage (V)	Comments
Transformer (T1) (TF041)				
pin 1 – pin A		160	226	--
pin 1 – pin B		174	246	--
pin 3 – pin A		171	242	--
pin 3 – pin B		165	233	--
pin 5 – pin A		163	230	--
pin 5 – pin B		154	218	--
Transformer (T1) (Alternate) (TF038)				
pin 1 – pin A		161	227	--
pin 1 – pin B		168	237	--
pin 3 – pin A		173	244	--
pin 3 – pin B		155	229	--
pin 5 – pin A		162	229	--
pin 5 – pin B		171	242	--
Transformer (T1) (Alternate) (TF039)				
pin 1 – pin A		173	244	--
pin 1 – pin B		167	236	--
pin 3 – pin A		168	237	--
pin 3 – pin B		176	249	--
pin 5 – pin A		162	229	--
pin 5 – pin B		170	240	--
Transformer (T1) (Alternate) (TF040)				
pin 1 – pin A		168	237	--
pin 1 – pin B		163	230	--
pin 3 – pin A		174	246	--
pin 3 – pin B		176	249	--
pin 5 – pin A		162	229	--
pin 5 – pin B		165	233	--





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 101 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

Transformer (T1) (Alternate) (TF057)

pin 1 – pin A	167	236	--
pin 1 – pin B	154	218	--
pin 3 – pin A	171	242	--
pin 3 – pin B	165	233	--
pin 5 – pin A	169	239	--
pin 5 – pin B	172	243	--
Line to neutral	240	339	Max. V_{rms} and V_{peak}

Supplementary information:

2.10.3 and 2.10.4	TABLE: Clearance and creepage distance measurements						P
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
Functional:							
Across Fuse (F1)	339	240	1.5	2.94	2.5	2.94	
Across Fuse (F2)	339	240	1.5	3.03	2.5	3.03	
Basic / supplementary:							
Line - Earth	339	240	2.0	6.01	2.5	8.31	
Reinforced:							
Transformer (T1) (TF041) primary to secondary pin	339	240	4.0	15.69	5.0	17.93	
Transformer (T1) (TF038) primary to secondary pin	339	240	4.0	15.66	5.0	17.82	
Transformer (T1) (TF039) primary to secondary pin	339	240	4.0	15.67	5.0	17.89	
Transformer (T1) (TF040) primary to secondary pin	339	240	4.0	15.71	5.0	17.95	
Transformer (T1) (TF057) primary to secondary pin	339	240	4.0	15.69	5.0	17.91	
Y-capacitor (CY2)	339	240	4.0	6.02	5.0	6.02	
Supplementary information:							

2.10.5	TABLE: Distance through insulation measurements						P
Distance through insulation (DTI) at/of:	U peak (V)	U r.m.s. (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)		
Basic:							
--	--	--	--	--	--	--	
Supplementary:							
--	--	--	--	--	--	--	
Reinforced:							
Enclosure	339	240	3000	0.4	2.04		
Supplementary information:							





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 102 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

4.3.8	TABLE: Batteries								N/A
The tests of 4.3.8 are applicable only when appropriate battery data is not available								No such battery used	N/A
Is it possible to install the battery in a reverse polarity position?								No such battery used	N/A
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. Current	Manuf. Specs.		Meas. Current	Manuf. Specs.	Meas. Current	Manuf. Specs.	Meas. Current	Manuf. Specs.
Max. Current during normal condition	--	--	--	--	--	--	--	--	--
Max. Current during fault condition	--	--	--	--	--	--	--	--	--
Test results:									
- Chemical leaks								No such battery used	N/A
- Explosion of the battery								No such battery used	N/A
- Emission of flame or expulsion of molten metal								No such battery used	N/A
- Electric strength tests of equipment after completion of tests								No such battery used	N/A
Supplementary information: No such battery used									

4.5	TABLE: Temperature rise measurements					P	
Temperatures were measured according cl. 1.4.5. Test in condition A and B at continuous normal operation as for power input measurements of table 1.6.2 resulted in highest temperature values.							
Temperatures are calculated according cl. 1.4.12.3 with regard to the maximum ambient operation temperature of 40°C(T _{ma}), as specified by the manufacturer.							
Test voltage(s) (V):			A: V= 90V~, 50Hz		B: V= 254.4V~, 50Hz		
t _{amb1} (°C):		A: 25.3	t _{amb2} (°C):		B: 25.5		
Temperature of part/at: (measured with thermocouples)			Measured temperature rise at T _{amb}		Calculated temperature at T _{ma}		Allowed T _{max} (°C)
			A dT (K)	B dT (K)	A T (°C)	B T (°C)	
Transformer core (T1) (TF041)			32.4	31.1	72.4	71.1	110
Transformer core (T1) (TF038) (Alternate)			31.5	30.2	71.5	70.2	110
Transformer core (T1) (TF039) (Alternate)			31.8	30.5	71.8	70.5	110
Transformer core (T1) (TF040) (Alternate)			33.0	31.5	73.0	71.5	110
Transformer core (T1) (TF057) (Alternate)			32.1	30.4	72.1	70.4	110
Line Filter (LF1)			19.9	17.3	59.9	57.3	110
Line Filter (LF2)			18.2	16.5	58.2	56.5	110
PCB Near Y-capacitor (CY1)			19.6	18.2	59.6	58.2	130
Enclsoure (Outer)			17.9	17.4	57.9	57.4	95
Supplementary information:							
Temperatures measured with winding resistance method: Not used							
temperature T of winding: (winding resistance method)		(V)	R ₁ (Ω)	R ₂ (Ω)	T (°C)	allowed T _{max} (°C)	insulation class
--		--	--	--	--	--	--
Supplementary information:							



Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 103 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

4.5.5	TABLE: Ball pressure test of thermoplastic parts			N/A
	Allowed impression diameter (mm)	≤2 mm		
Part		Test temperature (°C)	Impression diameter (mm)	
---		--	---	
Supplementary information: Refer Cl. 4.5.5				

4.6.1, 4.6.2	Table: Enclosure opening measurements		N/A
Location	Size (mm)	Comments	
--	--	--	
Supplementary information: No openings provided			

4.7	Table: Resistance to fire				P
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence
PCB	*	*	1.73	*	*
Enclosure	*	*	2.04	*	*
Supplementary information: * See table 1.5.1					

5.1.6	TABLE: Touch current and protective conductor current measurement					P	
	Test voltage (V).....:	AC 254.4V, 50 Hz				—	
Measurement location (Terminal A connected to...)		Polarity (normal) [mA]		Polarity (reverse) [mA]		Limit (mA)	Comments
		Switch: ON	Switch: OFF	Switch: ON	Switch: OFF		
Between live terminal to enclosure wrapped with metal foil		0.015	--	0.014	--	3.5	The Measured value is within the specified limit
Supplementary information:							

5.2	TABLE: Electric strength tests, impulse tests and voltage surge tests			P
Test voltage applied between:		Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Electric strength test				
Functional:				
Between Line to neutral (Fuse F1 open)	AC	1500V	No	
Basic / supplementary:				
Line to Earth	AC	1500	No	
Reinforced:				
Between Primary and Secondary circuit	AC	3000V	No	
L/N to external plastic enclosure with metal foil wrapped	AC	3000	No	
Supplementary information:				

[Signature]





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 104 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

5.3	TABLE: Fault condition tests					P
	Ambient temperature (°C)				25.8	—
	Power source for EUT: Manufacturer, model/type, output rating				LABs AC Power Source	—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
Electrolyte Capacitor (C5)	Short-circuit	90	15 sec	--	--	EUT Shutdown immediately No fire or hazards occurred
Transformer (T1)(TF041) (Secondary pins)	Short-circuit	254.4	15 sec	--	--	EUT Shutdown immediately No fire or hazards occurred
Transformer (T1)(TF038) (Secondary pins)	Short-circuit	254.4	15 sec	--	--	EUT Shutdown immediately No fire or hazards occurred
Transformer (T1)(TF039) (Secondary pins)	Short-circuit	254.4	15 sec	--	--	EUT Shutdown immediately No fire or hazards occurred
Transformer (T1)(TF040) (Secondary pins)	Short-circuit	254.4	15 sec	--	--	EUT Shutdown immediately No fire or hazards occurred
Transformer (T1)(TF057) (Secondary pins)	Short-circuit	254.4	15 sec	--	--	EUT Shutdown immediately No fire or hazards occurred
Transformer (T1)(TF041)	Overload	254.4	1.30Hrs	--	--	EUT operated normally Temperature of transformer coil is 64.2°C No fire or hazards occurred
Supplementary information:						





Report No. SC23EPF06503_1

IS 13252 (Part 1): 2010 + A1: 2013 + A2 : 2015 /

Page 105 of 106

Dated: 02/06/2023

IEC 60950-1: 2005 + A1:2009 + A2 : 2013

ULR No.: TC509923200000540F

C.2	TABLE: Insulation of transformers						P
	Transformer part name :		Isolating Transformer (T1) (TF041), (TF038), (TF039), (TF040), (TF057)				
	Manufacturer :		See table 1.5.1				
	Type..... :		See table 1.5.1				
Clearance (cl) and creepage distance (cr) at/of/between:		U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)
Primary /input winding and secondary/output winding (internal)		339	240	4.0	*	5.0	*
Primary/input winding and core (internal)				4.0	*	5.0	*
Secondary/output winding and core (internal)				4.0	*	5.0	*
Primary/input part and secondary/output part (external)				4.0	(TF041): 15.69 (TF038): 15.66 (TF039): 15.67 (TF040): 15.71 (TF057): 15.69	5.0	(TF041): 17.93 (TF038): 17.82 (TF039): 17.89 (TF040): 17.95 (TF057): 17.91
Primary/input part and core (external)				4.0	*	5.0	*
Primary/input part and secondary/output winding (external)				4.0	*	5.0	*
Secondary/output part and core (external)				4.0	*	5.0	*
Secondary/output part and primary/input winding (external)				4.0	(TF041): 15.69 (TF038): 15.66 (TF039): 15.67 (TF040): 15.71 (TF057): 15.69	5.0	(TF041): 17.93 (TF038): 17.82 (TF039): 17.89 (TF040): 17.95 (TF057): 17.91
Description of design:							
(a) Bobbin							
Primary/input pins..... :			1, 3, 5				
Secondary/output pins :			A,B				
Material (manufacturer, type, ratings) :			See Table 1.5.1				
Thickness (mm)..... :			2.2 mm				
(b) General							
Please insert here a description of the transformer design describing: Concentric windings on bobbin/Core. Windings ends additionally fixed with tape, outer winding is secondary. Teflon tube on all winding exits is provided. Core is considered as primary.							
Supplementary information: *Approved Triple insulated wire used (See table 1.5.1) (Primary & Secondary Pins are same for all transformers)							



**Attachment-1****PHOTOGRAPHS****External View-1****External View-2****Internal View****PCB View-1****PCB View-2*****End of Test Report***