접수번호 : KCA2022-13402

안 전 인 증 서
Safety Certificate

안전인증번호 : HU10499-23056A
(Applcation No.)

제조업자/수입업자명 : GlobTek (Suzhou) Co., Ltd.
(Manufacturer/importer)

주 소 : Building 4, #76, Jin Ling East Rd., Suzhou Park, Suzhou, Jiangsu 215021, P.R.China
(Address)

제 품 명 : 직류전원장치
(Product)

기본모델명 : GTM96600-6520-T2
(Basic Model)

파생모델명 (Series Model) :
GTM96600-6018-R2,GTM96600-6019-R2,GTM96600-6020-R2, [이면기재]

정격/안전기준상의 모델구분 : 100-240 V~, 50-60 Hz, 1.5 A Output: 20.0 Vdc, 3.25 A
(Rating)

시험기준 : KC 62368-1(2021-08)
(Standard)

본 인증서는

제 조 국 명 : 중국
제조업자명 : GlobTek (Suzhou) Co., Ltd.

제조공장의 주소 : Building 4, #76, Jin Ling East Rd., Suzhou Park, Suzhou, Jiangsu 215021, P.R.China
의 제품에만 해당함

「전기용품 및 생활용품 안전관리법 시행규칙」제9조제2항, 제4항, 제10조제2항 또는 제15조제2항에 따라 안전인증서를 발급합니다.
We issue this Safety Certificate for the above appliances in accordance with Article 9(2), 9(4), 10(2) or 15(2) of the Enforcement Rule of the Electirical Appliances and Consumer Products Safety Control Act.

2023 년 02 월 27 일
(Year) (Month) (Day)

한국기계전기전자시험연구원장
Korea Testing Certification Institute

※ 이 인증서는 「전기용품 및 생활용품 안전관리법」에 따른 제품의 안전성 확인에 한정된 것이며, 그 밖의 다른 법률이 적용되는 제품의 경우에는 해당 법률에 따라 추가로 인증 • 허가 등을 받아야 합니다.

첨부서류	1. 전기용품의 안전관리부품 및 재질목록(List of Critical Components) 2. 기본모델 • 파생모델의 내용(Description of the basic and series model) 3. 안전인증의 변경 현황(Revisions Status)

안전인증을 받은 자의 유의 사항
Notification for Recipients

1. 본 증명서는 기재된 제조공장에서 생산된 제품으로서 적용된 안전기준에 적합한 경우에 한하여 유효합니다.

   (This certificate is valid only when the product meets the safety standards and is produced from the manufacturing factory that states on this certificate.)

2. 안전인증 마크는 본래의 의미와 다르게 사용자가 오해를 일으킬 수 있는 방법으로 광고, 카탈로그 등에 사용하면 인증정지 또는 취소의 사유가 됩니다.

   (Cessation or cancellation of the certification may occur if the actual meaning of the Safety Certification Mark is misled to the public by false advertisement on a catalog of the product.)

3. 다음과 같은 사유가 발생할 경우에는 안전인증기관에 안전인증 변경 신청을 하여 안전인증서를 재교부 받아야 합니다.

   (In case of the following events, the Safety Certificate shall be reapplied and reissued for revision)
   1) 제조자, 대표자, 주소 등 인증서 기재내용의 변경
      (Revisions in contents of the certificate such as manufacturer representative, address and etc.)
   2) 파생모델의 추가, 변경 또는 삭제 (Additions, changes, or removals of series model)
   3) 안전관리 부품의 변경 또는 추가
      (Additions or changes in components which are listed on the certificate)

4. 안전인증을 받은 자는 다음 사항을 이행하여야 합니다.

   (Recipients of the Safety Certificate shall comply with the followings.)
   1) 안전인증 표시 등 인증요건의 유지관리
      (Maintaining and preserving the Mark and other certification requirements)
   ✻ 안전인증을 받기 이전 또는 정지, 취소된 이후 생산된 제품에 안전인증 표시를 하면 법에 의거 처벌을 받게 됩니다.
      (It will be punished by the law if the certification mark is used before the issue (or after suspension or cancellation) of the certification.)

   2) 자체 검사의 실시 및 그 기록관리 (Self-testing and record keeping)

   ✻ 안전인증을 받은 자는 제품검사를 철저히 실시하여 제품의 품질이 안전기준에 미달되지 않도록 유의.
      (Recipients of the Safety Certificate shall conduct products inspection strictly for products to comply with the safety standards)

5. 안전인증을 받을자는 전기용품 및 생활용품 안전관리법 제 7조에 따라 2년에 1회 정기검사를 실시하여야 한다.

   (Recipients of the Safety Certificate shall require to inspect once in two years according to the Article 7 section of the the Electrical Appliances and Consumer Products Safety Control Act.)

6. 인증서(증명서)에는 진위여부 확인을 위해 다음과 같은 사항이 적용되어 있습니다.
   1) 문서관리번호 (문서관리번호 노출시 CS홈페이지를 통해 기술문서 내용이 조회 가능함으로 사본 등 제출시 노출되지 않도록 주의하시기 바랍니다.)
   2) 시점확인필
   3) 2D바코드

안전인증시의 조건: 동 제품의 생산 시 자체검사를 실시하고 안전인증 시 등록된 부품누락 및 임의 변경하지 말 것.
Conditions of Certification : In the production of this product, conduct a self-test and do not miss and change the registered components.

파생모델명

GTM96600-6518-R2,GTM96600-6519-R2,GTM96600-6520-R2,GTM96600-6018-T2,GTM96600-6019-T2,GTM96600-6020-T2,GTM96600-6518-T2,GTM96600-6519-T2

기 술 문 서
Technical Document

안전인증번호 : HU10499-23056A (Certificate No)

접수번호 : KCA2022-13402 (Receipt No)

1. 기본모델 · 파생모델의 내용 (General Descriptions of Certified Products)

1.1 제품의 설명 (Product description)

인증제품의 개요는 다음과 같다.

(Information on certified basic model product is as follow)

구 분 (Section)	내 용 (Description)
용도 (Normal use)	The apparatus designed to be used for converting AC main voltage to DC low voltage.
내부구조 (Internal construction)	The apparatus consists of Switching transformer, rectifying part etc.
외부구조 (External construction)	Fire enclosure is flammability class V-0 and appliance inlet.
기타(others)	Class II.

1.2 전기용품의 표시 : 전기용품 및 생활용품 안전관리법 시행규칙 제20조(안전인증의 표시)에 따라 표시한다.

(Marking of KC Mark : Marking shall comply with the Article 20 of the Enforcement Rule of the Electrical Appliances and Consumer products Safety Control Act.)

1.3 등록모델 (Registered Models)

구분 (Class)	모 델 명 및 정 격 (Model / Rating)		기본모델과의 차이점 (Difference between basic model and series model)
기본모델 (Basic model)	GTM96600-6520-T2	100-240 V~, 50-60 Hz, 1.5 A Output: 20.0 Vdc, 3.25 A	
파생모델 (Variant model)	GTM96600-6018-R2		Identical to basic model except for model name, enclosure, inlet with hybrid destop housing and output rating(18 Vdc, 3.33 A, 60 W)
	GTM96600-6019-R2		Identical to basic model except for model name, enclosure, inlet with hybrid destop housing and output rating(19 Vdc, 3.15 A, 60 W)
	GTM96600-6020-R2		Identical to basic model except for model name, enclosure, inlet with hybrid destop housing and output rating(20 Vdc, 3 A, 60 W)

	GTM96600-6518-R2	Identical to basic model except for model name, enclosure, inlet with hybrid destop housing and output rating(18 Vdc, 3.61 A, 65 W)
	GTM96600-6519-R2	Identical to basic model except for model name, enclosure, inlet with hybrid destop housing and output rating(19 Vdc, 3.42 A, 65 W)
	GTM96600-6520-R2	Identical to basic model except for model name, enclosure, inlet with hybrid destop housing and output rating(20 Vdc, 3.25 A, 65 W)
	GTM96600-6018-T2	Identical to basic model except for model name, output rating(18 Vdc, 3.33 A, 60 W)
	GTM96600-6019-T2	Identical to basic model except for model name, output rating(19 Vdc, 3.15 A, 60 W)
	GTM96600-6020-T2	Identical to basic model except for model name, output rating(20 Vdc, 3 A, 60 W)
	GTM96600-6518-T2	Identical to basic model except for model name, output rating(18 Vdc, 3.61 A, 65 W)
	GTM96600-6519-T2	Identical to basic model except for model name, output rating(19 Vdc, 3.42 A, 65 W)

2. 안전관리 부품 및 재질목록(List of Critical Components)

부품명(회로기호) Components(Part no.)	제조자(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
PCB	WALEX ELECTRONIC (WUXI) CO LTD	T2, T2A, T2B T4	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	DONGGUAN HE TONG ELECTRONICS CO LTD	CEM1 2V0 FR402	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	CHEERFUL ELECTRONIC (HK) LTD	02 03 03A	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL

안전인증번호 : HU10499-23056A (Certificate No)

접수번호 : KCA2022-13402 (Receipt No)

부품명(회로기호) Components(Part no.)	제조자(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Alt. use	DONGGUAN DAYSUN ELECTRONIC CO LTD	DS2	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	DAFENG AREX ELECTRONICS TECHNOLOGY CO LTD	02V0 03V0 04V0	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	BRITE PLUS ELECTRONICS (SUZHOU) CO LTD	DKV0-3A DGV0-3A	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	KUOTIANG ENT LTD	C-2 C-2A	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	SHENZHEN TONGCHUANGXI N ELECTRONICS CO LTD	TCX	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	PACIFIC WIN INDUSTRIAL LTD	PW-02 PW-03	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	YUANMAN PRINTED CIRCUIT CO LTD	1V0	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	SUZHOU XINKE ELECTRONICS CO LTD	XK-2, XK-3	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	KUNSHAN CITY HUA SHENG CIRCUIT BOARD CO LTD	HS-S	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	HUIZHOU SHUNJIA ELECTRONICS CO LTD	SJ-B	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Alt. use	SHANGHAI H- FAST ELECTRONICS CO LTD	411001, 211001	Min. 1, 6 mm thickness, min. V- 0, 130°C	UL
Fuse (FS1, FS2 or F1, F2) (FS2 or F2 is optional) (FS1, FS2 for GT*91099 series, F1, F2 for GT*96600 series, F1 for GT*96600-*56*** series)	Conquer Electronics Co., Ltd.	MST series	T3.15A, 250V	IEC

안전인증번호 : HU10499-23056A (Certificate No)

접수번호 : KCA2022-13402 (Receipt No)

부품명(회로기호) Components(Part no.)	제조자(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Alt. use	Ever Island Electric Co., Ltd. And Walter Electric	2010, ICP	T3.15A, 250V	IEC
Alt. use	Bel Fuse Ltd.	RST-Serie(s)	T3.15A, 250V	IEC
Alt. use	Cooper Bussmann LLC	SS-5	T3.15A, 250V	IEC
Alt. use	Shenzhen Lanson Electronics Co. Ltd.	SMT	T3.15A, 250V	IEC
Alt. use	Das & Sons International Ltd.	385T series	T3.15A, 250V	IEC
Alt. use	Dongguan Better Electronics Technology Co., Ltd.	932	T3.15A, 250V	IEC
Alt. use	Hollyland Company Limited	5ET	T3.15A, 250V	IEC
Alt. use	Sunny East Enterprise Co. Ltd.	CFD-Serie(s)	T3.15A, 250V	IEC
Alt. use	Conquer Electronics Co., Ltd.	MET series	T3.15A, 250V	IEC
Alt. use	Zhongshan Lanbao Electrical Appliances Co., Ltd.	RTI-10	T3.15A, 250V	IEC
Y capacitor (CY1, CY2) (Optional) (CY1 and CY2 for GT*91099 and GT*96600 series; CY1 for GT*96600-*56*** series)	TDK Corporation	CD	Y1, AC250V, max 4700pF, 55/125/21/B	IEC
Alt. use	Success Electronics Co., Ltd.	SE	Y1, AC250V, or AC500V, max 4700pF, 40/125/56/C	IEC
Alt. use	Success Electronics Co., Ltd.	SB	Y1, AC250V, max 4700pF, 40/125/56/C	IEC

안전인증번호 : HU10499-23056A (Certificate No)

접수번호 : KCA2022-13402 (Receipt No)

부품명(회로기호) Components(Part no.)	제조자(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Alt. use	Murata Mfg. Co., Ltd.	KX	Y1, AC250V, max 4700pF, 25/125/21/B	IEC
Alt. use	Walsin Technology Corp.	AH	Y1, AC250V, max 4700pF, 25/125/21/C	IEC
Alt. use	JYA-NAY Co., Ltd.	JN	Y1, AC250V, max 4700pF, 25/125/21/C	IEC
Alt. use	Haohua Electronic Co.	CT 7	Y1, AC250V, max 4700pF, 30/125/56/C	IEC
Alt. use	Jyh Chung Electronic Co., Ltd.	JD	Y1, AC250V, max 4700pF, 40/125/21/C	IEC
Alt. use	Jerro Electronics Corp.	JX-series	Y1, AC250V, max 4700pF, 40/125/21/C	IEC
Alt. use	WELSON INDUSTRIAL CO LT D	WD	Y1, AC250V, max 4700pF, 55/125/21/C	IEC
X capacitor (CX1) (Optional)	Cheng Tung Industrial Co., Ltd.	CTX	Min. 300VAC, Max. 0.47μF, 110 oC, X1 or X2	IEC
Alt. use	Tenta Electric Industrial Co. Ltd.	MEX	Min. 250VAC, Max. 0.47μF, 40/100/21/B, X1 or X2	IEC
Alt. use	Joey Electronics (Dong Guan) Co., Ltd.	MPX	Min. 250VAC, Max. 0.47μF, 40/105/21/B, X1 or X2	IEC
Alt. use	Ultra Tech Xiphi Enterprise Co. Ltd.	HQX	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC
Alt. use	Yuon Yu Electronics Co. Ltd.	MPX	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC
Alt. use	Sinhua Electronics (Huzhou) Co., Ltd.	MPX	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC

안전인증번호 : HU10499-23056A (Certificate No)

접수번호 : KCA2022-13402 (Receipt No)

부품명(회로기호) Components(Part no.)	제조자(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Alt. use	Jiangsu Xinghua Huayu Electronics Co., Ltd.	MPX - Series	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC
Alt. use	Dain Electronics Co., Ltd.	MEX, MPX, NPX	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X1 or X2	IEC
Alt. use	Shenzhen Jinghao Capacitor Co., Ltd.	CBB62B	Min. 250VAC, Max. 0.47μF, 40/110/56/B, X1 or X2	IEC
Alt. use	Foshan Shunde Chuang Ge Electronic Industrial Co., Ltd.	MKP-X2	Min. 250VAC, Max. 0.47μF, 40/105/21/B, X2	IEC
Alt. use	Okaya Electric Industries Co. LTD	RE-Series	Min. 250VAC, Max. 0.47μF, 55/100/56/C, X2	IEC
Alt. use	VISHAY Capacitors Belgium NV	F 1772	Min. 250VAC, Max. 0.47μF, 40/100/56/C, X2	IEC
Alt. use	Winday Electronic Industrial Co., Ltd.	MPX series	Min. 250VAC, Max. 0.47μF, 40/100/21/C, X2	IEC
Photo coupler (U1 or U4) (U1 for GT*91099 series, U4 for GT*96600 series, U1 For GT*96600-*56*** series)	Everlight Electronics Co., Ltd.	EL817	Dti=0.5mm Int. , dcr=6.0mm EXT.dcr=7.7mm, thermal cycling test, 110oC	VDE
Alt. use	COSMO Electronics Corporation	K1010 / KP1010	Dti=0.6mm Int. , dcr=4.0mm EXT.dcr=5.0mm, thermal cycling test, 115oC	VDE
Alt. use	Lite-On Technology Corporation	LTV-817	Dti=0.8mm Int. , EXT.dcr=7.8mm, thermal cycling test, 100oC	VDE

안전인증번호 : HU10499-23056A (Certificate No)

접수번호 : KCA2022-13402 (Receipt No)

부품명(회로기호) Components(Part no.)	제조자(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Alt. use	Fairchild Semiconductor Pte Ltd.	H11A817B / FOD817B	Insulation voltage: 850V; Transient overvoltage: 6000V; CTI175; Int. Cr/ Ext. Cr: min. 7, 0/7, 0; 30/110/21	VDE
Alt. use	Sharp Corporation Electronic Components and Devices Group	PC817	Insulation voltage: 890V; Transient overvoltage: 9000V Int. Cr/ Ext. Cr: 7.62/ 7.62 mm; 30/100/21	VDE
Alt. use	Bright Led Electronics Corp.	BPC-817 A/B/C/D/L BPC-817 M BPC-817 S	Dti=0.4mm EXT.dcr=7.0mm, thermal cycling test, 100oC	VDE
Alt. use	Toshiba Corporation Semiconductor & Storage Products Company	TLP817F	Dti > 0.4mm, Ext cr > 8.0mm, Isolation 3000Vac min., 110°C min., Thermal cycling test	VDE
Varistor MOV1 or MOV (Optional) (MOV/MOV1 for GT*91099 series, MOV1 for GT*96600 series and GT*96600-*56*** series)	Thinking Electronic Industrial Co., Ltd.	TVR10471K, TVR14471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	VDE
Alt. use	Centra Science Corp.	10D471K, 14D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	VDE
Alt. use	Success Electronics Co., Ltd.	SVR10D471K SVR14D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	VDE
Alt. use	Walsin Technology Co., Ltd.	14D471K 10D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	VDE

안전인증번호 : HU10499-23056A (Certificate No)

접수번호 : KCA2022-13402 (Receipt No)

부품명(회로기호) Components(Part no.)	제조자(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Alt. use	Lien Shun Electronics Co., Ltd.	14D471K 10D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	VDE
Alt. use	Ceramate Techn. Co., Ltd.	GNR10D471K GNR14D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	VDE
Alt. use	Brightking (Shenzhen) Co., Ltd.	14D471K 10D471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	VDE
Alt. use	Joyin Co., Ltd.	JVR10N471K JVR14N471K	Max. Continuous voltage: min 300Vac(rms), 85°C, The coating is V-0	VDE
Appliance inlet CN1 Class II units (C8 type)	Zhejiang LECI Electronics Co., Ltd.	DB-8	2.5A, 250Vac	IEC
Alt. use	Rich Bay Co., Ltd.	R-201SN90	2.5A, 250Vac	IEC
Alt. use	Sun Fair Electric Wire & Cable (HK)Co. Ltd.	S-01	2.5A, 250Vac	IEC
Alt. use	TECX-UNIONS Technology Corporation	SO-222	2.5A, 250Vac	IEC
Alt. use	Rong Feng Industrial Co., Ltd.	RF-180	2.5A, 250Vac	IEC
Alt. use	Inalways Corporation	0721	2.5A, 250Vac	IEC
Alt. use	Zhe Jiang Bei Er jia	ST-A03-005	2.5A, 250Vac	IEC

안전인증번호 : HU10499-23056A (Certificate No)

접수번호 : KCA2022-13402 (Receipt No)

부품명(회로기호) Components(Part no.)	제조자(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Alt. use	Shenzhen Delikang Electronics Technology Co. Ltd.	CDJ-8	2.5A, 250Vac	IEC
Line filter LF1	GlobTek/HAOPUWEI/HEJIA	GTM91099- LF1 or LF019	Min. 200uH	Tested with appliance
Line filter LF2	GlobTek/HAOPUWEI/HEJIA	NF00031	Min. 10mH	Tested with appliance
Transformer (T1)	GlobTek / ENG / BOAM / HAOPUWEI	TF063	Class B	Tested with appliance
Enclosure (all parts)	SABIC INNOVATIVE PLASTICS B V	C2950	PC/ABS, Min. V-0, Min. thickness: 2.0mm, 85°C	UL
Alt. use	SABIC INNOVATIVE PLASTICS B V	HF500R	PC, V-0, Min. thickness: 2.0mm, 125°C	UL
Alt. use	SABIC INNOVATIVE PLASTICS B V	CX7211 EXCY0098	PC/ABS, Min. V-0, Min. thickness: 2.0mm, 90°C	UL
Alt. use	SABIC INNOVATIVE PLASTICS B V	945 940	PC, Min. V-1, Min. thickness: 2.0mm, 120°C	UL
Alt. use	SABIC INNOVATIVE PLASTICS B V	SE1, SE1X	PPE+PS, Min. V-1, Min. thickness:2.0mm, 105°C	UL
Alt. use	SABIC INNOVATIVE PLASTICS B V	SE100	PPE+PS, Min. V-1, Min. thickness:2.0mm, 95°C	UL
Alt. use	SABIC JAPAN L L C	C2950	PC/ABS, Min. V-0, Min. thickness: 2.0mm, 105°C	UL
Alt. use	SABIC JAPAN L L C	CX7211 EXCY0098	PC/ABS, Min. V-1, Min. thickness: 2.0mm, 90°C	UL
Alt. use	SABIC JAPAN L L C	945 940	PC, Min. V-1, Min. thickness: 2.0mm, 120°C	UL

안전인증번호 : HU10499-23056A (Certificate No)　　접수번호 : KCA2022-13402 (Receipt No)

부품명(회로기호) Components(Part no.)	제조자(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Alt. use	SABIC JAPAN L L C	HF500R	PC, V-0, Min. thickness: 2.0mm, 125°C	UL
Alt. use	SABIC JAPAN L L C	SE1, SE1X	PPE+PS, Min. V-1, Min. thickness:2.0mm, 105°C	UL
Alt. use	SABIC JAPAN L L C	SE100	PPE+PS, Min. V-1, Min. thickness:2.0mm, 95°C	UL
Alt. use	TEIJIN CHEMICALS LTD	LN-1250P LN-1250G	PC, Min. V-0, Min. thickness: 2.0mm, 115°C	UL
Alt. use	CHI MEI CORPORATION	PA-765A	ABS, Min. V-0, Min. thickness: 2.0mm, 85°C	UL
Alt. use	CHI MEI CORPORATION	PC-540	PC/ABS, Min. V-0, Min. thickness: 2.0mm, 70°C	UL

3. 전기용품안전인증의 변경현황(Status of Certificate Revisions)

일자(Date)	발급현황(Status of issues)
	변경내용(Modification of Contents)
2023/02/27	신규발급(파생)

4. 기타(Carefully Informed Note)

1) 안전관리부품 및 재질목록에 기재된 사항은 안전에 직접적인 영향을 주는 부분이므로 내용을 변경 또는 복수등재를 원하는 경우 안전인증변경신청 또는 안전확인변경신고를 하여야 합니다. 안전인증변경신청 또는 안전확인변경신고를 하지 않고 임의로 변경하는 경우에는 전기용품 및 생활용품 안전관리법에 따라 행정조치 될수 있습니다.

The certificate holder should apply for a revision of the certificate if the registered critical components are to be changed, modified or alternated.Should the contents of Certificate are altered without the application for the modification. the administrative measures can occur according to the Electrical Appliances and Consumer Products Safety Control Act.

안전인증번호 : HU10499-23056A (Certificate No)　　접수번호 : KCA2022-13402 (Receipt No)

2) 정기검사(시료채취포함)를 거부, 방해 또는 기피하는 경우에는 전기용품 및 생활용품 안전관리법 제 11조에 따라 안전인증이 취소될수 있습니다.

If Follow-up Factory Inspection, including sampling representative model by 11 categories of the certified product at factory-site for re-testing, should not has been arranged by Certificate holder, Safety Certification(KC Mark) may be withdrawn according to the Article 11 of the Electrical Appliances and Consumer Products Safety Control Act.

3) 공장주소(전화번호포함), 대표자, 상호 및 부품변경, 신고인정보 등 안전인증 또는 안전확인신고의 내용이 변경되었을 때, 안전인증변경신청 또는 안전확인변경신고를 하지 않을 경우에는 전기용품 및 생활용품 안전관리법에 따라 행정조치 될 수 있습니다.

Should a factory address, president name, manufacturer name and critical component are altered without the application for the modification, the administrative measures can occur according to the Electrical Appliances and Customer Products Safety Control Act.

4) 조건부 인증사항 (Conditional certification items) :

안전인증번호 : HU10499-23056A **접수번호 :** KCA2022-13402

NO. 1 표시사항

전기용품안전관리법에 의한 표시

안전인증번호(安全认证编号): HUXXXXX-XXXXX

제 품 명(产 品 名): AC/DC Adaptor

모 델 명(型 号 名): GTM96600-6520-T2

정 격 : (额 定) Input: 100-240V~, 50-60Hz, 1.5A

Output: 20.0Vdc, 3.25A

제조자(工 厂名): GlobTek (Suzhou) Co.,Ltd.

제 조 국(制 造 国):China

제조년월(制造年月): 2019/10

A/S 연락처(A/S 韩国售后服务联络处): 02-3451-3400

NO. 2 제품외부



안전인증번호 : HU10499-23056A **접수번호 :** KCA2022-13402

NO. 3 제품외부



NO. 4 제품외부




안전인증번호 : HU10499-23056A **접수번호 :** KCA2022-13402

NO. 5 제품외부




NO. 6 제품내부

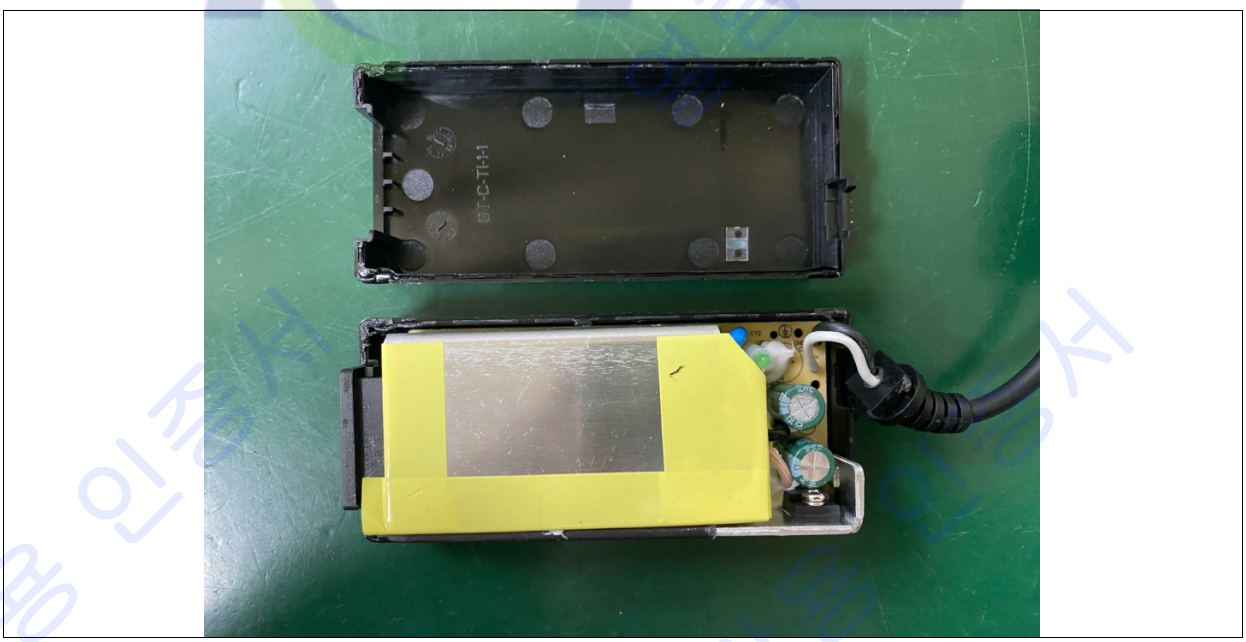

안전인증번호 : HU10499-23056A **접수번호 :** KCA2022-13402

NO. 7 제품내부

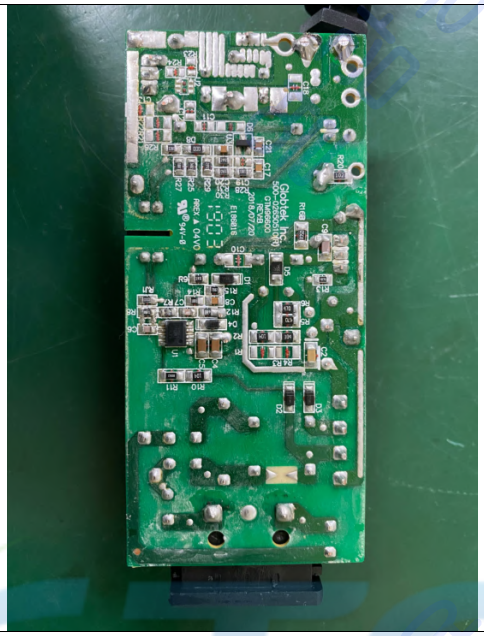

NO. 8 파생모델외부



안전인증번호 : HU10499-23056A **접수번호 :** KCA2022-13402

NO. 9 파생모델외부



NO. 10 파생모델외부



안전인증번호 : HU10499-23056A **접수번호 :** KCA2022-13402

NO. 11 파생모델외부

