
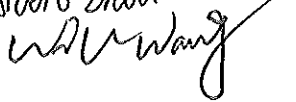



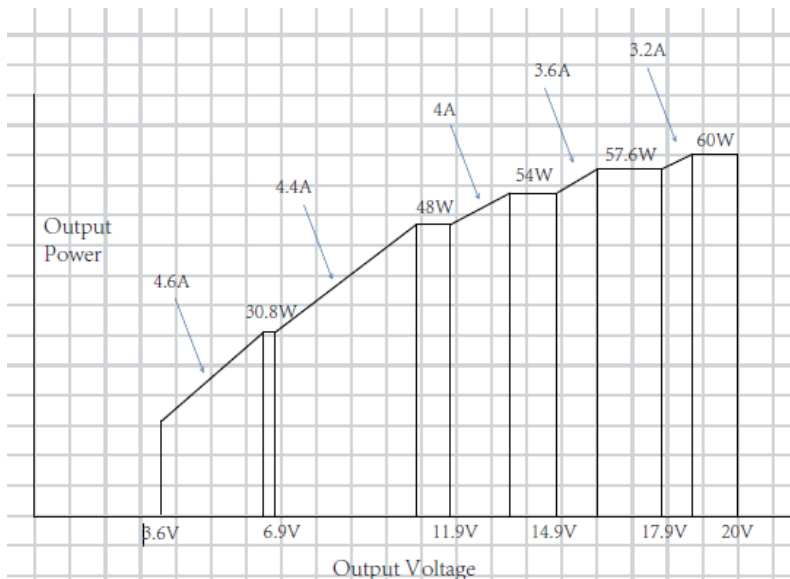
VERIFICATION STATEMENT EN 60950-1:2006+A11:2009+A1:2010+A12:2011+ A2:2013 Information technology equipment – Safety – Part 1: General requirements	
Report Reference No.	180500334SHA-002 (Based on CB certif. no. SE-93988)
Tested by (+ signature)	Albert Zhou 
Approved by (+ signature).....	Will Wang 
Date of issue	2019-05-14
Contents	3 pages
Testing laboratory Name	Intertek Testing Services Shanghai
Address	Building 86, 1198 Qinzhou Road (North), 200233 Shanghai, China
Testing location	Same as above
Client Name	GlobTek, Inc.
Address	186 Veterans Dr. Northvale, NJ 07647 USA
Standard	EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
Test procedure	S mark
Non-standard test method	N.A.
Test item Description	ITE Power Supply
Trademark	
Model and/or type reference	GT*96605-G2**** (The 1st "*" part can be 'M' or 'L' or 'H' for market identification and not related to safety. The 2nd "*" can be A1, A2, A3 denote different DC output voltage When 2nd *=A1: 5V/4.6A, 5.8V/4.6A, 9V/4.4A, 12V/4A, 15V/3.6A and 20V/3A When 2nd *=A2: 5V/3A, 5.8V/3A, 9V/3A, 12V/3A, 15V/3A and 20V/3A When 2nd *=A3: 5V/4.6A, 5.8V/4.6A, 9V/4.4A, 12V/4A, 15V/3.6A, 20V/3A and any one voltage/current combinations (Power Profiles), between 3.6V and 20V. The 3rd "*" denotes blank or the rated output wattage designation, which can be "01" to "60", with interval of 0.1W. The 4th "*" =-T2 means desktop class II with C8 AC inlet. =-T2A means desktop class II with C18 AC inlet. =-T3 means desktop class I with C14 AC inlet. =-T3A means desktop class I with C6 AC inlet. =-T3F means desktop class I with C14 AC inlet with FLOATING OUTPUT. =-T3AF means desktop class I with C6 AC inlet with FLOATING OUTPUT. =-R2 means hybrid desktop housing class II with C8 AC inlet. =-R3A means hybrid desktop housing class I with C6 AC inlet. =-R3AF means hybrid desktop housing class I with C6 AC inlet with FLOATING OUTPUT. The 5th "*" can be blank or -RA. -RA denotes the Product with RIGHT ANGLE daughter board (no output cord); blank denotes the product with output cord. The last * denote any six character = 0-9 or A-Z or ()] or – or blank for marketing purposes.)

Rating(s)	: Input: 100-240V~, 50-60Hz, 1.5A; Output: 3.6-20VDC, Max.4.6A, Max. 60W. Refer to page 2 for details.
Manufacture	: GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 USA
Factory	: GlobTek (Suzhou) Co., Ltd Building 4, No. 76 JinLing East Road, Suzhou Industrial Park, Suzhou, JiangSu, 215021, China
Remarks for acceptance and review work conducted by above qualified testing laboratory	
Sample Number reviewed.....	: 18 pcs

Remark	: The product and the mentioned test reports comply with Swedish standard and nationals' deviations, if any. The sample as shown in following page(s) is still corresponding with the one mentioned in CB test report. We concluded this statement verifies that above standards are fulfilled.
Test item description	: No tests are needed for this product.
Statement for deviations, if any.....	: National difference for Sweden has been evaluated in CB report.

Model list:

Model	Input	Output voltage (Vdc)	Max. output current (A)	Max. output power (W)
GT*96605-G2A1-T2/T2A/T3/T3A/T3F/T3AF/R2/R3A/R3AF**	100-240VAC, 50-60Hz, 1.5A	5V/4.6A, 5.8V/4.6A, 9V/4.4A, 12V/4A, 15V/3.6A and 20V/3A		
GT*96605-G2A2-T2/T2A/T3/T3A/T3F/T3AF/R2/R3A/R3AF**		5V/3A, 5.8V/3A, 9V/3A, 12V/3A, 15V/3A and 20V/3A		
GT*96605-G2A3*-T2/T2A/T3/T3A/T3F/T3AF/R2/R3A/R3AF**		3.6V - 6.9V	4.6A	30.8W
		7.0V - 11.9V	4.4A	48.0W
		12.0V - 14.9V	4.0A	54.0W
		15.0V - 17.9V	3.6A	57.6W
	18.0V - 20.0V	3.2A	60.0W	



Specification and key information involved in original CB certificate and test report

Involved Ref. Certif. no.....	: SE-93988
Issued date.....	: 2019-05-03
Original. Certif. no	: SE-93988
Issued date.....	: 2019-05-03
Test item description.....	: ITE Power Supply
Applicant's Name	: GlobTek, Inc.
Address	: 186 Veterans Dr. Northvale, NJ 07647 USA
Manufacturer.....	: GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 USA
Factory	: GlobTek (Suzhou) Co., Ltd Building 4, No. 76, Jin Ling East Rd., Suzhou Industrial Park, Suzhou, JiangSu 215021, China
Technical data.....	: Input: 100-240V~, 50-60Hz, 1.5A; Output: 3.6-20VDC, Max.4.6A, Max. 60W. Refer to page 2 for details.
Referred standard	: IEC 60950-1:2005 + A1:2009 + A2:2013 and EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 and National difference for CENELEC countries, Singapore, Japan, China, United Kingdom, Australia/New Zealand, Korea, Canada and USA
Model and/or type reference	: GT*96605-G2***** (The 1st "*" part can be 'M' or '-' or 'H' for market identification and not related to safety. The 2nd "*" can be A1, A2, A3 denote different DC output voltage When 2nd *=A1: 5V/4.6A, 5.8V/4.6A, 9V/4.4A, 12V/4A,15V/3.6A and 20V/3A When 2nd *=A2: 5V/3A, 5.8V/3A, 9V/3A, 12V/3A,15V/3A and 20V/3A When 2nd *=A3: 5V/4.6A, 5.8V/4.6A, 9V/4.4A, 12V/4A,15V/3.6A, 20V/3A and any one voltage/current combinations (Power Profiles), between 3.6V and 20V. The 3rd "*" denotes blank or the rated output wattage designation, which can be "01" to "60", with interval of 0.1W. The 4th "*" =-T2 means desktop class II with C8 AC inlet. =-T2A means desktop class II with C18 AC inlet. =-T3 means desktop class I with C14 AC inlet. =-T3A means desktop class I with C6 AC inlet. =-T3F means desktop class I with C14 AC inlet with FLOATING OUTPUT. =-T3AF means desktop class I with C6 AC inlet with FLOATING OUTPUT. =-R2 means hybrid desktop housing class II with C8 AC inlet. =-R3A means hybrid desktop housing class I with C6 AC inlet. =-R3AF means hybrid desktop housing class I with C6 AC inlet with FLOATING OUTPUT. The 5th "*" can be blank or -RA. -RA denotes the Product with RIGHT ANGLE daughter board (no output cord); blank denotes the product with output cord. The last * denote any six character = 0-9 or A-Z or () [] or - or blank for marketing purposes.)
Involved test report	: 180500334SHA-001