

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM968000P

May 20, 2024

GTM968000P

Information

Model Number	GTM968000P
Description	GTM968000P, ICT / ITE / Medical Power Supply, Open Frame/Internal, Regulated Switchmode AC-DC Power Supply AC Adaptor, Forced airflow for full rated power (CFM): 10CFM, Input Rating: 100-240V~, 50-60 Hz, , Output Rating: 800 Watts, Power rating with convection cooling (W) 520W, 12-54V in 0.1V increments, Approvals:
Model Picture	
Agency Documents	
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0O3a00000OA4O6EAL
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0O3a00000OA4O6EAL
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM968000P

May 20, 2024

MODEL PARAMETERS

Type	Open Frame/Internal
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT / ITE / Medical Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	6A
Wattage (W)	800.0
Vout Range (V)	12-54
Efficiency Level	USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782
Ingress Protection	N/A
Size (mm)	127.0 (L) x 76.2 (W) x 34.3 (H)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<https://www.globtek.com/ds/ZzCb8dc3884/QFJPeBnHt5V.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM968000P

May 20, 2024

ENCLOSURE

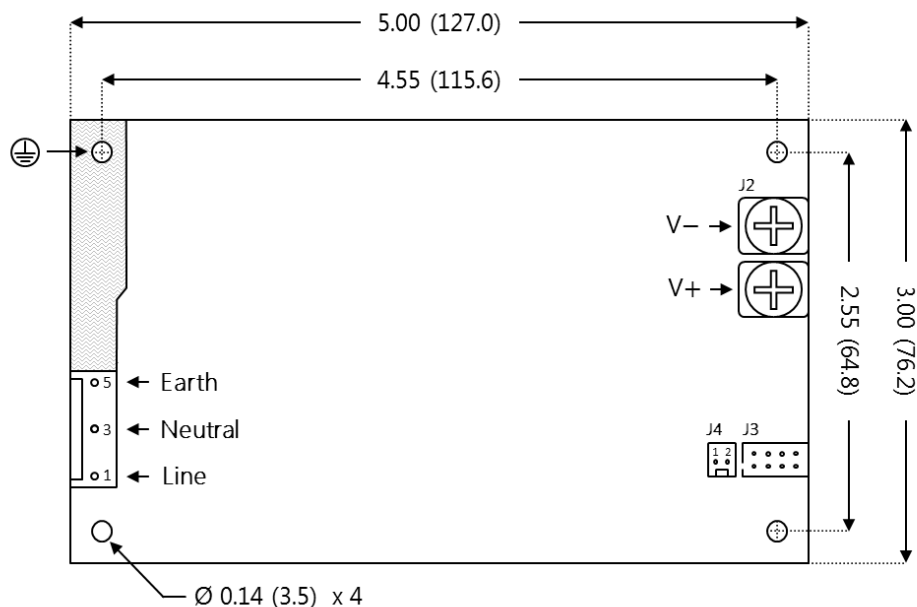

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM968000P

May 20, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
--------------	---------	---------	----------	-----

Model:GTM968000P

May 20, 2024

SPECIFICATIONS

Input

Input Voltage:	Specified: 90 - 264Vac, (85 - 264Vac with derating) Nameplate: 100 - 240Vac
Input Frequency:	Specified: 47 - 63Hz Nameplate: 50 - 60Hz
No Load Input Power:	< 1.5W @ 115V/230V
Inrush Current:	60A max @ 264Vac
Power Factor:	>0.95 @ 115Vac, >0.95 @ 230Vac, full load

Main Output

Output Power:	520W (linearly derated to 480W @ 85Vac) [natural convection, open U-frame version] 800W (linearly derated to 720W @ 85Vac) [forced air cooling, enclosed version]
Constant Current Operation:	CC/CV with a brick-wall CC limit at ~115% nominal current rating. Power supply enters auto-recovery (hiccup) mode once Vout drops to ~75% of nominal value.
Turn-on Delay:	< 2 seconds @ 85Vac (full load)
Voltage Set-Point Tolerance:	± 2.0% (measured at connector, no load, Ta = -20 to 50°C)
Load Regulation:	± 1.0% (measured at connector)
Line Regulation:	± 0.5% (measured at connector)
Ripple:	1% pk-pk (using a 47µF low-ESR cap + 0.1µF ceramic capacitor, measured @ 20MHz BW)
Transient Response:	<5% deviation (with 25-75% load step), recovery to within 1% in 1ms
Startup Overshoot:	<5% (full load)
Hold-up Time:	20ms min. (full load)

Standby Output

Output Voltage:	5V
Output Current:	1A
Line/Load Regulation + Set-Point Tolerance:	± 4%
Ripple:	1% pk-pk (using a 47µF low-ESR cap + 0.1µF ceramic capacitor, measured @ 20MHz BW)
Always on?	Yes

Fan Output

Output Voltage:	12V
Output Current:	0.6A

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM968000P

May 20, 2024

Line/Load Regulation + Set-Point Tolerance: $\pm 4\%$

Always on? On or off depending on internal sensed temperature

Other Control & Signaling Features

Remote On/Off (EN)	Yes
Remote Voltage Sense:	Yes, voltage drop compensation up to 500mV of total drop, short and reverse polarity protected
Power Good (PG)	Yes
Automatic On/Off Fan Control:	Yes, dependent on internal temperature, with hysteresis
Main output voltage adjustment:	Yes, $\pm 10\%$ adjustment range via trimmer potentiometer (special option)

Protections

Fusing:	Dual, high-breaking-capacity fuses compliant to IEC60601-1, $\geq 1,500\text{A}$ breaking capacity
Over-Voltage Protection:	110 - 130%. Latched-off, cycle AC to reset
Over-Current Protection:	115% typical, CC operation when Vout is between 75 - 100% of nominal value, auto-recovery hiccup-mode when Vout collapses to $<75\%$ of nominal value
Short Circuit Protection:	Auto-recovery
Over-Temperature Protection:	Latched-off, cycle AC to reset
AC Under-Voltage Protection:	Brown-out trip @ 70Vac (nom.), Restore @ 75 - 80Vac

Environmental

Operating Temperature:	-20°C to 50°C (full output power), -20°C to 70°C (linearly derated to 50% power rating @ 70°C)
Storage Temperature:	-30°C to 85°C
Humidity:	0% to 95% relative humidity, non-condensing
Altitude:	5000m max.
Vibration:	Conforms to EN60068-2-6, ISO80601-2, EN1789

Safety

Certifications:	IEC60601-1 IEC62368-1 IEC60335-1
Dielectric Withstand Voltage:	4000VAC or 5656VDC, primary-to-secondary 3000VAC or 4242VDC, primary-to-earth 3000Vac or 4242VDC, secondary-to-earth (Class II FE models only, N/A for Class I)
Suitable Medical Applications:	Type-B (Class I) or Type-BF (Class II with FE)
Output Touch Current:	NC: $<80\mu\text{A}$, SFC: $<400\mu\text{A}$ (open neutral, open earth)
Earth Leakage Current	NC: $<300\mu\text{A}$, SFC: $<1.0\text{mA}$ (open neutral) 2 x MOPP (primary-to-secondary), 1xMOPP (primary-to-earth), 1xMOPP

Model:GTM968000P

May 20, 2024

Means of Protection: (secondary-to-earth, Class II FE models only)

EMC

Certifications:	IEC60601-1-2 EN55032 (CISPR32) EN55035 (CISPR35)
Conducted Emissions:	Class B, FCC Part 15, Class B (with resistive load, Class I and Class II FE configurations)
Radiated Emissions:	Class B, FCC Part 15, Class B (with resistive load, Class I and Class II FE configurations)
Harmonic Current Voltage Distortion:	EN61000-3-2, Class A
Voltage Fluctuations/Flicker:	EN61000-3-3
Electrostatic Discharge (ESD) Immunity:	EN61000-4-2, 10KV contact discharge, 18KV air discharge (applied to output terminals, and to horizontal/vertical coupling planes [HCP/VCP] with power supply sitting on HCP)
Radiated RF Immunity:	EN61000-4-3, 20V/m 80-2700MHz, 80% 1KHz AM, 80% 5Hz AM
EFT/Burst Immunity:	EN61000-4-4, 4KV/100kHz.
Line Surge Immunity:	EN61000-4-5, 2KV differential, 4KV common-mode
Conducted RF Immunity:	EN61000-4-6, 3VRMS, 80% 1KHz AM
Power Frequency Magnetic Field Immunity:	EN61000-4-8, 30A/m
Voltage Dip Immunity:	EN61000-4-11

Mechanical

Dimensions:	U-Frame version: 6.00" x 4.00" x 1.69" (152.3mm x 101.6mm x 43.0mm) Enclosed version with top-side fan: 6.00" x 4.00" x 2.40" (152.3mm x 101.6mm x 61.0mm)
Fan Audible Noise Specification:	28.5dB(A) (Enclosed version with fan only)


Input/Output Connectors

Input Connector (J1):	Connector on PCB: TE Connectivity/AMP 641966-1 Recommended mate: TE Connectivity/AMP 350766-1 Pinout: 1: Neutral 2: Not used 3: Line
Main Output Connectors (J2, J3):	Connector on PCB: CNNT ACTB207 (M5 ring terminal), Recommended mounting torque: 2.0Nm Recommended mate: Various, depends on required wire size Pinout: J2: V+ J3: V- (GND)
Standby/Control Output Connector (J4):	Connector on PCB: Molex 0705550005 Recommended mate: Molex 0014562062 Pinout: 1: SNS+ 2: SNS- 3: PGOOD 4. EN 5. GND 6. +5VSB
Fan Output Connector: (J5):	Connector on PCB: Molex 22-04-1021 Recommended mate: Molex 22-01-1022 Pinout: 1: GND 2: +FAN
Earth Connector (J6):	Connector on PCB: Kang Yang PCH250 (0.250" x 0.031" Faston) Recommended mate: TE Connectivity/AMP 2-520184-2

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM968000P

May 20, 2024



PROPRIETARY INFORMATION



PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/ZzCb8dc3884/QFJPeBnHt5V.html>

Model: GTM968000P

May 20, 2024

DERATING CURVE

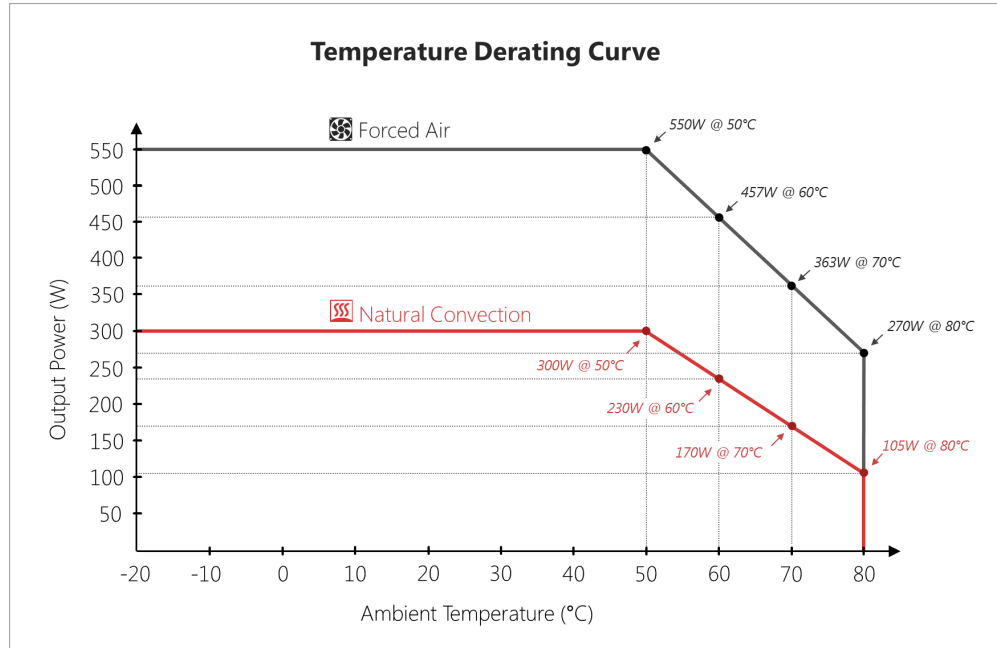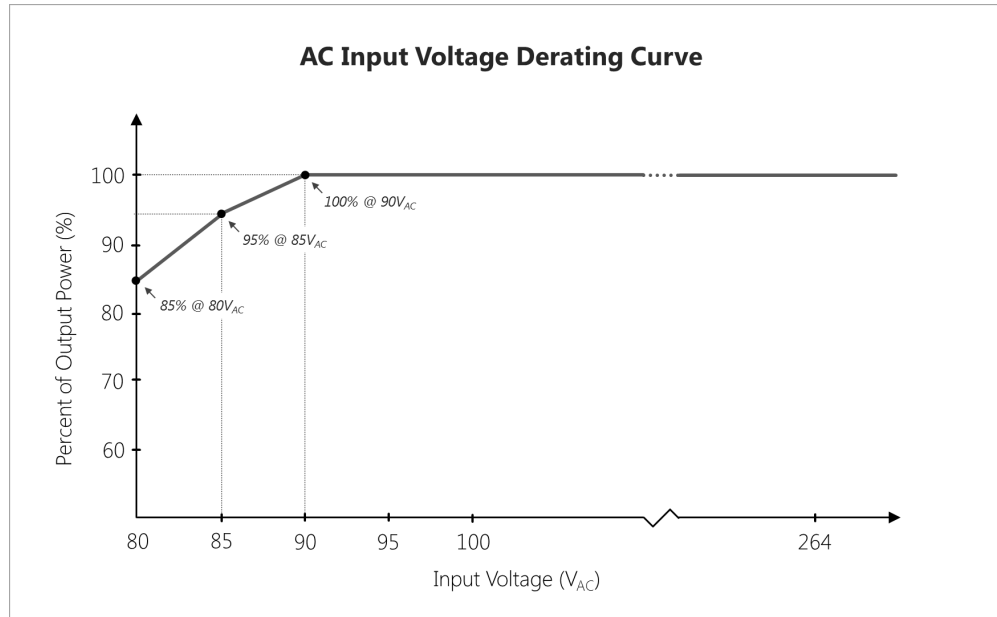

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM968000P

May 20, 2024

INPUT CONFIGURATION

Description



Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM968000P

May 20, 2024

Approvals

Logo	
------	--