



Test Report issued under the responsibility of:



**TEST REPORT
IEC 62133**

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications

Report Number: 17047118 001
Date of issue: 2015-03-18
Total number of pages 34 pages

Applicant's name.....: GlobTek, Inc.
Address: 186 Veterans Dr. Northvale, NJ 07647, USA

Test specification:

Standard: IEC 62133: 2012 (Second Edition)
Test procedure: CB Scheme
Non-standard test method.....: N/A

Test Report Form No.....: IEC62133B
Test Report Form(s) Originator: UL(Demko)
Master TRF.....: Dated 2013-03

Copyright © 2013 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.


This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

Test item description: RECHARGEABLE LITHIUM-ION BATTERY PACK
Trade Mark: N/A
Manufacturer.....: Same as applicant
Address: Same as applicant
Model/Type reference: BL1880F6835661S5PG*T (*=9, A, B, C, J, K, L, M, N, P, R, T, U, V, 1, 2, 3, Q, W)
Ratings: 3.7Vdc, MAX. 9.4Ah, MAX. 34.78Wh

Testing procedure and testing location:		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.
Testing location/ address		3&4 F, Cybio Technology Building No. 1, Langshan No. 2 Road South, 5th Industrial Area, High-Tech Industry Park North, Nanshan District, 518057 Shenzhen, P.R. China
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address		
Tested by (name + signature).....:		Jacob Lu
Approved by (name + signature)		Charlie Zeng
		<i>Jacob Lu</i> <i>Charlie Zeng</i>
<input type="checkbox"/>	Testing procedure: TMP	
Testing location/ address		
Tested by (name + signature).....:		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: WMT	
Testing location/ address		
Tested by (name + signature).....:		
Witnessed by (name + signature)		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: SMT	
Testing location/ address		
Tested by (name + signature).....:		
Approved by (name + signature)		
Supervised by (name + signature)....:		

<p>List of Attachments (including a total number of pages in each attachment):</p> <p>Attachment 1: Photo documentation (5 pages).</p>	
<p>Summary of testing:</p>	
<p>Tests performed (name of test and test clause):</p> <p>cl.5.6.2 Design recommendation(Lithium system);</p> <p>cl.8.1 Charging procedure for test purposes (for Cell and Pack);</p> <p>cl.8.2.1 Continuous charging at constant voltage (Cells);</p> <p>cl.8.3.1 External short circuit (Cell);</p> <p>cl.8.3.2 External short circuit (Battery);</p> <p>cl.8.3.3 Free fall (for Cell and Pack);</p> <p>cl.8.3.4 Thermal abuse (Cells);</p> <p>cl.8.3.5 Crush (Cells);</p> <p>cl.8.3.6 Over-charging of battery;</p> <p>cl.8.3.7 Forced discharge (Cells);</p> <p>cl.8.3.8 Transport tests (Cells).</p> <p>cl.8.3.9 Forced internal short circuit (Cells)</p> <p>Tests are made with the number of cells and batteries specified in IEC 62133: 2012 (Second Edition) Table 2.</p> <p>Remark: Batteries from three factories which listed in page 6 were selected for all the testing.</p>	<p>Testing location:</p> <p>TÜV Rheinland (Shenzhen) Co., Ltd.</p> <p>3&4 F, Cybio Technology Building No. 1, Langshan No. 2 Road South, 5th Industrial Area, High-Tech Industry Park North, Nanshan District, 518057 Shenzhen, P.R. China</p>
<p>Summary of compliance with National Differences:</p> <p>BE, BY, CH, CN, DE, DK, FI, FR, GB, HU, JP, KR, NL, NO, SE, SG.</p> <p>BE=Belgium, BY=Belarus, CH=Switzerland, CN=China, DE=Germany, DK=Denmark, FI=Finland, FR=France, GB=United Kingdom, HU=Hungary, JP=Japan, KR=Republic of Korea, NL=The Netherlands, NO=Norway, SE=Sweden, SG=Singapore.</p> <p><input checked="" type="checkbox"/>The product fulfils the requirements of EN62133: 2013.</p>	




Copy of marking plates:

 **GlobTek® ,Inc.**
www.globtek.com

P/N:BL1880F6835661S5PG9T


RECHARGEABLE LITHIUM-ION BATTERY PACK

MODEL:BL1880F6835661S5PG9T **IEC designation: 1ICP7/35/66-5**
 VBAT: 3.7Vdc
 RATED CAPACITY: 9.1Ah
 MAX. CAPACITY: 9.4Ah
 RATED WATT-HOUR: 33.67Wh
 MAX. WATT-HOUR: 34.78Wh

PIN1,PIN2,PIN3: +
 PIN4: THERM
 PIN5: SDA
 PIN6: SCL
 PIN 1 PIN7,PIN=8,PIN8: -

CAUTION:
 Risk of Fire and Burns.
 Do Not Open, Crush,
 Heat Above 140°F/60°C
 or Incinerate.
 Follow Manufacturer's Instructions.



PRECAUCIÓN:
 Risque d'incendie et de brûlures.
 Ne pas ouvrir, écraser,
 Chaleur supérieure à 140°F/60°C
 ou incinérer.
 Suivez les instructions du fabricant.

MADE IN CHINA YYYYMM

Remark: This is a representative label, the others are identical to these one only except for the model name.

Test item particulars:	
Classification of installation and use:	To be defined in final product
Supply connection:	DC Connector
Recommend charging method declared by the manufacturer	Charging the battery with 1880mA constant current until 4.2V and then constant voltage until charging current reduces to 94mA at ambient 20°C±5°C.
Discharge current (0,2 I_L A)	1880mA
Specified final voltage	3.0V
Chemistry	<input type="checkbox"/> nickel systems <input checked="" type="checkbox"/> lithium systems
Recommend of charging limit for lithium system	
Upper limit charging voltage per cell:	4.25V
Maximum charging current	9400mA
Charging temperature upper limit	45°C
Charging temperature lower limit:	0°C
Polymer cell electrolyte type	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
Possible test case verdicts:	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
Testing:	
Date of receipt of test item	2014-12-30
Date (s) of performance of tests	2014-12-30 to 2015-01-23
General remarks:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC62133B:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	

Name and address of factory (ies) : 1. GlobTek (Suzhou) Co., Ltd.
Building 4, No. 76, Jinling East Road, Suzhou
Industrial Park, Jiangsu 215021, P.R. China

General product information:

This battery is constructed with 5 lithium-ion cells in 1S5P, and has overcharge, over-discharge, over current and short-circuits proof circuit.

The main features of the cell in the battery pack are shown as below (clause 8.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
683566	1880mAh	3.7V	376mA	376mA	1880mA	2820mA	4.20V	3.0V

The main features of the cell in the battery pack are shown as below (clause 8.1.2):


Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
683566	4.25V	94mA	0°C	45°C

The main features of the battery pack are shown as below (clause 8.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
BL1880F68356 61S5PG*T	MAX. 9400mAh	3.7V	1880mA	1880mA	9400mA	14100mA	4.20V	3.0V

The main features of the battery pack are shown as below (clause 8.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
BL1880F68356 61S5PG*T	4.25V	470mA	0°C	45°C

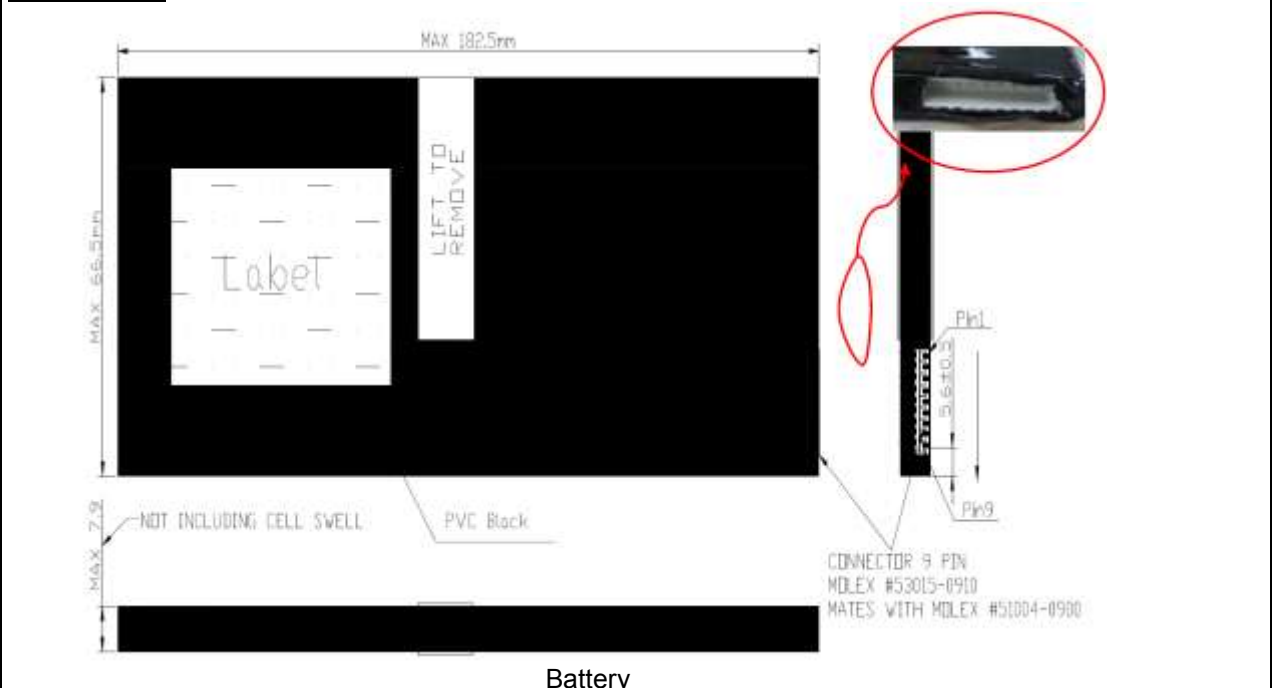Construction:


IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
4	Parameter measurement tolerances		P
	Parameter measurement tolerances		P
5	General safety considerations		P
5.1	General		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N/A
	Insulation resistance (MΩ)..... :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate creepage and clearance distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		N/A
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	No venting mechanism exists on the pouch cell.	N/A
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
5.4	Temperature/voltage/current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, overdischarge, over current and short-circuit proof circuit used in this battery. See tests of clause 4.	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that associated chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in the manufacturer's specifications.	P
5.5	Terminal contacts		P
	Terminals have a clear polarity marking on the external surface of the battery	DC connector used. Also see page 4.	P

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC connector contacts complied with the requirements.	P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries		P
5.6.1	If there is more than one battery housed in a single battery case, cells used in the assembly of each battery have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer	Complied, 1S5P.	P
	Each battery has an independent control and protection		N/A
	Manufacturers of cells make recommendations about current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate separate circuitry to prevent the cell reversal caused by uneven discharges		N/A
	Protective circuit components are added as appropriate and consideration given to the end-device application		P
	When testing a battery, the manufacturer of the battery provides a test report confirming the compliance according to this standard		N/A
5.6.2	Design recommendation for lithium systems only		P
	For the battery consisting of a single cell or a single cellblock: - Charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Clause 8.1.2, Table 4; or	Charging voltage: 4.2V, not exceed 4.25V specified in Clause 8.1.2, table 4.	P
	- Charging voltage of the cell does not exceed the different upper limit of the charging voltage determined through Clause 8.1.2, NOTE 1.		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - The voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, by monitoring the voltage of every single cell or the single cellblocks; or		N/A

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	- The voltages of any one of the single cells or single cellblocks does not exceed the different upper limit of the charging voltage, determined through Clause 8.1.2, NOTE 1, by monitoring the voltage of every single cell or the single cellblocks		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - Charging is stopped when the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks; or		N/A
	- Charging is stopped when the upper limit of the different charging voltage, determined through Clause 8.1.2, NOTE 1, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Complied. ISO 9001: 2008 certificate provided.	P
6	Type test conditions		P
	Tests were made with the number of cells or batteries specified in Table 1 for nickel-cadmium and nickel-metal hydride systems and Table 2 for lithium systems, using cells or batteries that are not more than six months old	Complied. Lithium system.	P
	Unless noted otherwise in the test methods, testing was conducted in an ambient of 20°C ± 5°C.	Tests are carried out at 20°C ± 5°C.	P
7	Specific requirements and tests (nickel systems)		N/A
7.1	Charging procedure for test purposes	Lithium system.	N/A
7.2	Intended use		N/A
7.2.1	Continuous low-rate charging (cells)		N/A
	Results: No fire. No explosion		N/A
7.2.2	Vibration		N/A
	Results: No fire. No explosion. No leakage	(See Table 7.2.2)	N/A
7.2.3	Moulded case stress at high ambient temperature		N/A
	Oven temperature (°C)		—
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N/A
7.2.4	Temperature cycling		N/A

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	Results: No fire. No explosion. No leakage.		N/A
7.3	Reasonably foreseeable misuse		N/A
7.3.1	Incorrect installation cell		N/A
	The test was carried out using: - Four fully charged cells of the same brand, type, size and age connected in series, with one of them reversed; or		N/A
	- A stabilized dc power supply.		N/A
	Results: No fire. No explosion	(See Table 7.3.1)	N/A
7.3.2	External short circuit		N/A
	The cells or batteries were tested until one of the following occurred: - 24 hours elapsed; or		N/A
	- The case temperature declined by 20% of the maximum temperature rise		N/A
	Results: No fire. No explosion	(See Table 7.3.2)	N/A
7.3.3	Free fall		N/A
	Results: No fire. No explosion.		N/A
7.3.4	Mechanical shock (crash hazard)		N/A
	Results: No fire. No explosion. No leakage.		N/A
7.3.5	Thermal abuse		N/A
	Oven temperature (°C)		—
	Results: No fire. No explosion.		N/A
7.3.6	Crushing of cells		N/A
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or		N/A
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	The cell is prismatic type and a second set of samples was tested, rotated 90° around longitudinal axis compared to the first set		N/A
	Results: No fire. No explosion	(See Table 7.3.6)	N/A
7.3.7	Low pressure		N/A
	Chamber pressure (kPa)		—
	Results: No fire. No explosion. No leakage.		N/A
7.3.8	Overcharge		N/A
	Results: No fire. No explosion	(See Table 7.3.8)	N/A
7.3.9	Forced discharge		N/A

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	Results: No fire. No explosion	(See Table 7.3.9)	N/A
8	Specific requirements and tests (lithium systems)		P
8.1	Charging procedures for test purposes	Complied.	P
8.1.1	First procedure: This charging procedure applied to tests other than those specified in 8.1.2		P
8.1.2	Second procedure: This charging procedure applied to the tests of 8.3.1, 8.3.2, 8.3.4, 8.3.5, and 8.3.9		P
	If a cell's specified upper and/or lower charging temperature exceeds values for the upper and/or lower limit test temperatures of Table 4, the cells were charged at the specified values plus 5 °C for the upper limit and minus 5 °C for the lower limit	The upper limit test temperature was 45°C; The lower limit test temperature was -5°C.	P
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)		P
	For a different upper limit charging voltage (i.e. other than for lithium cobalt oxide systems at 4,25 V), the applied upper limit charging voltage and upper limit charging temperatures were adjusted accordingly	Lithium cobalt oxide system only.	N/A
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)		N/A
8.2	Intended use		P
8.2.1	Continuous charging at constant voltage (cells)	Tested complied.	P
	Results: No fire. No explosion	(See Table 8.2.1)	P
8.2.2	Moulded case stress at high ambient temperature (battery)		N/A
	Oven temperature (°C)		—
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N/A
8.3	Reasonably foreseeable misuse		P
8.3.1	External short circuit (cell)		P
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		N/A
	- The case temperature declined by 20% of the maximum temperature rise		P
	Results: No fire. No explosion	(See Table 8.3.1)	P
8.3.2	External short circuit (battery)		P

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		P
	- The case temperature declined by 20% of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N/A
	Results: No fire. No explosion	(See Table 8.3.2)	P
8.3.3	Free fall		P
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.4	Thermal abuse (cells)		P
	The cells were held at 130°C ± 2°C for: - 10 minutes; or	Tested complied.	P
	- 30 minutes for large cells (gross mass of more than 500 g as defined in IEC 62281)		N/A
	Oven temperature (°C)	130°C	P
	Gross mass of cell (g)	Small cell.	P
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.5	Crush (cells)		P
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or	Tested complied.	P
	- An abrupt voltage drop of one-third of the original voltage has been obtained; or		N/A
	- 10% of deformation has occurred compared to the initial dimension		N/A
	Results: No fire. No explosion	(See Table 8.3.5)	P
8.3.6	Over-charging of battery		P
	Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10°C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: No fire. No explosion	(See Table 8.3.6)	P
8.3.7	Forced discharge (cells)		P
	Results: No fire. No explosion	(See Table 8.3.7)	P
8.3.8	Transport tests		P

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	Manufacturer's documentation provided to show compliance with UN Recommendations on Transport of Dangerous Goods	T-1, T-2, T-3 and T-4 tested complied. No leakage, no venting, no short-circuit, no rupture, no explosion and no fire. T-5, See Table 8.3.8. T-6, Taking 13kN as testing condition refers to 8.3.5 for the testing result.	P
8.3.9	Design evaluation – Forced internal short circuit (cells)	Tested complied.	P
	The cells complied with national requirement for	France, Japan, Republic of Korea and Switzerland.	—
	The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or		P
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	400N	P
	Results: No fire	(See Table 8.3.9)	P
9	Information for safety		P
	The manufacturer of secondary cells ensures that information is provided about current, voltage and temperature limits of their products.	Information for safety mentioned in manufacturer's specifications.	P
	The manufacturer of batteries ensures that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards.	Information for safety mentioned in manufacturer's specifications.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, information relating to hazard avoidance resulting from a system analysis is provided to the end user		N/A
10	Marking		P
10.1	Cell marking		N/A
	Cells marked as specified in the applicable cell standards: IEC 61951-1, IEC 61951-2 or IEC 61960.	The final product is battery.	N/A
10.2	Battery marking		P
	Batteries marked in accordance with the requirements for the cells from which they are assembled.	The battery is marked in accordance with IEC 61960, also see page 4.	P
	Batteries marked with an appropriate caution statement.		P

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
10.3	Other information		P
	Storage and disposal instructions marked on or supplied with the battery.	Information for disposal instructions mentioned in manufacturer's specifications.	P
	Recommended charging instructions marked on or supplied with the battery.	Information for recommended charging instructions mentioned in manufacturer's specifications.	P
11	Packaging		P
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants.		P
Annex A	Charging range of secondary lithium ion cells for safe use		P
A.1	General		P
A.2	Safety of lithium-ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General	Max. charging voltage is 4.2V	P
A.3.2	Upper limit charging voltage	4.25V applied.	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied		N/A
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 0-45°C	P
A.4.3	High temperature range	Not higher than the temperature range specific in this standard.	N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in high temperature range		N/A
A.4.3.4	Safety consideration when specifying new upper limit in high temperature range		N/A

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.4	Low temperature range	Charging low temperature declared by client is: 0°C.	P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in low temperature range		P
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range	-5°C applied.	P
A.4.5	Scope of the application of charging current		P
A.5	Sample preparation		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
	The insertion procedure carried out at 20°C±5°C and under -25 °C of dew point		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle to cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle to winding core		N/A
A.5.5.2	Mark the position of nickel particle on the both end of winding core of the separator		N/A
A.5.6	Insertion of nickel particle to prismatic cell		P

TABLE: Critical components information					P
Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity ¹⁾
Cell	GlobTek (Suzhou) Co., Ltd.	683566	3.7V, 1880mAh	IEC 62133: 2012	Test with compliance
Cell (Alternative)		683566	3.7V, 1880mAh	IEC 62133: 2012	Test with compliance
Cell (Alternative)		683566	3.7V, 1880mAh	IEC 62133: 2012	Test with compliance
-Cell Case	SHOWA DENKO K.K	Interchangeable	113µm±10%, Nylon, PP, Aluminum	--	--
-Positive Electrode	Kayo Maxtar	Interchangeable	LiCoO ₂ , PVDF, NMP, Conductive Additive, Aluminum Foil	--	--
-Negative Electrode	Kayo Maxtar	Interchangeable	Graphite, CMC, SBR, H ₂ O, Conductive Additive, Copper Foil	--	--
-Separator	Senior	Interchangeable	16µm, Nylon, PP	--	--
-Electrolyte	Guangzhou Tinci Materials Technology Co., Ltd	TC-2011	LiPF ₆ , DMC, EC, PC, EMC	--	--
PCM	Shenzhen Litongwei Electronic Technology Co., Ltd	BH.1S0864001	Overcharge detection voltage: 4.30±0.025V, Overdischarge detection voltage: 2.80±0.05V, Overcurrent detection voltage: 200±15mV, Overcurrent detection current: 5.0- 12.0A, RDS≤65mΩ	--	Test with compliance

Fuel Gauge IC (U1)	TI	BQ27200	VCC: -0.30-7V, TA: -20-70°C, ISINK: 5mA, TJ: -40-125°C, TSSOP-8	--	Test with compliance
Mosfet (U3, U4)	SIAI	SIS8205A	VDSS: 20V, VGSS: ±12V, ID: 6.0A, TJ: -55- 150°C, TSSOP-8	--	Test with compliance
Protection IC (U2)	SEIKO	S-8261BAU-M6T1U	Over-charge detection voltage: 4.300±0.025V, Over-discharge detection voltage: 2.800±0.050V, Discharge overcurrent detection voltage: 0.200±0.015V, Topr: -40-85°C, SOT23-6	--	Test with compliance
NTC (RT)	JOINSET CO LTD	ECTH160808 103F	R020 =10K±1%, B=3435K Topr: -40°C-125°C, 0603	UL 1434	UL E258805
PCB	SHEN ZHEN JIRUIDA CIRCUIT TECHNOLOGY CO LTD	JRD-S	V-0, 130°C	UL 796	UL E340032
Lead wire	DONGGUAN XIONGXIN ELECTRONICS CO LTD	1007	80°C, 24AWG, VW-1	UL 758	UL E358766
Connector (for model BL1880F6835661 S5PG9T use only)	Molex	53015	9 pins	--	--
Plastic material of connector	SABIC JAPAN L L C	945 (GG)	V-0, 130°C	UL 94	UL E207780
Insulation sheet	ANTAEUS TECHNOLOGY & INDUSTRY (JIANGMEN) CO LTD	PC10, PC13, PC15, PC35	V-2, 80°C	UL 746	UL E318695
Supplementary information:					
¹⁾ Provided evidence ensures the agreed level of compliance.					

7.2.1	TABLE: Continuous low rate charge (cells)					N/A
Model	Recommended charging method, (CC, CV, or CC/CV)	Recommended charging voltage V_c , (Vdc)	Recommended charging current I_{rec} , (A)	OCV at start of test, (Vdc)	Results	
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 						

7.2.2	TABLE: Vibration		N/A
Model	OCV at start of test, (Vdc)	Results	
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 			

7.3.1	TABLE: Incorrect installation (cells)		N/A
Model	OCV of reversed cell, (Vdc)	Results	
Supplementary information:			
<ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 			

7.3.2	TABLE: External short circuit				N/A
Model	Ambient (at 20°C ± 5°C or 55°C ± 5°C)	OCV at start of test, (Vdc)	Resistance of circuit, (Ω)	Maximum case temperature rise ΔT, (°C)	Results
Supplementary information:					
<ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 					

7.3.6	TABLE: Crush			N/A
Model	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Results	
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 				

7.3.8	TABLE: Overcharge			N/A
Model	OCV prior to charging, (Vdc)	Maximum charge current, (A)	Time for charging, (hours)	Results
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 				

7.3.9	TABLE: Forced discharge (cells)				N/A
Model	OCV before application of reverse charge, (Vdc)	Measured reverse charge I_r , (A)	Time for reversed charge, (minutes)	Results	

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.2.1	TABLE: Continuous charging at constant voltage (cells) for cell from GlobTek (Suzhou) Co., Ltd.				P
Model	Recommended charging voltage V_c , (Vdc)	Recommended charging current I_{rec} , (A)	OCV at start of test, (Vdc)	Results	
c1#	4.20	0.376	4.19	P	
c2#	4.20	0.376	4.18	P	
c3#	4.20	0.376	4.19	P	
c4#	4.20	0.376	4.18	P	
c5#	4.20	0.376	4.19	P	

Supplementary information:

- No fire
- No explosion
- No leakage

8.2.1	TABLE: Continuous charging at constant voltage (cells) for cell from Kayo Maxtar Battery Limited				P
Model	Recommended charging voltage V_c , (Vdc)	Recommended charging current I_{rec} , (A)	OCV at start of test, (Vdc)	Results	
c1#	4.20	0.376	4.18	P	
c2#	4.20	0.376	4.19	P	
c3#	4.20	0.376	4.18	P	
c4#	4.20	0.376	4.19	P	
c5#	4.20	0.376	4.19	P	

Supplementary information:					
- No fire					
- No explosion					
- No leakage					

8.2.1	TABLE: Continuous charging at constant voltage (cells) for cell from CTE Energy Co., Ltd.				P
Model	Recommended charging voltage V_c (Vdc)	Recommended charging current I_{rec} (A)	OCV at start of test, (Vdc)	Results	
c1#	4.20	0.376	4.19	P	
c2#	4.20	0.376	4.18	P	
c3#	4.20	0.376	4.18	P	
c4#	4.20	0.376	4.19	P	
c5#	4.20	0.376	4.18	P	

Supplementary information:					
- No fire					
- No explosion					
- No leakage					

8.3.1	TABLE: External short circuit (cells) for cell from GlobTek (Suzhou) Co., Ltd.				P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT_c (°C)	Results
Samples charged at charging temperature upper limit (45°C)					
c6#	18.5	4.23	79	108.9	P
c7#	18.5	4.23	83	103.9	P
c8#	19.9	4.23	77	116.0	P
c9#	19.9	4.23	89	104.9	P
c10#	20.8	4.23	84	98.5	P
Samples charged at charging temperature lower limit (-5°C)					
c11#	24.4	4.17	87	99.1	P
c12#	24.4	4.16	79	103.5	P
c13#	24.4	4.16	84	99.0	P
c14#	24.4	4.16	77	97.3	P
c15#	24.4	4.16	78	103.7	P

Supplementary information:					
- No fire					
- No explosion					

8.3.1	TABLE: External short circuit (cells) for cell from Kayo Maxtar Battery Limited					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT_r , (°C)	Results	
Samples charged at charging temperature upper limit (45°C)						
c6#	18.5	4.23	79	103.4	P	
c7#	18.5	4.22	83	105.9	P	
c8#	19.9	4.23	77	107.0	P	
c9#	19.9	4.22	89	98.9	P	
c10#	20.8	4.23	84	104.5	P	
Samples charged at charging temperature lower limit (-5°C)						
c11#	24.4	4.17	87	102.1	P	
c12#	24.4	4.16	79	94.5	P	
c13#	24.4	4.17	84	97.0	P	
c14#	24.4	4.16	77	101.2	P	
c15#	24.4	4.17	78	99.5	P	
Supplementary information:						
- No fire						
- No explosion						

8.3.1	TABLE: External short circuit (cells) for cell from CTE Energy Co., Ltd.					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT_r , (°C)	Results	
Samples charged at charging temperature upper limit (45°C)						
c6#	18.5	4.22	79	99.1	P	
c7#	18.5	4.23	83	104.5	P	
c8#	19.9	4.23	77	103.8	P	
c9#	19.9	4.23	89	97.4	P	
c10#	20.8	4.22	84	100.2	P	
Samples charged at charging temperature lower limit (-5°C)						
c11#	24.4	4.17	87	94.5	P	
c12#	24.4	4.16	79	93.7	P	
c13#	24.4	4.16	84	100.3	P	
c14#	24.4	4.17	77	97.9	P	
c15#	24.4	4.17	78	101.1	P	
Supplementary information:						
- No fire						
- No explosion						

8.3.2	TABLE: External short circuit (battery) (for battery from GlobTek (Suzhou) Co., Ltd.)					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT , (°C)	Results	
Samples charged at charging temperature upper limit (45°C)						
b4#	54.9	4.21	87	55.4	P	
b5#	54.9	4.21	77	55.4	P	
b6#	54.9	4.21	89	55.4	P	
b7#	54.9	4.22	85	55.3	P	
b8#	54.9	4.22	84	55.2	P	
Samples charged at charging temperature lower limit (-5°C)						
b9#	54.6	4.17	78	55.0	P	
b10#	54.6	4.16	83	55.2	P	
b11#	54.6	4.16	84	55.0	P	
b12#	54.6	4.16	81	54.9	P	
b13#	54.6	4.16	79	55.0	P	
Supplementary information:						
- No fire						
- No explosion						

8.3.2	TABLE: External short circuit (battery) (for battery from CTE Energy Co., Ltd.)					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT , (°C)	Results	
Samples charged at charging temperature upper limit (45°C)						
b4#	54.9	4.22	87	55.4	P	
b5#	54.9	4.22	77	55.4	P	
b6#	54.9	4.21	89	55.4	P	
b7#	54.9	4.22	85	55.4	P	
b8#	54.9	4.22	84	55.4	P	
Samples charged at charging temperature lower limit (-5°C)						
b9#	54.6	4.17	78	55.2	P	
b10#	54.6	4.16	83	55.0	P	
b11#	54.6	4.17	84	55.2	P	
b12#	54.6	4.17	81	54.9	P	
b13#	54.6	4.16	79	55.1	P	
Supplementary information:						
- No fire						
- No explosion						

8.3.2	TABLE: External short circuit (battery) (for battery from Kayo Maxtar Battery Limited)					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT , (°C)	Results	
Samples charged at charging temperature upper limit (45°C)						
b4#	54.9	4.22	87	55.2	P	
b5#	54.9	4.21	77	55.4	P	
b6#	54.9	4.22	89	55.3	P	
b7#	54.9	4.21	85	55.2	P	
b8#	54.9	4.22	84	55.3	P	
Samples charged at charging temperature lower limit (-5°C)						
b9#	54.6	4.16	78	55.0	P	
b10#	54.6	4.16	83	55.1	P	
b11#	54.6	4.17	84	55.2	P	
b12#	54.6	4.17	81	54.7	P	
b13#	54.6	4.17	79	55.1	P	
Supplementary information:						
- No fire						
- No explosion						

8.3.5	TABLE: Crush for cell from GlobTek (Suzhou) Co., Ltd.					P
Model	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Width/diameter of cell before crush, (mm)	Required deformation for crush, (mm)	Results	
Samples charged at charging temperature upper limit (45°C)						
c29#	4.24	--	--	--	P	
c30#	4.23	--	--	--	P	
c31#	4.23	--	--	--	P	
c32#	4.23	--	--	--	P	
c33#	4.23	--	--	--	P	
Note:						
A 13kN force applied at the wide side of prismatic cells.						
Supplementary information:						
- No fire						
- No explosion						

8.3.5	TABLE: Crush for cell from Kayo Maxtar Battery Limited					P
Model	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Width/ diameter of cell before crush, (mm)	Required deformation for crush, (mm)	Results	
Samples charged at charging temperature upper limit (45°C)						
c29#	4.24	--	--	--	P	
c30#	4.23	--	--	--	P	
c31#	4.24	--	--	--	P	
c32#	4.24	--	--	--	P	
c33#	4.23	--	--	--	P	
Note: A 13kN force applied at the wide side of prismatic cells. Supplementary information: - No fire - No explosion						

8.3.5	TABLE: Crush for cell from CTE Energy Co., Ltd.					P
Model	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Width/ diameter of cell before crush, (mm)	Required deformation for crush, (mm)	Results	
Samples charged at charging temperature upper limit (45°C)						
c29#	4.23	--	--	--	P	
c30#	4.23	--	--	--	P	
c31#	4.23	--	--	--	P	
c32#	4.22	--	--	--	P	
c33#	4.23	--	--	--	P	
Note: A 13kN force applied at the wide side of prismatic cells. Supplementary information: - No fire - No explosion						

8.3.6	TABLE: Over-charging of battery (for battery from GlobTek (Suzhou) Co., Ltd.)			P
Constant charging current (A).....:		18.8		—
Supply voltage (Vdc).....:		5.0		—
Model	OCV before charging, (Vdc)	Resistance of circuit, (mΩ)	Maximum outer casing temperature, (°C)	Results
b17#	3.28	70.9	23.2	P
b18#	3.28	70.8	21.0	P
b19#	3.27	71.0	22.3	P
b20#	3.27	71.2	21.8	P
b21#	3.28	70.8	22.9	P
Supplementary information:				
- No fire				
- No explosion				

8.3.6	TABLE: Over-charging of battery (for battery from CTE Energy Co., Ltd.)			P
Constant charging current (A).....:		18.8		—
Supply voltage (Vdc).....:		5.0		—
Model	OCV before charging, (Vdc)	Resistance of circuit, (mΩ)	Maximum outer casing temperature, (°C)	Results
b17#	3.27	70.9	21.2	P
b18#	3.27	70.8	22.3	P
b19#	3.28	71.0	23.4	P
b20#	3.28	71.2	23.1	P
b21#	3.27	70.8	22.8	P
Supplementary information:				
- No fire				
- No explosion				

8.3.6	TABLE: Over-charging of battery (for battery from Kayo Maxtar Battery Limited)				P
Constant charging current (A).....:			18.8	—	
Supply voltage (Vdc).....:			5.0	—	
Model	OCV before charging, (Vdc)	Resistance of circuit, (mΩ)	Maximum outer casing temperature, (°C)	Results	
b17#	3.26	70.9	23.5	P	
b18#	3.28	70.8	22.1	P	
b19#	3.28	71.0	21.9	P	
b20#	3.26	71.2	20.9	P	
b21#	3.26	70.8	21.4	P	
Supplementary information:					
- No fire - No explosion					

8.3.7	TABLE: Forced discharge (cells) for cell from GlobTek (Suzhou) Co., Ltd.				P
Model	OCV before application of reverse charge, (Vdc)	Measured Reverse charge I_t , (A)	Time for reversed charge, (minutes)	Results	
c39#	3.32	1.88	90	P	
c40#	3.26	1.88	90	P	
c41#	3.32	1.88	90	P	
c42#	3.34	1.88	90	P	
c43#	3.33	1.88	90	P	
Supplementary information:					
- No fire - No explosion					

8.3.7	TABLE: Forced discharge (cells) for cell from Kayo Maxtar Battery Limited				P
Model	OCV before application of reverse charge, (Vdc)	Measured Reverse charge I_t , (A)	Time for reversed charge, (minutes)	Results	
c39#	3.28	1.88	90	P	
c40#	3.27	1.88	90	P	
c41#	3.31	1.88	90	P	
c42#	3.29	1.88	90	P	
c43#	3.31	1.88	90	P	

Supplementary information:

- No fire
- No explosion

8.3.7	TABLE: Forced discharge (cells) for cell from CTE Energy Co., Ltd.				P
Model	OCV before application of reverse charge, (Vdc)	Measured Reverse charge I_t , (A)	Time for reversed charge, (minutes)	Results	
c39#	3.33	1.88	90	P	
c40#	3.32	1.88	90	P	
c41#	3.29	1.88	90	P	
c42#	3.29	1.88	90	P	
c43#	3.28	1.88	90	P	

Supplementary information:

- No fire
- No explosion

8.3.8 T-5	TABLE: External short circuit (cells) for cell from GlobTek (Suzhou) Co., Ltd.					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT , (°C)	Results	
c1#	55.6	4.18	80	106.7	P	
c2#	55.6	4.19	86	102.3	P	
c3#	55.6	4.19	79	98.2	P	
c4#	55.6	4.19	79	105.7	P	
c5#	55.6	4.19	82	103.3	P	
c6#	54.5	4.18	80	105.7	P	
c7#	54.5	4.19	82	102.3	P	
c8#	54.5	4.18	81	97.5	P	
c9#	54.5	4.19	84	104.1	P	
c10#	54.5	4.19	79	103.8	P	

Supplementary information:

The external short-circuit test of 10 pcs samples performed after the test of Altitude, Thermal cycling, Vibration and Shock in sequence.

- No fire
- No explosion

8.3.8 T-5		TABLE: External short circuit (cells) for cell from Kayo Maxtar Battery Limited				P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT, (°C)	Results	
c1#	55.6	4.19	80	105.1	P	
c2#	55.6	4.18	86	103.2	P	
c3#	55.6	4.18	79	104.1	P	
c4#	55.6	4.18	79	97.2	P	
c5#	55.6	4.18	82	102.9	P	
c6#	54.5	4.19	80	99.8	P	
c7#	54.5	4.18	82	101.1	P	
c8#	54.5	4.19	81	104.2	P	
c9#	54.5	4.18	84	103.4	P	
c10#	54.5	4.18	79	102.9	P	
Supplementary information:						
The external short-circuit test of 10 pcs samples performed after the test of Altitude, Thermal cycling, Vibration and Shock in sequence.						
- No fire						
- No explosion						

8.3.8 T-5		TABLE: External short circuit (cells) for cell from CTE Energy Co., Ltd.				P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT, (°C)	Results	
c1#	55.6	4.18	80	99.7	P	
c2#	55.6	4.19	86	101.2	P	
c3#	55.6	4.18	79	103.4	P	
c4#	55.6	4.19	79	102.3	P	
c5#	55.6	4.19	82	98.7	P	
c6#	54.5	4.18	80	104.3	P	
c7#	54.5	4.18	82	98.9	P	
c8#	54.5	4.18	81	105.2	P	
c9#	54.5	4.19	84	102.6	P	
c10#	54.5	4.18	79	101.3	P	

Supplementary information:

The external short-circuit test of 10 pcs samples performed after the test of Altitude, Thermal cycling, Vibration and Shock in sequence.

- No fire
- No explosion

8.3.9		TABLE: Forced internal short circuit (cells) for cell from GlobTek (Suzhou) Co., Ltd.					P
Model	Chamber ambient, (°C)	OCV at start of test, (Vdc)	Particle location ¹⁾	Maximum applied pressure, (N)	Voltage drop, (mV)	Results	
c44#	45.0	4.23	1	182.0	115	P	
c45#	45.0	4.23	1	175.3	143	P	
c46#	45.0	4.23	1	165.4	108	P	
c47#	45.0	4.23	2	400.0	0	P	
c48#	45.0	4.23	2	400.0	0	P	
c49#	10.0	4.18	1	139.2	98	P	
c50#	10.0	4.18	1	174.6	143	P	
c51#	10.0	4.18	1	198.1	201	P	
c52#	10.0	4.18	2	400.0	0	P	
c53#	10.0	4.18	2	400.0	0	P	

Supplementary information:

¹⁾ Identify one of the following:

1: Nickel particle inserted between positive and negative (active material) coated area.

2: Nickel particle inserted between positive aluminium foil and negative active material coated area.

- No fire

8.3.9		TABLE: Forced internal short circuit (cells) for cell from Kayo Maxtar Battery Limited					P
Model	Chamber ambient, (°C)	OCV at start of test, (Vdc)	Particle location ¹⁾	Maximum applied pressure, (N)	Voltage drop, (mV)	Results	
c44#	45.0	4.23	1	400.0	0	P	
c45#	45.0	4.23	1	400.0	0	P	
c46#	45.0	4.22	1	400.0	0	P	
c47#	45.0	4.23	2	234.2	45	P	
c48#	45.0	4.23	2	400.0	0	P	
c49#	10.0	4.18	1	400.0	0	P	
c50#	10.0	4.19	1	400.0	0	P	
c51#	10.0	4.18	1	187.2	54	P	
c52#	10.0	4.18	2	222.3	197	P	
c53#	10.0	4.18	2	196.9	300	P	

Supplementary information:

1) Identify one of the following:

1: Nickel particle inserted between positive and negative (active material) coated area.

2: Nickel particle inserted between positive aluminium foil and negative active material coated area.

- No fire

8.3.9	TABLE: Forced internal short circuit (cells) for cell from CTE Energy Co., Ltd.					P
Model	Chamber ambient, (°C)	OCV at start of test, (Vdc)	Particle location ¹⁾	Maximum applied pressure, (N)	Voltage drop, (mV)	Results
c44#	45.0	4.23	1	224.5	89	P
c45#	45.0	4.23	1	400.0	0	P
c46#	45.0	4.23	1	107.1	14	P
c47#	45.0	4.23	2	400.0	0	P
c48#	45.0	4.23	2	400.0	0	P
c49#	10.0	4.18	1	147.4	76	P
c50#	10.0	4.18	1	400.0	0	P
c51#	10.0	4.18	1	400.0	0	P
c52#	10.0	4.18	2	400.0	0	P
c53#	10.0	4.18	2	78.9	345	P

Supplementary information:

1) Identify one of the following:

1: Nickel particle inserted between positive and negative (active material) coated area.

2: Nickel particle inserted between positive aluminium foil and negative active material coated area.

- No fire

-- End of Report --

Attachment 1

Report Number:

17047118 001

Model:

BL1880F6835661S5PG*T (* = 9, A, B, C, J, K, L, M, N, P, R, T, U, V, 1, 2, 3, Q, W)



Picture 1 For model BL1880F6835661S5PG9T



Picture 2 For model BL1880F6835661S5PG9T

Attachment 1

Report Number:

17047118 001

Model:

BL1880F6835661S5PG*T (* = 9, A, B, C, J, K, L, M, N, P, R, T, U, V, 1, 2, 3, Q, W)



Picture 3 For model BL1880F6835661S5PG9T



Picture 4 For model BL1880F6835661S5PG9T


Attachment 1

Report Number:


17047118 001

Model:

BL1880F6835661S5PG*T (* = 9, A, B, C, J, K, L, M, N, P, R, T, U, V, 1, 2, 3, Q, W)

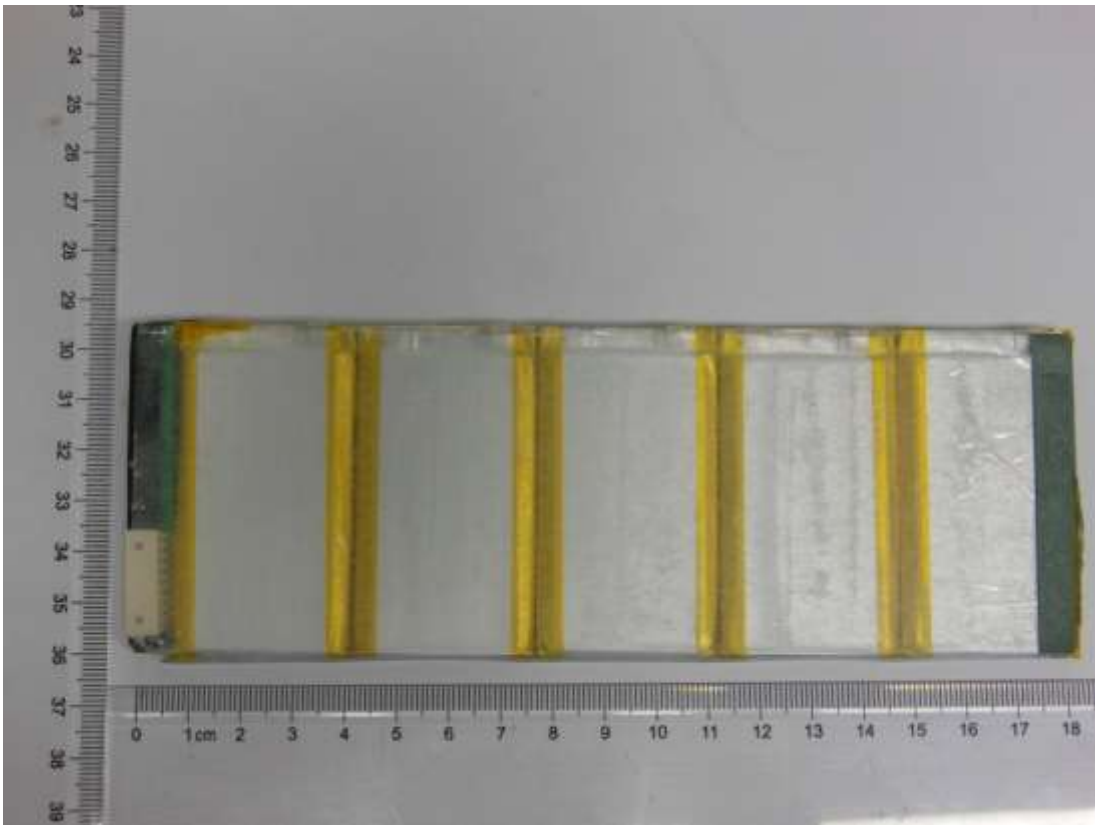

Picture 5 For model BL1880F6835661S5PG9T

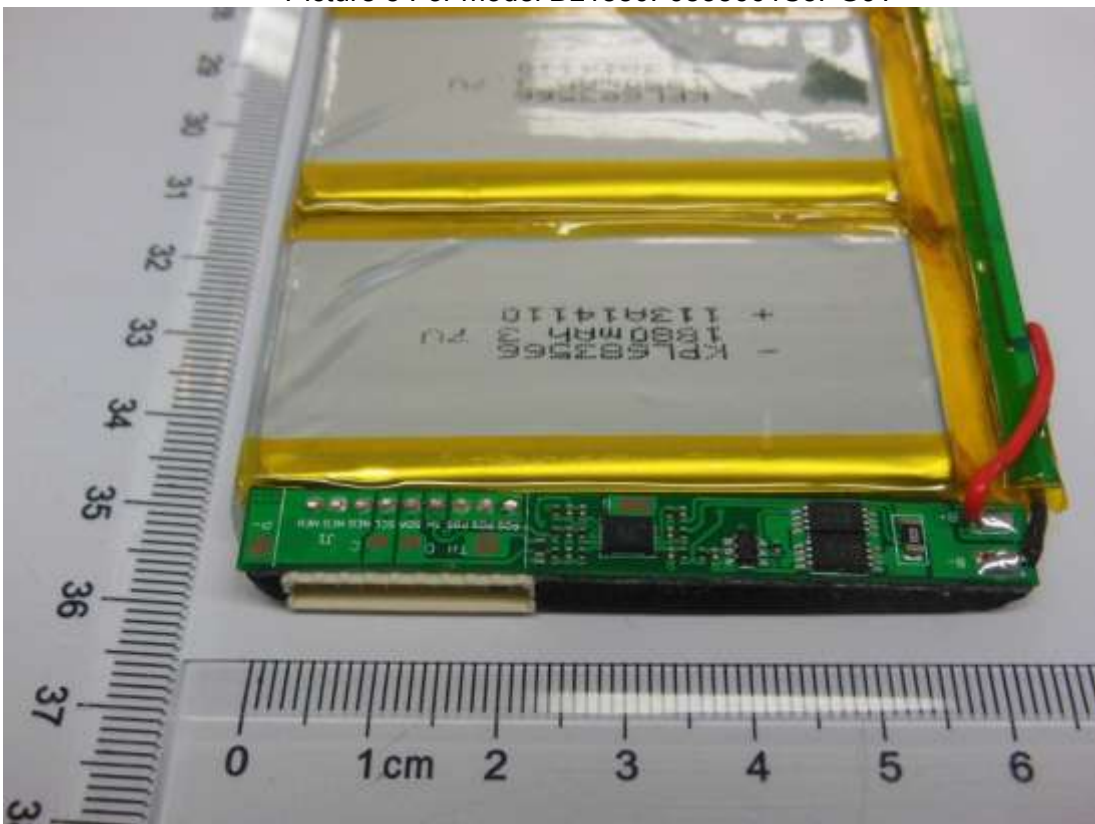

Picture 6 For model BL1880F6835661S5PG9T


Attachment 1

Report Number:


17047118 001

Model:

BL1880F6835661S5PG*T (* = 9, A, B, C, J, K, L, M, N, P, R, T, U, V, 1, 2, 3, Q, W)

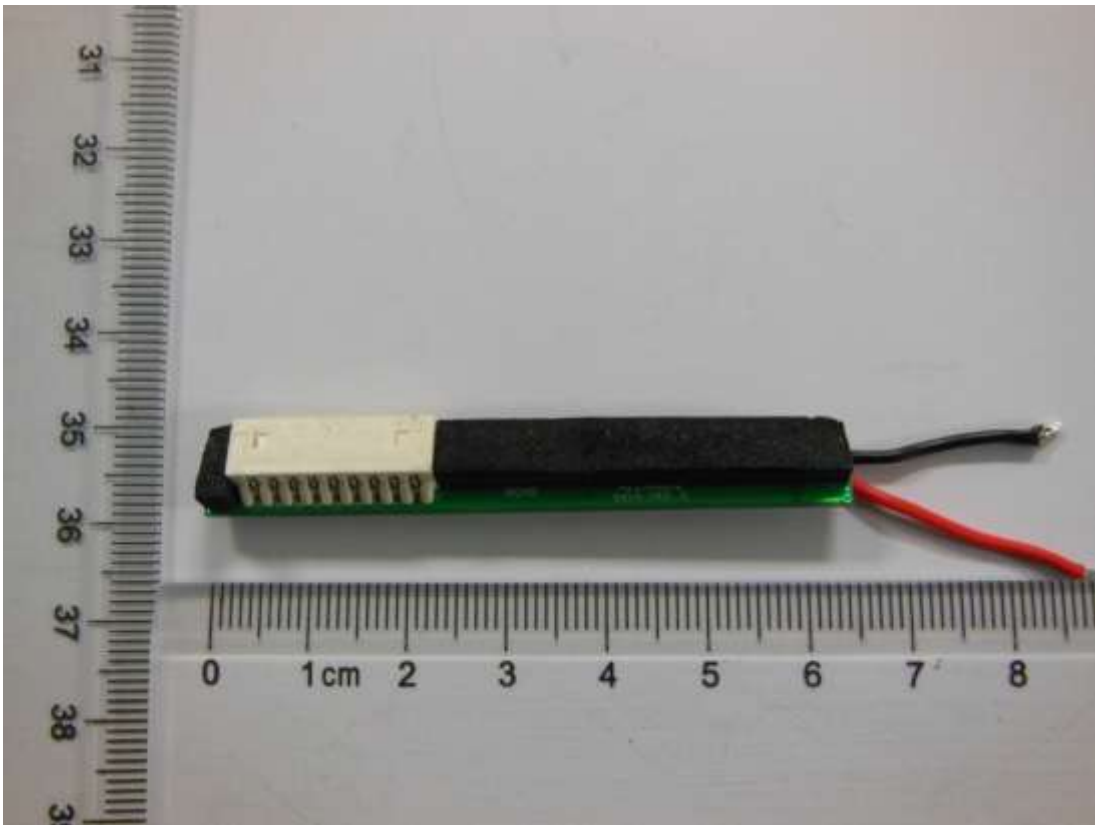

Picture 7 For model BL1880F6835661S5PG9T

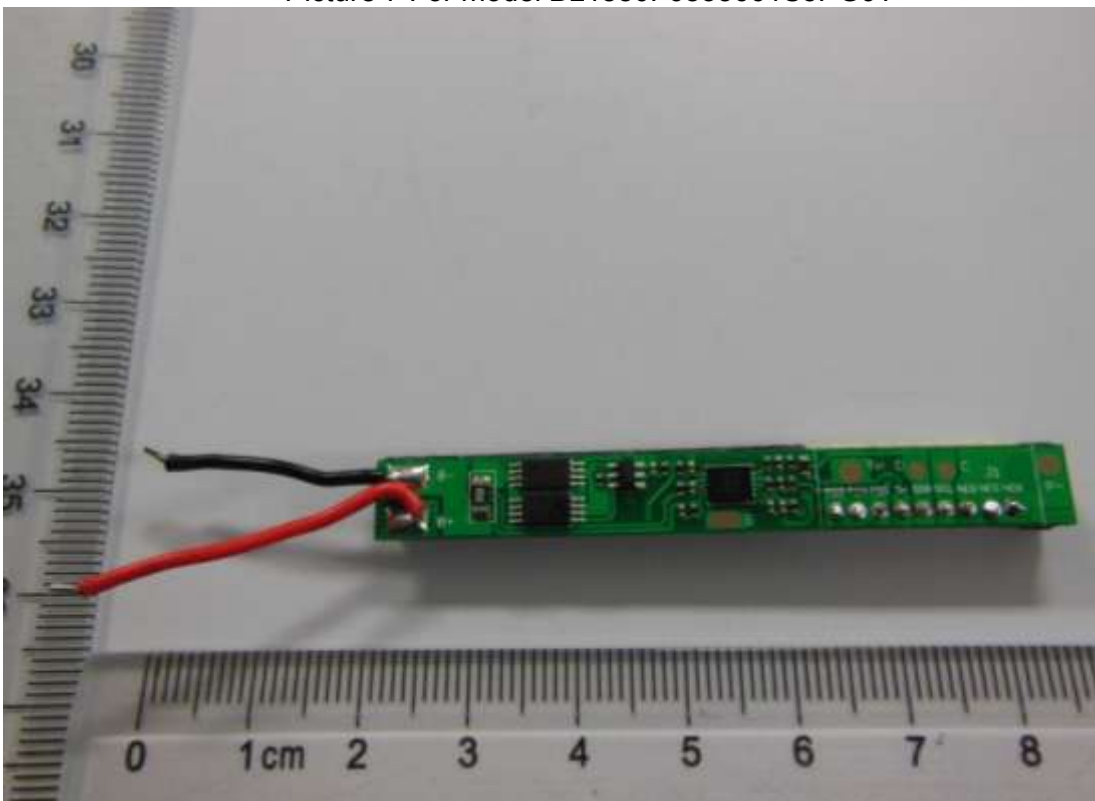

Picture 8 For model BL1880F6835661S5PG9T

Attachment 1

Report Number:


17047118 001

Model:

BL1880F6835661S5PG*T (* = 9, A, B, C, J, K, L, M, N, P, R, T, U, V, 1, 2, 3, Q, W)



Picture 9

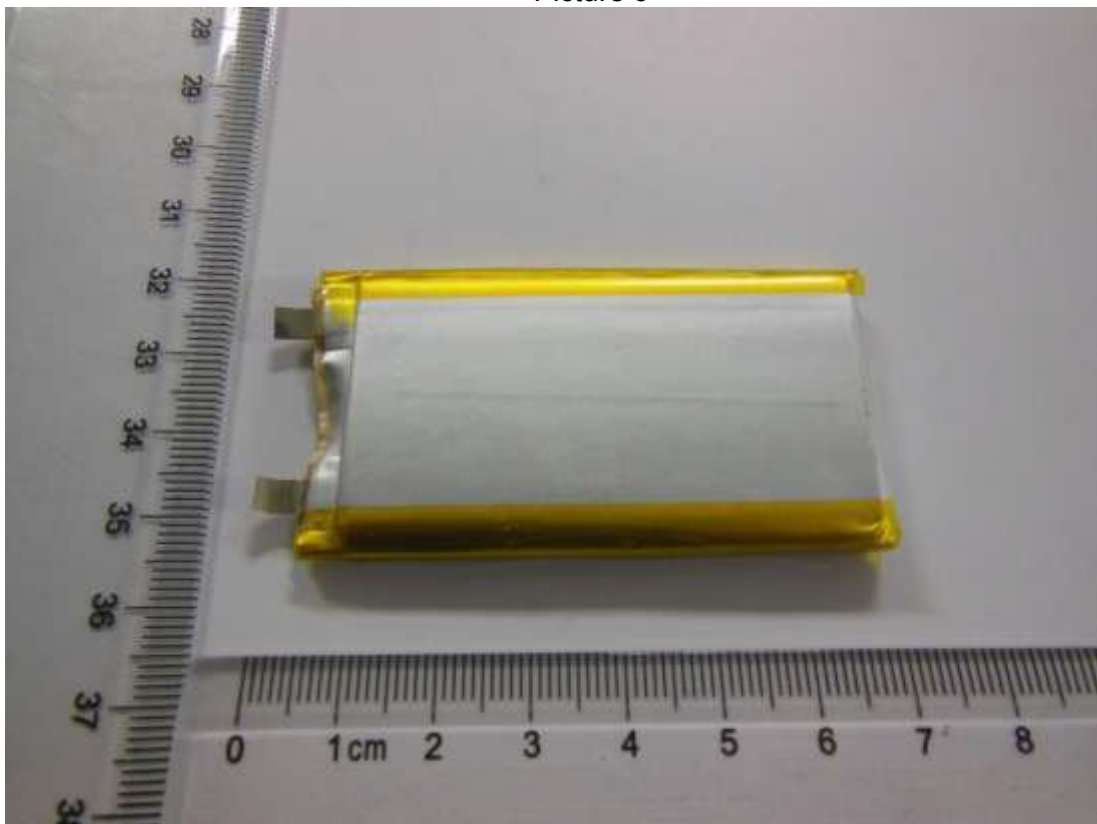

Picture 10