



Test Report issued under the responsibility of:



**TEST REPORT
IEC 62133-2**

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems

Report Number..... : 220517164GZC-001

Date of issue..... : 25 Jul., 2022

Total number of pages..... : 36 pages

Name of Testing Laboratory preparing the Report : **Intertek Testing Services Shenzhen Ltd. Guangzhou Branch**

Applicant's name..... : GlobTek, Inc.

Address..... : 186 Veterans Dr. Northvale, NJ 07647, United States of America

Test specification:

Standard..... : IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021

Test procedure..... : CB Scheme

Non-standard test method : N/A

TRF template used : IECEE OD-2020-F1:2021, Ed.1.4

Test Report Form No. : IEC62133_2C

Test Report Form(s) Originator.... : DEKRA Certification B.V.

Master TRF : Dated 2022-07-01

Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description..... :		Li-ion Battery Pack	
Trade Mark(s)..... :			
Manufacturer..... :		Same as applicant	
Model/Type reference..... :		BL2200F6034501S2P*** (The * denotes any character = 0-9 or A-Z for market purpose only), 1ICP6/35/51-2	
Ratings..... :		3.7V, 2200mAh, 8.14Wh	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):			
<input checked="" type="checkbox"/>	CB Testing Laboratory:	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch	
Testing location/ address..... :		C2-1, Heping Xu, Yongning Street, Zengcheng District, Guangzhou, China	
Tested by (name, function, signature)		Vin Zhou Engineer	<i>Vin</i>
Approved by (name, function, signature)..:		Carl Chen Reviewer	<i>Carl</i>
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	N/A	
Testing location/ address..... :			
Tested by (name, function, signature)			
Approved by (name, function, signature)..:			
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	N/A	
Testing location/ address..... :			
Tested by (name + signature)			
Witnessed by (name, function, signature)..:			
Approved by (name, function, signature)..:			
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	N/A	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	N/A	
Testing location/ address..... :			
Tested by (name, function, signature)			
Witnessed by (name, function, signature)..:			
Approved by (name, function, signature)..:			
Supervised by (name, function, signature):			

<p>List of Attachments (including a total number of pages in each attachment): See appendix (page 26~36) in this report for details.</p>	
<p>Summary of testing: Summary of testing: From the result of our examination and tests in the submitted samples, conclude they comply with the requirements of the standard IEC 62133-2:2017/AMD1:2021 and BS EN 62133-2:2017/A1:2021</p>	
<p>Tests performed (name of test and test clause): 7.2.1 Continuous charging at constant voltage (cells) 7.3.1 External short circuit (cell) 7.3.2 External short circuit (battery) 7.3.3 Free fall 7.3.4 Thermal abuse (cells) 7.3.5 Crush (cells) 7.3.6 Over-charging of battery 7.3.7 Forced discharge (cells) 7.3.8 Mechanical tests (batteries) 7.3.8.1 Vibration 7.3.8.2 Mechanical shock 7.3.9 Design evaluation – Forced internal short-circuit (cells)</p> <p>Tests are made with the number of cells and batteries specified in IEC 62133-2: 2017+A1 Table 1.</p>	<p>Testing location: Intertek Testing Services Shenzhen Ltd. Guangzhou Branch C2-1, Heping Xu, Yongning Street, Zengcheng District, Guangzhou, China</p>
<p>Summary of compliance with National Differences (List of countries addressed): National differences of Korea have been considered.</p> <p><input checked="" type="checkbox"/> The product fulfils the requirements of IEC 62133-2:2017/AMD1:2021 and BS EN 62133-2:2017/A1:2021</p>	

Use of uncertainty of measurement for decisions on conformity (decision rule) :

No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

Other: ... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:


The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.


IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

Li-ion Battery Pack	
Model: BL2200F6034501S2PPML	
3.7V, 2200mAh, 8.14Wh	
1ICP6/35/51-2	Date cod: YYYYMM
CAUTION:	
May explode if disposed of in fire.	
Use specified charger only.	
Do not short circuit.	

Li-ion Battery Pack	
Model: 1ICP6/35/51-2	
3.7V, 2200mAh, 8.14Wh	
1ICP6/35/51-2	Date cod: YYYYMM
CAUTION:	
May explode if disposed of in fire.	
Use specified charger only.	
Do not short circuit.	



DC Connector

Remark:

For date cod: YYYYMM, "YYYY" represents year, "MM" represents month.

The other models have the same marking except the model name.

The above markings are the minimum requirements required by the safety standard. For the final production samples, the additional markings which do not give rise to misunderstanding may be added.

Test item particulars..... :	
Classification of installation and use..... :	To be defined in final product
Supply Connection..... :	DC Connector
Recommend charging method declared by the manufacturer	CC/CV 1100mA/4.2V
Discharge current (0,2 It A)..... :	440mA
Specified final voltage	3.0V
Upper limit charging voltage per cell..... :	4.2V
Maximum charging current	2200mA
Charging temperature upper limit	45°C
Charging temperature lower limit..... :	0°C
Polymer cell electrolyte type	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
Possible test case verdicts:	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement	
- test object does not meet the requirement..... : F (Fail)	
Testing	
Date of receipt of test item	25 Jun., 2022
Date (s) of performance of tests	25 Jun., 2022 – 15 Jul., 2022
General remarks:	
<p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> <p>"(See Enclosure #)" refers to additional information appended to the report.</p> <p>"(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p> <p>Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty. This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.</p> <p>The test report only allows to be revised only within the report defined retention period unless standard or regulation was withdrawn or invalid.</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC62133_2C:	

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable
---	--

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies).....: Factory :

GlobTek (Suzhou) Co., Ltd.
 Building 4 No. 76, Jinling East Road Suzhou
 Industrial Park Jiangsu 215021, P.R. China

General product information and other remarks:

This battery is constructed with two Li-ion cells in 1S2P, and has overcharge, over-discharge, over current and short-circuits protection circuit.
 Model BL200F6034501S2P*** is identical to 1ICP6/35/51/2 except the PCB layout.

The control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region shall be provided within the charger or the end devices.

Parameter	Cell	Battery
Model	JHY603450	BL2200F6034501S2P*** (The * denotes any character = 0-9 or A-Z for market purpose only), 1ICP6/35/51-2
Nominal voltage	3.7V	3.7V
Capacity	1100mAh	2200mAh
Charging voltage	4.2V	4.2V
Upper limited charging voltage	4.2V	4.2V
Standard charging current	220mA	1100mA
Max. charging current	1100mA	2200mA
Discharge cut-off voltage	3.0V	3.0V
Max. discharging current	1100mA	2200mA
Charging temperature	0 ~ 45°C	0 ~ 45°C
Discharging temperature	-20 ~ +60°C	-20 ~ +60°C

4	PARAMETER MEASUREMENT TOLERANCES		P
	Parameter measurement tolerances		P
5	GENERAL SAFETY CONSIDERATIONS		P
5.1	General		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ		N/A
	Insulation resistance (MΩ)		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearances and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition		P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief	Need to considered in end product	N/A
5.4	Temperature, voltage and current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented		P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer		P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified		P
5.5	Terminal contacts		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current		P

	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries		P
5.6.1	General		P
	Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region		P
	This protection may be provided external to the battery such as within the charger or the end devices		P
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		P
	If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions		N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components are added as appropriate and consideration given to the end-device application		P
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance		N/A
5.6.2	Design recommendation		P
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2		P
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks		N/A

	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection		N/A
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage		P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system		N/A
5.6.3	Mechanical protection for cells and components of batteries	Need to considered in end product.	N/A
	Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse		N/A
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product		N/A
	The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer		N/A
	For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests		N/A
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Quality plan provided	P
5.8	Battery safety components		P
6	TYPE TEST AND SAMPLE SIZE		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P

	The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 Ω are tested in accordance with Table 1		N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C ± 5 °C		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection		P
	When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test		P

7	SPECIFIC REQUIREMENTS AND TESTS		P
7.1	Charging procedure for test purposes		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C ± 5 °C, using the method declared by the manufacturer		P
	Prior to charging, the battery has been discharged at 20 °C ± 5 °C at a constant current of 0,2 It A down to a specified final voltage		P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		P
	After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method		P
7.2	Intended use		P
7.2.1	Continuous charging at constant voltage (cells)		P
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer		P
	Results: no fire, no explosion, no leakage	(See appended table 7.2.1)	P
7.2.2	Case stress at high ambient temperature (battery)		N/A
	Oven temperature (°C).....		—

	Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells		N/A
7.3	Reasonably foreseeable misuse		P
7.3.1	External short-circuit (cell)		P
	The cells were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	Results: no fire, no explosion..... : (See appended table 7.3.1)		P
7.3.2	External short-circuit (battery)		P
	The batteries were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		P
	A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test		P
	A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field-effect transistor), fuse, thermostat or positive temperature coefficient (PTC) thermistor		P
	Results: no fire, no explosion..... : (See appended table 7.3.2)		P
7.3.3	Free fall	For cell and battery	P
	Results: no fire, no explosion		P
7.3.4	Thermal abuse (cells)		P
	Oven temperature (°C)..... : 130		—
	Results: no fire, no explosion		P
7.3.5	Crush (cells)		P
	The crushing force was released upon:		P
	- The maximum force of 13 kN ± 0,78 kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: no fire, no explosion..... : (See appended table 7.3.5)		P
7.3.6	Over-charging of battery		P

	The supply voltage which is:		P
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or		P
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and		N/A
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		P
	Test was continued until the temperature of the outer casing:		P
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		P
	- Returned to ambient		N/A
	Results: no fire, no explosion..... :	(See appended table 7.3.6)	P
7.3.7	Forced discharge (cells)		P
	Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer		P
	The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage		P
	- The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	- The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration		P
	Results: no fire, no explosion..... :	(See appended table 7.3.7)	P
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration		P
	Results: no fire, no explosion, no rupture, no leakage or venting. :	(See appended table 7.3.8.1)	P
7.3.8.2	Mechanical shock		P
	Results: no leakage, no venting, no rupture, no explosion and no fire..... :	(See appended table 7.3.8.2)	—
7.3.9	Design evaluation – Forced internal short-circuit (cells)		P
	The cells complied with national requirement for..... :	France, Japan, Korea, Switzerland	N/A
	The pressing was stopped upon:		P
	- A voltage drop of 50 mV has been detected; or		N/A

	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	400N	P
	Results: no fire..... :	(See appended table 7.3.9)	P

8	INFORMATION FOR SAFETY		P
8.1	General		P
	Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products		P
	Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users		P
	Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user		N/A
	Do not allow children to replace batteries without adult supervision		P
8.2	Small cell and battery safety information		N/A
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N/A
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A

9	MARKING		P
9.1	Cell marking		N/A
	Cells are marked as specified in IEC 61960, except coin cells		N/A
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
9.2	Battery marking		P

	Batteries are marked as specified in IEC 61960, except for coin batteries		P
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity		N/A
	Batteries are marked with an appropriate caution statement		P
	- Terminals have clear polarity marking on the external surface of the battery, or		N/A
	- Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		P
9.3	Caution for ingestion of small cells and batteries		N/A
	Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2		N/A
	Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package		N/A
9.4	Other information		P
	The following information are marked on or supplied with the battery:		P
	- Storage and disposal instructions		P
	- Recommended charging instructions		P

10	PACKAGING AND TRANSPORT		N/A
	Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3		N/A

ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		P
A.1	General		P
A.2	Safety of lithium ion secondary battery		P
A.3	Consideration on charging voltage		P
A.3.1	General		P
A.3.2	Upper limit charging voltage		P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		P
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied		N/A
A.4	Consideration of temperature and charging current		P

A.4.1	General		P
A.4.2	Recommended temperature range		P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied		P
A.4.3	High temperature range		P
A.4.3.1	General		P
A.4.3.2	Explanation of safety viewpoint		P
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		P
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A
A.4.4	Low temperature range		P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		N/A
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		P
A.4.5	Scope of the application of charging current		P
A.4.6	Consideration of discharge		P
A.4.6.1	General		P
A.4.6.2	Final discharge voltage and explanation of safety viewpoint		P
A.4.6.3	Discharge current and temperature range		P
A.4.6.4	Scope of application of the discharging current		P
A.5	Sample preparation		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle in cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle in winding core		N/A
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		N/A
A.5.6	Insertion of nickel particle in prismatic cell		P
A.6	Experimental procedure of the forced internal short-circuit test		P
A.6.1	Material and tools for preparation of nickel particle		P

A.6.2	Example of a nickel particle preparation procedure		P
A.6.3	Positioning (or placement) of a nickel particle		P
A.6.4	Damaged separator precaution		P
A.6.5	Caution for rewinding separator and electrode		P
A.6.6	Insulation film for preventing short-circuit		P
A.6.7	Caution when disassembling a cell		P
A.6.8	Protective equipment for safety		P
A.6.9	Caution in the case of fire during disassembling		P
A.6.10	Caution for the disassembling process and pressing the electrode core		P
A.6.11	Recommended specifications for the pressing device		P

ANNEX B	RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS		P
----------------	--	--	---

ANNEX C	RECOMMENDATIONS TO THE END-USERS		P
----------------	---	--	---

ANNEX D	MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS		N/A
D.1	General		N/A
D.2	Method		N/A
	A sample size of three coin cells is required for this measurement		N/A
	Coin cells with an internal resistance greater than 3 Ω require no further testing	(See appended table D.2)	N/A
	Coin cells with an internal resistance less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		N/A

ANNEX E	PACKAGING AND TRANSPORT		N/A
----------------	--------------------------------	--	-----

ANNEX F	COMPONENT STANDARDS REFERENCES		P
----------------	---------------------------------------	--	---

7.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample No.	Recommended charging voltage Vc (Vdc)	Recommended charging current I _{rec} (A)	OCV before test (Vdc)	Results	
001	4.2	0.22	4.19	P	
002	4.2	0.22	4.18	P	
003	4.2	0.22	4.19	P	
004	4.2	0.22	4.19	P	
005	4.2	0.22	4.19	P	
Supplementary information: - No fire or explosion - No leakage - Others (please explain)					

7.3.1	TABLE: External short circuit (cell)				P
Sample No.	Ambient (°C)	OCV at start of test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (°C)	Results
Samples charged at charging temperature upper limit 45°C					
009	57.7	4.18	88	51.9	P
010	57.7	4.17	82	54.9	P
011	57.7	4.18	79	49.8	P
012	57.7	4.18	85	58.6	P
013	57.7	4.17	87	42.7	P
Samples charged at charging temperature lower limit -5°C					
014	56.3	4.14	89	61.7	P
015	56.3	4.13	92	54.3	P
016	56.3	4.13	85	47.4	P
017	56.3	4.13	87	41.9	P
018	56.3	4.14	88	56.9	P
Supplementary information: - No fire or explosion - Others (please explain)					

7.3.2	TABLE: External short circuit (battery)					P
For model: BL2200F6034501S2P***						
Sample No.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (°C)	Component single fault condition	Results
019	23.9	4.18	81	3.4	Normal	P
020	23.9	4.18	87	19.5	U2 (S2-S1) SC	P
021	23.9	4.18	88	22.1	U2 (S2-S1) SC	P
022	23.9	4.18	85	2.9	F1 SC	P
023	23.9	4.17	94	3.4	F1 SC	P
Supplementary information: - No fire or explosion - Others (please explain) Remark: SC: Short circuit						

7.3.2	TABLE: External short circuit (battery)					P
For model: 1ICP6/35/51-2						
Sample No.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (°C)	Component single fault condition	Results
024	23.6	4.17	89	0.3	F1 SC	P
025	23.6	4.18	90	0.4	F1 SC	P
026	23.6	4.17	87	17.7	U2 (S2-S1) SC	P
027	23.6	4.18	82	15.5	U2 (S2-S1) SC	P
028	23.6	4.18	80	0.5	Normal	P
Supplementary information: - No fire or explosion - Others (please explain) Remark: SC: Short circuit						

7.3.5	TABLE: Crush (cells)				P
Sample No.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
Samples charged at charging temperature upper limit 45°C					
045	4.19	4.18	13	P	
046	4.18	4.17	13	P	
047	4.18	4.18	13	P	
048	4.19	4.18	13	P	
049	4.19	4.17	13	P	
Samples charged at charging temperature lower limit -5°C					
050	4.12	4.11	13	P	
051	4.13	4.12	13	P	
052	4.13	4.12	13	P	
053	4.12	4.11	13	P	
054	4.13	4.12	13	P	
Supplementary information:					
- No fire or explosion					
- Others (please explain)					

7.3.6	TABLE: Over-charging of battery				P
For model: BL2200F6034501S2P***					
Constant charging current (A)..... :			4.4	—	
Supply voltage (Vdc)..... :			5.88	—	
Sample No.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results	
055	3.35	31	23.9	P	
056	3.42	31	23.6	P	
057	3.39	31	24.1	P	
058	3.35	31	23.7	P	
059	3.37	31	24.2	P	
Supplementary information:					
- No fire or explosion					
- Others (please explain)					

7.3.6	TABLE: Over-charging of battery				P
For model: 1ICP6/35/51-2					
Constant charging current (A)..... :			4.4	—	
Supply voltage (Vdc)..... :			5.88	—	
Sample No.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results	
060	3.40	36	25.9	P	
061	3.38	36	26.4	P	
062	3.38	36	26.0	P	
063	3.39	36	25.6	P	
064	3.40	36	26.5	P	
Supplementary information:					
- No fire or explosion					
- Others (please explain)					

7.3.7	TABLE: Forced discharge (cells)				P
Sample No.	OCV before application of reverse charge (Vdc)	Measured reverse charge I_t (A)	Lower limit discharge voltage (Vdc)	Results	
065	3.42	1.1	3.0	P	
066	3.38	1.1	3.0	P	
067	3.37	1.1	3.0	P	
068	3.40	1.1	3.0	P	
069	3.41	1.1	3.0	P	
Supplementary information:					
- No fire or explosion					
- Others (please explain)					

7.3.8.1		TABLE: Vibration				P
Sample No.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
070	4.18	4.17	53.660	53.656	P	
071	4.17	4.17	53.485	53.482	P	
072	4.18	4.17	53.628	53.626	P	
Supplementary information: - No fire or explosion - No rupture - No leakage - No venting - Others (please explain)						

7.3.8.2		TABLE: Mechanical shock				P
Sample No.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
073	4.18	4.17	53.584	53.583	P	
074	4.18	4.18	53.279	53.277	P	
075	4.18	4.18	53.601	53.600	P	
Supplementary information: - No fire or explosion - No rupture - No leakage - No venting - Others (please explain)						

7.3.9	TABLE: Forced internal short circuit (cells)					P
Sample No.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location ¹⁾	Maximum applied pressure (N)	Results	
Samples charged at charging temperature upper limit 45°C						
076	45	4.18	1	400	P	
077	45	4.17	1	400	P	
078	45	4.18	1	400	P	
079	45	4.18	1	400	P	
080	45	4.17	1	400	P	
Samples charged at charging temperature lower limit -5°C						
081	-5	4.13	1	400	P	
082	-5	4.12	1	400	P	
083	-5	4.12	1	400	P	
084	-5	4.13	1	400	P	
085	-5	4.12	1	400	P	
Supplementary information:						
¹⁾ Identify one of the following:						
1: Nickel particle inserted between positive and negative (active material) coated area.						
2: Nickel particle inserted between positive aluminium foil and negative active material coated area.						
- No fire						
- Others (please explain)						

D.2	TABLE: Internal AC resistance for coin cells				N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results ¹⁾	
Supplementary information:					

TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
Cell	SHENZHEN JUHEYUAN SCIENCE&TECHNOLOGY CO.,LTD.	JHY603450	3.7V, 1100mAh	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
-Positive electrode	HuNan ShanShan New Energy Co., Ltd	LC-412	LiCoO2, PVDF, NMP, Conductive Additive	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
-Negative electrode	HuNan ShanShan New Energy Co., Ltd	FSNC-1	Graphite, CMC, SBR, Distilled Water, Conductive	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
-Electrolyte	Zhuhai Saiwei Fine Chemical Co., Ltd	SW2002A	LiPF6+EMC+EC+DMC	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
-Separator	Shanghai Energy New Materials Technology Co., Ltd	PE	0.016mm, Shutdown temperature: 130°C	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
PCB	SHUANG MING INDUSTRY CO LTD	T005V0	V-0, 130°C	IEC 62133-2: 2017/AMD1: 2021, UL 796	Tested with appliance and UL E78017
PCB Alternative	Interchangeable	Interchangeable	V-0, 130°C	UL 796	UL approved
Protection IC (U1)	HYCON	HY2113-FB2B	VCU=4.25±0.025 V, VDL=2.5±0.05V	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
Fuse (F1)	BHFUSE	BSMD1812-300-6V	Ihold: 3A, Itrip: 6A, Imax: 100A, Vmax: 6Vdc	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
MOSFET (U2)	Wuxi NCE Power Semiconductor Co., Ltd	NCE2010E	VDS: 20V, VGS: ±12V, ID: 7A	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
NTC (RT1) (Just for model 1ICP6/35/51-2)	Jiangsu Yufei Electronic Technology Co., Ltd.	YFT0603X103F 3435FA	10K ohm at 25°C	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
NTC (RT1) (Just for model 1ICP6/35/51-2) Alternative	TDK	NTC163JF103F T1	10K ohm at 25°C	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance
Wire	DONGGUAN XIONGXIN ELECTRONICS CO LTD	3302	Min. 28AWG, 30V, 80°C	IEC 62133-2: 2017/AMD1: 2021, UL 758	Tested with appliance and UL E358766
Wire Alternative	Interchangeable	3302	Min. 28AWG, 30V, 80°C	UL 758	UL approved
Connector	MOLEX L L C	43025	105°C, 2Pin	IEC 62133-2: 2017/AMD1: 2021	Tested with appliance

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

Appendix: National Deviation of Korea


ATTACHMENT TO TEST REPORT IEC 62133-2 (Republic of Korea) NATIONAL DIFFERENCES (Secondary cells and batteries containing alkaline or other non-acid electrolytes - Safety requirements for portable sealed secondary lithium cells, and for batteries made from them, for use in portable applications - Part 2: Lithium systems)			
Differences according to: National standard KC62133-2(2020-07)			
TRF template used:.....: IECEE OD-2020-F3, Ed. 1.1			
Attachment Form No.....: KR_ND_IEC62133_2A			
Attachment Originator: KTR			
Master Attachment: Dated 2020-09-25			
Copyright © 2020 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		
7.3.6	Over-charging of battery		P
(Revision)	<p><i>[Add the bolded text]</i></p> <p>b) Test The test shall be carried out in an ambient temperature of 20 °C ± 5 °C. Each test battery shall be discharged at a constant current of 0,2 It A, to a final discharge voltage specified by the manufacturer. Sample batteries shall then be charged at a constant current of 2,0 It A, using a supply voltage which is:</p> <ul style="list-style-type: none"> • 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or • 1,2 times the upper limit charging voltage presented in Table A.1 per cell for series connected multi-cell batteries, and • sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached. <p><u>• In case the charging voltage specified by the manufacturer is higher than the overcharge test voltage, the maximum charging voltage specified by manufacturer should be applied with 2.0 ItA.</u> <u>(e.g., quick charging power bank, etc.)</u></p>		P

Appendix: National Deviation of Korea

	<p>[Replace to the following statement]</p> <p>c) Acceptance criteria</p> <p>Overcharging exceeding to the limits specified by the manufacturer should not result in fire or explosion.</p>		P
Annex G	Definition for shape and materials of outer case for cell		—
(Addition)	<p>G.1 General Annex G provides definitions for shape and materials of outer case for cell</p> <p>G.2 Shape of outer case for cell G 2.1 Cylindrical cell Cell with a cylindrical shape in which the overall height is equal to or greater than diameter.</p> <p>G 2.2 Prismatic cell Cell having the shape of a parallelepiped whose faces are rectangular</p> <p>G.3 Materials of outer case for cell G.3.1 Soft case Non-metallic outer case or container for cell</p> <p>G.3.2 Hard case Metallic outer case or container for cell.</p>	<p>(Shape of outer cases)</p> <p><input type="checkbox"/> Cylindrical</p> <p><input checked="" type="checkbox"/> Prismatic</p> <p>(Materials of outer cases)</p> <p><input type="checkbox"/> Hard</p> <p><input checked="" type="checkbox"/> Soft</p>	—
Annex H	Calculation method of the volumetric energy density for cell		—
(Addition)	<p>Annex H provide a calculation method of the volumetric energy density for cell in use of smart phone, tablet, notebook.</p> <p>H.1 General Unless otherwise stated in the Annex E, the dimensions for calculation are based on these for cell before shipment and the volumetric energy density shall be calculated with a maximum values specified by manufacturer. If the specification for cell can't be provided a dimension for calculation, the manufacturer's other documentation shall be provided to demonstrate compliance for its calculation.</p>	389.34Wh / L	—

Appendix: National Deviation of Korea


H.2 Calculation Method



L : Length (max.) of cell (including terrace)
 W : Width (max.) of cell
 T : Thickness (max.) when shipping charge
 (For reference, Please
 Exclude the dimension of any tape that
 is attached to cell)

$$\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{\text{Length (L)} \times \text{Width (W)} \times \text{Thickness (T)}}$$


[H.1 – Prismatic cell using soft case]



L : Length (max.) of cell
 W : Width (max.) of cell
 T : Thickness when shipping charge
 (For reference, Please
 Exclude the dimension of any tape that
 is attached to cell)

$$\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{\text{Length (L)} \times \text{Width (W)} \times \text{Thickness (T)}}$$

[H.2 – Prismatic cell using hard case]



D : Diameter (max.) of cell
 L : Length (max.) of cell

(According to shape of cell at shipping,
 The dimension of tube for cell may be included
 in overall dimension of cell)

$$\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{3.14159 \times \frac{\text{Diameter (D)}^2}{4} \times \text{Length(L)}}$$

[H.3 – Cylindrical cell using hard case]

Appendix: Photos




Overview of battery




Overview of battery

Appendix: Photos

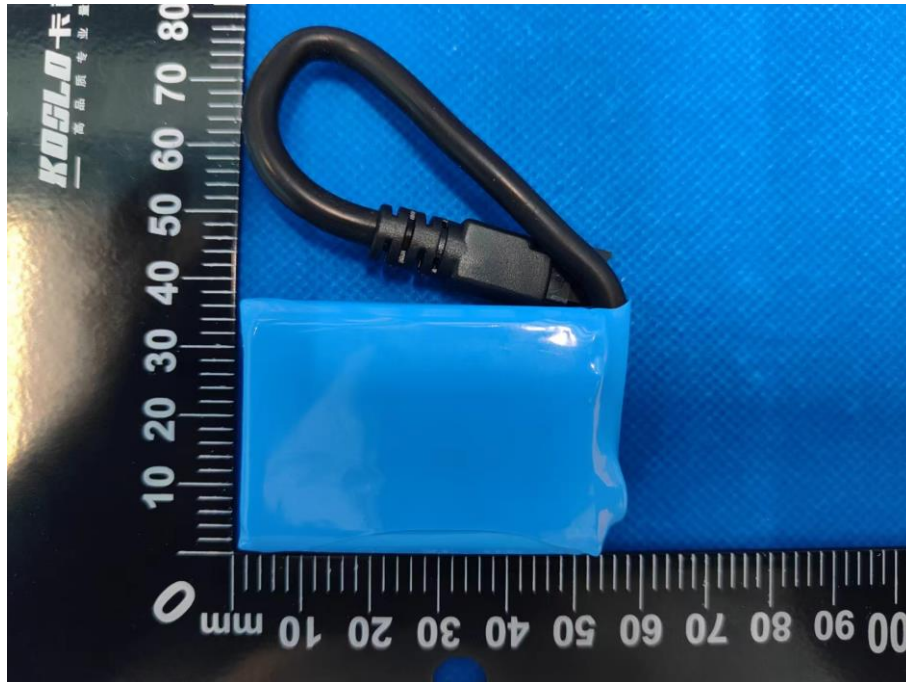


Overview of battery

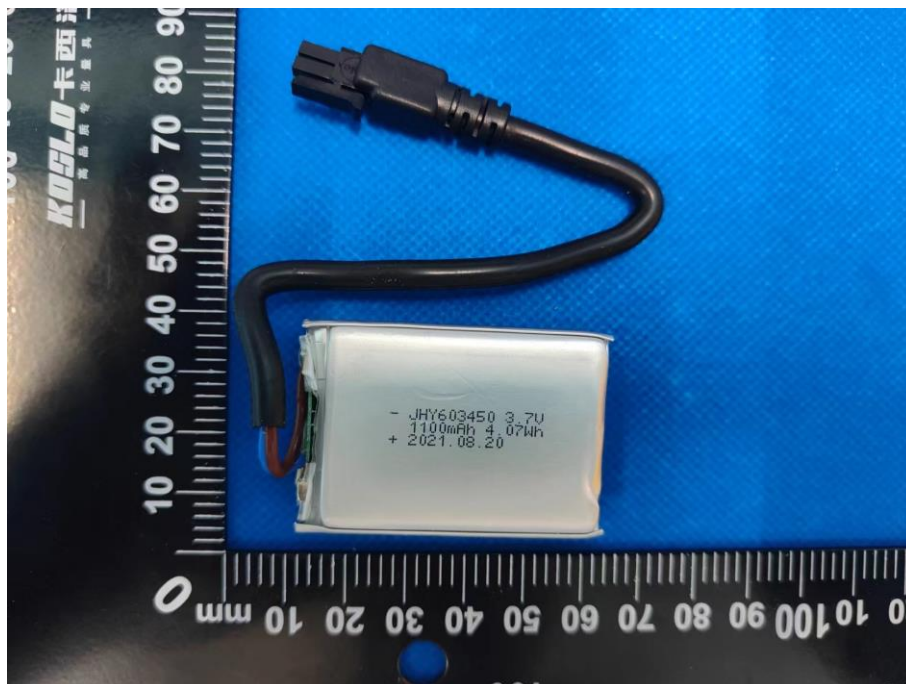


Internal view of battery

Appendix: Photos

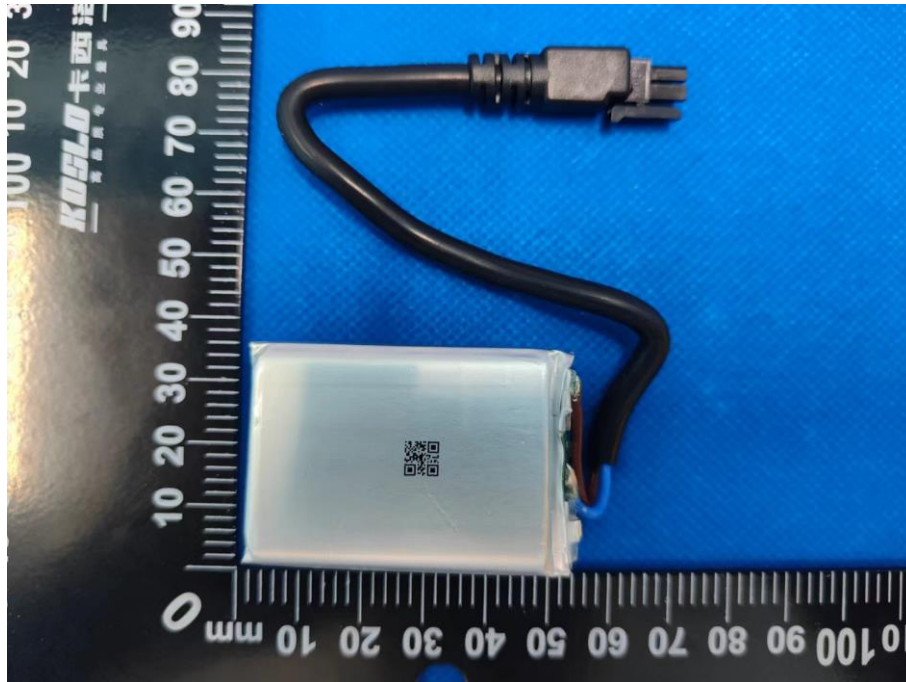


Internal view of battery

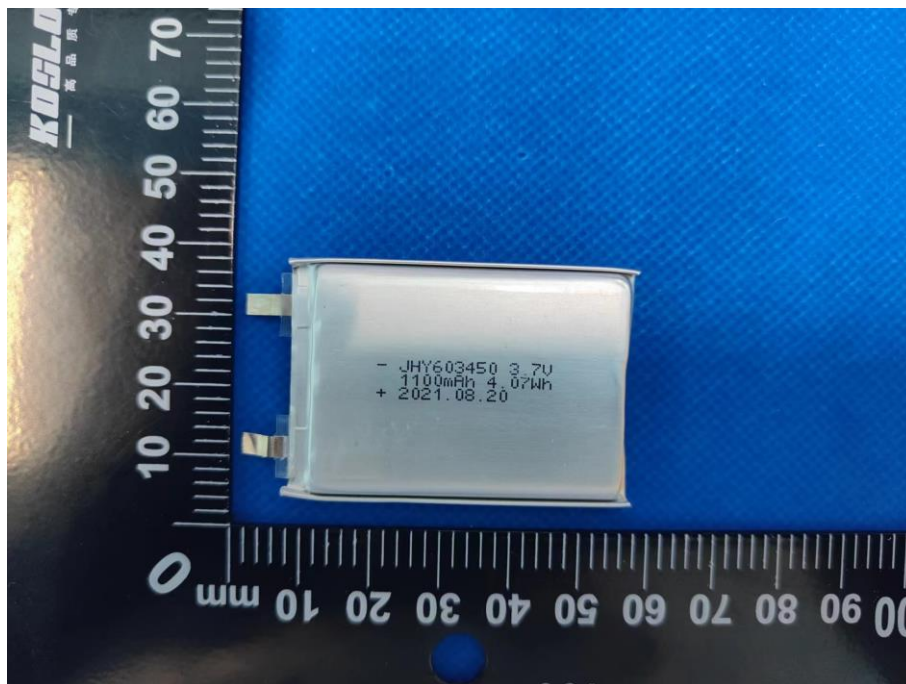


Cell view

Appendix: Photos

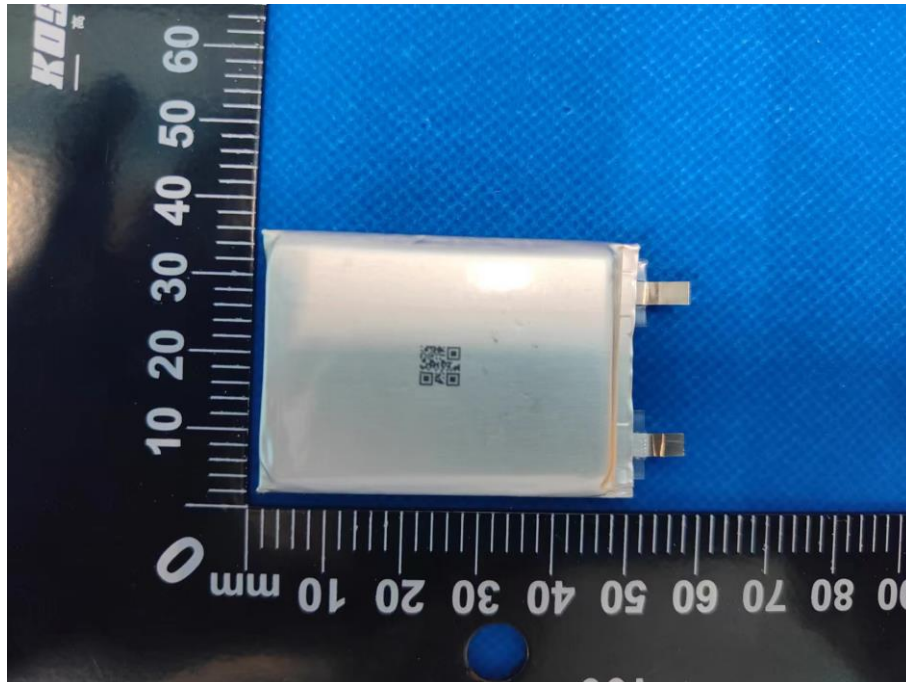


Cell view

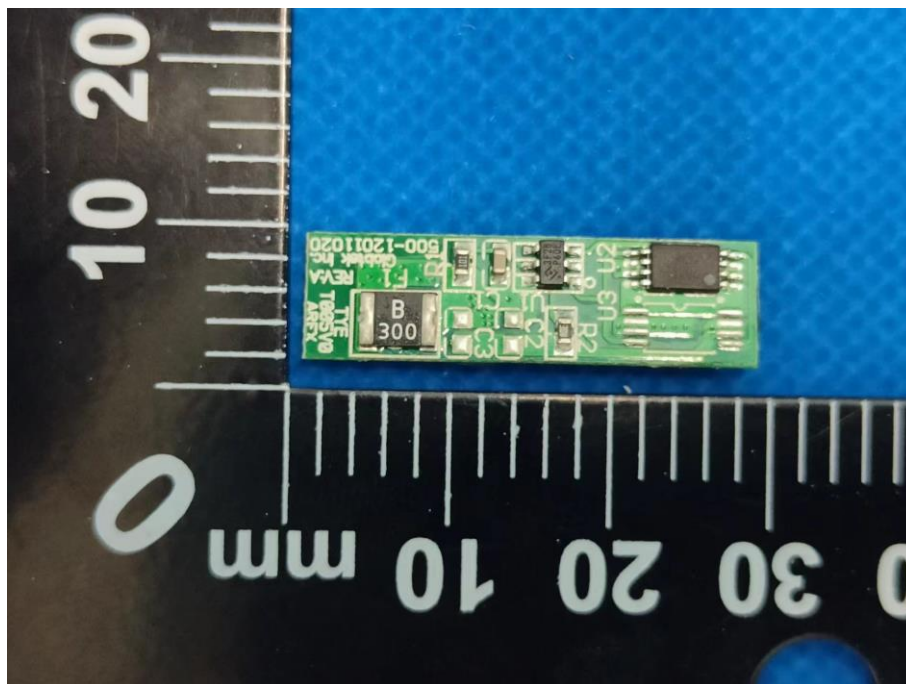


PCB view (For model: BL2200F6034501S2P*)**

Appendix: Photos

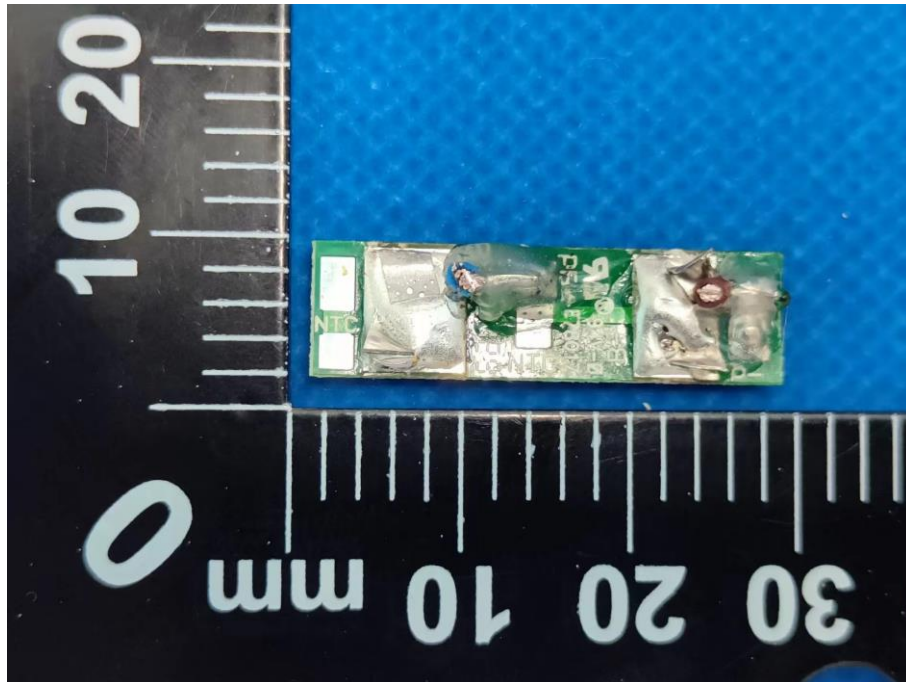


PCB view (For model: BL2200F6034501S2P*)**

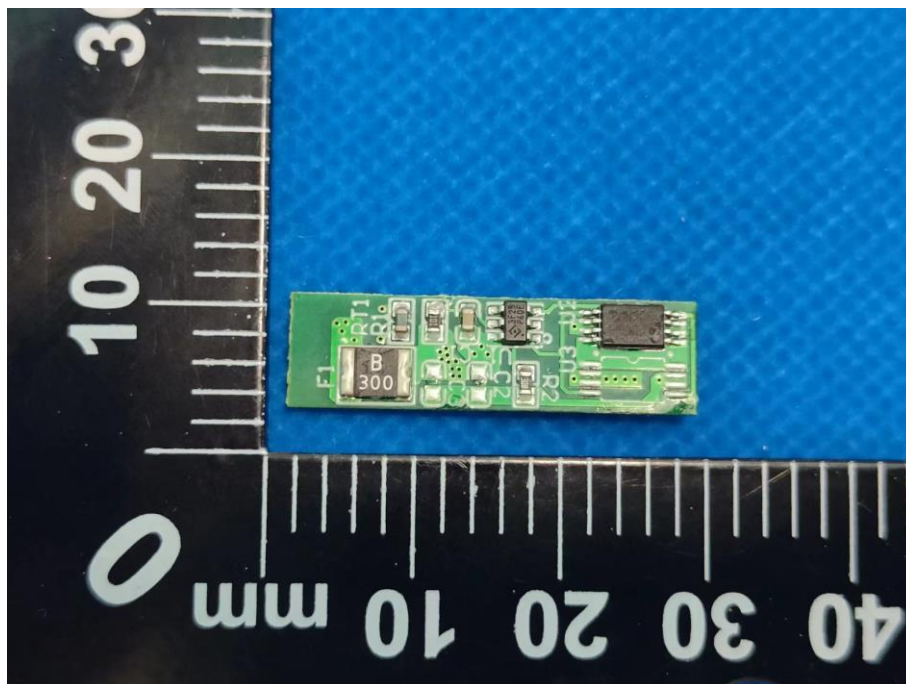

PCB view (For model: 11CP6/35/51-2)

Appendix: Photos

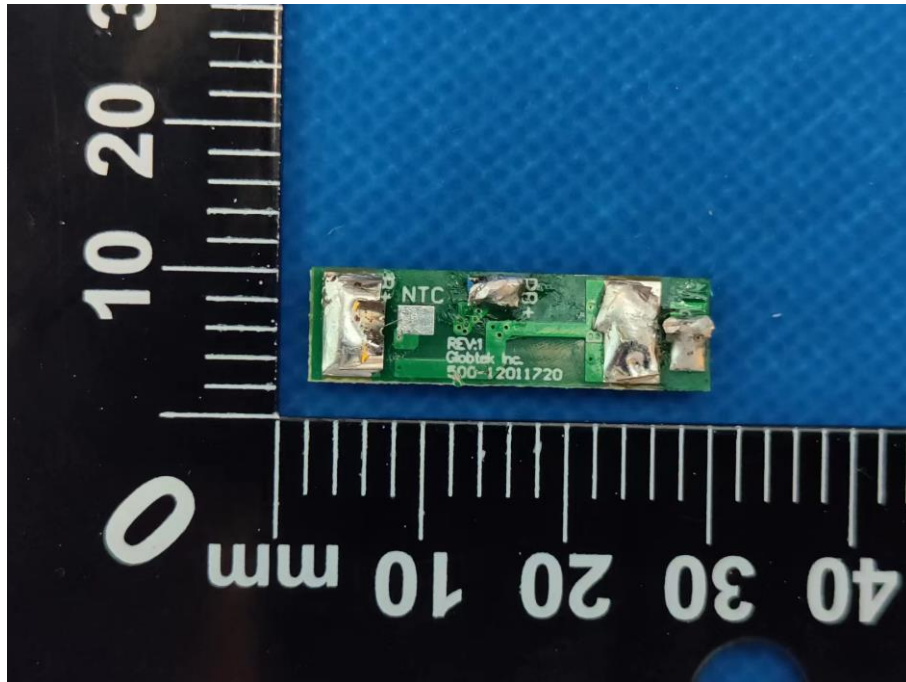

PCB view (For model: 1ICP6/35/51-2)