

COVER PAGE FOR TEST REPORT

Product Category:	Power Supplies for Information Technology Equipment Including Electrical Business Equipment
Product Category CCN:	QQGQ, QQGQ7
Test Procedure:	Listing
Product:	Power Unit
Model/Type Reference:	GT-2S5024D-R-ES
Rating(s):	Input: 100-240 V, 1.5 A, 50-60 Hz, 60-70 VA Output: 24 Vdc, 2.1 A, 50 W maximum.
Standards:	UL 60950-1, 1st Edition, 2006-07-07 (Information Technology Equipment - Safety - Part 1: General Requirements) CSA C22.2 No. 60950-1-03, 1st Edition, 2006-07 (Information Technology Equipment - Safety - Part 1: General Requirements)
Applicant Name and Address:	GLOBTEK INC 186 VETERANS DR NORTHVALE NJ 07647
This Report includes the following parts, in addition to this cover page:	
<ol style="list-style-type: none">1. Specific Technical Criteria2. Clause Verdicts3. Critical Components4. Enclosures	

This is to certify that representative samples of the products covered by this Test Report have been investigated in accordance with the above referenced Standards. The products have been found to comply with the requirements covering the category and the products are judged to be eligible for Follow-Up Service under the indicated Test Procedure. The manufacturer is authorized to use the UL Mark on such products which comply with this Test Report and any other applicable requirements of Underwriters Laboratories Inc. ('UL') in accordance with the Follow-Up Service Agreement. Only those products which properly bear the UL Mark are considered as being covered by UL's Follow-Up Service under the indicated Test Procedure.

The applicant is authorized to reproduce the referenced Test Report provided it is reproduced in its entirety.


Any information and documentation involving UL Mark services are provided on behalf of Underwriters Laboratories Inc. (UL) or any authorized licensee of UL.

Test Report By:



David Keen
Staff Engineer
Underwriters Laboratories Inc.

Reviewed By:

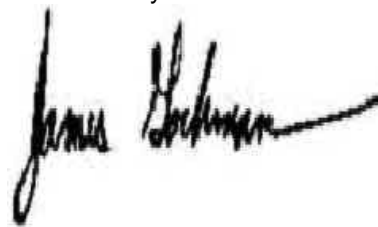

James Gochman
Senior Project Engineer
Underwriters Laboratories Inc.

SPECIFIC INSPECTION CRITERIA

BA1.0	Special Instructions to UL Representative
BA1.1	N/A

BB1.0	Supporting Documentation
BB1.1	<p>The following documents located at the beginning of this Procedure supplement the requirements of this Test Report:</p> <p>A. Authorization - The Authorization page may include additional Factory Identification Code markings.</p> <p>B. Generic Inspection Instructions -</p> <ol style="list-style-type: none"> i. Part AC details important information which may be applicable to products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of this Test Report. ii. Part AE details any requirements which may be applicable to all products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of each Test Report. iii. Part AF details the requirements for the UL Certification Mark which is not controlled by the technical standard used to investigate these products. Products are permitted to bear only the Certification Mark(s) corresponding to the countries for which it is certified, as indicated in each Test Report.


BC1.0	Markings and instructions	
BC1.1	The following markings and instructions are provided as indicated.	
BC1.2	All clause references are from UL 60950-1, 1st Edition, 2006-07-07 (Information Technology Equipment - Safety - Part 1: General Requirements).	
Standard Clause	Clause Title	Marking or Instruction Details
1.7.1	Power rating - Ratings	Ratings (voltage, frequency/dc, current)
	Power rating - Company identification	Listee's or Recognized company's name, Trade Name, Trademark or File Number
	Power rating - Model	Model Number
1.7.6	Fuses - Non-operator access/soldered-in fuses	Unambiguous reference to service documentation for instructions for replacement of fuses replaceable only by service personnel
1.7.7	Class 2/3 terminals	"Class 2" or "Class 2 output"

Other	Limited Power Source Marking	Unit may be optionally marked "LPS" or "Limited Power Source"
-------	------------------------------	---

BD1.0	Production-Line Testing Requirements						
BD1.1	Electric Strength Test Special Constructions - Refer to Generic Inspection Instructions, Part AC for further information.						
	Model	Component	Removable Parts	Test probe location	Test Potential		Test Time, s
	V rms		V dc				
	N/A						
BD1.2	Earthing Continuity Test Exemptions - This test is not required for the following models:						
BD1.3	Electric Strength Test Exemptions - This test is not required for the following models:						
BD1.4	Electric Strength Test Component Exemptions - The following solid-state components may be disconnected from the remainder of the circuitry during the performance of this test:						

BE1.0	Sample and Test Specifics for Follow-Up Tests at UL						
BE1.1	Model	Component	Material	Test	Sample(s)	Test Specifics	
	N/A						

SPECIFIC TECHNICAL CRITERIA

UL 60950-1, First Edition Information technology equipment - Safety- Part 1: General Requirements	
Report Reference No	E170507-A22-UL-1
Compiled by	David Keen
Reviewed by	James Gochman
Date of issue	2007-10-03
Standards	UL 60950-1, 1st Edition, 2006-07-07 (Information Technology Equipment - Safety - Part 1: General Requirements) CSA C22.2 No. 60950-1-03, 1st Edition, 2006-07 (Information Technology Equipment - Safety - Part 1: General Requirements)
Test procedure	Listing
Non-standard test method	N/A
Test item description	Power Unit
Trademark	
Model and/or type reference	GT-2S5024D-R-ES
Rating(s)	Input: 100-240 V, 1.5 A, 50-60 Hz, 60-70 VA Output: 24 Vdc, 2.1 A, 50 W maximum.

Particulars: test item vs. test requirements

Equipment mobility	movable
Operating condition	continuous
Mains supply tolerance (%)	+10%, -10%
Tested for IT power systems	No
IT testing, phase-phase voltage (V)	N/A
Class of equipment	Class I (earthed)
Mass of equipment (kg)	0.58
Protection against ingress of water	IP X0

Possible test case verdicts:

- test case does not apply to the test object
 - test object does meet the requirement
 - test object does not meet the requirement
- N / A
Pass
Fail (acceptable only if a corresponding, less stringent national requirement is "Pass")

General remarks:

- "(see Enclosure #)" refers to additional information appended to the Test Report
- "(see appended table)" refers to a table appended to the Test Report
- Throughout the Test Report a point is used as the decimal separator

GENERAL PRODUCT INFORMATION:	
CA1.0	Report Summary
CA1.1	N/A
CB1.0	Product Description
CB1.1	This product is a power unit intended to be used for information technology equipment in TN power systems and are for indoor use only. It consists of an isolated transformer with electronic circuitry housed in a metal enclosure.
CC1.0	Model Differences
CC1.1	N/A
CD1.0	Additional Information
CD1.1	Model number GT-2S5024D-R-ES is the same as GS599ES.
CE1.0	Technical Considerations
CE1.2	The product was submitted and tested for use at the maximum ambient temperature (Tma) permitted by the manufacturer's specification of: 40°C
CE1.3	The means of connection to the mains supply is: Pluggable A
CE1.4	The product is intended for use on the following power systems: TN
CE1.5	The equipment disconnect device is considered to be: Appliance inlet
CE1.9	The following circuit locations (with circuit/schematic designation) were investigated as a limited power source (LPS): Vout (+ to -). Additionally evaluated to Class 2 requirements of UL1310 for marking as a "Class 2 Output".
CE1.14	The following are available from the Applicant upon request: Specific data sheets for LED indicators that are class I and operate at wavelength in the 400-710 nm range.
CE2.0	Evaluated as a wall mount unit.

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1	GENERAL		Pass
1.5	Components		Pass
1.5.1	General		Pass
	Comply with IEC 60950 or relevant component standard	(See Critical Component List)	Pass
1.5.2	Evaluation and testing of components	<p>Certified components are used in accordance with their ratings, certifications and they comply with applicable parts of this Standard.</p> <p>Components not certified are used in accordance with their ratings and they comply with applicable parts of this Standard and the relevant component Standard.</p> <p>Components, for which no relevant IEC Standard exist, have been tested under the condition occurring in the equipment, using applicable parts of this Standard.</p>	Pass
1.5.3	Thermal controls		N/A
1.5.4	Transformers	Transformers comply with relevant requirements including Annex C.	Pass
1.5.5	Interconnecting cables	VW-1 or FT-1, max. 3.05 m length.	Pass
1.5.6	Capacitors in primary circuits	<p>Line-to-line capacitors are subclass X1 or X2.</p> <p>Primary-to-earth capacitors are subclass Y1 or Y2.</p> <p>Primary-to-secondary capacitors are subclass Y1.</p>	Pass
1.5.7	Double insulation or reinforced insulation bridged by components		Pass
1.5.7.1	General		Pass
1.5.7.2	Bridging capacitors	Double Insulation bridged by a single capacitor complying with IEC 384-14: 1993, subclass	Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
		Y1. See 2.4.	
1.5.7.3	Bridging resistors		N/A
1.5.7.4	Accessible parts	Accessible conductive parts separated from other parts by DOUBLE or REINFORCED INSULATION bridged by Capacitor CY3 comply with the requirements for LIMITED CURRENT CIRCUITS.	Pass
1.5.8	Components in equipment for IT power systems	Not for use on IT power systems.	N/A

1.6	Power interface		Pass
1.6.1	AC power distribution systems	AC power distribution systems are classified as TN.	Pass
1.6.2	Input current	The steady state input current of the equipment did not exceed the RATED CURRENT by more than 10% under NORMAL LOAD. See Test Record for details.	Pass
1.6.3	Voltage limit of hand-held equipment	Not hand-held equipment .	N/A
1.6.4	Neutral conductor	Neutral is insulated from earth with basic insulation.	Pass

1.7	Marking and instructions		Pass
1.7.1	Power rating	Rating marking readily visible to operator.	Pass
	Rated voltage(s) or voltage range(s) (V)	100-240 Vac	Pass
	Symbol for nature of supply, for d.c. only	AC source	N/A
	Rated frequency or rated frequency range (Hz).....	50-60 Hz	Pass
	Rated current (mA or A)	1.5 A	Pass
	Manufacturer's name or trademark or identification mark.....	Globtek	Pass
	Type/model or type reference	GT-2S5024D-R-ES	Pass
	Symbol for Class II equipment only		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Other symbols	Additional marking may be provided when submitted for national approval.	Pass
	Certification marks.....	UL, c-UL.	Pass
1.7.2	Safety instructions	Operating/safety instructions made available to the user.	Pass
1.7.3	Short duty cycles		N/A
1.7.4	Supply voltage adjustment	Equipment is auto-ranging.	N/A
1.7.5	Power outlets on the equipment.....	No standard power outlets are provided.	N/A
1.7.6	Fuse identification.....	F1: T2.0 A, 250 Vac marked on PWB near primary input fuse.	Pass
1.7.7	Wiring terminals		Pass
1.7.7.1	Protective earthing and bonding terminals.....	The earth terminal is marked with the standard earth symbol (60417-2-IEC-5019) near the terminal.	Pass
1.7.7.2	Terminal for a.c. mains supply conductors		N/A
1.7.7.3	Terminals for d.c. mains supply conductors		N/A
1.7.8	Controls and indicators		N/A
1.7.8.1	Identification, location and marking	No indicator, control affecting safety provided.	N/A
1.7.8.2	Colours	A green LED is illuminated when the unit is operating.	N/A
1.7.8.3	Symbols according to IEC 60417	There are no switches in the equipment.	N/A
1.7.8.4	Markings using figures.....	Figures are not used for indicating different positions of controls.	N/A
1.7.9	Isolation of multiple power sources	There is only one connection to hazardous voltages.	N/A
1.7.10	IT power distribution systems	Not intended to use IT Power System	N/A
1.7.11	Thermostats and other regulating devices	No thermostats or similar regulating devices.	N/A
1.7.12	Language.....	Reviewed only English markings/instructions. May be provided in other languages	-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

		upon request from the manufacturer.	
1.7.13	Durability	All markings provided on UL Recognized Component labels suitable for surface they are applied upon and meet the durability test.	Pass
1.7.14	Removable parts	Marking is not placed on removable parts.	Pass
1.7.15	Replaceable batteries	No batteries provided.	N/A
	Language..... :		-
1.7.16	Operator access with a tool..... :	No operator access areas require the use of a tool.	N/A
1.7.17	Equipment for restricted access locations..... :		N/A

2	PROTECTION FROM HAZARDS		Pass
2.1	Protection from electric shock and energy hazards		Pass
2.1.1	Protection in operator access areas		Pass
2.1.1.1	Access to energized parts	No operator access to energized parts.	Pass
	Test by inspection..... :	Operator can not make contact with any parts with hazardous voltage. No openings in product.	Pass
	Test with test finger :		N/A
	Test with test pin..... :		N/A
	Test with test probe :	No TNV present.	N/A
2.1.1.2	Battery compartments :		N/A
2.1.1.3	Access to ELV wiring		N/A
	Working voltage (V); minimum distance (mm) through insulation :		-
2.1.1.4	Access to hazardous voltage circuit wiring		N/A
2.1.1.5	Energy hazards :	The output of the power supply is not an energy hazard.	Pass
2.1.1.6	Manual controls		N/A
2.1.1.7	Discharge of capacitors in equipment		Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Time-constant (s); measured voltage (V) :	1 second; 136 V	-
2.1.2	Protection in service access areas		N/A
2.1.3	Protection in restricted access locations	The unit is not intended to be used in restricted locations.	N/A

2.2	SELV circuits		Pass
2.2.1	General requirements		Pass
2.2.2	Voltages under normal conditions (V) :	24.23 V dc	Pass
2.2.3	Voltages under fault conditions (V) :	___ V dc Under fault conditions voltages never exceed 71 Vp and 120 V dc and do not exceed 42.4 Vp or 60 V dc for more than 0.2 sec.	Pass
2.2.3.1	Separation by double insulation or reinforced insulation (method 1)	SELV circuits permanently separated from hazardous voltage circuits by barriers, routing and fixing.	Pass
2.2.3.2	Separation by earthed screen (method 2)		N/A
2.2.3.3	Protection by earthing of the SELV circuit (method 3)		N/A
2.2.4	Connection of SELV circuits to other circuits :	The SELV circuits are not connected to other circuits other than protective earth.	Pass

2.3	TNV circuits		N/A
2.3.1	Limits		N/A
	Type of TNV circuits :		-
2.3.2	Separation from other circuits and from accessible parts		N/A
	Insulation employed..... :		-
2.3.3	Separation from hazardous voltages		N/A
	Insulation employed..... :		-
2.3.4	Connection of TNV circuits to other circuits		N/A
	Insulation employed..... :		-
2.3.5	Test for operating voltages generated externally		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.4	Limited current circuits		Pass
2.4.1	General requirements	Requirements applied to bridging capacitor CY3.	Pass
2.4.2	Limit values		Pass
	Frequency (Hz)..... :	60 Hz	-
	Measured current (mA)..... :	0.267 mA	-
	Measured voltage (V)..... :	N/A	-
	Measured capacitance (mF)..... :	N/A	-
2.4.3	Connection of limited current circuits to other circuits		N/A

2.5	Limited power sources		Pass
	Inherently limited output		Pass
	Impedance limited output		N/A
	Overcurrent protective device limited output		N/A
	Regulating network limited output under normal operating and single fault condition		Pass
	Regulating network limited output under normal operating conditions and overcurrent protective device limited output under single fault condition		N/A
	Output voltage (V), output current (A), apparent power (VA):..... :	30 V, 3.0 A, 93 W	-
	Current rating of overcurrent protective device (A) :		-

2.6	Provisions for earthing and bonding		Pass
2.6.1	Protective earthing		Pass
2.6.2	Functional earthing		N/A
2.6.3	Protective earthing and protective bonding conductors		Pass
2.6.3.1	General	Protective bonding conductors/terminals sized appropriately for application.	Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.6.3.2	Size of protective earthing conductors		N/A
	Rated current (A), cross-sectional area (mm ²), AWG		-
2.6.3.3	Size of protective bonding conductors		Pass
	Rated current (A), cross-sectional area (mm ²), AWG	1.5 A, 18 AWG	-
2.6.3.4	Resistance (Ohm) of earthing conductors and their terminations, test current (A)	0.015 ohm, 40 A	Pass
2.6.3.5	Colour of insulation.....	Protective bonding conductors are green with yellow stripe.	Pass
2.6.4	Terminals		Pass
2.6.4.1	General		Pass
2.6.4.2	Protective earthing and bonding terminals	Terminals comply with Table 3E.	Pass
	Rated current (A), type and nominal thread diameter (mm)	1.5 A, 3.5 mm	-
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors		N/A
2.6.5	Integrity of protective earthing		Pass
2.6.5.1	Interconnection of equipment		N/A
2.6.5.2	Components in protective earthing conductors and protective bonding conductors		N/A
2.6.5.3	Disconnection of protective earth	An IEC60320 appliance inlet is used.	Pass
2.6.5.4	Parts that can be removed by an operator		N/A
2.6.5.5	Parts removed during servicing		N/A
2.6.5.6	Corrosion resistance		Pass
2.6.5.7	Screws for protective bonding		N/A
2.6.5.8	Reliance on telecommunication network or cable distribution system		N/A

2.7	Overcurrent and earth fault protection in primary circuits		Pass
2.7.1	Basic requirements		Pass
	Instructions when protection relies on building installation		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.7.2	Faults not covered in 5.3		Pass
2.7.3	Short-circuit backup protection	Protective devices have adequate breaking (rupturing) capacity to interrupt the maximum fault current (including short-circuit current).	Pass
2.7.4	Number and location of protective devices :	One protective device in the "LIVE" phase	Pass
2.7.5	Protection by several devices		N/A
2.7.6	Warning to service personnel..... :		N/A

2.8	Safety interlocks		N/A
2.8.1	General principles		N/A
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches and relays		N/A
2.8.7.1	Contact gaps (mm) :		N/A
2.8.7.2	Overload test		N/A
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test		N/A
2.8.8	Mechanical actuators		N/A

2.9	Electrical insulation		Pass
2.9.1	Properties of insulating materials	Natural rubber, hygroscopic materials and materials containing asbestos are not used as insulating materials. Electric strength test was conducted after the humidity treatment. See below.	Pass
2.9.2	Humidity conditioning	Humidity treatment performed	Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

		for 48 hrs.	
	Humidity (%)	93 %RH	-
	Temperature (°C).....	30°C	-
2.9.3	Grade of insulation	Reinforced Insulation between Primary and SELV, Basic Insulation between Primary and Earth.	Pass

2.10	Clearances, creepage distances and distances through insulation		Pass
2.10.1	General	Pollution degree 2 applicable.	Pass
2.10.2	Determination of working voltage		Pass
2.10.3	Clearances	(see appended table 2.10.3 and 2.10.4).	Pass
2.10.3.1	General		Pass
2.10.3.2	Clearances in primary circuit	(see appended table 2.10.3 and 2.10.4).	Pass
2.10.3.3	Clearances in secondary circuits	Functional insulation, see 5.3.4.	N/A
2.10.3.4	Measurement of transient voltage levels		N/A
2.10.4	Creepage distances	(see appended table 2.10.3 and 2.10.4).	Pass
	CTI tests	Material group IIIb; 100 <= CTI < 175.	-
2.10.5	Solid insulation	Solid or laminated insulating materials having adequate thickness are provided.	Pass
2.10.5.1	Minimum distance through insulation		N/A
2.10.5.2	Thin sheet material		N/A
	Number of layers (pcs)		-
	Electric strength test.....		-
2.10.5.3	Printed boards	PWB is not used as reinforced or supplementary insulation.	N/A
	Distance through insulation		N/A
	Electric strength test for thin sheet insulating material		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Number of layers (pcs)		N/A
2.10.5.4	Wound components		Pass
	Number of layers (pcs)	Three extruded layers.	Pass
	Two wires in contact inside wound component; angle between 45° and 90°	Physical separation in the form of insulating sleeving provided to relieve mechanical stress at the crossover point.	Pass
2.10.6	Coated printed boards	No coated printed wiring boards.	N/A
2.10.6.1	General		N/A
2.10.6.2	Sample preparation and preliminary inspection		N/A
2.10.6.3	Thermal cycling		N/A
2.10.6.4	Thermal ageing (°C)		N/A
2.10.6.5	Electric strength test		-
2.10.6.6	Abrasion resistance test		N/A
	Electric strength test		-
2.10.7	Enclosed and sealed parts		N/A
	Temperature T1=T2 = Tma - Tamb +10K (°C).....		N/A
2.10.8	Spacings filled by insulating compound		N/A
	Electric strength test		-
2.10.9	Component external terminations		N/A
2.10.10	Insulation with varying dimensions		N/A

3	WIRING, CONNECTIONS AND SUPPLY		Pass
3.1	General		Pass
3.1.1	Current rating and overcurrent protection	Internal wiring is adequately sized for the current it is intended to carry and protected from overcurrent.	Pass
3.1.2	Protection against mechanical damage	The wires are routed away from sharp edges and parts which could damage insulation.	Pass
3.1.3	Securing of internal wiring	The wires are positioned in	Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

		such a manner that prevents excessive strain, loosening of terminal connections and damage of conductor insulation.	
3.1.4	Insulation of conductors	Uninsulated conductors have been adequately fixed to prevent, in normal use, any reduction of creepage or clearance distances below those prescribed by in 2.9.	Pass
3.1.5	Beads and ceramic insulators		N/A
3.1.6	Screws for electrical contact pressure	All electrical screw connections are by metal screw with more than 2 threads into a metal plate.	Pass
3.1.7	Insulating materials in electrical connections		N/A
3.1.8	Self-tapping and spaced thread screws		N/A
3.1.9	Termination of conductors	Conductors suitably terminated, creepage and clearances maintained, second securing for soldered terminations provided.	Pass
	10 N pull test		Pass
3.1.10	Sleeving on wiring		N/A

3.2	Connection to an a.c. mains supply or a d.c. mains supply		Pass
3.2.1	Means of connection	The unit is provided with an appliance inlet.	Pass
3.2.1.1	Connection to an a.c. mains supply		Pass
3.2.1.2	Connection to a d.c. mains supply		N/A
3.2.2	Multiple supply connections	Single mains supply	N/A
3.2.3	Permanently connected equipment		N/A
	Number of conductors, diameter (mm) of cable and conduits		-
3.2.4	Appliance inlets		Pass
3.2.5	Power supply cords	Not provided with unit.	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

3.2.5.1	AC power supply cords		N/A
	Type..... :		-
	Rated current (A), cross-sectional area (mm ²), AWG :		-
3.2.5.2	DC power supply cords		N/A
3.2.6	Cord anchorages and strain relief		N/A
	Mass of equipment (kg), pull (N) :		-
	Longitudinal displacement (mm) :		-
3.2.7	Protection against mechanical damage		N/A
3.2.8	Cord guards		N/A
	D (mm); test mass (g)..... :		-
	Radius of curvature of cord (mm) :		-
3.2.9	Supply wiring space		N/A

3.3	Wiring terminals for connection of external conductors		N/A
3.3.1	Wiring terminals		N/A
3.3.2	Connection of non-detachable power supply cords		N/A
3.3.3	Screw terminals		N/A
3.3.4	Conductor sizes to be connected		N/A
	Rated current (A), cord/cable type, cross-sectional area (mm ²)..... :		-
3.3.5	Wiring terminal sizes		N/A
	Rated current (A), type and nominal thread diameter (mm) :		-
3.3.6	Wiring terminals design		N/A
3.3.7	Grouping of wiring terminals		N/A
3.3.8	Stranded wire		N/A

3.4	Disconnection from the mains supply		Pass
3.4.1	General requirement		Pass
3.4.2	Disconnect devices	Appliance inlet.	Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.4.3	Permanently connected equipment		N/A
3.4.4	Parts which remain energized	No parts remain energized when the disconnect device is removed.	N/A
3.4.5	Switches in flexible cords	No isolating switch in the cord set.	Pass
3.4.6	Single-phase equipment and d.c. equipment	Disconnect device disconnects both poles simultaneously.	Pass
3.4.7	Three-phase equipment	The equipment is single-phased.	N/A
3.4.8	Switches as disconnect devices	No such switch is provided.	N/A
3.4.9	Plugs as disconnect devices		N/A
3.4.10	Interconnected equipment	No interconnection of hazardous voltages.	N/A
3.4.11	Multiple power sources	One power source only.	N/A

3.5	Interconnection of equipment		Pass
3.5.1	General requirements	Output of power supply is a limited power source.	Pass
3.5.2	Types of interconnection circuits	Interconnection circuits are SELV CIRCUITS.	Pass
3.5.3	ELV circuits as interconnection circuits		N/A

4	PHYSICAL REQUIREMENTS		Pass
4.1	Stability		N/A
	Angle of 10°		N/A
	Test: force (N).....		N/A

4.2	Mechanical strength		Pass
4.2.1	General	See below	Pass
4.2.2	Steady force test, 10 N		Pass
4.2.3	Steady force test, 30 N		N/A
4.2.4	Steady force test, 250 N	No hazards as a result of the 250 N test.	Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.2.5	Impact test		Pass
	Fall test		Pass
	Swing test		N/A
4.2.6	Drop test		N/A
4.2.7	Stress relief test		Pass
4.2.8	Cathode ray tubes		N/A
	Picture tube separately certified		N/A
4.2.9	High pressure lamps		N/A
4.2.10	Wall or ceiling mounted equipment; force (N)	50 N	Pass

4.3	Design and construction		Pass
4.3.1	Edges and corners	All edges and corners are judged to be sufficiently well rounded so as not to constitute a hazard.	Pass
4.3.2	Handles and manual controls; force (N)		N/A
4.3.3	Adjustable controls	No setting for power supply voltage.	N/A
4.3.4	Securing of parts		N/A
4.3.5	Connection of plugs and sockets	The equipment does not have any interchangeable plugs/sockets.	N/A
4.3.6	Direct plug-in equipment		N/A
	Dimensions (mm) of mains plug for direct plug-in . :		N/A
	Torque and pull test of mains plug for direct plug-in; torque (Nm); pull (N)		N/A
4.3.7	Heating elements in earthed equipment		N/A
4.3.8	Batteries		N/A
4.3.9	Oil and grease	The insulation of the internal wiring is not exposed to oil, grease, etc.	N/A
4.3.10	Dust, powders, liquids and gases	The equipment does not produce or employ powders, liquids, or gases.	N/A
4.3.11	Containers for liquids or gases	The equipment does not	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

		contain liquid.	
4.3.12	Flammable liquids..... :	The equipment does not use any flammable liquids.	N/A
	Quantity of liquid (l)..... :		N/A
	Flash point (°C)..... :		N/A
4.3.13	Radiation; type of radiation	Ionising radiation or laser or in which similar hazards are not presents.	Pass
4.3.13.1	General		Pass
4.3.13.2	Ionizing radiation		N/A
	Measured radiation (pA/kg) :		-
	Measured high-voltage (kV) :		-
	Measured focus voltage (kV)..... :		-
	CRT markings..... :		-
4.3.13.3	Effect of ultraviolet (UV) radiation on materials		N/A
	Part, property, retention after test, flammability classification :		N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation :		N/A
4.3.13.5	Laser (including LEDs)	This product contains only visible indicator LEDs (Class 1) operating in the range of 400 - 700 nm wavelength. No IEC60825-1 evaluation was deemed necessary. Additional review may be required at the discretion of the accepting NCB.	Pass
	Laser class :	See above	-
4.3.13.6	Other types :		N/A

4.4	Protection against hazardous moving parts		N/A
4.4.1	General		N/A
4.4.2	Protection in operator access areas		N/A
4.4.3	Protection in restricted access locations		N/A
4.4.4	Protection in service access areas		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.5	Thermal requirements		Pass
4.5.1	Maximum temperatures	The equipment and its component parts did not attain excessive temperatures during normal operation.	Pass
	Normal load condition per Annex L :	Operated in the most unfavorable way of operation given in the operating instructions until steady conditions established. Permitted rises based on manufacturer's specified Tmra of 40°C.	N/A
4.5.2	Resistance to abnormal heat	It has been determined from examination of the physical characteristics of the materials used that the material meets the requirements of the test.	Pass

4.6	Openings in enclosures		N/A
4.6.1	Top and side openings		N/A
	Dimensions (mm) :		-
4.6.2	Bottoms of fire enclosures	No openings.	N/A
	Construction of the bottom :		-
4.6.3	Doors or covers in fire enclosures		N/A
4.6.4	Openings in transportable equipment		N/A
4.6.5	Adhesives for constructional purposes		N/A
	Conditioning temperature (°C)/time (weeks) :		-

4.7	Resistance to fire		Pass
4.7.1	Reducing the risk of ignition and spread of flame		Pass
	Method 1, selection and application of components wiring and materials		Pass
	Method 2, application of all of simulated fault condition tests		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.2	Conditions for a fire enclosure		Pass
4.7.2.1	Parts requiring a fire enclosure	Components in primary and secondary circuits are provided with fire enclosure.	Pass
4.7.2.2	Parts not requiring a fire enclosure		N/A
4.7.3	Materials		Pass
4.7.3.1	General		Pass
4.7.3.2	Materials for fire enclosures	The fire enclosure is metal.	N/A
4.7.3.3	Materials for components and other parts outside fire enclosures		N/A
4.7.3.4	Materials for components and other parts inside fire enclosures	All internal materials are rated V-2 or better or are mounted on a PWB rated V-1 or better.	Pass
4.7.3.5	Materials for air filter assemblies	No air filter assemblies.	N/A
4.7.3.6	Materials used in high-voltage components	No high-voltage components	N/A

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS		Pass
5.1	Touch current and protective conductor current		Pass
5.1.1	General	Touch current levels did not exceed limits of Table 5A.	Pass
5.1.2	Equipment under test (EUT)	Single mains connection.	Pass
5.1.3	Test circuit	Single phase equipment intended only for connection to star TN or TT system.	Pass
5.1.4	Application of measuring instrument	Tested using D.1 measuring instrument.	Pass
5.1.5	Test procedure		Pass
5.1.6	Test measurements		Pass
	Test voltage (V)	264 V ac, 60 Hz	-
	Measured touch current (mA).....	0.119	-
	Max. allowed touch current (mA).....	3.5 mA	-
	Measured protective conductor current (mA)		-
	Max. allowed protective conductor current (mA) ...		-
5.1.7	Equipment with touch current exceeding 3.5 mA..		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.1.8	Touch currents to and from telecommunication networks and cable distribution systems and from telecommunication networks	No TNV circuit.	N/A
5.1.8.1	Limitation of the touch current to a telecommunication network and a cable distribution system	No TNV circuit.	N/A
	Test voltage (V)		-
	Measured touch current (mA).....		-
	Max. allowed touch current (mA).....		-
5.1.8.2	Summation of touch currents from telecommunication networks		N/A

5.2	Electric strength		Pass
5.2.1	General	Based on the electric strength test the use of the insulating materials within the equipment is satisfactory.	Pass
5.2.2	Test procedure	(see appended table 5.2)	Pass

5.3	Abnormal operating and fault conditions		Pass
5.3.1	Protection against overload and abnormal operation	(see appended table 5.3)	Pass
5.3.2	Motors		N/A
5.3.3	Transformers	Transformers are protected by primary fuse and by regulating network.	Pass
5.3.4	Functional insulation.....	Functional insulation complies with the requirements (a), (b), or (c).	Pass
5.3.5	Electromechanical components		N/A
5.3.6	Simulation of faults	Transformer temperatures measured for compliance with Annex C during test.	Pass
5.3.7	Unattended equipment	The equipment is not intended for unattended use.	N/A
5.3.8	Compliance criteria for abnormal operating and fault conditions	No fire, emission of molten metal or deformation was noted during the tests. Electric	Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

		Strength tests performed after abnormal and fault tests.	
--	--	--	--

6	CONNECTION TO TELECOMMUNICATION NETWORKS		N/A
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N/A
6.1.1	Protection from hazardous voltages		N/A
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements		N/A
	Test voltage (V)	:	-
	Current in the test circuit (mA).....	:	-
6.1.2.2	Exclusions	:	N/A

6.2	Protection of equipment users from overvoltages on telecommunication networks		N/A
6.2.1	Separation requirements		N/A
6.2.2	Electric strength test procedure		N/A
6.2.2.1	Impulse test		N/A
6.2.2.2	Steady-state test		N/A
6.2.2.3	Compliance criteria		N/A

6.3	Protection of the telecommunication wiring system from overheating		N/A
	Max. output current (A).....	:	-
	Current limiting method	:	-

7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS		N/A
7.1	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N/A
7.2	Protection of equipment users from overvoltages on the cable distribution system		N/A
7.3	Insulation between primary circuits and cable distribution systems		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.1	General		N/A
7.3.2	Voltage surge test		N/A
7.3.3	Impulse test		N/A

A	Annex A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N/A
A.1.1	Samples..... :		-
	Wall thickness (mm)		-
A.1.2	Conditioning of samples; temperature (°C)		N/A
A.1.3	Mounting of samples		N/A
A.1.4	Test flame		N/A
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s)		-
	Sample 2 burning time (s)		-
	Sample 3 burning time (s)		-

A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N/A
A.2.1	Samples, material..... :		-
	Wall thickness (mm)		-
A.2.2	Conditioning of samples		N/A
A.2.3	Mounting of samples		N/A
A.2.4	Test flame		N/A
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A
	Sample 1 burning time (s)		-
	Sample 2 burning time (s)		-
	Sample 3 burning time (s)		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

A.2.7	Alternative test acc. to IEC 60695-2-2, cl. 4, 8		N/A
	Sample 1 burning time (s)		-
	Sample 2 burning time (s)		-
	Sample 3 burning time (s)		-

A.3	Hot flaming oil test (see 4.6.2)		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A
A.3.3	Compliance criterion		N/A

B	Annex B, MOTOR TESTS UNDER ABNORMAL CONDITIONS(see 4.7.2.2 and 5.3.2)		N/A
B.1	General requirements		N/A
	Position		-
	Manufacturer		-
	Type		-
	Rated values		-
B.2	Test conditions		N/A
B.3	Maximum temperatures		N/A
B.4	Running overload test		N/A
B.5	Locked-rotor overload test		N/A
	Test duration (days)		-
	Electric strength test: test voltage (V)		-
B.6	Running overload test for d.c. motors in secondary circuits		N/A
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
B.7.1	Test procedure		N/A
B.7.2	Alternative test procedure; test time (h)		N/A
B.7.3	Electric strength test		N/A
B.8	Test for motors with capacitors		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.9	Test for three-phase motors		N/A
B.10	Test for series motors		N/A
	Operating voltage (V)		-

C	Annex C, TRANSFORMERS (see 1.5.4 and 5.3.3)		Pass
	Position	T1	-
	Manufacturer	XEPEX	-
	Type	B9111-1673000110(1.0)	-
	Rated values	T1 employs Class B (130C), Type SPB-6	-
	Method of protection	Regulating Network	-
C.1	Overload test	(see appended table 5.3)	Pass
C.2	Insulation	(see appended table 5.2)	Pass
	Protection from displacement of windings	Triple insulated wire used	Pass

D	Annex D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS		Pass
D.1	Measuring instrument	Simpson 228	Pass
D.2	Alternative measuring instrument		N/A

E	Annex E, TEMPERATURE RISE OF A WINDING		N/A
----------	---	--	-----

F	Annex F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10)		Pass
----------	---	--	------

G	Annex G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N/A
G.1	Summary of the procedure for determining minimum clearances		N/A
G.2	Determination of mains transient voltage (V)		N/A
G.2.1	AC mains supply		N/A
G.2.2	DC mains supply		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

G.3	Determination of telecommunication network transient voltage (V) :		N/A
G.4	Determination of required withstand voltage (V) ... :		N/A
G.5	Measurement of transient levels (V)..... :		N/A
G.6	Determination of minimum clearances		N/A

H	ANNEX H, IONIZING RADIATION (see 4.3.13)		N/A
---	---	--	-----

J	Annex J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)		Pass
	Metal used	Aluminum	-

K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.7)		N/A
K.1	Making and breaking capacity		N/A
K.2	Thermostat reliability; operating voltage (V)..... :		N/A
K.3	Thermostat endurance test; operating voltage (V) :		N/A
K.4	Temperature limiter endurance; operating voltage (V)		N/A
K.5	Thermal cut-out reliability		N/A
K.6	Stability of operation		N/A

L	Annex L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.1)		N/A
L.1	Typewriters		N/A
L.2	Adding machines and cash registers		N/A
L.3	Erasers		N/A
L.4	Pencil sharpeners		N/A
L.5	Duplicators and copy machines		N/A
L.6	Motor-operated files		N/A
L.7	Other business equipment		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

M	Annex M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N/A
M.1	Introduction		N/A
M.2	Method A		N/A
M.3	Method B		N/A
M.3.1	Ringing signal		N/A
M.3.1.1	Frequency (Hz)..... :		-
M.3.1.2	Voltage (V)..... :		-
M.3.1.3	Cadence; time (s), voltage (V)..... :		-
M.3.1.4	Single fault current (mA)..... :		-
M.3.2	Tripping device and monitoring voltage..... :		N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V) :		N/A

N	Annex N, IMPULSE TEST GENERATORS (see 2.10.3.4, 6.2.2.1, 7.3.2 and clause G.5)		N/A
N.1	ITU-T impulse test generators		N/A
N.2	IEC 60065 impulse test generator		N/A

P	Annex P, NORMATIVE REFERENCES		Pass
---	--------------------------------------	--	------

Q	Annex Q, BIBLIOGRAPHY		Pass
---	------------------------------	--	------

R	Annex R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6)		N/A
R.2	Reduced clearances (see 2.10.3)		N/A

S	Annex S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N/A
---	---	--	-----

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

S.1	Test equipment		N/A
S.2	Test procedure		N/A
S.3	Examples of waveforms during impulse testing		N/A

T	Annex T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N/A
 :		-

U	Annex U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		Pass
 :	See Table 1.5.1	-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: list of critical components					Pass
Object/part No.	Manufacturer/ trademark	type/model	technical data	Product Category CCN(s)	Required Marks of Conformity	Supplement ID
Enclosure	-	-	Aluminum, 1.2 mm thick. Approximately 152 by 105 by 87 mm	-	-	
Appliance Inlet	Tec-x	TU-301-A	250Vac, 10A	AXUT2	UL	
Appliance Inlet alternate	Supercom	SC-9-3P	250Vac, 10A	AXUT2	UL	
Internal wiring, appliance inlet to PWB/Chassis	-	-	20AWG, Style 1015, 600V, 105°C	AVLV2	UL	
Insulating Tubing/Sleeving	-	-	FEP, PTFE, PVC, TFE, neoprene, polyimide or marked VW-1; rated 105°C, 300 V.	UZFT2, YDPU2, YDRY2, YDTU2	UL	
Printed Wiring Board	-	-	Rated minimum V-0, 130°C.	ZPMV2	UL	
Fuse F1	Littelfuse	662 Series	250V, 2A	JDYX2	UL	
Fuse F1, alternate	Walter	FSD Series	250V, 2A	JDYX2	UL	
Fuse F1, alternate	Littelfuse	217 Series	250V, 2A	JDYX2	UL	
Fuse F1, alternate	Bel	RST Series	250V, 2A	JDYX2	UL	
Fuse F1, alternate	Bussmann	SR-5-2A	250V, 2A	JDYX2	UL	
Fuse F1, alternate	-	-	250V, 2A	JDYX2	UL	
Capacitors CY1 and CY2	Murata	DE Series	Rated maximum 1000 pF, minimum 250 Vac. Class Y1 or Y2.	FOKY2 or FOWX2	UL	
Capacitors CY1 and CY2 alternate	TDK	CS Series	Rated maximum 1000 pF, minimum 250 Vac. Class Y1 or Y2.	FOKY2 or FOWX2	UL	
Capacitors CY1 and CY2 alternate	Jya-Nay Co Ltd	JN Series	Rated maximum 1000 pF, minimum 250 Vac. Class Y1 or Y2.	FOKY2 or FOWX2	UL	
Capacitors CY1 and	Success	SE Series	Rated maximum 1000 pF,	FOKY2 or	UL	

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

CY2 alternate			minimum 250 Vac. Class Y1 or Y2.	FOWX2		
Capacitors CY1 and CY2 alternate	-	-	Rated maximum 1000 pF, minimum 250 Vac. Class Y1 or Y2.	FOKY2 or FOWX2	UL	
Surge Arrestor VR1	Centra Science Corp	CNR-D471K	300V	XUHT2	UL	
Surge Arrestor VR1 alternate	Thinking Electronics	TVR07471	470V	XUHT2	UL	
Surge Arrestor VR1 alternate	Littlefuse	V07E300	300V	XUHT2	UL	
Surge Arrestor VR1 alternate	-	-	300V	XUHT2	UL	
Capacitors (CX1, CX3)	Cheng Tung Industry Co Ltd	CTX Series	0.47 µF, 250 Vac, Class X2.	FOKY2, FOWX2	UL	
Capacitors (CX1, CX3) alternate	UTX or Various	HQX Series	0.47 µF, 250 Vac, Class X2.	FOKY2, FOWX2	UL	
Capacitors (CX1, CX3) alternate	Dain Electronics Co Ltd	MPX Series	0.47 µF, 250 Vac, Class X2.	FOKY2, FOWX2	UL	
Capacitors (CX1, CX3) alternate	Panasonic	ECQU2A474	0.47 µF, 250 Vac, Class X2.	FOKY2, FOWX2	UL	
Capacitors (CX1, CX3) alternate	-	-	0.47 µF, 250 Vac, Class X2.	FOKY2, FOWX2	UL	
Bleeder Resistors R1A, R1B and R1C	-	-	357kohm, 0.25 W	-	-	
Capacitor CY3	Murata	DE Series	Rated maximum 3.3 nF, minimum 250 Vac. Class Y1.	FOWX2	UL	
Capacitor CY3 alternate	TDK	CD Series	Rated maximum 3.3 nF, minimum 250 Vac. Class Y1.	FOWX2	UL	
Capacitor CY3 alternate	Success	SB Series	Rated maximum 3.3 nF, minimum 250 Vac. Class Y1.	FOWX2	UL	
Capacitor CY3 alternate	Jya-Nay Co Ltd	JN Series	Rated maximum 3.3 nF, minimum 250 Vac. Class Y1.	FOWX2	UL	
Capacitor CY3 alternate	-	-	Rated maximum 3.3 nF, minimum 250 Vac. Class Y1.	FOWX2	UL	

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Transformer T1	Xepex, Wuxi Huipu, Yangshang or Globtek	B9111-1673000110(1.0)	Employs OBJT2 TIW and OBJY2 Class B insulation system	-	-	4-01
Triple Insulated Wire	Furukawa	TEX-E	Rated 3000 V isolation	OBJT2	UL	
Insulation System	Xepex Electronic	SPB-6	Class B	OBJY2	UL	
Insulation System alternate	Wuxi Huipu Electronics	Huipu 130-TM	Class B	OBJY2	UL	
Insulation System alternate	Yangshang Electronics	TS-130-1 or GH-130	Class B	OBJY2	UL	
Insulation System alternate	Globtek Inc.	GTX-1	Class B	OBJY2	UL	
Optocoupler U4	Liteon	LTV-817	Minimum 3000 V ac isolation. Double protection	FPQU2	UL	
Optocoupler U4	NEC	PS2561L-1	Minimum 3000 V ac isolation. Double protection	FPQU2	UL	
Optocoupler U4	Cosmo Electronics Corp	KP1010	Minimum 3000 V ac isolation. Double protection	FPQU2	UL	
Optocoupler U4	-	-	Minimum 3000 V ac isolation. Double protection	FPQU2	UL	
Output Cord	Jinan Cable & Wire Co Ltd	-	Type CMP, 18AWG	DUZX	UL	
Inductors LF1, LF3	-	-	Open-type construction. Rated minimum 130°C.	-	-	
Label	-	-	60 °C on metal.	PGDQ2	UL	