
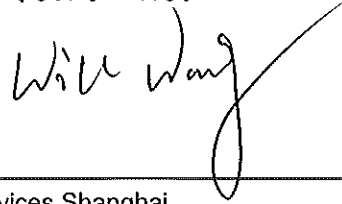



VERIFICATION STATEMENT EN 60950-1:2006+A11:2009+A1:2010+A12:2011+ A2:2013 Information technology equipment – Safety – Part 1: General requirements	
Report Reference No.	161200880SHA-001 (based on CB certif. no. SE-84462M1)
Tested by (+ signature)	Albert Zhou 
Approved by (+ signature).....	Will Wang 
Date of issue	2017-02-21
Contents	5 pages
Testing laboratory Name	Intertek Testing Services Shanghai
Address	Building 86, 1198 Qinzhou Road (North), 200233 Shanghai, China
Testing location	Same as above
Client Name	GlobTek, Inc.
Address	186 Veterans Dr. Northvale, NJ 07647 USA
Standard	EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
Test procedure	S mark
Non-standard test method	N.A.
Test item Description	ITE Power Supply
Trademark.....	
Model and/or type reference	GT**_****, GT*96600-*56*** Refer to page 2 for details.
Rating(s).....	GT**_****: Input: 100-240V~, 50-60Hz, 1.5A; Output: 5-54VDC, Max. 60W GT*96600-*56***: Input: 100-240V~, 50-60Hz, 2.0A Output: 56VDC, Max. 70W Output: Refer to pages 3-4 for details.
Manufacture	GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 USA
Factory	GlobTek (Suzhou) Co., Ltd Building 4, No. 76 JinLing East Road, Suzhou Industrial Park, Suzhou, JiangSu, 215021, China
Remarks for acceptance and review work conducted by above qualified testing laboratory	
Sample Number reviewed.....	12 pcs

Remark	: The product and the mentioned test reports comply with Swedish standard and national deviations, if any. The sample as shown in following page(s) is still corresponding with the one mentioned in CB test report. We concluded this statement verifies that above standards are fulfilled.
Test item description	: No tests are needed for this product.
Statement for deviations, if any.....	: National difference for Sweden has been evaluated in CB report.

Model similarity:

GT**_*****

The 1st “*” part can be ‘M’ or ‘-’ or ‘H’ for market identification and not related to safety.

The 2nd “*” can be 91099 or 96600 for market identification

The 3rd “*” denotes the rated output wattage designation, which can be “01” to “60”, with interval of 1.

When the 2nd “*”=91099

The 4th “*” denotes the standard rated output voltage designation, which can be “09”, “15”, “24”, “48”;

The 5th “*” is optional deviation, subtracted from standard output voltage, which can be “-0.01” to “-23.9” with interval of 0.01, or blank to indicate no voltage different.

The 4th “*” and 5th “*” together denote the output voltage, with a range of 5–48volts.

When the 2nd “*”=96600

The 4th “*” denote the standard rated output voltage designation, which can be “05” to “54” or “5.0” to “54.0” in 0.1V increments.

The 5th “*”=Blank

The 6th “*” =-T2 means desktop class II with C8 AC inlet

=-T2A means desktop class II with C18 AC inlet

=-T3 means desktop class I with C14 AC inlet

=-T3A means desktop class I with C6 AC inlet

=-T2L means desktop class II with C8 AC inlet and housing with a DC jack

=-T2AL means desktop class II with C18 AC inlet and housing with a DC jack

=-T3L means desktop class I with C14 AC inlet and housing with a DC jack

=-T3AL means desktop class I with C6 AC inlet and housing with a DC jack

=-R2 means hybrid desktop housing class II with C8 AC inlet

=-R3A means hybrid desktop housing class I with C6 AC inlet

=-F means Open Frame class I

=-FW means Open Frame class II

=-P2 means Encapsulated class II

=-P3 means Encapsulated class I

The last * denote any six character = 0-9 or A-Z or ()[] or – or blank for marketing purposes.

GT*96600-*56***

The 1st “*” part can be ‘M’ or ‘-’ or ‘H’ for market identification and not related to safety.

The 2nd “*” denotes the rated output wattage designation, which can be “01” to “70”, with interval of 1.

The 3rd “*” =-T2 means desktop class II with C8 AC inlet

=-T2A means desktop class II with C18 AC inlet

=-T3 means desktop class I with C14 AC inlet

=-T3A means desktop class I with C6 AC inlet

The 4th “*” =-AP or -PP or -SP

- AP (with baby board) stands for Active POE
- PP (no baby board) stands for Passive POE
- SP (no baby board) stands for Simple POE

The last * denote any six character = 0-9 or A-Z or ()[] or – or blank for marketing purposes.

Alternate Rating:

For models GTM96600-2005-R2 / GTM96600-2005-R3A: output 5VDC, 4.0A at Tma=70 Deg.C;

For models GTM96600-2412-R2 / GTM96600-2412-R3A: output 12VDC, 2.0A at Tma=70 Deg.C;

For models GTM96600-2436-R2 / GTM96600-2436-R3A: output 36VDC, 0.66A at Tma=70 Deg.C;

For models GTM96600-2448-R2 / GTM96600-2448-R3A: output 48VDC, 0.5A at Tma=70 Deg.C;

For models GTM96600-2454-R2 / GTM96600-2454-R3A: output 54VDC, 0.44A at Tma=70 Deg.C;

For models GT-96600-7056-T3-AP/ GT-96600-7056-T2-AP: output 56VDC, 1.25A at Tma=40 Deg.C;

Model list:

GT*96600--T2/T2A/T3/T3A/T2L/T2AL/T3L/T3AL* Desktop models**


Model	Output Voltage	Max. output current	Max. output power
GT*96600-**-T2/T2A/T3/T3A/T2L/T2AL/T3L/T3AL*	5-6.7V	8A	40W
GT*96600-**-T2/T2A/T3/T3A/T2L/T2AL/T3L/T3AL*	6.8-54V	6A	60W

GT*96600-*56-T2/T2A/T3/T3A-AP/PP/SP* Desktop models

GT*96600-*56-T2/T2A/T3/T3A-AP/PP/SP*	56V	1.25A	70W
--------------------------------------	-----	-------	-----

GT*96600-*-R2/R3A* External/Hybrid models**

Model	Output Voltage	Max. output current	Max. output power
GT*96600-***-R2/R3A*	5-6.7V	8A	40W
GT*96600-***-R2/R3A*	6.8-54V	6A	60W

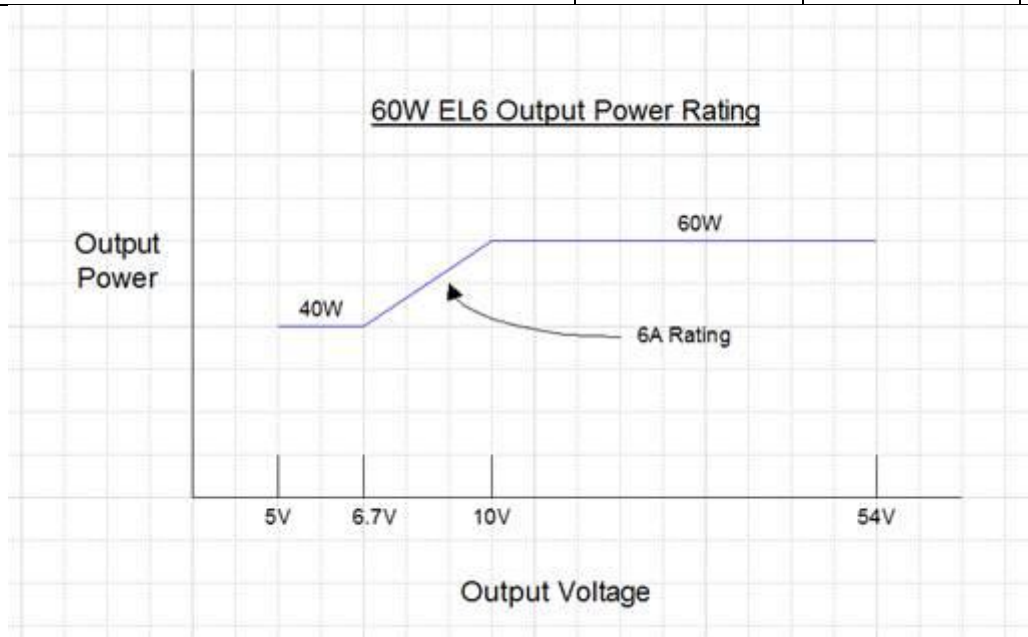



GT*91099-*-T2/T2A/T3/T3A/F/FW/P2/P3* External/Hybrid desktop or direct plug-in model or Open Frame or Encapsulated**

Model	Output Voltage	Max. output current	Max. output power
GT*91099-*09*-T2/T2A/T3/T3A/F/FW/P2/P3*	5-9V	6A	50W
GT*91099-*15*- T2/T2A/T3/T3A/F/FW/P2/P3*	9.1-15V	6A	60W
GT*91099-*24*- T2/T2A/T3/T3A/F/FW/P2/P3*	15.1-24V	4A	60W
GT*91099-*48*- T2/T2A/T3/T3A/F/FW/P2/P3*	24.1-48V	2.5A	60W

Note: For 91099 series, T2A model use C8 inlet.

Specification and key information involved in original CB certificate and test report

Involved Ref. Certif. no.....	: SE-84462M1
Issued date.....	: 2017-02-10
Original. Certif. no	: SE-84462M1
Issued date.....	: 2016-02-10
Test item description.....	: ITE Power Supply
Applicant's Name	: GlobTek, Inc.
Address	: 186 Veterans Dr. Northvale, NJ 07647 USA
Manufacturer.....	: GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 USA
Factory	: GlobTek (Suzhou) Co., Ltd Building 4, No. 76, Jin Ling East Rd., Suzhou Industrial Park, Suzhou, JiangSu 215021, China
Technical data.....	: GT**-*****: Input: 100-240V~, 50-60Hz, 1.5A; Output: 5-54VDC, Max. 60W GT*96600-*56***: Input: 100-240V~, 50-60Hz, 2.0A Output: 56VDC, Max. 70W Output: Refer to pages 3-4 for details.
Referred standard	: IEC 60950-1:2005 + A1:2009 + A2:2013 and EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 and National difference for CENELEC countries, Singapore, Japan, China, Australia/New Zealand, Korea, Canada and USA
Model and/or type reference	: GT**-*****, GT*96600-*56*** Refer to page 2 for details.
Involved test report	: 160800340SHA-001, 160800340SHA-001 M1