




VERIFICATION STATEMENT EN 60950-1:2006+A11:2009+A1:2010+A12:2011+ A2:2013 Information technology equipment – Safety – Part 1: General requirements	
Report Reference No.	: 170702437SHA-001 (Based on CB certif. no. SE-91447)
Tested by (+ signature)	: Albert Zhou 
Approved by (+ signature)	: Dani Zhao 
Date of issue	: 2018-08-20
Contents	: 3 pages
Testing laboratory Name	: Intertek Testing Services Shanghai
Address	: Building 86, 1198 Qinzhou Road (North), 200233 Shanghai, China
Testing location	: Same as above
Client Name	: GlobTek, Inc.
Address	: 186 Veterans Dr. Northvale, NJ 07647 USA
Standard	: EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
Test procedure	: S mark
Non-standard test method	: N.A.
Test item Description	: Building-in ITE Power Supply
Trademark	: 
Model and/or type reference	: GT*96700-***** (The 1st "*" part can be 'M' or 'L' or 'H' for market identification and not related to safety. The 2nd "*" can be B or C and is related to PCB size: B=2"x4", C=3"x5". The 3rd "*" denotes the rated output wattage designation, which can be "01" to "70", with interval of 1W. The 4th "*" denote the standard rated output voltage designation, which can be "05" to "56" or "5.0" to "56.0" in 0.1V increments. The 5th "*" can be -F or -FW, -F means Class I, -FW means Class II. The last * denote any six character, which can be 0-9 or A-Z or () [] or - or blank for marketing purposes.)
Rating(s)	: Input: 100-240V~ or 100-277V~, 50-60Hz, 2.0A; Output: 5-56 VDC, Max. 8.00A, Max. 70W. Refer to page 2 for details.
Manufacture	: GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 USA
Factory	: GlobTek (Suzhou) Co., Ltd Building 4, No. 76 JinLing East Road, Suzhou Industrial Park, Suzhou, JiangSu, 215021, China

Remarks for acceptance and review work conducted by above qualified testing laboratory

Sample Number reviewed..... : 18 pcs


Remark : The product and the mentioned test reports comply with Swedish standard and national deviations, if any. The sample as shown in following page(s) is still corresponding with the one mentioned in CB test report. We concluded this statement verifies that above standards are fulfilled.

Test item description : No tests are needed for this product.

Statement for deviations, if any..... : National difference for Sweden has been evaluated in CB report.

Model list:

Model	Input	Output Voltage	Max. output current	Max. output power
GT*96700-*****	100-240V~ or 100-277V~, 50-60Hz,2.0A	5-8.9Vdc	8.00A	49W
		9-44Vdc	5.42A	65W
		44.1-56Vdc	1.48A	70W

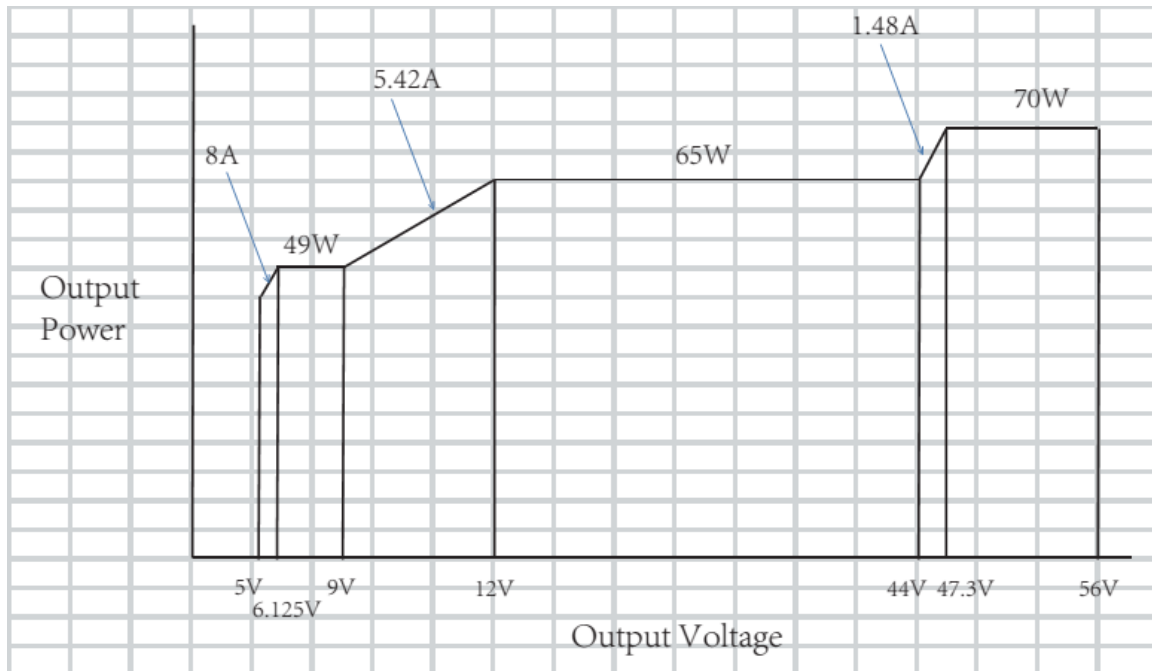

Specification and key information involved in original CB certificate and test report	
Involved Ref. Certif. no..... :	SE-91447
Issued date..... :	2018-07-24
Original. Certif. no :	SE-91447
Issued date..... :	2018-07-24
Test item description..... :	Building-in ITE Power Supply
Applicant's Name :	GlobTek, Inc.
Address :	186 Veterans Dr. Northvale, NJ 07647 USA
Manufacturer..... :	GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 USA
Factory :	GlobTek (Suzhou) Co., Ltd Building 4, No. 76, Jin Ling East Rd., Suzhou Industrial Park, Suzhou, JiangSu 215021, China
Technical data..... :	Input: 100-240V~ or 100-277V~, 50-60Hz, 2.0A; Output: 5-56 VDC, Max. 8.00A, Max. 70W. Refer to page 2 for details.
Referred standard :	IEC 60950-1:2005 + A1:2009 + A2:2013 and EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 and National difference for CENELEC countries, Singapore, Japan, China, United Kingdom, Australia/New Zealand, Korea, Canada and USA
Model and/or type reference :	GT*96700-***** (The 1st "*" part can be 'M' or '-' or 'H' for market identification and not related to safety. The 2nd "*" can be B or C and is related to PCB size: B=2"x4", C=3"x5". The 3rd "*" denotes the rated output wattage designation, which can be "01" to "70", with interval of 1W. The 4th "*" denote the standard rated output voltage designation, which can be "05" to "56" or "5.0" to "56.0" in 0.1V increments. The 5th "*" can be -F or -FW, -F means Class I, -FW means Class II. The last * denote any six character, which can be 0-9 or A-Z or () or - or blank for marketing purposes.)
Involved test report :	170702435SHA-001