

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST
CERTIFICATES FOR ELECTRICAL EQUIPMENT
(IECEE) CB SCHEME

SYSTEME CEI D'ACCEPTATION MUTUELLE DE
CERTIFICATS D ESSAIS DES EQUIPEMENTS
ELECTRIQUES (IECEE) METHODE OC

CB TEST CERTIFICATE

CERTIFICAT D'ESSAI OC

Product
Produit

Lithium-Ion Battery Pack

Name and address of the applicant
Nom et adresse du demandeur

GlobTek, Inc.
186 Veterans Dr. Northvale
NJ 07647, USA

Name and address of the manufacturer
Nom et adresse du fabricant

GlobTek, Inc.
186 Veterans Dr. Northvale
NJ 07647, USA

Name and address of the factory
Nom et adresse de l'usine

See additional page(s)

Ratings and principal characteristics
Valeurs nominales et caractéristiques principales

3.63V, 5200mAh, 18.876Wh

Trademark (if any)
Marque de fabrique (si elle existe)

see test report

Type of Manufacturer's Testing Laboratories used
Type de programme du laboratoire d'essais constructeur

N/A

Model / Type Ref.
Ref. de type

BL2600C1865001S2P**L(The first *=R, Z; The second *=A, B,
C, H, J, K, L, M, N, P, Q, R, T, U, V, X, 1, 2, 3, 4, 5,
6, 7, 8, 9)

Additional information (if necessary may also be
reported on page 2)
Les informations complémentaires (si nécessaire,
peuvent être indiqués sur la 2^{ème} page)

For model differences, refer to the test report.

A sample of the product was tested and found
to be in conformity with
Un échantillon de ce produit a été essayé et a été
considéré conforme à la

IEC 62133-2:2017
See Test Report for National Differences

As shown in the Test Report Ref. No. which forms part
of this Certificate
Comme indiqué dans le Rapport d'essais numéro de
référence qui constitue partie de ce Certificat

50264388 001

This CB Test Certificate is issued by the National Certification Body
Ce Certificat d'essai OC est établi par l'Organisme National de Certification



TÜV Rheinland Japan Ltd.
Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku
Yokohama 224-0021 Japan
Phone + 81 45 914-3888
Fax + 81 45 914-3354
Mail: info@jpn.tuv.com
Web: www.tuv.com

Date: 06.08.2019

Signature:

Dipl.-Ing. Univ. S. O. Steinke

1. GlobTek (Suzhou) Co., Ltd.
Building 4
No. 76, Jinling East Road
Suzhou Industrial Park
Jiangsu 215021, P. R. China

Additional information (if necessary)
Information complémentaire (si nécessaire)

Report Ref. No.: 50264388 001

Date: 06.08.2019

Signature:



Dipl.-Ing. Univ. S. O. Steinke

GlobTek, Inc.

Date : 06.08.2019
Our ref. : Qinj SZ
Your ref.: 168120091

186 Veterans Dr. Northvale
NJ 07647
USA

Ref : CB Certificate Japan

Type of Equipment : Lithium-Ion Battery Pack
Model Designation : See Certificate
Certificate No. : JPTUV-099230
Report No. : 50264388 001

Dear Ladies and Gentlemen,

Thank you very much for your interest in our services.

Please find enclosed your certification documents.

We appreciate your support and would like to offer our assistance in the approval of your future products through our extensive range of technical services.

Please feel free to contact us whatever your requirements may be.

With kind regards,

Certification Body

Dipl.-Ing. Univ. S. O. Steinke

Enclosure

证书的详细资料请登陆www.certipedia.com查阅,或拨打我司客服热线800 999 3668 / 400 883 1300咨询



Test Report issued under the responsibility of:



TEST REPORT
IEC 62133-2
Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications –
Part 2: Lithium systems

Report Number: 50264388 001
Date of issue: 2019-08-06
Total number of pages.....: 25 pages

Name of Testing Laboratory preparing the Report.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Applicant’s name.....: GlobTek, Inc.
Address: 186 Veterans Dr. Northvale, NJ 07647, USA

Test specification:
Standard: IEC 62133-2: 2017
Test procedure: CB Scheme
Non-standard test method.....: N/A

Test Report Form No.....: IEC 62133_2A
Test Report Form(s) Originator: DEKRA
Master TRF.....: Dated 2017-08-10




Copyright © 2017 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader’s interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:
The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description	Lithium-Ion Battery Pack	
Trade Mark	 GlobTek, Inc.	
Manufacturer	Same as applicant	
Model/Type reference	BL2600C1865001S2P**L(The first *=R, Z; The second *=A, B, C, H, J, K, L, M, N, P, Q, R, T, U, V, X, 1, 2, 3, 4, 5, 6, 7, 8, 9)	
Ratings	3.63V, 5200mAh, 18.876Wh	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	Shenzhen LCS Compliance Testing Laboratory Ltd.
Testing location/ address	Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China	
Tested by (name, function, signature)	Dean Du	
Approved by (name, function, signature) ...:	Hart Qiu	
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature) ...:		
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
Testing location/ address		
Tested by (name + signature)		
Witnessed by (name, function, signature) ...:		
Approved by (name, function, signature) ...:		
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	
Testing location/ address		
Tested by (name, function, signature)		
Witnessed by (name, function, signature) ...:		
Approved by (name, function, signature) ...:		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):	
Attachment 1: Photo Documentation (4 pages).	
Summary of testing:	
<p>Tests performed (name of test and test clause):</p> <p>cl.5.6.2 Design recommendation;</p> <p>cl.7.1 Charging procedure for test purposes (for Cells and Batteries);</p> <p>cl.7.2.1 Continuous charging at constant voltage (Cells);</p> <p>cl.7.2.2 Case stress at high ambient temperature (Batteries);</p> <p>cl.7.3.1 External short-circuit (Cells);</p> <p>cl.7.3.2 External short-circuit (Batteries);</p> <p>cl.7.3.3 Free fall (Cells and Batteries);</p> <p>cl.7.3.4 Thermal abuse (Cells);</p> <p>cl.7.3.5 Crush (Cells);</p> <p>cl.7.3.6 Over-charging of battery;</p> <p>cl.7.3.7 Forced discharge (Cells);</p> <p>cl.7.3.8 Mechanical tests (Batteries);</p> <p>cl.7.3.9 Design evaluation – Forced internal short-circuit (Cells).</p> <p>Remark:</p> <p>1. The cell (ICR18650-26++/ ICR19/65) inside the battery is CB approved according to IEC 62133-2: 2017 (CB Certificate No. DK-73496-UL, Report No. BA-4788423722-A-1).</p> <p>2. The alternative cell (Model: CMICR18650F8) inside the battery was tested with appliance.</p> <p>Tests are made with the number of cells and batteries specified in IEC 62133-2: 2017 Table 1.</p>	<p>Testing location:</p> <p>Shenzhen LCS Compliance Testing Laboratory Ltd. Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China</p>
Summary of compliance with National Differences (List of countries addressed):	
N/A	
<input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN 62133-2: 2017</u>	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

**Remark:**

1. For the date code YYYYMM:
 "YYYY" means year for manufacture,
 "MM" means month for manufacture.
2. The above label is applicable to all models: BL2600C1865001S2P**L (The first *=R, Z; The second *=A, B, C, H, J, K, L, M, N, P, Q, R, T, U, V, X, 1, 2, 3, 4, 5, 6, 7, 8, 9), for market purpose only, all models are identical except the model name.

Test item particulars.....:	
Classification of installation and use.....:	To be defined in final product
Supply Connection.....:	DC connector
Recommend charging method declared by the manufacturer.....:	Charging the battery with 1040mA constant current and 4.2V constant voltage until the current reduces to 52mA at ambient 20°C±5°C.
Discharge current (0,2 It A):	1040mA
Specified final voltage.....:	3.0V
Upper limit charging voltage per cell.....:	4.25V
Maximum charging current.....:	2600mA
Charging temperature upper limit.....:	45°C
Charging temperature lower limit.....:	0°C
Polymer cell electrolyte type.....:	<input type="checkbox"/> gel polymer... <input type="checkbox"/> solid polymer... <input checked="" type="checkbox"/> N/A
Possible test case verdicts:	
- test case does not apply to the test object....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
Testing.....:	
Date of receipt of test item:	2019-05-26
Date (s) of performance of tests.....:	2019-05-26 to 2019-06-15
General remarks:	
<p>The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> <p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 62133-2:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies).....:	1. GlobTek (Suzhou) Co., Ltd. Building 4, No. 76, Jinling East Road, Suzhou Industrial Park Jiangsu 215021, P. R. China

General product information and other remarks:

The battery is constructed with two lithium-ion cells in 1S2P, and has overcharge, over-discharge, over current and short-circuits proof circuit.

The cell (ICR18650-26++/ ICR19/65) inside the battery is CB approved according to IEC 62133-2: 2017 (CB Certificate No. DK-73496-UL, Report No. BA-4788423722-A-1).

Add an alternative cell (Model: CMICR18650F8), the alternative cell inside the battery was tested with appliance.

The manufacturer declared that the battery would be produced in two factories. For each factory, all of the critical components (PCB, IC, MOS) in the battery are identical. Detail see page 20, TABLE: Critical components information.

All models are identical except the model name, Definition of variable for the model.

BL2600C1865001S2P**L, the first “*” means output wires length, the second “*” means the connector type, see below table for details:

Variable	Range of variable	Content
First *	R, Z	any letters for market use
Second *	A, B, C, H, J, K, L, M, N, P, Q, R, T, U, V, X, 1, 2, 3, 4, 5, 6, 7, 8, 9	A = Strip + tin, B = Button, C = Contacts, H = Hirose (any style), J = 2p JST, K = 3p JST, L = 4p JST, M = 2p Molex, N = 3p Molex, P = 4p Molex, Q = 6 contacts Molex, R = Multiple connectors, T = 2p Tyco, U = 3p Tyco, V = 4p Tyco, X = 5p Molex, 1 = 1p connector, 2 = 2p connector, 3 = 3p connector, 4 = 4p connector, 5 = 5p connector, 6 = 6p connector, 7 = 7p connector, 8 = 8p connector, 9 = 9p connector

The main features of the battery pack are shown as below (clause 7.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
BL2600C1865001S2P**L(The first *=R, Z; The second *=A, B, C, H, J, K, L, M, N, P, Q, R, T, U, V, X, 1, 2, 3, 4, 5, 6, 7, 8, 9)	5200mAh	3.63V	1040mA	1040mA	2600mA	2600mA	4.2V	3.0V



The main features of the cell in the battery pack are shown as below (clause 7.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
CMICR 18650F8	2600mAh	3.63V	1300mA	520mA	2600mA	2600mA	4.25V	2.75V


The main features of the cell in the battery pack are shown as below (clause 7.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
CMICR 18650F8	4.25V	130mA	0°C	45°C

Construction:

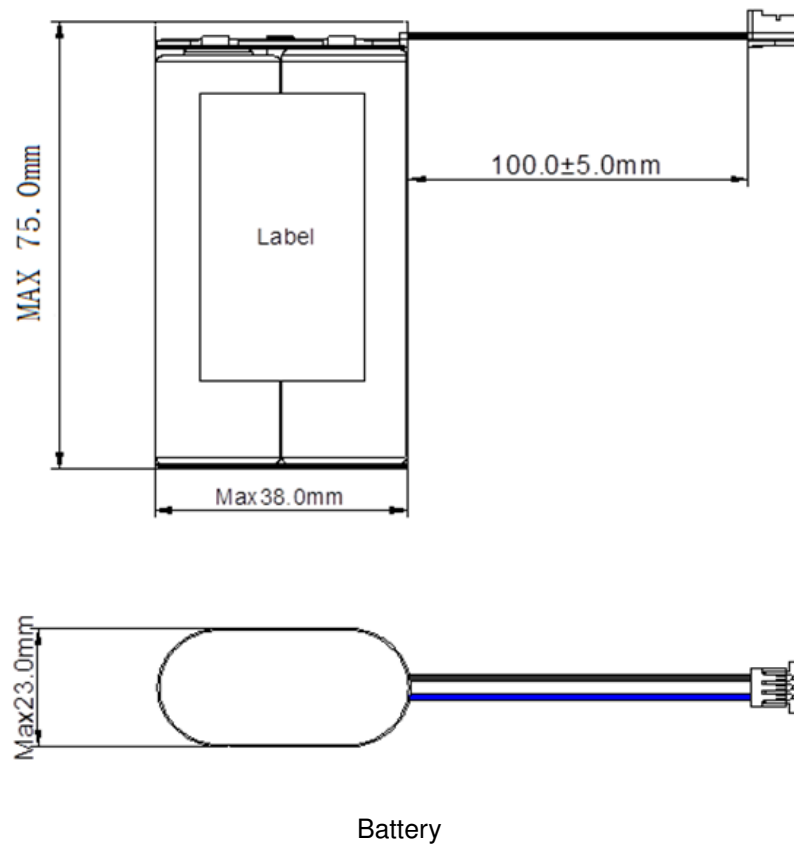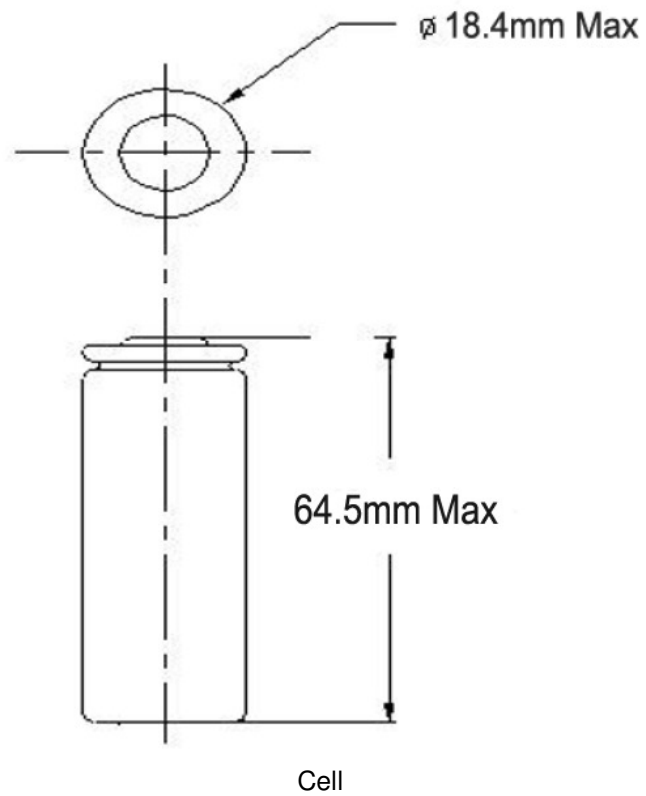

Circuit diagram:

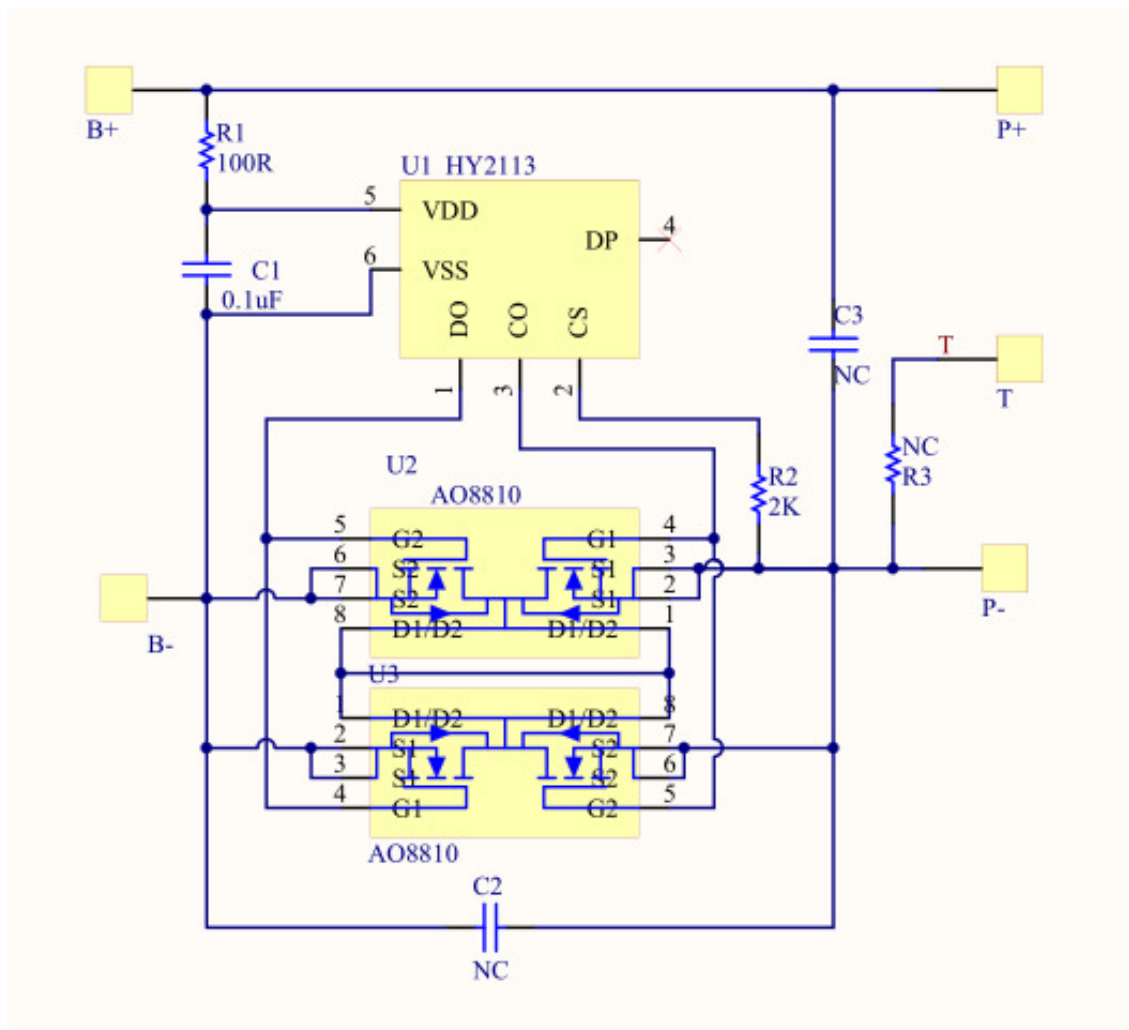

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
4	PARAMETER MEASUREMENT TOLERANCES		P
	Parameter measurement tolerances		P
5	GENERAL SAFETY CONSIDERATIONS		P
5.1	General		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N/A
	Insulation resistance (MΩ) :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearance and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism exists on top of the cylindrical cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
5.4	Temperature, voltage and current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 7.	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in the manufacturer's specification.	P
5.5	Terminal contacts		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC connector complied with the requirements.	P

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short-circuit		P
5.6	Assembly of cells into batteries		P
5.6.1	General	1S2P	P
	Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region		P
	This protection may be provided external to the battery such as within the charger or the end devices		N/A
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions		P
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/ designer may ensure proper design and assembly	Current, Voltage and temperature limits specified by cell manufacturer.	P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components added as appropriate and consideration given to the end-device application		P
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance	Safety analysis report provided by manufacturer.	P
5.6.2	Design recommendation		P
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2	Max. charging voltage: 4.25V, not exceed 4.25V specified in Clause 7.1.2, Table 2.	P
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks		N/A

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection		N/A
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage	Final voltage of cell: 2.75V, not exceed the final voltage specified by the cell manufacturer.	P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system		N/A
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse	Mechanical protection for cell connections and control circuits provided.	P
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product	Build-in batteries, mechanical protection for cells should be provided by end product.	N/A
	The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer	To be evaluated in final systems.	N/A
	For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests		N/A
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Complied. ISO 9001: 2015 certificate provided.	P
5.8	Battery safety components		P
	According annex F	See TABLE: Critical components information.	N/A

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
6	TYPE TEST AND SAMPLE SIZE		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	Coin cells with resistance $\leq 3 \Omega$ (measured according annex D) are tested according table 1	Not coin cells.	N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and overdischarge protection		P
	When conducting the short-circuit test, consideration given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test	See clause 7.3.2.	P
7	SPECIFIC REQUIREMENTS AND TESTS		P
7.1	Charging procedure for test purposes		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$, using the method declared by the manufacturer		P
	Prior to charging, the battery have been discharged at $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ at a constant current of 0,2 It A down to a specified final voltage	See page 5.	P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		P
	After stabilization for 1 h and 4 h, respectively, at ambient temperature of highest test temperature and lowest test temperature, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant voltage charging method	Charge temperature 0~45°C declared. 45°C used for upper limit test, -5°C used for lower limit test.	P
7.2	Intended use		P
7.2.1	Continuous charging at constant voltage (cells)		P
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer	Charging for 7 days with 1300mA.	P
	Results: No fire. No explosion. No leakage.....:	(See appended table 7.2.1)	P

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
7.2.2	Case stress at high ambient temperature (battery)	Tested as client requested.	P
	Oven temperature (°C) :	70°C	—
	Results: No physical distortion of the battery case resulting in exposure of internal protective components and cells	No physical distortion of the battery case resulting in exposure of internal protective components and cells.	P
7.3	Reasonably foreseeable misuse		P
7.3.1	External short-circuit (cell)	Tested complied.	P
	The cells were tested until one of the following occurred:		N/A
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	Results: No fire. No explosion..... :	(See appended table 7.3.1)	P
7.3.2	External short-circuit (battery)	Tested complied.	P
	The batteries were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		P
	A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test	Single fault conducted on four samples.	P
	A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermistor	Single fault applies on MOSFET(U2)	P
	Results: No fire. No explosion..... :	(See appended table 7.3.2)	P
7.3.3	Free fall	Tested complied.	P
	Results: No fire. No explosion	No fire. No explosion.	P
7.3.4	Thermal abuse (cells)	Tested complied.	P
	Oven temperature (°C) :	130°C	—
	Results: No fire. No explosion	No fire. No explosion.	P
7.3.5	Crush (cells)	Tested complied.	P
	The crushing force was released upon:		P
	- The maximum force of 13 kN ± 0,78 kN has been applied; or		P

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: No fire. No explosion..... :	(See appended table 7.3.5)	P
7.3.6	Over-charging of battery	Tested complied.	P
	The supply voltage which is:		--
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or		N/A
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and	5.88V applied.	P
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		P
	Test was continued until the temperature of the outer casing:		P
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: No fire. No explosion..... :	(See appended table 7.3.6)	P
7.3.7	Forced discharge (cells)	Tested complied.	P
	If the discharge voltage reaches the negative value of upper limit charging voltage within the testing duration, the voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	If the discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration, the test is terminated at the end of the testing duration		P
	Results: No fire. No explosion..... :	(See appended table 7.3.7)	P
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration	Tested complied.	P
	Results: No fire, no explosion, no rupture, no leakage or venting. :	(See appended table 7.3.8.1)	P
7.3.8.2	Mechanical shock	Tested complied.	P
	Results: No leakage, no venting, no rupture, no explosion and no fire :	(See appended table 7.3.8.2)	P
7.3.9	Design evaluation – Forced internal short-circuit (cells)	Tested complied.	P
	The cells complied with national requirement for :	France, Japan, Republic of Korea and Switzerland.	—
	The pressing was stopped upon:		P

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	800N for cylindrical cells.	P
	Results: No fire	(See appended table 7.3.9)	P
8	INFORMATION FOR SAFETY		P
8.1	General		P
	Manufacturers of secondary cells ensure that information is provided about current, voltage and temperature limits of their products	Information for safety mentioned in manufacturer's specifications.	P
	Manufacturers of batteries ensure that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards	Information for safety mentioned in manufacturer's specifications.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, any information relating to hazard avoidance resulting from a system analysis provided to the end user		N/A
	Do not allow children to replace batteries without adult supervision		N/A
8.2	Small cell and battery safety information	Not small cell and battery.	N/A
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A
	- Keep small cells and batteries which are considered swallow able out of the reach of children		N/A
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A
9	MARKING		P
9.1	Cell marking	The final product is battery.	N/A
	Cells marked as specified in IEC 61960, except coin cells		N/A
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
9.2	Battery marking		P
	Batteries marked as specified in IEC 61960, except for coin batteries	The battery is marked in accordance with IEC 61960, also see page 4.	P
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity. Batteries also marked with an appropriate caution statement		N/A
	Terminals have clear polarity marking on the external surface of the battery		N/A
	Batteries with keyed external connectors designed for connection to specific end products need not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		P
9.3	Caution for ingestion of small cells and batteries	Not small cell and battery.	N/A
	Coin cells and batteries identified as small batteries according to 8.2 include a caution statement regarding the hazards of ingestion in accordance with 8.2		N/A
	When small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion given on the immediate package		N/A
9.4	Other information		P
	Storage and disposal instructions	Information for safety mentioned in manufacturer's specifications.	P
	Recommended charging instructions	Information for safety mentioned in manufacturer's specifications.	P
10	PACKAGING AND TRANSPORT		P
	Packaging for coin cells not small enough to fit within the limits of the ingestion gauge of Figure 3	Not coin cells.	N/A
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants		P

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		P
A.1	General		P
A.2	Safety of lithium ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General		P
A.3.2	Upper limit charging voltage	4.25V	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.25V applied.	N/A
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature range declared by client is 0~45°C	P
A.4.3	High temperature range	Not higher than the temperature specific in this standard.	N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		N/A
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A
A.4.4	Low temperature range	Charging low temperature declared by client is 0°C.	P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		P
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range	Documents provided by manufacturer explaining the lower limit exceed 10°C, -5°C applied for testing in this report for safety considerations.	P
A.4.5	Scope of the application of charging current		P
A.4.6	Consideration of discharge		P
A.4.6.1	General		P

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.6.2	Final discharge voltage and explanation of safety viewpoint		P
A.4.6.3	Discharge current and temperature range		P
A.4.6.4	Scope of application of the discharging current		P
A.5	Sample preparation		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle in cylindrical cell		P
A.5.5.1	Insertion of nickel particle in winding core		P
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		P
A.5.6	Insertion of nickel particle in prismatic cell		N/A
A.6	Experimental procedure of the forced internal short-circuit test		P
A.6.1	Material and tools for preparation of nickel particle		P
A.6.2	Example of a nickel particle preparation procedure		P
A.6.3	Positioning (or placement) of a nickel particle		P
A.6.4	Damaged separator precaution		P
A.6.5	Caution for rewinding separator and electrode		P
A.6.6	Insulation film for preventing short-circuit		P
A.6.7	Caution when disassembling a cell		P
A.6.8	Protective equipment for safety		P
A.6.9	Caution in the case of fire during disassembling		P
A.6.10	Caution for the disassembling process and pressing the electrode core		P
A.6.11	Recommended specifications for the pressing device		P

IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
ANNEX B	RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS		N/A
ANNEX C	RECOMMENDATIONS TO THE END-USERS		N/A
ANNEX D	MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS		N/A
D.1	General	Not coin cells.	N/A
D.2	Method		N/A
	A sample size of three coin cells is required for this measurement..... :		N/A
	Coin cells with an internal resistance of less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		N/A
	Coin cells with an internal resistance greater than 3 Ω require no further testing		N/A
ANNEX E	PACKAGING AND TRANSPORT		N/A
ANNEX F	COMPONENT STANDARDS REFERENCES		N/A

TABLE: Critical components information					P
Object/part no.	Manufacturer/trademark	Type/model	Technical data	Standard	Mark(s) of conformity ¹⁾
Cell	SAMSUNG SDI CO LTD	ICR18650-26+±/ICR19/65	3.63Vdc, 2600mAh	IEC 62133-2: 2017	CB Certificate No. DK-73496-UL, Report No. BA-47884237 22-A-1
Cell (Alternative)	CHAM BATTERY TECHNOLOGY CO.,LTD	CMICR18650F8	3.63V, 2600mAh	IEC 62133-2: 2017	Tested with appliance
-Positive Electrode	CHAM BATTERY TECHNOLOGY CO.,LTD	LY-305	LiCoO ₂ , NMP, PVDF, Conductive Additive, Aluminum Foil	--	--
-Negative Electrode	CHAM BATTERY TECHNOLOGY CO.,LTD	ZN-6C	Graphite, CMC, SBR, Conductive Additive, Copper Foil	--	--
-Electrolyte	DONGGUAN SHANSHAN BATTERY MATERIALS CO.,LTD	311	LiPF ₆ +EC+EMC+DEC	--	--
-Separator	SHENZHEN LIPAL TECHNOLOGY CO., LTD.	16µm	Shutdown Temperature: 135°C	--	--
PCB	LI TONG WEI ELECTRONIC TECHNOLOGY CO.,LTD	KMBH1S1865006	130°C	--	--
Protection IC (U1)	HYCON TECHNOLOGY CO LTD	HY2113	Overcharge Protection Voltage: 4.25V±0.025V, Over-discharge Protection Voltage: 2.5V±0.1V, T _{opr} : -40°C~+85°C	--	Tested with appliance
MOSFET (U2, U3)	Alpha & Omega Semiconductor.	AO8810	V _{DS} : 20V, V _{GS} : 4.5V, I _D : 7A, T _J : -55°C~+150°C	--	Tested with appliance
Wire	DONGGUAN XIONGXIN ELECTRONICS CO LTD	3302	Min. 18AWG, 30V, 105°C	UL 758	UL E358766
Connector	MOLEX L L C	43025	105°C, I _{max} =3A, 2Pin	--	--
Supplementary information:					
¹⁾ Provided evidence ensures the agreed level of compliance.					

7.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample no.	Recommended charging voltage Vc (Vdc)	Recommended charging current I _{rec} (mA)	OCV before test (Vdc)	Results	
For "Cell (Alternative)" model: CMICR18650F8					
C1	4.2	1300	4.19	P	
C2	4.2	1300	4.19	P	
C3	4.2	1300	4.19	P	
C4	4.2	1300	4.20	P	
C5	4.2	1300	4.20	P	
Supplementary information:					
- No fire or explosion					
- No leakage					

7.3.1	TABLE: External short-circuit (cells)					P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature (°C)	Results	
For "Cell (Alternative)" model: CMICR18650F8						
Samples charged at charging temperature upper limit (45°C)						
C6	55.5	4.21	84	69.9	P	
C7	55.5	4.20	77	69.7	P	
C8	55.5	4.21	83	69.4	P	
C9	55.5	4.21	80	70.1	P	
C10	55.5	4.21	75	67.4	P	
Samples charged at charging temperature lower limit (-5°C)						
C11	55.3	4.15	74	66.9	P	
C12	55.3	4.16	71	73.2	P	
C13	55.3	4.16	79	72.2	P	
C14	55.3	4.15	86	74.4	P	
C15	55.3	4.15	82	71.8	P	
Supplementary information:						
- No fire or explosion						

7.3.2	TABLE: External short-circuit (batteries)					P
Sample no.	Ambient (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature (°C)	Component single fault condition	Results
For "Cell" model: ICR18650-26+// ICR19/65						
B4	23.6	4.19	83	68.4	MOSFET (U2) Short Circuit	P
B5	23.6	4.19	80	71.8	MOSFET (U2) Short Circuit	P
B6	23.6	4.18	76	75.6	MOSFET (U2) Short Circuit	P
B7	23.6	4.19	71	64.5	MOSFET (U2) Short Circuit	P
B8	23.6	4.18	81	23.8	--	P
For "Cell (Alternative)" model: CMICR18650F8						
B4	23.4	4.19	75	68.2	MOSFET (U2) Short Circuit	P
B5	23.4	4.18	78	67.3	MOSFET (U2) Short Circuit	P
B6	23.4	4.19	86	64.9	MOSFET (U2) Short Circuit	P
B7	23.4	4.19	73	64.3	MOSFET (U2) Short Circuit	P
B8	23.4	4.19	83	23.7	--	P
Supplementary information:						
- No fire or explosion						

7.3.5	TABLE: Crush (cells)				P
Sample no.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
For "Cell (Alternative)" model: CMICR18650F8					
Samples charged at charging temperature upper limit (45°C)					
C29	4.21	4.20	13	P	
C30	4.21	4.21	13	P	
C31	4.20	4.20	13	P	
C32	4.20	4.20	13	P	
C33	4.21	4.21	13	P	
Samples charged at charging temperature lower limit (-5°C)					
C34	4.16	4.15	13	P	
C35	4.16	4.16	13	P	
C36	4.15	4.15	13	P	

C37	4.15	4.14	13	P
C38	4.15	4.15	13	P
Supplementary information: - No fire or explosion				

7.3.6	TABLE: Over-charging of battery				P
Constant charging current (A)		10.4		—	
Supply voltage (Vdc)		5.88		—	
Sample no.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results	
For "Cell" model: ICR18650-26++/ ICR19/65					
B12	3.32	70	23.9	P	
B13	3.31	70	23.8	P	
B14	3.31	70	23.7	P	
B15	3.32	70	23.8	P	
B16	3.31	70	23.7	P	
For "Cell (Alternative)" model: CMICR18650F8					
B12	3.31	100	23.4	P	
B13	3.30	100	23.4	P	
B14	3.32	100	23.6	P	
B15	3.32	100	23.5	P	
B16	3.31	100	23.5	P	
Supplementary information: - No fire or explosion					

7.3.7	TABLE: Forced discharge (cells)				P
Sample no.	OCV before application of reverse charge (Vdc)	Measured reverse charge I_t (mA)	Lower limit discharge voltage (Vdc)	Results	
For "Cell (Alternative)" model: CMICR18650F8					
C39	3.24	2600	2.75	P	
C40	3.25	2600	2.75	P	
C41	3.25	2600	2.75	P	
C42	3.24	2600	2.75	P	
C43	3.24	2600	2.75	P	
Supplementary information: - No fire or explosion					

7.3.8.1	TABLE: Vibration(batteries)					P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
For "Cell" model: ICR18650-26++/ ICR19/65						
B17	4.19	4.18	104.981	104.980	P	
B18	4.19	4.19	105.285	105.283	P	
B19	4.19	4.18	105.363	105.360	P	
For "Cell (Alternative)" model: CMICR18650F8						
B17	4.19	4.19	103.110	103.108	P	
B18	4.18	4.18	103.267	103.263	P	
B19	4.19	4.19	103.539	103.538	P	
Supplementary information:						
<ul style="list-style-type: none"> - No fire or explosion - No rupture - No leakage - No venting 						

7.3.8.2	TABLE: Mechanical shock(batteries)					P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
For "Cell" model: ICR18650-26++/ ICR19/65						
B20	4.19	4.19	105.139	105.137	P	
B21	4.19	4.18	105.244	105.243	P	
B22	4.18	4.18	105.287	105.285	P	
For "Cell (Alternative)" model: CMICR18650F8						
B20	4.19	4.19	103.126	103.125	P	
B21	4.18	4.18	103.253	103.250	P	
B22	4.19	4.19	103.282	103.281	P	
Supplementary information:						
<ul style="list-style-type: none"> - No fire or explosion - No rupture - No leakage - No venting 						

7.3.9	TABLE: Forced internal short circuit (cells)					P
Sample no.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location ¹⁾	Maximum applied pressure (N)	Results	
For "Cell (Alternative)" model: CMICR18650F8						
Samples charged at charging temperature upper limit (45°C)						
C44	45	4.21	1	800	P	
C45	45	4.20	1	800	P	
C46	45	4.21	1	800	P	
C47	45	4.21	1	800	P	
C48	45	4.21	1	800	P	
Samples charged at charging temperature lower limit (-5°C)						
C49	-5	4.16	1	800	P	
C50	-5	4.15	1	800	P	
C51	-5	4.16	1	800	P	
C52	-5	4.16	1	800	P	
C53	-5	4.15	1	800	P	
Supplementary information:						
¹⁾ Identify one of the following: 1: Nickel particle inserted between positive and negative (active material) coated area. 2: Nickel particle inserted between positive aluminium foil and negative active material coated area. - No fire or explosion						

D.2	TABLE: Internal AC resistance for coin cells				N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results ¹⁾	
Supplementary information:					
¹⁾ Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables					

-- End of Report --

Product: Lithium-Ion Battery Pack

Type Designation: BL2600C1865001S2P**L(The first *=R, Z; The second *=A, B, C, H, J, K, L, M, N, P, Q, R, T, U, V, X, 1, 2, 3, 4, 5, 6, 7, 8, 9)



Figure 1 Front view of battery



Figure 2 Back view of battery

Product: Lithium-Ion Battery Pack

Type Designation: BL2600C1865001S2P**L(The first *=R, Z; The second *=A, B, C, H, J, K, L, M, N, P, Q, R, T, U, V, X, 1, 2, 3, 4, 5, 6, 7, 8, 9)

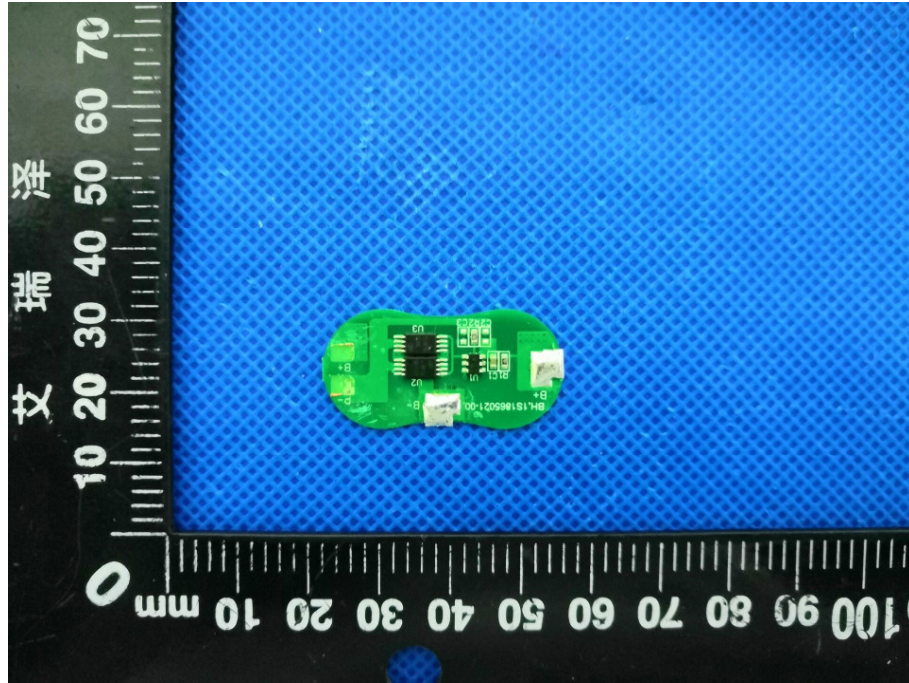


Figure 3 Front view of PCM

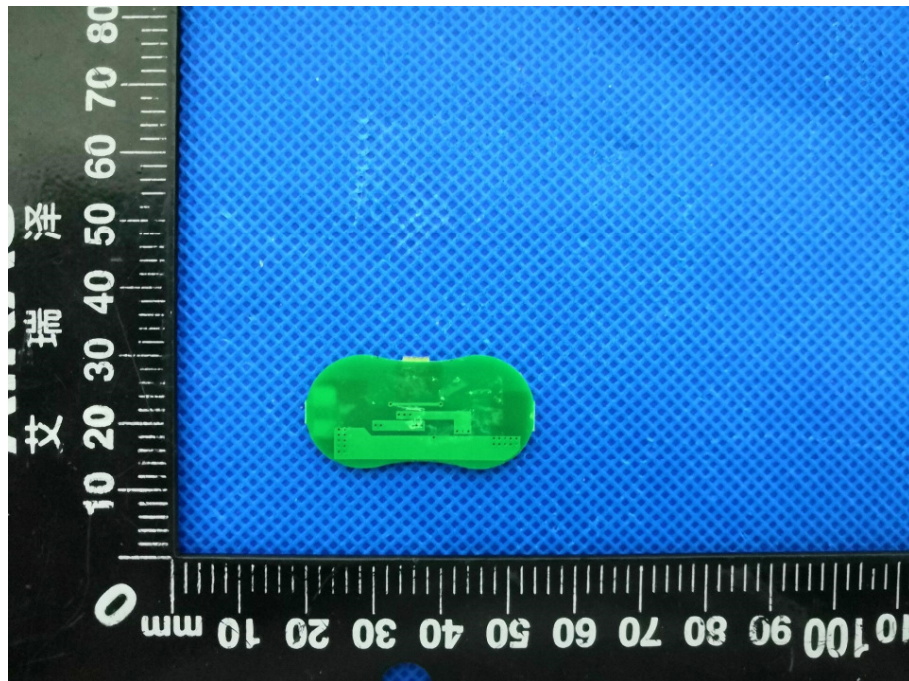


Figure 4 Back view of PCM

Product: Lithium-Ion Battery Pack

Type Designation: BL2600C1865001S2P**L(The first *=R, Z; The second *=A, B, C, H, J, K, L, M, N, P, Q, R, T, U, V, X, 1, 2, 3, 4, 5, 6, 7, 8, 9)

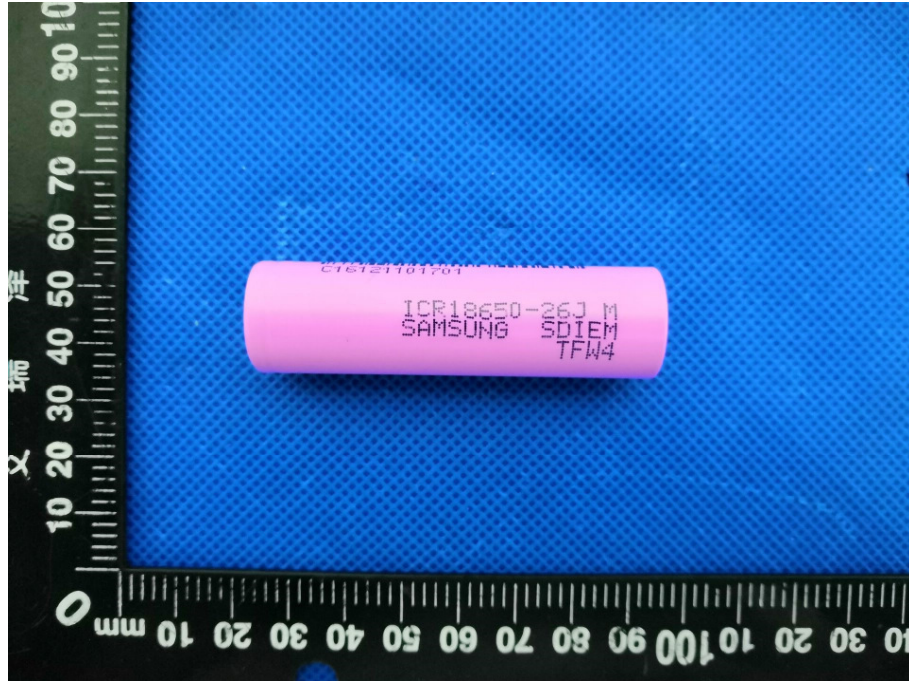


Figure 5 Front view of cell
(Cell model: ICR18650-26++/ ICR19/65)

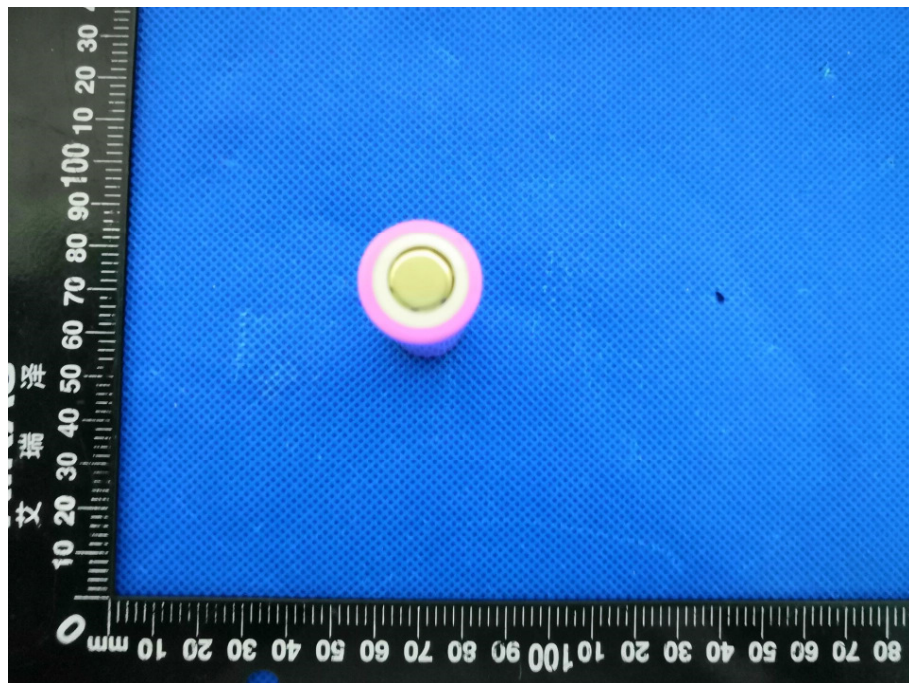


Figure 6 Back view of cell
(Cell model: ICR18650-26++/ ICR19/65)

Product: Lithium-Ion Battery Pack

Type Designation: BL2600C1865001S2P**L(The first *=R, Z; The second *=A, B, C, H, J, K, L, M, N, P, Q, R, T, U, V, X, 1, 2, 3, 4, 5, 6, 7, 8, 9)



Figure 7 Front view of cell
(Cell (Alternative) model: CMICR18650F8)

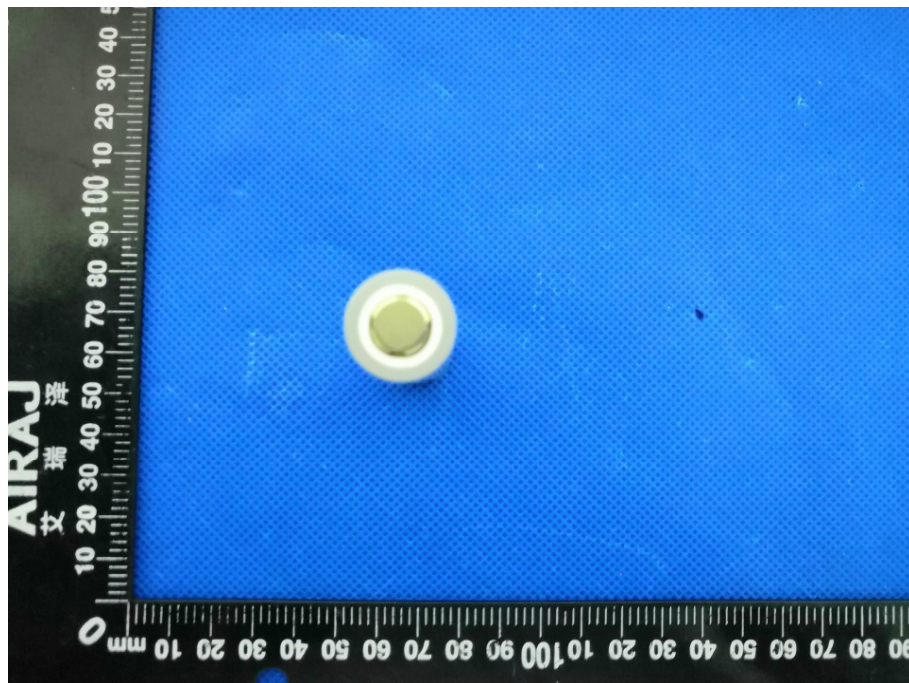


Figure 8 Back view of cell
(Cell (Alternative) model: CMICR18650F8)