


CONDUCTED EMISSIONS

EUT: GTM21089-1812-T3
 Manuf: GlobTek Inc.
 Op Cond: LINE
 Operator: JESSIE
 Test Spec: FOR CISPR22 CLASS B
 Comment: 110V/60Hz
 FULL LOAD
 Result File: 03190031.dat : GTM21089-1812-T3

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Subranges: 8
 Acc Margin: 55 dB

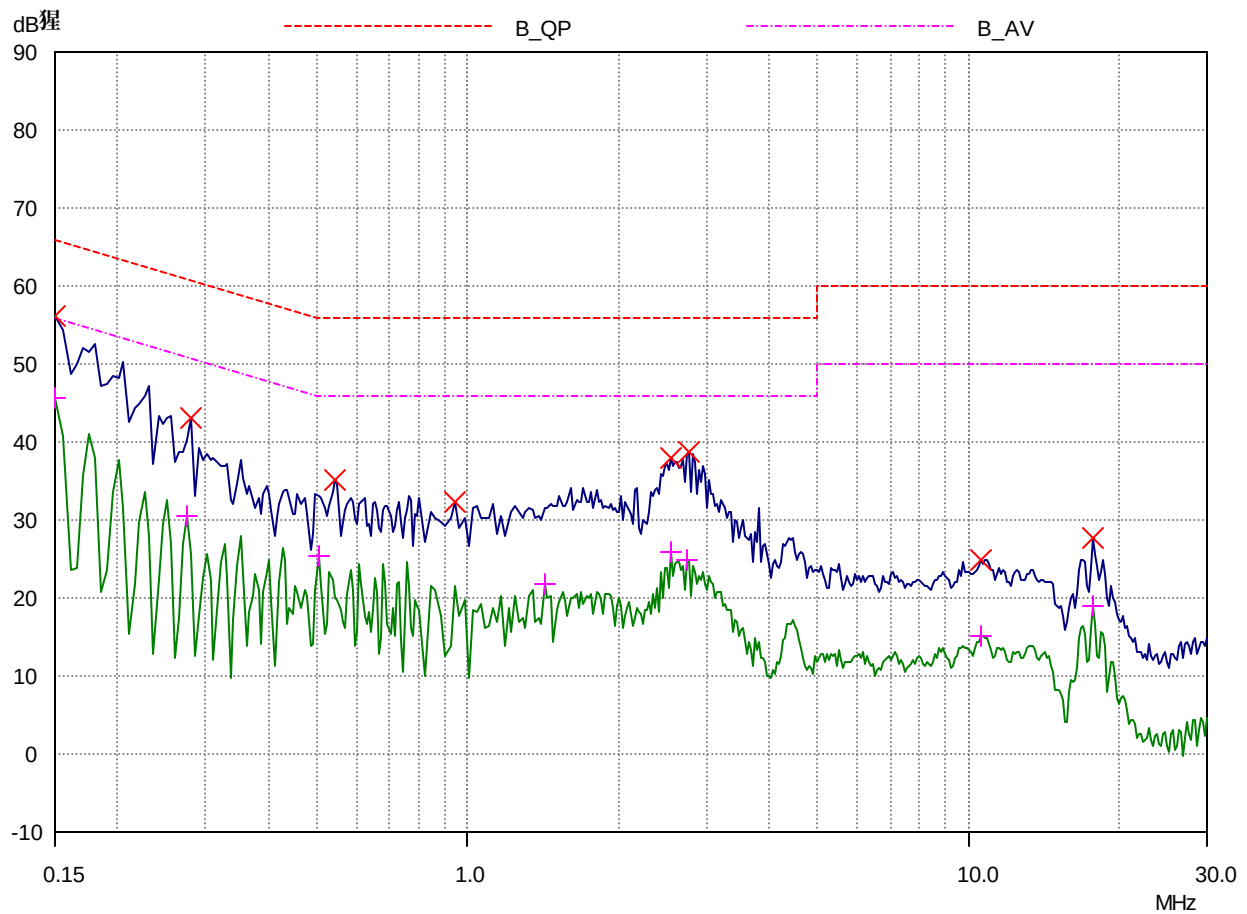

CONDUCTED EMISSIONS

EUT: GTM21089-1812-T3
 Manuf: GlobTek Inc.
 Op Cond: LINE
 Operator: JESSIE
 Test Spec: FOR CISPR22 CLASS B
 Comment: 110V/60Hz
 FULL LOAD
 Result File: 03190031.dat : GTM21089-1812-T3

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Subranges: 8
 Acc Margin: 55 dB

Peak Search Results


Frequency MHz	PK Level dB μ	PK Limit dB μ	PK Delta dB
0.15	56.13	66.00	9.87
0.28	42.98	60.82	17.84
0.541	35.19	56.00	20.81
0.94	32.38	56.00	23.62
2.54	38.08	56.00	17.92
2.76	38.65	56.00	17.35
10.6	24.92	60.00	35.08
17.64	27.67	60.00	32.33

Frequency MHz	AV Level dB μ	AV Limit dB μ	AV Delta dB
0.15	45.70	56.00	10.30
0.275	30.45	50.97	20.52
0.502	25.27	46.00	20.73
1.42	21.77	46.00	24.23
2.54	25.93	46.00	20.07
2.72	24.99	46.00	21.01
10.52	15.16	50.00	34.84
17.64	18.90	50.00	31.10

CONDUCTED EMISSIONS

EUT: GTM21089-1812-T3
 Manuf: GlobTek Inc.
 Op Cond: NEUTRAL
 Operator: JESSIE
 Test Spec: FOR CISPR22 CLASS B
 Comment: 110V/60Hz
 FULL LOAD
 Result File: 03190032.dat : GTM21089-1812-T3

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Subranges: 8
 Acc Margin: 55 dB

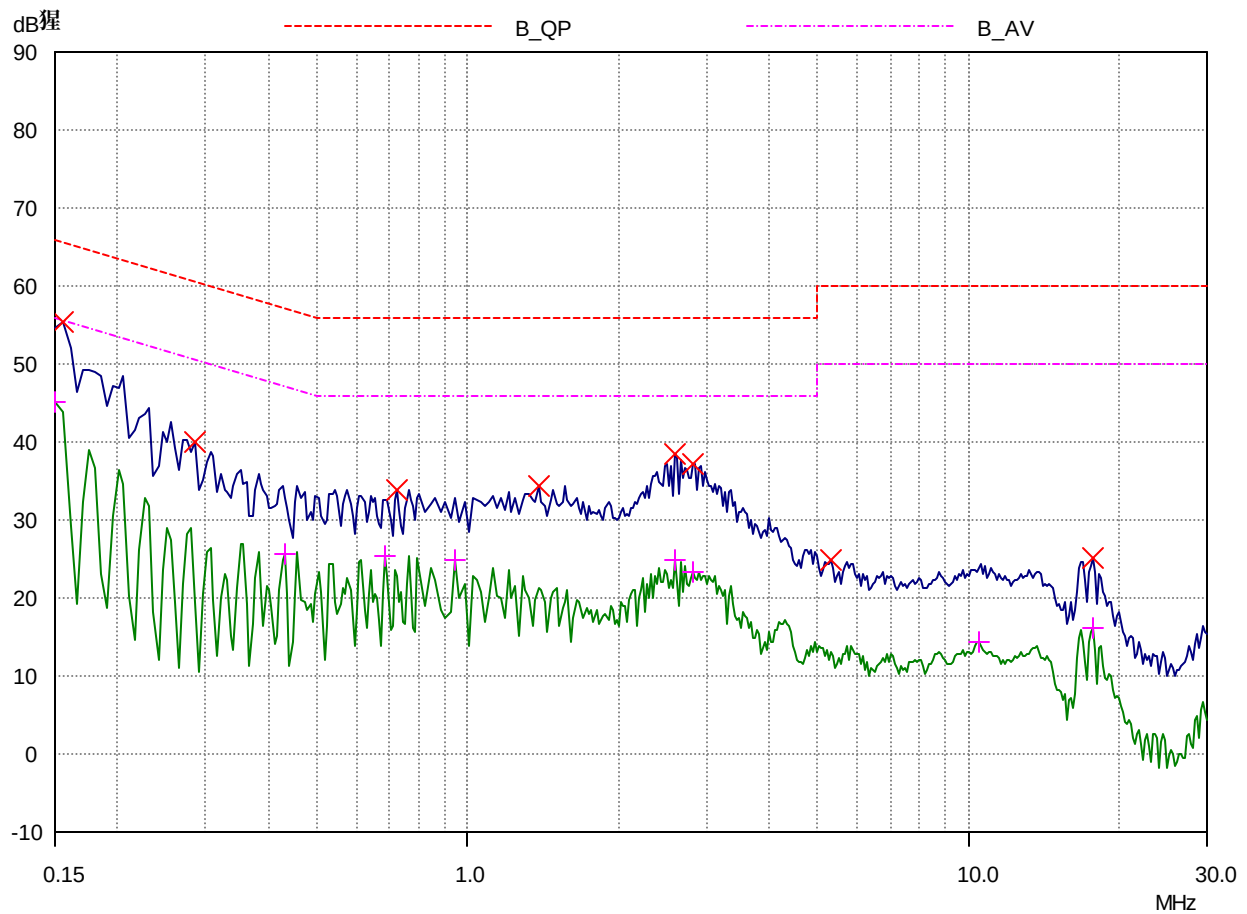

CONDUCTED EMISSIONS

EUT: GTM21089-1812-T3
 Manuf: GlobTek Inc.
 Op Cond: NEUTRAL
 Operator: JESSIE
 Test Spec: FOR CISPR22 CLASS B
 Comment: 110V/60Hz
 FULL LOAD
 Result File: 03190032.dat : GTM21089-1812-T3

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Subranges: 8
 Acc Margin: 55 dB

Peak Search Results

Frequency MHz	PK Level dB _{μV}	PK Limit dB _{μV}	PK Delta dB
0.155	55.36	65.73	10.37
0.285	40.09	60.67	20.58
0.723	33.98	56.00	22.02
1.38	34.38	56.00	21.62
2.58	38.55	56.00	17.45
2.8	37.32	56.00	18.68
5.28	24.90	60.00	35.10
17.64	25.08	60.00	34.92


Frequency MHz	AV Level dB _{μV}	AV Limit dB _{μV}	AV Delta dB
0.15	45.06	56.00	10.94
0.43	25.66	47.25	21.59
0.684	25.37	46.00	20.63
0.94	24.95	46.00	21.05
2.58	24.95	46.00	21.05
2.8	23.23	46.00	22.77
10.44	14.35	50.00	35.65
17.64	16.14	50.00	33.86



HomeTek Technology Inc.

Hometek(Dong-Guan) technology Inc.
South Aera, Shatou Chang-An Town
Tel:86-769-5303005,5303007,
Fax:86-769-5303006

Data#: 913 File#:GlobTek Inc.EMI Date: 2005-03-19 Time: 14:17:59

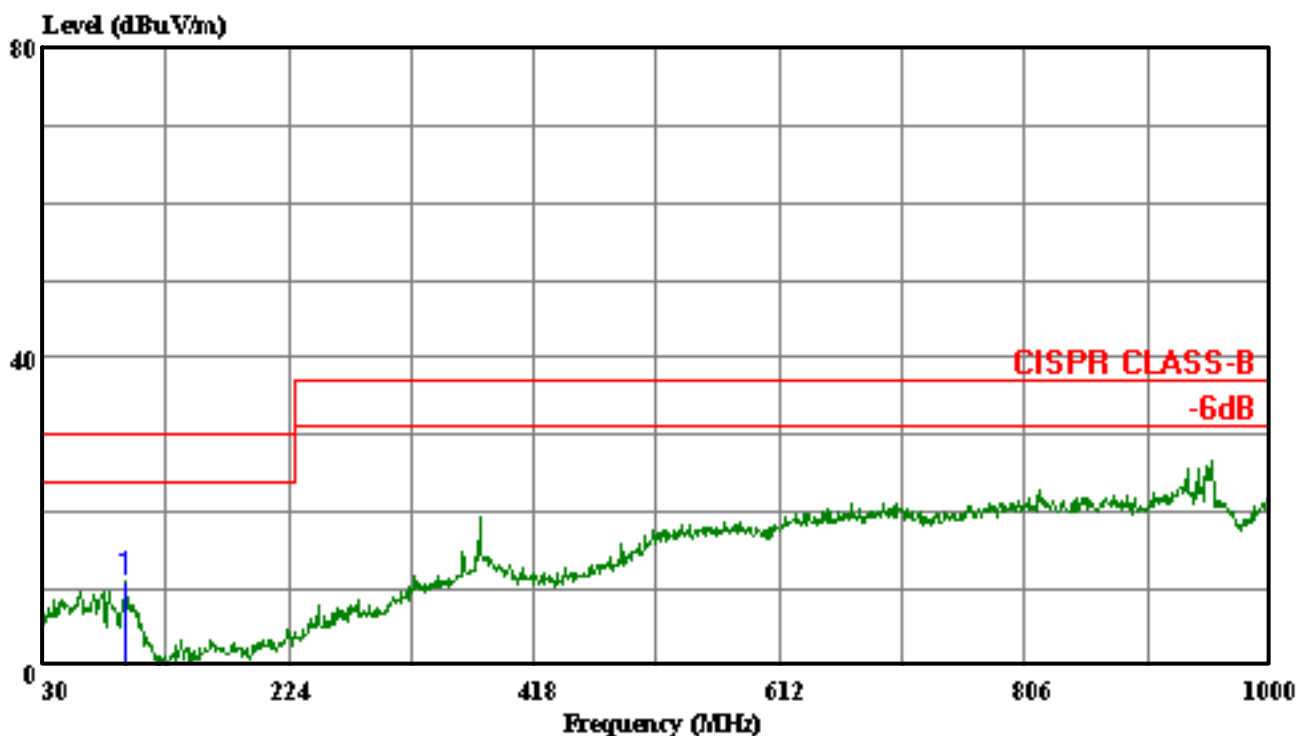

(Home Tek(Chang-An))

Trace: 912

Ref Trace:

Condition: CISPR CLASS-B 10m 966_040730 HORIZONTAL

eut : GTM21089-1812-T3

power: 110V/60Hz

memo : FULL LOAD

Page:


	Freq	Level	Limit	Over	Read		
	MHz	dBuV/m	Line	Limit	Level	Factor	Remark
			dBuV/m	dB	dBuV	dB	
1	94.990	10.93	30.00	-19.08	32.10	-21.18	Peak



HomeTek Technology Inc.

Hometek(Dong-Guan) technology Inc.
South Aera, Shatou Chang-An Town
Tel:86-769-5303005, 5303007,
Fax:86-769-5303006

Data#: 915 File#:GlobTek Inc.EMI Date: 2005-03-19 Time: 14:22:56

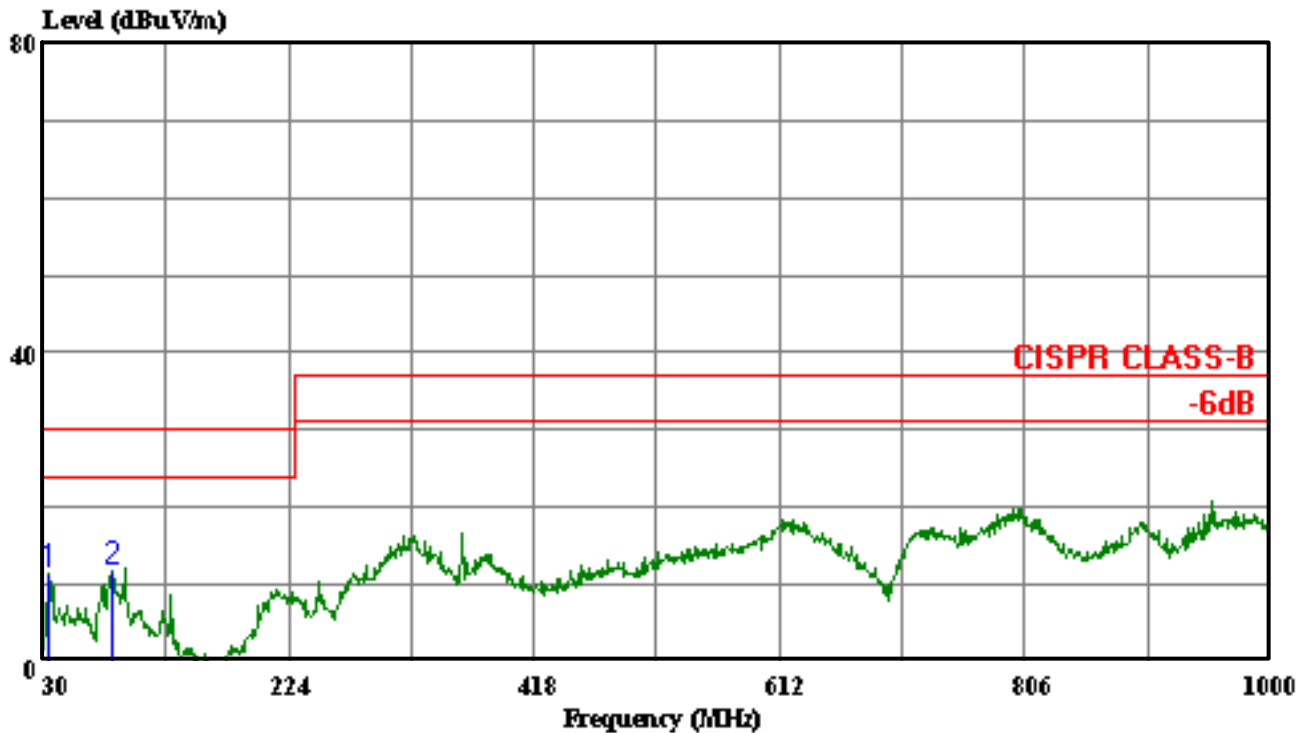

(Home Tek(Chang-An))

Trace: 914

Ref Trace:

Condition: CISPR CLASS-B 10m 966_040730 VERTICAL
eut : GTM21089-1812-T3
power: 110V/60Hz
memo : FULL LOAD

Page:

	Freq	Level	Limit	Over	Read		
	MHz	dBuV/m	Line	Limit	Level	Factor	Remark
			dBuV/m	dB	dBuV	dB	
1	34.850	11.30	30.00	-18.70	31.50	-20.20	Peak
2	84.320	11.77	30.00	-18.23	32.80	-21.03	Peak