


CONDUCTED EMISSIONS

EUT: GTM21089-1812-T3
Manuf: GlobTek Inc.
Op Cond: LINE
Operator: JESSIE
Test Spec: FOR CISPR22 CLASS B
Comment: 230V/50Hz
FULL LOAD
Result File: 03150011.dat : GTM21089-1812-T3

Prescan Measurement: Detectors: X PK / + AV
Meas Time: see scan settings
Subranges: 8
Acc Margin: 55 dB

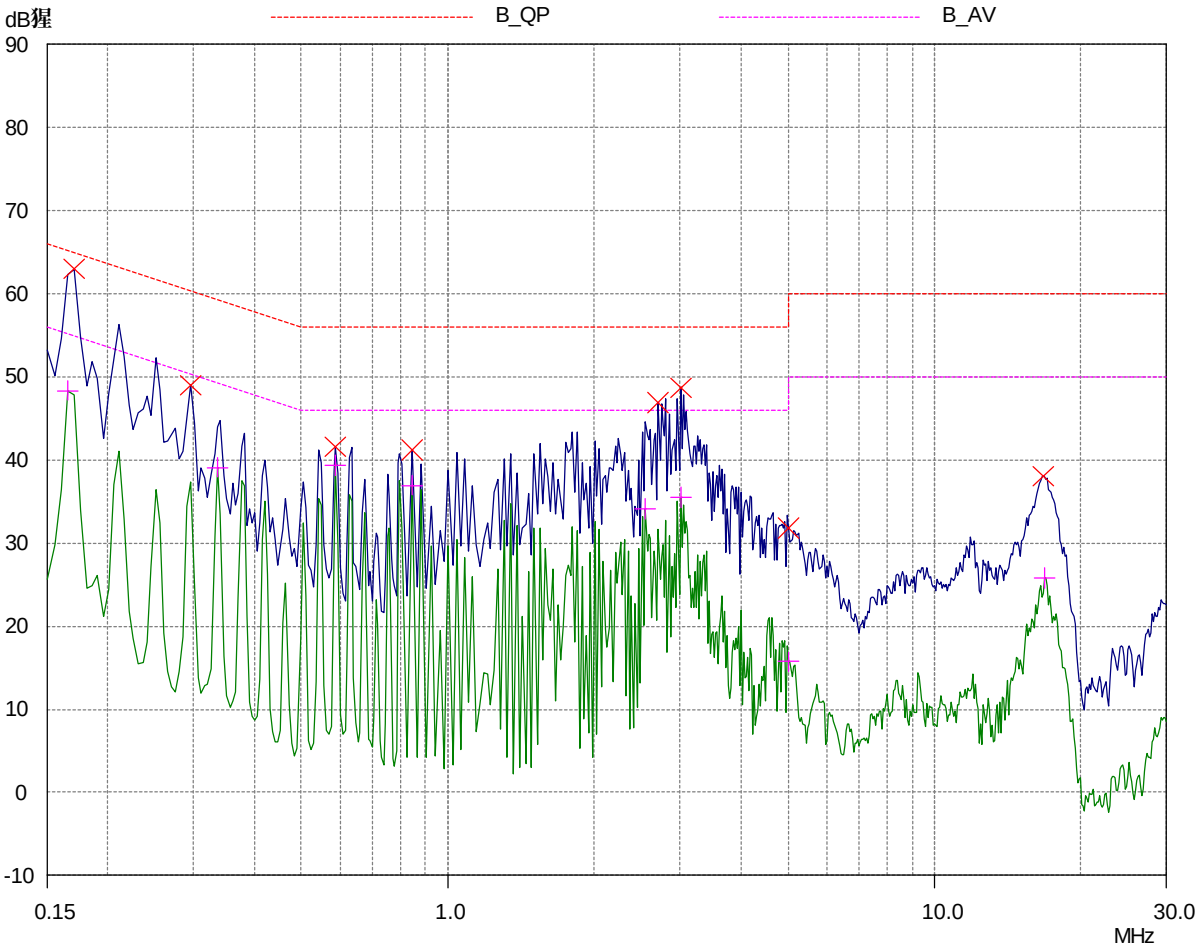

CONDUCTED EMISSIONS

EUT: GTM21089-1812-T3
 Manuf: GlobTek Inc.
 Op Cond: LINE
 Operator: JESSIE
 Test Spec: FOR CISPR22 CLASS B
 Comment: 230V/50Hz
 FULL LOAD
 Result File: 03150011.dat : GTM21089-1812-T3

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Subranges: 8
 Acc Margin: 55 dB

Peak Search Results


Frequency MHz	PK Level dB _{μV}	PK Limit dB _{μV}	PK Delta dB
0.17	62.99	64.96	1.97
0.295	48.99	60.38	11.39
0.5865	41.57	56.00	14.43
0.84	41.25	56.00	14.75
2.7	46.87	56.00	9.13
3.0	48.71	56.00	7.29
5.0	31.78	60.00	28.22
16.73999	38.06	60.00	21.94

Frequency MHz	AV Level dB _{μV}	AV Limit dB _{μV}	AV Delta dB
0.165	48.36	55.21	6.85
0.335	39.13	49.33	10.20
0.5865	39.34	46.00	6.66
0.84	36.94	46.00	9.06
2.54	34.10	46.00	11.90
3.0	35.55	46.00	10.45
5.0	15.71	50.00	34.29
16.86	25.76	50.00	24.24

CONDUCTED EMISSIONS

EUT: GTM21089-1812-T3
Manuf: GlobTek Inc.
Op Cond: NEUTRAL
Operator: JESSIE
Test Spec: FOR CISPR22 CLASS B
Comment: 230V/50Hz
FULL LOAD
Result File: 03150012.dat : GTM21089-1812-T3

Prescan Measurement: Detectors: X PK / + AV
Meas Time: see scan settings
Subranges: 8
Acc Margin: 55 dB

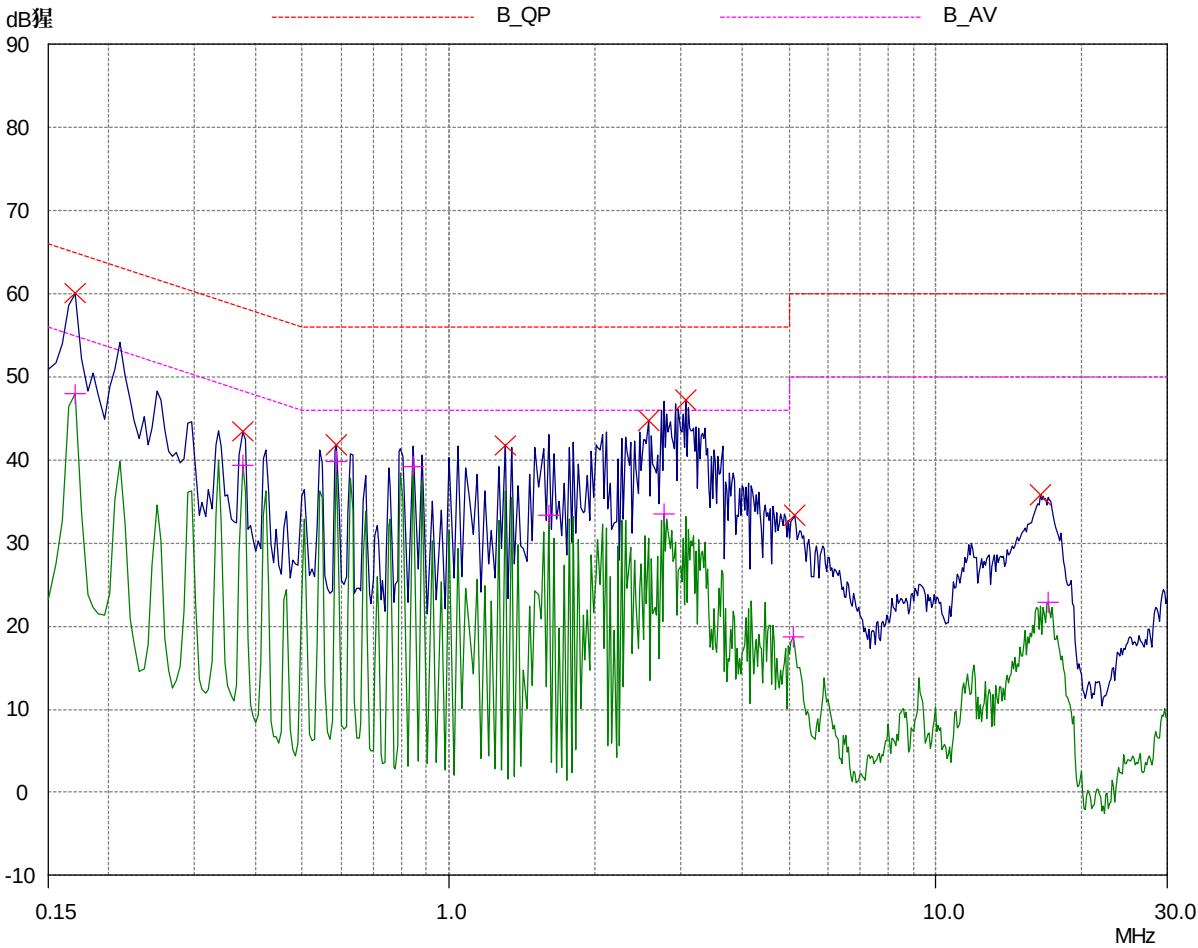

CONDUCTED EMISSIONS

EUT: GTM21089-1812-T3
 Manuf: GlobTek Inc.
 Op Cond: NEUTRAL
 Operator: JESSIE
 Test Spec: FOR CISPR22 CLASS B
 Comment: 230V/50Hz
 FULL LOAD
 Result File: 03150012.dat : GTM21089-1812-T3

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Subranges: 8
 Acc Margin: 55 dB

Peak Search Results

Frequency MHz	PK Level dB _{μV}	PK Limit dB _{μV}	PK Delta dB
0.17	60.07	64.96	4.89
0.375	43.43	58.39	14.96
0.5865	41.84	56.00	14.16
1.3	41.77	56.00	14.23
2.56	44.71	56.00	11.29
3.06	47.22	56.00	8.78
5.12	33.38	60.00	26.62
16.44	35.84	60.00	24.16


Frequency MHz	AV Level dB _{μV}	AV Limit dB _{μV}	AV Delta dB
0.17	47.93	54.96	7.03
0.375	39.42	48.39	8.97
0.5865	39.78	46.00	6.22
0.84	39.26	46.00	6.74
1.6	33.41	46.00	12.59
2.76	33.55	46.00	12.45
5.08	18.72	50.00	31.28
17.04	22.89	50.00	27.11



HomeTek Technology Inc.

Hometek(Dong-Guan) technology Inc.
South Aera, Shatou Chang-An Town
Tel:86-769-5303005, 5303007,
Fax:86-769-5303006

Data#: 855 File#:GlobTek Inc.EMI Date: 2005-03-15 Time: 09:08:28

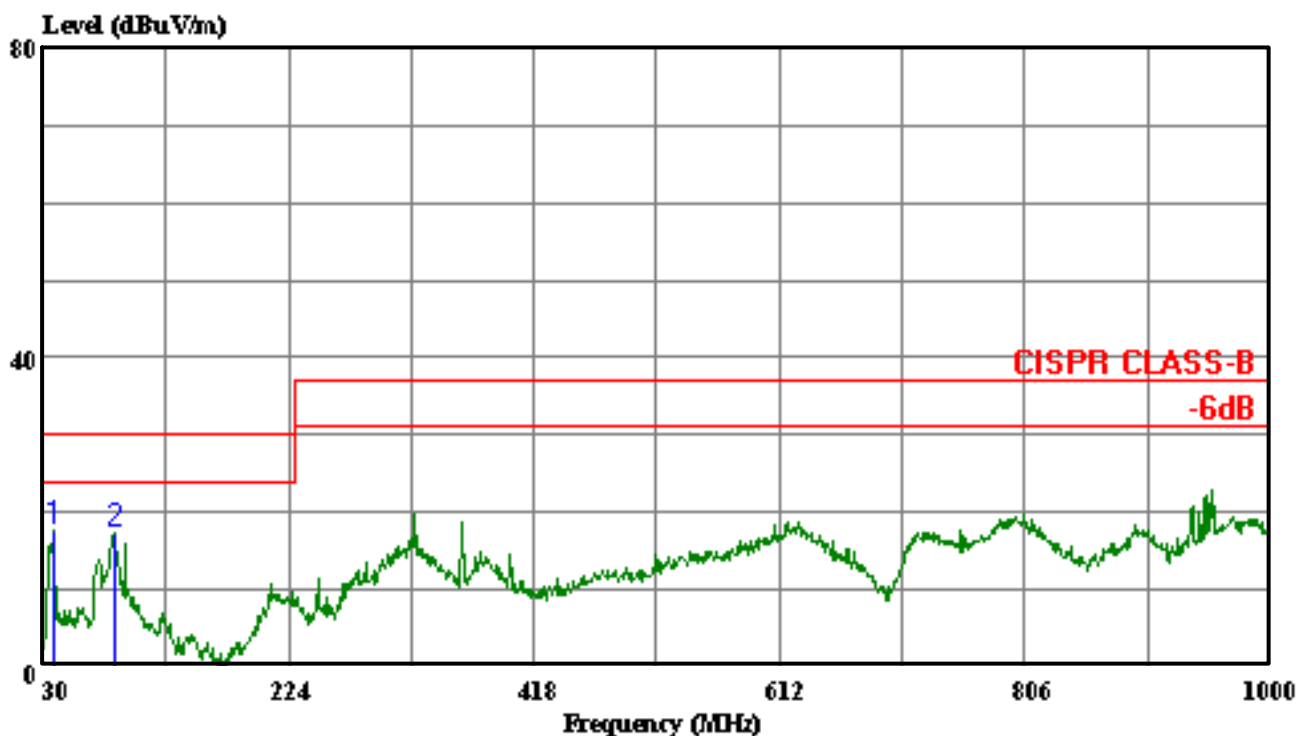

(Home Tek(Chang-An))

Trace: 854

Ref Trace:

Condition: CISPR CLASS-B 10m 966_040730 VERTICAL
eut : GTM21089-1812-T3
power: 230V/50Hz
memo : FULL LOAD

Page:


	Freq	Level	Limit	Over	Read		
	MHz	dBuV/m	Line	Limit	Level	Factor	Remark
			dBuV/m	dB	dBuV	dB	
1	37.760	17.52	30.00	-12.48	37.50	-19.98	Peak
2	86.260	17.19	30.00	-12.81	37.60	-20.41	Peak



HomeTek Technology Inc.

Hometek(Dong-Guan) technology Inc.
 South Aera, Shatou Chang-An Town
 Tel:86-769-5303005, 5303007,
 Fax:86-769-5303006

Data#: 859 File#:GlobTek Inc.EMI Date: 2005-03-15 Time: 09:13:23

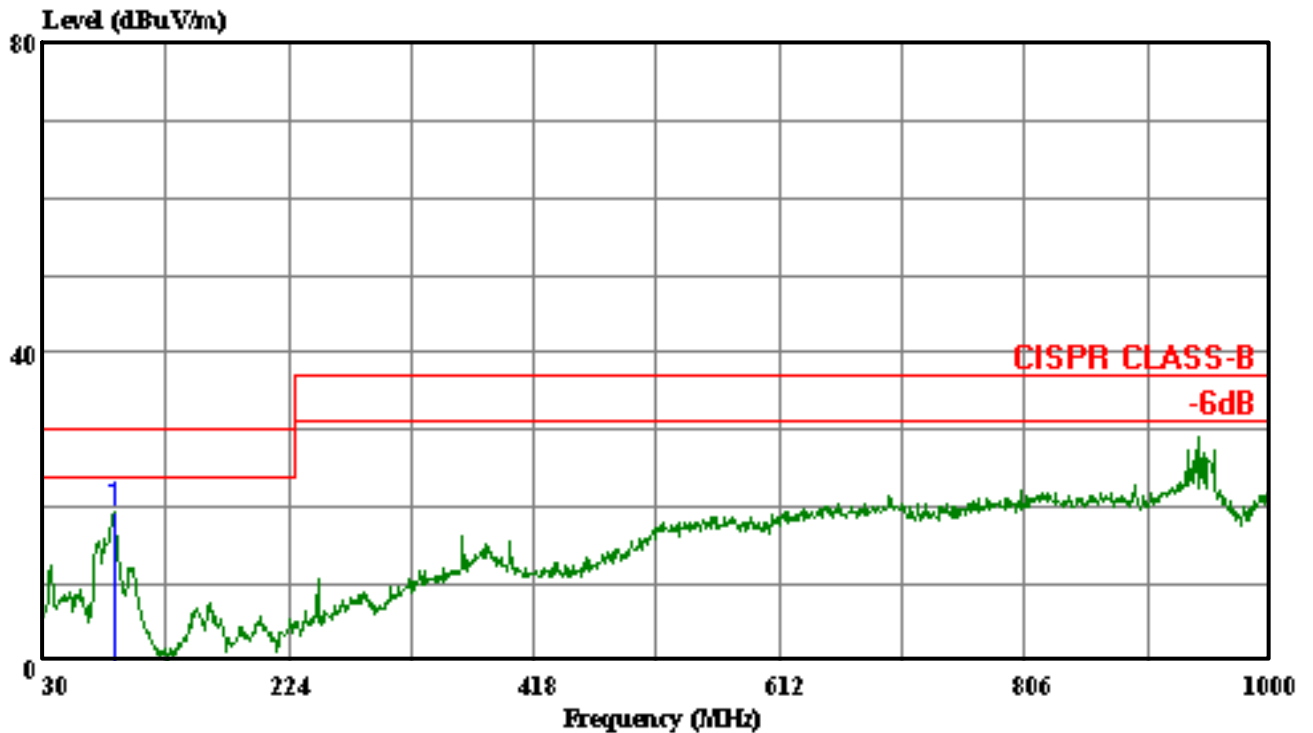

(Home Tek(Chang-An))

Trace: 858

Ref Trace:

Condition: CISPR CLASS-B 10m 966_040730 HORIZONTAL
 eut : GTM21089-1812-T3
 power: 230V/50Hz
 memo : FULL LOAD

Page:

	Freq	Level	Limit	Over	Read		
	MHz	dBuV/m	dBuV/m	Limit	Level	Factor	Remark
				dB	dBuV	dB	
1	86.260	19.24	30.00	-10.76	40.40	-21.16	Peak